T-43-21

CD4000A, CD4001A, CD4002A, CD4025A Types

CMOS NOR Gates

Dual 3 Input plus Inverter—CD4000A
Quad 2 Input—CD4001A
Dual 4 Input—CD4002A
Triple 3 Input—CD4025A

The RCA-CD4000A, CD4001A, CD4002A, and CD4025A NOR gates provide the system designer with direct implementation of the NOR function and supplement the existing family of CMOS gates.

These types are supplied in 14-lead hermetic dual-in-line ceramic packages (D and F suffixes), 14-lead dual-in-line plastic packages (E suffix), 14-lead ceramic flat packages (K suffix), and in chip form (H suffix).

Features:

- **Quiescent current specified to 15 V**
- **Maximum input leakage of 1 μA at 15 V (full package-temperature range)**
- **1-V noise margin (full package-temperature range)**

FUNCTIONAL DIAGRAMS

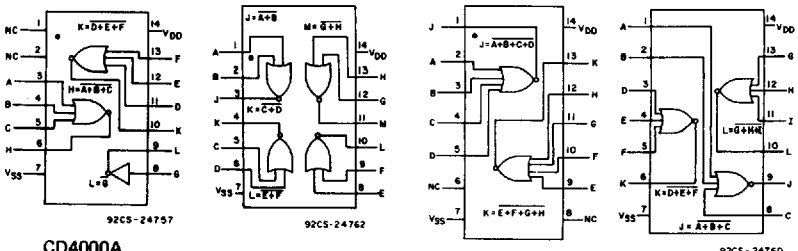



ALL INPUTS ARE PROTECTED BY COS/MOS PROTECTION NETWORK

MAXIMUM RATINGS, *Absolute-Maximum Values:*

STORAGE-TEMPERATURE RANGE (T_{stg}) . . . . . -65 to +150°C
OPERATING-TEMPERATURE RANGE (T_A):
PACKAGE TYPES D, F, K, H . . . . . -55 to +125°C
PACKAGE TYPE E . . . . . -40 to +85°C
DC SUPPLY-VOLTAGE RANGE, (V_{DD})
(Voltages referenced to V_{SS} Terminal): . . . . . -0.5 to +15 V
POWER DISSIPATION PER PACKAGE (P_D):
FOR T_A = -40 to +60°C (PACKAGE TYPE E) . . . . . 500 mW
FOR T_A = +60 to +85°C (PACKAGE TYPE E) . . . . . Derate Linearly at 12 mW/°C to 200 mW
For T_A = -55 to +100°C (PACKAGE TYPES D, F, K) . . . . . 500 mW
For T_A = +100 to +125°C (PACKAGE TYPES D, F, K) . . . . Derate Linearly at 12 mW/°C to 200 mW
DEVICE DISSIPATION PER OUTPUT TRANSISTOR
FOR T_A = FULL PACKAGE-TEMPERATURE RANGE (ALL PACKAGE TYPES) . . . . . 100 mW
INPUT VOLTAGE RANGE, ALL INPUTS . . . . . -0.5 to V_{DD} +0.5 V
LEAD TEMPERATURE (DURING SOLDERING):
At distance 1/16 ± 1/32 inch (1.59 ± 0.79 mm) from case for 10 s max. . . . . +265°C

RECOMMENDED OPERATING CONDITIONS

For maximum reliability, nominal operating conditions should be selected so that operation is always within the following ranges:

CHARACTERISTIC	LIMITS		UNITS
	MIN.	MAX.	
Supply-Voltage Range (For T_A = Full Package-Temperature Range)	3	12	V

DYNAMIC ELECTRICAL CHARACTERISTICS *at T_A = 25°C, C_L = 15 pF, Input t_r, t_f = 20 ns*

CHARACTERISTIC	TEST CONDITIONS V_{DD} (Volts)	LIMITS D, F, K, H PACKAGES TYP.	LIMITS D, F, K, H PACKAGES MAX.	LIMITS E PACKAGE TYP.	LIMITS E PACKAGE MAX.	UNITS
Propagation Delay Time: High-to-Low Level, t_{PHL}	5	35/60	50/95	35/60	80/95	ns
	10	25/35	40/60	25/35	55/60	
Low-to-High Level, t_{PLH}	5	35/80	95/120	35/80	120/120	ns
	10	25/40	45/65	25/40	65/65	
Transition Time: High-to-Low Level, t_{THL}	5	65	125	65	200	ns
	10	35	70	35	115	
Low-to-High Level, t_{TLH}	5	65	175	65	300	ns
	10	35	75	35	125	
Input Capacitance, C_I	Any Input	5	—	5	—	pF

Note: Numbers to the right of slash mark are for CD4025A: numbers to the left of slash mark are for 4000A, 4001A, and 4002A.

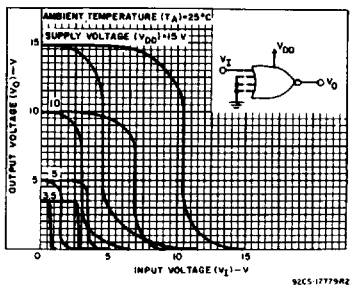

Fig. 1 — Minimum & maximum voltage transfer characteristics.

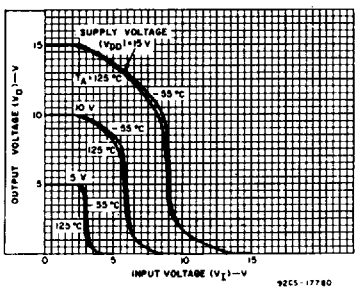

Fig. 2 — Typical voltage transfer characteristics as a function of temperature.

CD4000A, CD4001A, CD4002A, CD4025A Types

STATIC ELECTRICAL CHARACTERISTICS

CHARACTERISTICS	CONDITIONS			LIMITS AT INDICATED TEMPERATURES (°C)								UNITS
				D, F, K, H PACKAGES				E PACKAGE				
	V_O (V)	V_{IN} (V)	V_{DD} (V)	-55	+25 TYP.	+25 LIMIT	+125	-40	+25 TYP.	+25 LIMIT	+85	
Quiescent Device Current, I_L Max.	–	–	5	0.05	0.001	0.05	3	0.5	0.005	0.5	15	μA
	–	–	10	0.1	0.001	0.1	6	5	0.005	5	30	
	–	–	15	2	0.02	2	40	50	0.5	50	500	
Output Voltage: Low Level, V_{OL}	–	0, 5	5	0 Typ.; 0.05 Max								V
	–	0, 10	10	0 Typ.; 0.05 Max								
High Level V_{OH}	–	0, 5	5	4.95 Min.; 5 Typ.								
	–	0, 10	10	9.95 Min.; 10 Typ.								
Noise Immunity: Inputs Low, V_{NL}	3.6	–	5	1.5 Min.; 2.25 Typ.								V
	7.2	–	10	3 Min.; 4.5 Typ.								
Inputs High V_{NH}	1.4	–	5	1.5 Min.; 2.25 Typ.								
	2.8	–	10	3 Min.; 4.5 Typ.								
Noise Margin: Inputs Low, V_{NML}	4.5	–	5	1 Min.								V
	9	–	10	1 Min.								
Inputs High, V_{NMH}	0.5	–	5	1 Min.								
	1	–	10	1 Min.								
Output Drive Current: N-Channel (Sink),	0.4	–	5	0.5	1	0.4	0.28	0.35	1	0.3	0.24	mA
I_DN Min.	0.5	–	10	1.1	2.5	0.9	0.65	0.72	2.5	0.6	0.48	
P-Channel (Source):	2.5	–	5	-0.62	-2	-0.5	-0.35	-0.35	-2	-0.3	-0.24	
I_DP Min.	9.5	–	10	-0.62	-1	-0.5	-0.35	-0.3	-1	-0.25	-0.2	
Input Leakage Current, I_{IL}, I_{IH}	Any Input		15	$\pm 10^{-5}$ Typ., ±1 Max.								μA

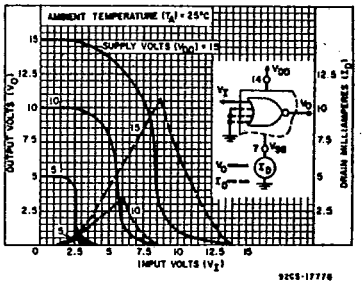

Fig. 3 – Typical current & voltage transfer characteristics.

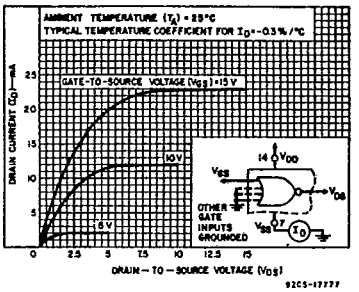

Fig. 4 – Typical n-channel drain characteristics.

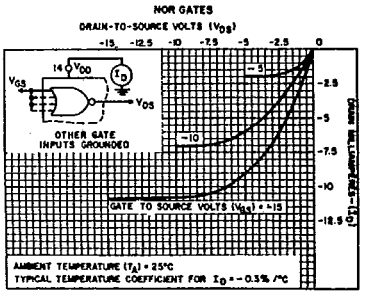

Fig. 5 – Typical p-channel drain characteristics.

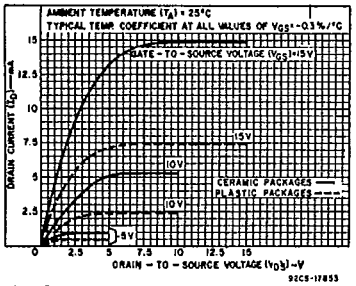

Fig. 6 – Minimum n-channel drain characteristics.

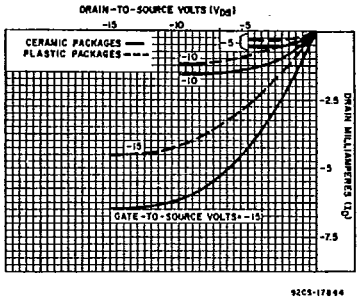

Fig. 7 – Minimum p-channel drain characteristics.

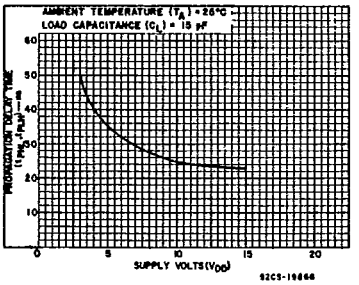

Fig. 8 – Typical propagation delay time vs. V_{DD}.

CD4000A, CD4001A, CD4002A, CD4025A Types

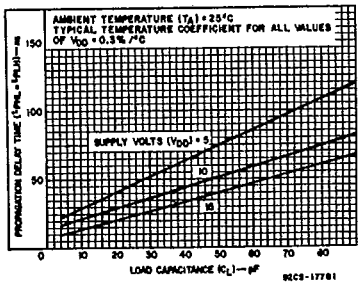

Fig. 9 — Typical propagation delay time vs. C_L.

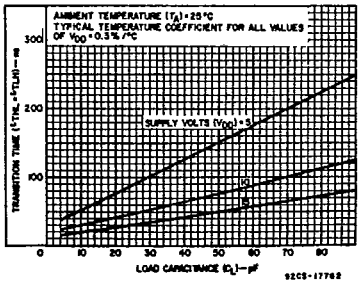

Fig. 10 — Typical transition time vs. C_L.

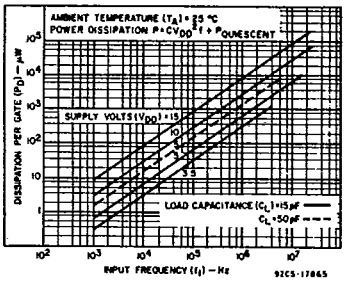

Fig. 11 — Typical dissipation characteristics.



Fig. 12 — Quiescent device current test circuit.



NOTE:
CD4000, CD4002, CD4025 - TEST ANY ONE INPUT WITH OTHER INPUTS AT V_{DD} OR V_{SS}.

CD4001 - TEST ANY COMBINATION OF INPUTS.

Fig. 13 — Noise immunity test circuit.

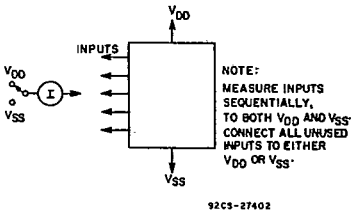

Fig. 14 — Input leakage current test circuit.

Dimensional Outlines

Dual-In-Line Welded-Seal Ceramic Packages

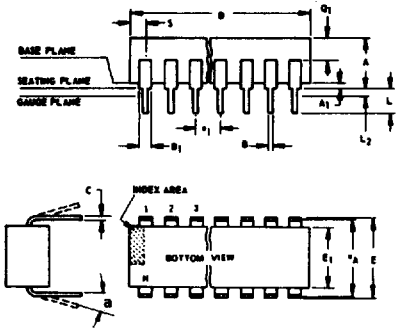

NOTES:
Refer to Rules for Dimensioning (JEDEC Publication No. 95) for Axial Lead Product Outlines.
1. When this device is supplied solder-dipped, the maximum lead thickness (narrow portion) will not exceed 0.013" (0.33 mm).
2. Leads within 0.005" (0.12 mm) radius of True Position (TP) at gauge plane with maximum material condition and unit installed.
3. e_A applies in zone L_2 when unit installed.
4. α applies to spread leads prior to installation.
5. N is the maximum quantity of lead positions.
6. N_1 is the quantity of allowable missing leads.

(D) SUFFIX (JEDEC MO-001-AD)
14-Lead Dual-In-Line Welded-Seal Ceramic Package

SYMBOL	INCHES		NOTE	MILLIMETERS	
	MIN.	MAX.		MIN.	MAX.
A	0.120	0.160		3.05	4.06
A_1	0.020	0.065		0.51	1.65
B	0.014	0.020		0.356	0.508
B_1	0.050	0.065		1.27	1.65
C	0.008	0.012	1	0.204	0.304
D	0.745	0.770		18.93	19.55
E	0.300	0.325		7.62	8.25
E_1	0.240	0.260		6.10	6.60
e_1	0.100 TP		2	2.54 TP	
e_A	0.300 TP		2, 3	7.62 TP	
L	0.125	0.150		3.18	3.81
L_2	0.000	0.030		0.000	0.76
α	0°	15°	4	0°	15°
N	14		5	14	
N_1	0		6	0	
Q_1	0.050	0.085		1.27	2.15
S	0.065	0.090		1.66	2.28

92SS-4411R2

(D) SUFFIX (JEDEC MO-001-AE)
16-Lead Dual-In-Line Welded-Seal Ceramic Package

SYMBOL	INCHES		NOTE	MILLIMETERS	
	MIN.	MAX.		MIN.	MAX.
A	0.120	0.160		3.05	4.06
A_1	0.020	0.065		0.51	1.65
B	0.014	0.020		0.356	0.508
B_1	0.035	0.065		0.89	1.65
C	0.008	0.012	1	0.204	0.304
D	0.745	0.785		18.93	19.93
E	0.300	0.325		7.62	8.25
E_1	0.240	0.260		6.10	6.60
e_1	0.100 TP		2	2.54 TP	
e_A	0.300 TP		2, 3	7.62 TP	
L	0.125	0.150		3.18	3.81
L_2	0.000	0.030		0.000	0.76
α	0°	15°	4	0°	15°
N	16		5	16	
N_1	0		6	0	
Q_1	0.050	0.085		1.27	2.15
S	0.015	0.060		0.39	1.52

92SS-4286R5

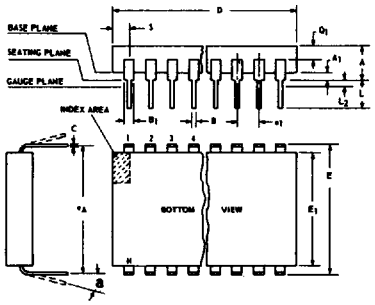

NOTES:
Refer to Rules for Dimensioning (JEDEC Publication No. 95) for Axial Lead Product Outlines.
1. When this device is supplied solder-dipped, the maximum lead thickness (narrow portion) will not exceed 0.013" (0.33 mm).
2. Leads within 0.005" (0.12 mm) radius of True Position (TP) at gauge plane with maximum material condition and unit installed.
3. e_A applies in zone L_2 when unit installed.
4. α applies to spread leads prior to installation.
5. N is the maximum quantity of lead positions.
6. N_1 is the quantity of allowable missing leads.

(D) SUFFIX (JEDEC MO-015-AG)
24-Lead Dual-In-Line Welded-Seal Ceramic Package

SYMBOL	INCHES		NOTE	MILLIMETERS	
	MIN.	MAX.		MIN.	MAX.
A	0.090	0.200		2.29	5.08
A_1	0.020	0.070		0.51	1.78
B	0.015	0.020		0.381	0.508
B_1	0.045	0.055		1.143	1.397
C	0.008	0.012	1	0.204	0.304
D	1.15	1.22		29.21	30.98
E	0.600	0.625		15.24	15.87
E_1	0.480	0.520		12.20	13.20
e_1	0.100 TP		2	2.54 TP	
e_A	0.600 TP		2,3	15.24 TP	
L	0.100	0.180		2.54	4.57
L_2	0.000	0.030		0.00	0.76
α	0°	15°	4	0°	15°
N	24		5	24	
N_1	0		6	0	
Q_1	0.020	0.080		0.51	2.03
S	0.020	0.060		0.51	1.52

92CS-19948R4

(D) SUFFIX (JEDEC MO-015-AH)
28-Lead Dual-In-Line Welded-Seal Ceramic Package

SYMBOL	INCHES		NOTE	MILLIMETERS	
	MIN.	MAX.		MIN.	MAX.
A	0.090	0.200		2.29	5
A_1	0	0.070	2	0	1.77
B	0.015	0.020		0.381	0.508
B_1	0.015	0.055		0.39	1.39
C	0.008	0.012	1	0.204	0.304
D	1.380	1.420		35.06	36.06
E	0.600	0.625		15.24	15.87
E_1	0.485	0.515		12.32	13.08
e_1	0.100 TP		2	2.54 TP	
e_A	0.600 TP		2,3	15.24 TP	
L	0.100	0.200		2.8	5
L_2	0	0.030		0	0.76
α	0°	15°	4	0°	15°
N	28		5	28	
N_1	0		6	0	
Q_1	0.020	0.070		0.51	1.77
S	0.040	0.070		1.02	1.77

92CM-20250R2

TO-5 Style Package

(T) SUFFIX (JEDEC MO-006-AG)
12-Lead Metal Package



92CS-19774

SYMBOL	INCHES		NOTE	MILLIMETERS	
	MIN.	MAX.		MIN.	MAX.
a	0.230		2	5.84 TP	
A_1	0	0		0	0
A_2	0.165	0.185		4.19	4.70
ϕB	0.016	0.019	3	0.407	0.482
ϕB_1	0	0		0	0
ϕB_2	0.016	0.021	3	0.407	0.533
ϕD	0.335	0.370		8.51	9.39
ϕD_1	0.305	0.335		7.75	8.50
F_1	0.020	0.040		0.51	1.01
j	0.028	0.034		0.712	0.863
k	0.029	0.045	4	0.74	1.14
L_1	0.000	0.050	3	0.00	1.27
L_2	0.250	0.500	3	6.4	12.7
L_3	0.500	0.562	3	12.7	14.27
α	30° TP			30° TP	
N	12		6	12	
N_1	1		5	1	

NOTES:
1. Refer to Rules for Dimensioning Axial Lead Product Outlines.
2. Leads at gauge plane within 0.007" (0.178 mm) radius of True Position (TP) at maximum material condition.
3. ϕB applies between L_1 and L_2. ϕB_2 applies between L_2 and 0.500" (12.70 mm) from seating plane. Diameter is uncontrolled in L_1 and beyond 0.500" (12.70 mm).
4. Measure from Max. ϕD.
5. N_1 is the quantity of allowable missing leads.
6. N is the maximum quantity of lead positions.

Dimensional Outlines (Cont'd)

DUAL-IN-LINE SIDE-BRAZED CERAMIC PACKAGES

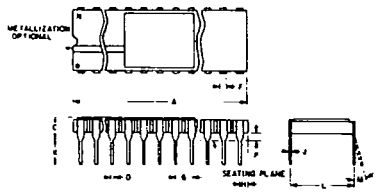

NOTES:
1. Leads within 0.005" (0.13 mm)-radius of True Position at maximum material condition.
2. Dimension "L" to center of leads when formed parallel.
3. When this device is supplied solder-dipped, the maximum lead thickness (narrow portion) will not exceed 0.013" (0.33 mm).

(D) SUFFIX
18-Lead Dual-In-Line
Side-Brazed Ceramic Package

SYMBOL	INCHES		NOTE	MILLIMETERS	
	MIN.	MAX.		MIN.	MAX.
A	0.890	0.915		22.606	23.241
C	–	0.200		–	5.080
D	0.015	0.021		0.381	0.533
F	0.054 REF.		1	1.371 REF.	
G	0.100 BSC		1	2.54 BSC	
H	0.035	0.065		0.889	1.651
J	0.008	0.012	3	0.203	0.304
K	0.125	0.150		3.175	3.810
L	0.290	0.310	2	7.366	7.874
M	0°	15°		0°	15°
P	0.025	0.045		0.635	1.143
N	18			18	

92CS-27231R1

(D) SUFFIX
22-Lead Dual-In-Line
Side-Brazed Ceramic Package

SYMBOL	INCHES		NOTE	MILLIMETERS	
	MIN.	MAX.		MIN.	MAX.
A	1.065	1.100		27.05	27.94
C	0.085	0.145		2.16	3.68
D	0.017	0.023		0.43	0.58
F	0.040 REF.		1	1.02 REF.	
G	0.100 BSC		1	2.54 BSC	
H	0.030	0.070		0.76	1.78
J	0.008	0.012	3	0.20	0.30
K	0.125	0.175		3.18	4.45
L	0.380	0.420	2	9.65	10.67
M	–	7°		–	7°
P	0.025	0.050		0.64	1.27
N	22			22	

92CS-26186R2

(D) SUFFIX
24-Lead Dual-In-Line
Side-Brazed Ceramic Package

SYMBOL	INCHES		NOTE	MILLIMETERS	
	MIN.	MAX.		MIN.	MAX.
A	1.180	1.220		29.98	30.98
C	0.085	0.145		2.16	3.68
D	0.015	0.023		0.39	0.58
F	0.040 REF.			1.02 REF.	
G	0.100 BSC		1	2.54 BSC	
H	0.030	0.070		0.77	1.77
J	0.008	0.012	3	0.21	0.30
K	0.125	0.175		3.18	4.44
L	0.580	0.620	2	14.74	15.74
M	–	7°		–	7°
P	0.025	0.050		0.64	1.27
N	24			24	

92CS-30986R1

(D) SUFFIX
40-Lead Dual-In-Line
Side-Brazed Ceramic Package

SYMBOL	INCHES		NOTE	MILLIMETERS	
	MIN.	MAX.		MIN.	MAX.
A	1.980	2.020		50.30	51.30
C	0.095	0.155		2.43	3.93
D	0.017	0.023		0.43	0.56
F	0.050 REF.			1.27 REF.	
G	0.100 BSC		1	2.54 BSC	
H	0.030	0.070		0.76	1.78
J	0.008	0.012	3	0.20	0.30
K	0.125	0.175		3.18	4.45
L	0.580	0.620	2	14.74	15.74
M	–	7°		–	7°
P	0.025	0.050		0.64	1.27
N	40			40	

92CM-27029R2

Dual-In-Line Plastic and Frit-Seal Ceramic Packages

(E) SUFFIX (JEDEC MO-001-AN)
8-Lead Dual-In-Line Plastic
(Mini-DIP) Package

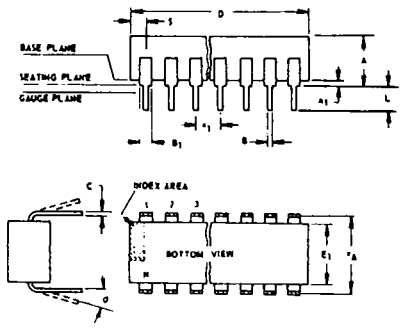

SYMBOL	INCHES		NOTE	MILLIMETERS	
	MIN.	MAX.		MIN.	MAX.
A	0.155	0.200		3.94	5.08
A_1	0.020	0.050		0.508	1.27
B	0.014	0.020		0.356	0.508
B_1	0.035	0.065		0.889	1.65
C	0.008	0.012	1	0.203	0.304
D	0.370	0.400		9.40	10.16
E	0.300	0.325		7.62	8.25
E_1	0.240	0.260		6.10	6.60
e_1	0.100 TP		2	2.54 TP	
e_A	0.300 TP		2, 3	7.62 TP	
L	0.125	0.150		3.18	3.81
L_2	0.000	0.030		0.000	0.762
α	0	15	4	0	15
N	8		5	8	
N_1	0		6	0	
Q_1	0.040	0.075		1.02	1.90
S	0.015	0.060		0.381	1.52

92CS-24026RI

NOTES:

Refer to Rules for Dimensioning (JEDEC Publication No. 95) for Axial Lead Product Outlines.

1. When this device is supplied solder-dipped, the maximum lead thickness (narrow portion) will not exceed 0.013".
2. Leads within 0.005" (0.12 mm) radius of True Position (TP) at guage plane with maximum material condition and unit installed.
3. e_A applies in zone L_2 when unit installed.
4. α applies to spread leads prior to installation.
5. N is the maximum quantity of lead positions.
6. N_1 is the quantity of allowable missing leads.

Dimensional Outlines (Cont'd)

Dual-In-Line Plastic and Frit-Seal Ceramic Packages (Cont'd)

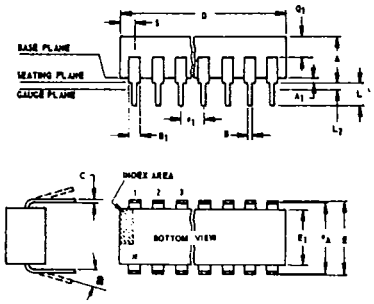

NOTES:
Refer to Rules for Dimensioning (JEDEC Publication No. 95) for Axial Lead Product Outlines.
1. When this device is supplied solder dipped, the maximum lead thickness (narrow portion) will not exceed 0.013" (0.33 mm).
2. Leads within 0.005" (0.12 mm) radius of True Position (TP) at gauge plane with maximum material condition and unit installed.
3. e_A applies in zone L_2 when unit installed.
4. α applies to spread leads prior to installation.
5. N is the maximum quantity of lead positions.
6. N_1 is the quantity of allowable missing leads.

(E) SUFFIX
18-Lead Dual-In-Line
Plastic Package

SYMBOL	INCHES		NOTE	MILLIMETERS	
	MIN.	MAX.		MIN.	MAX.
A	0.155	0.200		3.94	5.08
A_1	0.020	0.050		0.508	1.27
B	0.014	0.020		0.356	0.508
B_1	0.035	0.065		0.89	1.65
C	0.008	0.012	1	0.204	0.304
D	0.845	0.885		21.47	22.47
E_1	0.240	0.260		6.10	6.60
e_1	0.100 TP		2	2.54 TP	
e_A	0.300 TP		2,3	7.62 TP	
L	0.125	0.150		3.18	3.81
α	0°	15°	4	0°	15°
N	18		5	18	
N_1	0		6	0	
S	0.015	0.060		0.39	1.52

92CS-30630

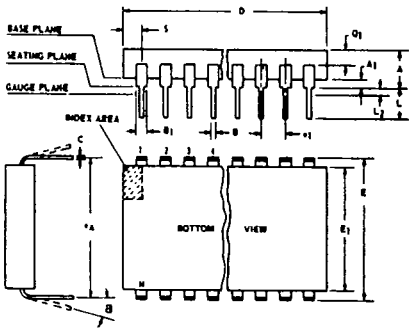

NOTES.
Refer to Rules for Dimensioning (JEDEC Publication No. 95) for Axial Lead Product Outlines.
1. When this device is supplied solder dipped, the maximum lead thickness (narrow portion) will not exceed 0.013".
2. Leads within 0.005" (0.12 mm) radius of True Position (TP) at guage plane with maximum material condition and unit installed
3. e_A applies in zone L_2 when unit installed.
4. α applies to spread leads prior to installation.
5. N is the maximum quantity of lead positions.
6. N_1 is the quantity of allowable missing leads.

(E) and (F) SUFFIXES (JEDEC MO-001-AB)
14-Lead Dual-In-Line Plastic or
Frit-Seal Ceramic Package

SYMBOL	INCHES		NOTE	MILLIMETERS	
	MIN.	MAX.		MIN.	MAX.
A	0.155	0.200		3.94	5.08
A_1	0.020	0.060		0.51	1.27
B	0.014	0.020		0.356	0.508
B_1	0.050	0.065		1.27	1.65
C	0.008	0.012	1	0.204	0.304
D	0.745	0.770		18.93	19.55
E	0.300	0.325		7.62	8.25
E_1	0.240	0.260		6.10	6.60
e_1	0.100 TP		2	2.54 TP	
e_A	0.300 TP		2, 3	7.62 TP	
L	0.125	0.150		3.18	3.81
L_2	0.000	0.030		0.000	0.76
a	0°	15°	4	0°	15°
N	14		5	14	
N_1	0		6	0	
Q_1	0.040	0.075		1.02	1.90
S	0.065	0.090		1.66	2.28

92SS-4296R3

(E) SUFFIX
22-Lead Dual-In-Line
Plastic Package

SYMBOL	INCHES		NOTE	MILLIMETERS	
	MIN.	MAX.		MIN.	MAX.
A	0.155	0.200		3.94	5.08
A_1	0.020	0.050		0.508	1.27
B	0.015	0.020		0.381	0.508
B_1	0.035	0.065		0.89	1.65
C	0.008	0.012	1	0.204	0.304
D		1.120			28.44
E	0.390	0.420		9.91	10.66
E_1	0.345	0.355		8.77	9.01
e_1	0.100 TP		2	2.54 TP	
e_A	0.400 TP		2, 3	10.16 TP	
L	0.125	0.150		3.18	3.81
L_2	0	0.030		0	0.762
a	2°	15°	4	2°	15°
N	22		5	22	
N_1	0		6	0	
Q_1	0.055	0.085		1.40	2.15
S	0.015	0.060		0.381	1.27

92CS-30830

(E) and (F) SUFFIXES (JEDEC MO-015-AA)
24-Lead Dual-In-Line Plastic or
Frit-Seal Ceramic Package

SYMBOL	INCHES		NOTE	MILLIMETERS	
	MIN.	MAX.		MIN.	MAX.
A	0.120	0.250		3.10	6.30
A_1	0.020	0.070		0.51	1.77
B	0.016	0.020		0.407	0.508
B_1	0.028	0.070		0.72	1.77
C	0.008	0.012	1	0.204	0.304
D	1.20	1.29		30.48	32.76
E	0.600	0.625		15.24	15.87
E_1	0.515	0.580		13.09	14.73
e_1	0.100 TP		2	2.54 TP	
e_A	0.600 TP		2,3	15.24 TP	
L	0.100	0.200		2.54	5.00
L_2	0.000	0.030		0.00	0.76
a	0°	15°	4	0°	15°
N	24		5	24	
N_1	0		6	0	
Q_1	0.040	0.075		1.02	1.90
S	0.040	0.100		1.02	2.54

92CS26938R2

(E) and (F) SUFFIXES (JEDEC MO-001-AC)
16-Lead Dual-In-Line Plastic or
Frit-Seal Ceramic Package

SYMBOL	INCHES		NOTE	MILLIMETERS	
	MIN.	MAX.		MIN.	MAX.
A	0.155	0.200		3.94	5.08
A_1	0.020	0.050		0.51	1.27
B	0.014	0.020		0.356	0.508
B_1	0.035	0.065		0.89	1.65
C	0.008	0.012	1	0.204	0.304
D	0.745	0.785		18.93	19.93
E	0.300	0.325		7.62	8.25
E_1	0.240	0.260		6.10	6.60
e_1	0.100 TP		2	2.54 TP	
e_A	0.300 TP		2, 3	7.62 TP	
L	0.125	0.150		3.18	3.81
L_2	0.000	0.030		0.000	0.76
a	0°	15°	4	0°	15°
N	16		5	16	
N_1	0		6	0	
Q_1	0.040	0.075		1.02	1.90
S	0.015	0.060		0.39	1.52

92CM-15967R4

(F) SUFFIX (JEDEC MO-001-AG)
16-Lead Dual-In-Line
Frit-Seal Ceramic Package

SYMBOL	INCHES		NOTE	MILLIMETERS	
	MIN.	MAX.		MIN.	MAX.
A	0.165	0.210		4.20	5.33
A_1	0.015	0.045		0.381	1.14
B	0.015	0.020		0.381	0.508
B_1	0.045	0.070		1.15	1.77
C	0.009	0.011	1	0.229	0.279
D	0.750	0.795		19.05	20.19
E	0.295	0.325		7.50	8.25
E_1	0.245	0.300		6.23	7.62
e_1	0.100 TP		2	2.54 TP	
e_A	0.300 TP		2, 3	7.62 TP	
L	0.120	0.160		3.05	4.06
L_2	0.000	0.030		0.000	0.76
a	2°	15°	4	2°	15°
N	16		5	16	
N_1	0		6	0	
Q_1	0.050	0.080		1.27	2.03
S	0.010	0.060		0.254	1.52

92CM-22284R1

(E) SUFFIX
40-Lead Dual-In-Line
Plastic Package

SYMBOL	INCHES		NOTE	MILLIMETERS	
	MIN.	MAX.		MIN.	MAX.
A	0.120	0.250		3.10	6.30
A_1	0.020	0.070		0.51	1.77
B	0.016	0.020		0.407	0.508
B_1	0.028	0.070		0.72	1.77
C	0.008	0.012	1	0.204	0.304
D	2.000	2.090		50.80	53.09
E_1	0.515	0.580		13.09	14.73
e_1	0.100 TP		2	2.54 TP	
e_A	0.600 TP		2,3	15.24 TP	
L	0.100	0.200		2.54	5.00
L_2	0.000	0.030		0.00	0.76
a	0°	15°	4	0°	15°
N	40		5	40	
N_1	0		6	0	
Q_1	0.065	0.095		1.66	2.41
S	0.040	0.100		1.02	2.54

92CS-30959

Dimensional Outlines (Cont'd)

Ceramic Flat Packs

(K) SUFFIX (JEDEC MO-004-AF)
14-Lead

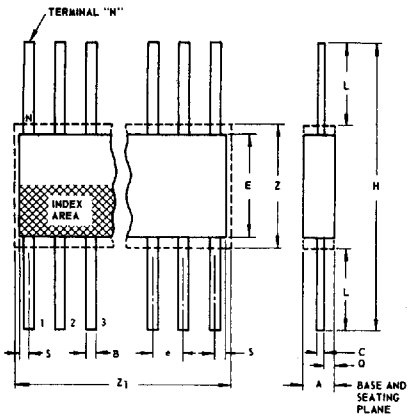

SYMBOL	INCHES		NOTE	MILLIMETERS	
	MIN.	MAX.		MIN.	MAX.
A	0.008	0.100		0.21	2.54
B	0.015	0.019	1	0.381	0.482
C	0.003	0.006	1	0.077	0.152
e	0.050 TP		2	1.27 TP	
E	0.200	0.300		5.1	7.6
H	0.600	1.000		15.3	25.4
L	0.150	0.350		3.9	8.8
N	14		3	14	
Q	0.005	0.050		0.13	1.27
S	0.000	0.050		0.00	1.27
Z	0.300		4	7.62	
Z_1	0.400		4	10.16	

92SS-4300R3

NOTES:
1. Refer to JEDEC Publication No. 95 for Rules for Dimensioning Peripheral Lead Outlines.
2. Leads within 0.005" (0.12 mm) radius of True Position (TP) at maximum material condition.
3. N is the maximum quantity of lead positions.
4. Z and Z_1 determine a zone within which all body and lead irregularities lie.

(K) SUFFIX (JEDEC MO-004-AG)
16-Lead

SYMBOL	INCHES		NOTE	MILLIMETERS	
	MIN.	MAX.		MIN.	MAX.
A	0.008	0.100		0.21	2.54
B	0.015	0.019	1	0.381	0.482
C	0.003	0.006	1	0.077	0.152
e	0.050 TP		2	1.27 TP	
E	0.200	0.300		5.1	7.6
H	0.600	1.000		15.3	25.4
L	0.150	0.350		3.9	8.8
N	16		3	16	
Q	0.005	0.050		0.13	1.27
S	0.000	0.025		0.00	0.63
Z	0.300		4	7.62	
Z_1	0.400		4	10.16	

92CS-17271R3

(K) SUFFIX
24-Lead

SYMBOL	INCHES		NOTE	MILLIMETERS	
	MIN.	MAX.		MIN.	MAX.
A	0.075	0.120		1.91	3.04
B	0.018	0.022	1	0.458	0.558
C	0.004	0.007	1	0.102	0.177
e	0.050 TP		2	1.27 TP	
E	0.600	0.700		15.24	17.78
H	1.150	1.350		29.21	34.29
L	0.225	0.325		5.72	8.25
N	24		3	24	
Q	0.035	0.070		0.89	1.77
S	0.060	0.110	1	1.53	2.79
Z	0.700		4	17.78	
Z_1	0.750		4	19.05	

92CS-19949R2

(K) SUFFIX
28-Lead

SYMBOL	INCHES		NOTE	MILLIMETERS	
	MIN.	MAX.		MIN.	MAX.
A	0.075	0.120		1.91	3.04
B	0.018	0.022	1	0.458	0.558
C	0.004	0.007	1	0.102	0.177
e	0.050 TP		2	1.27 TP	
E	0.600	0.700		15.24	17.78
H	1.150	1.350		29.21	34.29
L	0.225	0.325		5.72	8.25
N	28		3	28	
Q	0.035	0.070		0.89	1.77
S	0	0.060	1	0	1.53
Z	0.700		4	17.78	
Z_1	0.750		4	19.05	

92CS-20972