MILITARY SPECIFICATION

ROTARY SWITCH AND HARNESS

This amendment forms a part of Military Specification MIL-R-82642(OS) of 25 July 1975.

PAGES 2 and 3

3.9.1 through 3.9.1.4: Delete and substitute:

3.9.1 Resistance (see Figure 2).

3.9.1.1 Open position. Angle (A + D) is the minimum angle of rotation from the open position stop to position One. Within this angle, there shall be continuity between the connector output contacts A and B and the ground wire terminal, along with a maximum resistance of 0.07 ohm. Simultaneously, there shall be an open circuit between the harness input terminals "A", "B", "C" and "D" and the connector output contacts.

3.9.1.2 Closed position stop. Angle K is the minimum angle of rotation from position two to the closed position stop. Within this angle there shall be continuity between the harness input terminals "A" and "C", "B" and "D" and the connector output contacts "A" and "B", respectively, along with a maximum resistance of 0.25 ohm. Simultaneously there shall be an open circuit between the connector output contacts and the ground wire terminal.


3.9.1.3 Switching function. Angle B is the zone of transition from the open to closed positions specified in 3.9.1.1 and 3.9.1.2 respectively. The switching function between the open and closed positions shall take place within this angle.

3.9.1.4 Shield. The electrical resistance between the connector ground contact "G" and the cable shielding at the harness terminals shall not exceed 0.25 ohm.

3.9.1.5 Insulation resistance. Insulation resistance shall not be less than 1000 megohms at 500 volts direct current (vdc) between circuits; and between circuits and ground.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:19Z
Check the source to verify that this is the current version before use.

Figure 2. Delete and substitute:

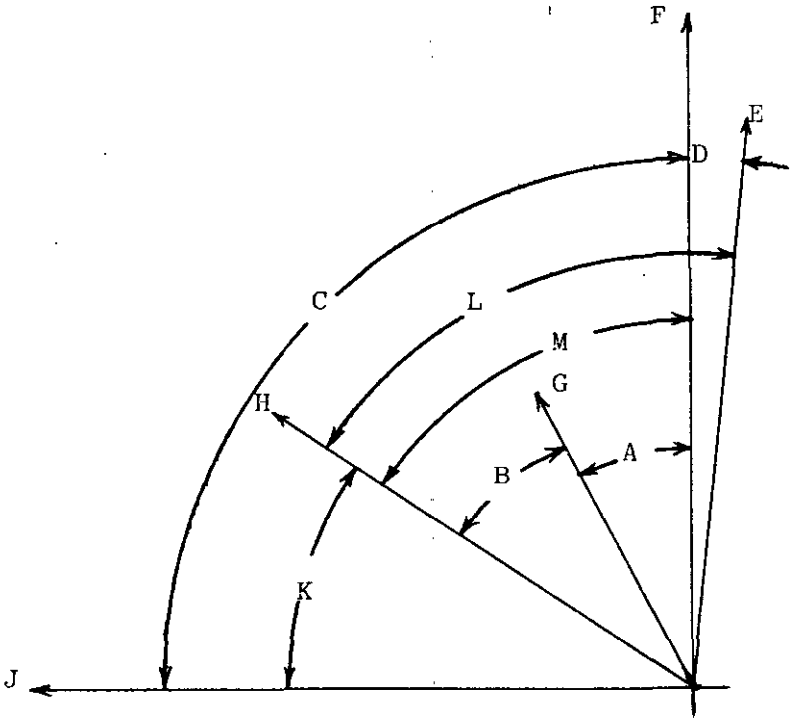

A	37°- 46°
B	5°- 20°
C	85°- 90°
D	5°- 10°
E	Open Position Stop
F	Zero Position
G	Position One
H	Position Two
J	Closed Position Stop
K	33°- 39°
L	56°- 67°
M	51°- 57°

Zero position is established when the flat of rotor is perpendicular to the "A" - plane shown on Drawing 2806551.

Figure 2 Switch positions and tolerances.

PAGE 6

Add new paragraph 4.6.10:

4.6.10 Switching function. Using the device of 4.3d, monitor the resistance between the harness input terminals "A and C" and "B and D" and the connector output contacts "A" and "B" respectively, while the switch is rotated from the open to closed position, to verify conformance to 3.9.1.3.

Custodian:
Navy - OS

Preparing Activity:
Navy - OS
Project No. 1338-N0011

☆U.S. GOVERNMENT PRINTING OFFICE: 1978-703-122/779

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:19Z
Check the source to verify that this is the current version before use.