
MILITARY SPECIFICATION SHEET

FUSEHOLDER, BLOCK TYPE
STYLES FH26, FH27, FH28, AND FH29

The complete requirements for procuring the fuseholder described herein shall consist of this document and the latest issue of Specification MIL-F-21346.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

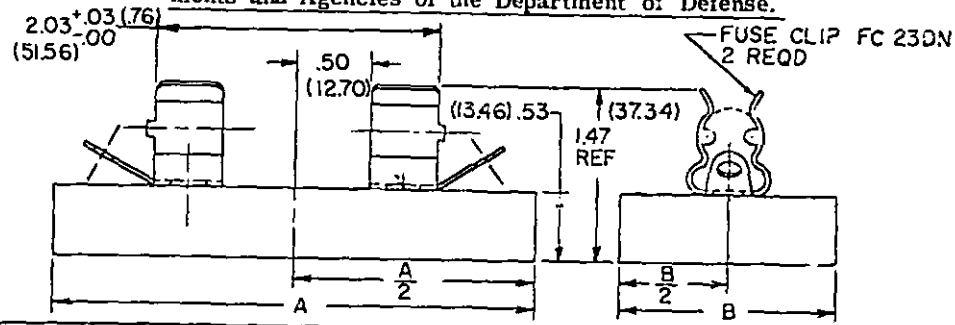

Part No.	Class	Mtg. hole plan	Block dimensions and mounting hole plan (see fig 5)							
			A	B	C	D	E	F	G	H
FH26AM	1 pole, main line	1	3.44 (87.38)	1.50 (38.10)	.750 (19.05)	.38 (9.65)				
FH26BM	2 pole, main line		3.44 (87.38)							
FH26BS	2 pole, single branch	2	4.94 (125.48)	2.81 (71.37)	1.313 (33.35)		3.44 (87.38)			
FH26BD	2 pole, double branch	3	7.75 (196.85)				4.313 (109.55)	1.72 (43.69)		
FH26CM	3 pole, main line	1	3.75 (95.25)							
FH26CS	3 pole, single branch	4	6.06 (153.92)	4.06 (103.12)	2.563 (65.10)	.75 (19.05)	1.88 (47.75)	2.938 (74.63)	1.313 (33.35)	1.38 (35.05)
FH26CD	3 pole, double branch	3	8.88 (225.55)				5.125 (130.18)	1.88 (47.75)		
FH26DM	3 pole, main line *	1	3.75 (95.25)							
FH26DS	3 pole, single branch *	4	7.50 (190.50)	4.00 (101.60)	2.500 (63.50)		1.88 (47.75)	4.375 (111.13)	1.250 (31.75)	1.38 (35.05)
FH26DD	3 pole, double branch *	3	9.38 (238.25)				5.625 (142.88)	1.88 (47.75)		


* Two poles fusible; solid neutral bus

NOTES:
1. All dimensions are in inches. Millimeters are in parentheses.
2. Unless otherwise specified, tolerances on 2 place decimals shall be ±.02 (.51) and ±.005 (.13) on 3 place decimals.
3. The base block shall be plastic.
4. Mounting holes shall be countersunk and provide free fit for no. 8 flat head machine screw.
5. Fuseholders having 2 and 3 poles; the longitudinal centerlines of the outside pairs of fuse clips shall be located .75(19.05) from the edge of the base block.
6. Fuse holders having 3 poles; the longitudinal centerline of one pair of clips shall be located centrally between the outside pairs of fuse clips.
7. Fuseholders of this style shall have a rating of 30 amperes at 250 volts.
8. This fuseholder is for use with styles F15 and F61 fuses of MIL-F-15160 (for 9/16 (14.27)-inch-diameter by 2 (50.80)-inch-long fuse).
9. See figure 5 for mounting plan.
10. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 1. Style FH26 fuseholders (solder lug type terminals).

FSC 5920

Source: https://assist.dla.mil - Downloaded: 202640-19T09:19Z
Check the source to verify that this is the current version before use.

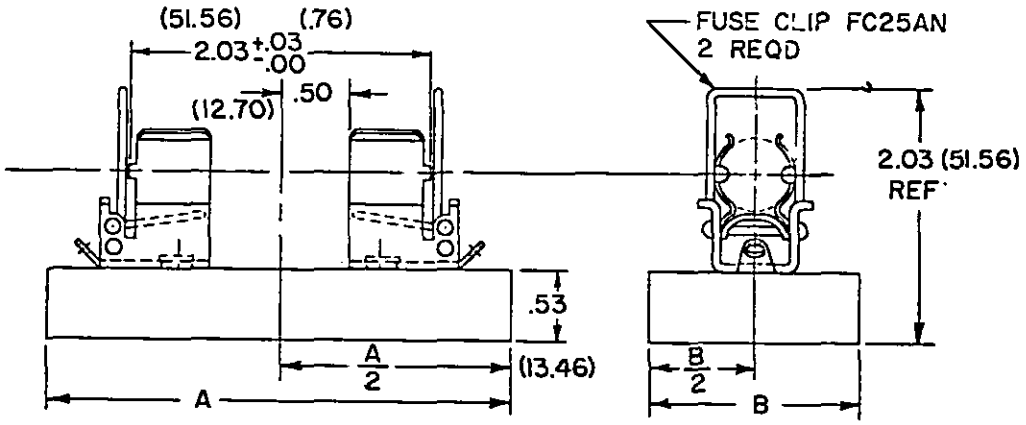


Part No.	Class	Mtg. hole plan	Block dimensions and mounting hole plan (see fig 5)							
			A	B	C	D	E	F	G	H
FH27AM	1 pole, main line	1	3.44 (87.38)	1.50 (38.10)	.750 (19.05)	.44 (11.18)				
FH27BM	2 pole, main line	1	3.44 (87.38)	2.81 (71.37)	1.313 (33.35)	.94 (23.88)				
FH27BS	2 pole, single branch	2	4.94 (125.48)				3.44 (87.38)			
FH27BD	2 pole, double branch	3	7.75 (196.85)				4.313 (109.55)	1.72 (43.69)		
FH27CM	3 pole, main line	1	3.75 (95.25)	4.06 (103.12)	2.563 (65.10)					
FH27CS	3 pole, single branch	4	6.06 (153.92)				1.88 (47.75)	2.938 (74.63)	1.313 (33.35)	1.38 (35.05)
FH27CD	3 pole, double branch	3	8.88 (225.55)				5.125 (130.18)	1.88 (47.75)		
FH27DM	3 pole, main line *	1	3.75 (95.25)	4.00 (101.60)	2.500 (63.50)					
FH27DS	3 pole, single branch *	4	7.50 (190.50)				1.88 (47.75)	4.375 (111.13)	1.250 (31.75)	1.38 (35.05)
FH27DD	3 pole, double branch *	3	9.38 (238.25)				5.625 (142.88)	1.88 (47.75)		

* Two poles fusible; solid neutral bus.

NOTES:
1. All dimensions are in inches. Millimeters are in parentheses.
2. Unless otherwise specified, tolerances on 2 place decimals shall be ±.02 (.51) and ±.005 (.13) on 3 place decimals.
3. The base block shall be plastic.
4. Mounting holes shall be countersunk and provide free fit for no. 8 flat head machine screw.
5. Fuseholders having 2 and 3 poles; the longitudinal centerlines of the outside pairs of fuse clips shall be located .75(19.05) from the edge of the base block.
6. Fuse holders having 3 poles; the longitudinal centerline of one pair of clips shall be located centrally between the outside pairs of fuse clips.
7. Fuseholders of this style shall have a rating of 30 amperes at 250 volts.
8. This fuseholder is for use with styles F15 and F61 fuses of MIL-F-15160 (for 9/16 (14.27)-inch-diameter by 2 (50.80)-inch-long fuse).
9. See figure 5 for mounting plan.
10. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 2. Style FH27 fuseholder (locking and ejector spring).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:19Z
Check the source to verify that this is the current version before use.

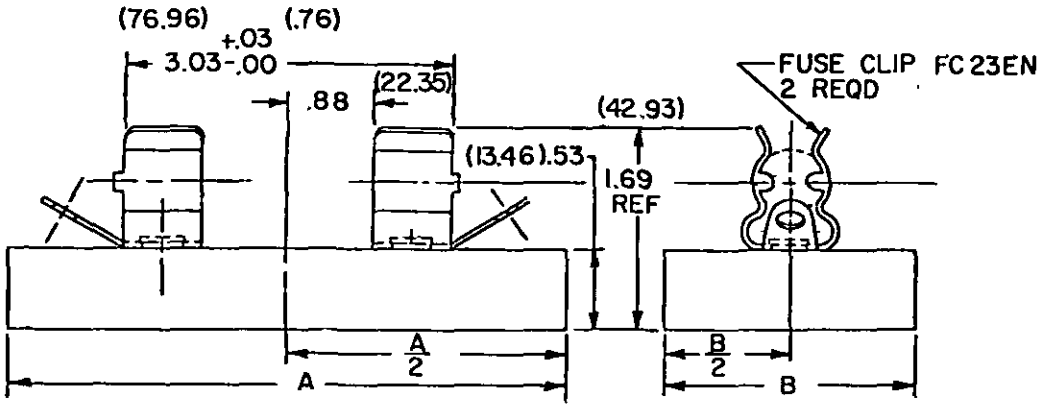


Part No.	Class	Mtg hole plan	Block dimensions and mounting hole plan (see figure 5)							
			A	B	C	D	E	F	G	H
FH28AM	1 pole, main line	1	5.00 (127.00)	1.88 (47.75)	1.000 (25.40)	.44 (11.18)				
FH28BM	2 pole, main line	2	5.00 (127.00	3.62 (91.95)	1.750 (44.45)	.94 (23.88)	5.00 (127.00)			
FH28BS	2 pole, single branch		6.75 (171.45)							
FH28BD	2 pole, double branch	3	10.62 (269.75)				5.62 (142.75)	2.50 (63.50)		
FH28CM	3 pole, main line	1	5.00 (127.00)	5.31 (134.87)	3.438 (87.33)					
FH28CS	3 pole, single branch	4	8.06 (204.72)				2.50 (63.50)	4.313 (109.55)	1.750 (44.45)	1.78 (45.21)
FH28CD	3 pole, double branch	3	11.88 (301.75)				6.875 (174.63)	2.50 (63.50)		

NOTES:
1. All dimensions are in inches. Millimeters are in parentheses.
2. Unless otherwise specified, tolerances on 2 place decimals shall be ±.02 (.51) and ±.005 (.13) on 3 place decimals.
3. The base block shall be plastic.
4. Mounting holes shall be countersunk and provide a free fit for no. 8 flat head machine screw.
5. Fuseholders having 2 and 3 poles: The longitudinal centerlines of the outside pairs of fuse clips shall be located .94(23.88) from the edge of the base block.
6. Fuseholders having 3 poles: The longitudinal centerline of one pair of clips shall be centrally located between the two outer pairs.
7. Fuseholders of this style shall have a rating of 60 amperes at 250 volts.
8. This fuseholder is for use with styles F16 and F62 fuses of MIL-F-15160 (for 13/16 (20.62)-inch-diameter by 3 (76.20)-inch-long fuse).
9. See figure 5 for mounting plan.
10. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 3. Style FH28 fuseholder (solder lug type terminals).

Source: https://assist.dla.mil -- Downloaded: 202610-19T09:19Z
Check the source to verify that this is the current version before use.

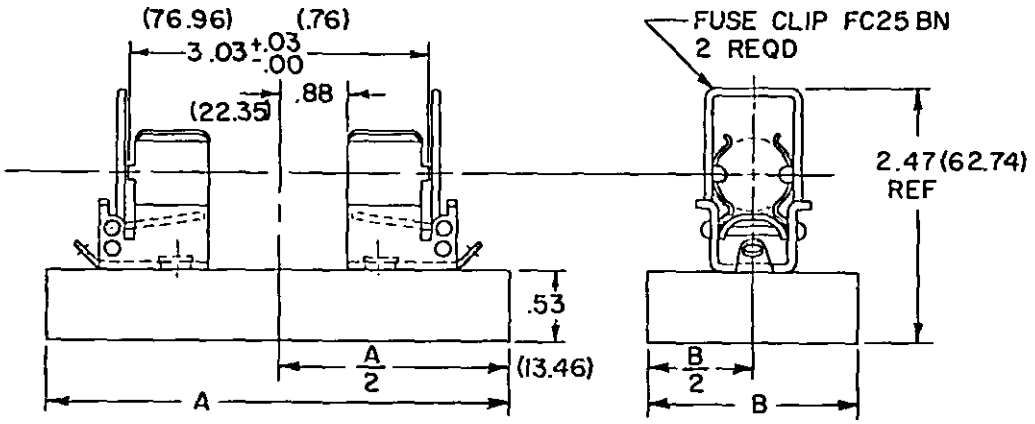

Part No.	Class	Mtg hole plan	Block dimensions and mounting hole plan (see figure 5)							
			A	B	C	D	E	F	G	H
FH29AM	1 pole, main line	1	5.00 (127.00)	1.88 (47.75)	1.000 (25.40)	.44 (11.18)				
FH29BM	2 pole, main line		5.00 (127.00				5.00 (127.00)			
FH29BS	2 pole, single branch	2	6.75 (171.45)	3.62 (91.95)	1.750 (44.45)					
FH29BD	2 pole, double branch	3	10.62 (269.75)			.94 (23.88)	5.62 (142.75)	2.50 (63.50)		
FH29CM	3 pole, main line	1	5.00 (127.00)							
FH29CS	3 pole, single branch	4	8.06 (204.72)	5.31 (134.87)	3.438 (87.33)		2.50 (63.50)	4.313 (109.55)	1.750 (44.45)	1.78 (45.21)
FH29CD	3 pole, double branch	3	11.88 (301.75)				6.875 (174.63)	2.50 (63.50)		

NOTES:
1. Dimensions are in inches.
2. Millimeters are in parentheses
3. Unless otherwise specified, tolerances on 2 place decimals shall be ±.02 (.51) and ±.005 (.13) on 3 place decimals.
4. The base block shall be plastic.
5. Mounting holes shall be countersunk and provide a free fit for No. 8 flat head machine screw.
6. Fuseholders having 2 and 3 poles: The longitudinal centerlines of the outside pairs of fuse clips shall be located .94 (23.88) from the edge of the base block.
7. Fuseholders having 3 poles: The longitudinal centerline of one pair of clips shall be centrally located between the two outer pairs.
8. Fuseholders of this style shall have a rating of 60 amperes at 250 volts.
9. This fuseholder is for use with styles F16 and F62 fuses of MIL-F-15160 (for 13/16 (20.62) inch-diameter by 3 (76.20) inch-long fuse).
10. See figure 5 for mounting plan.
11. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 4. Style FH29 fuseholder (locking and ejector spring).

Source: https://assist.dla.mil -- Downloaded: 202640-19T09:19Z
Check the source to verify that this is the current version before use.

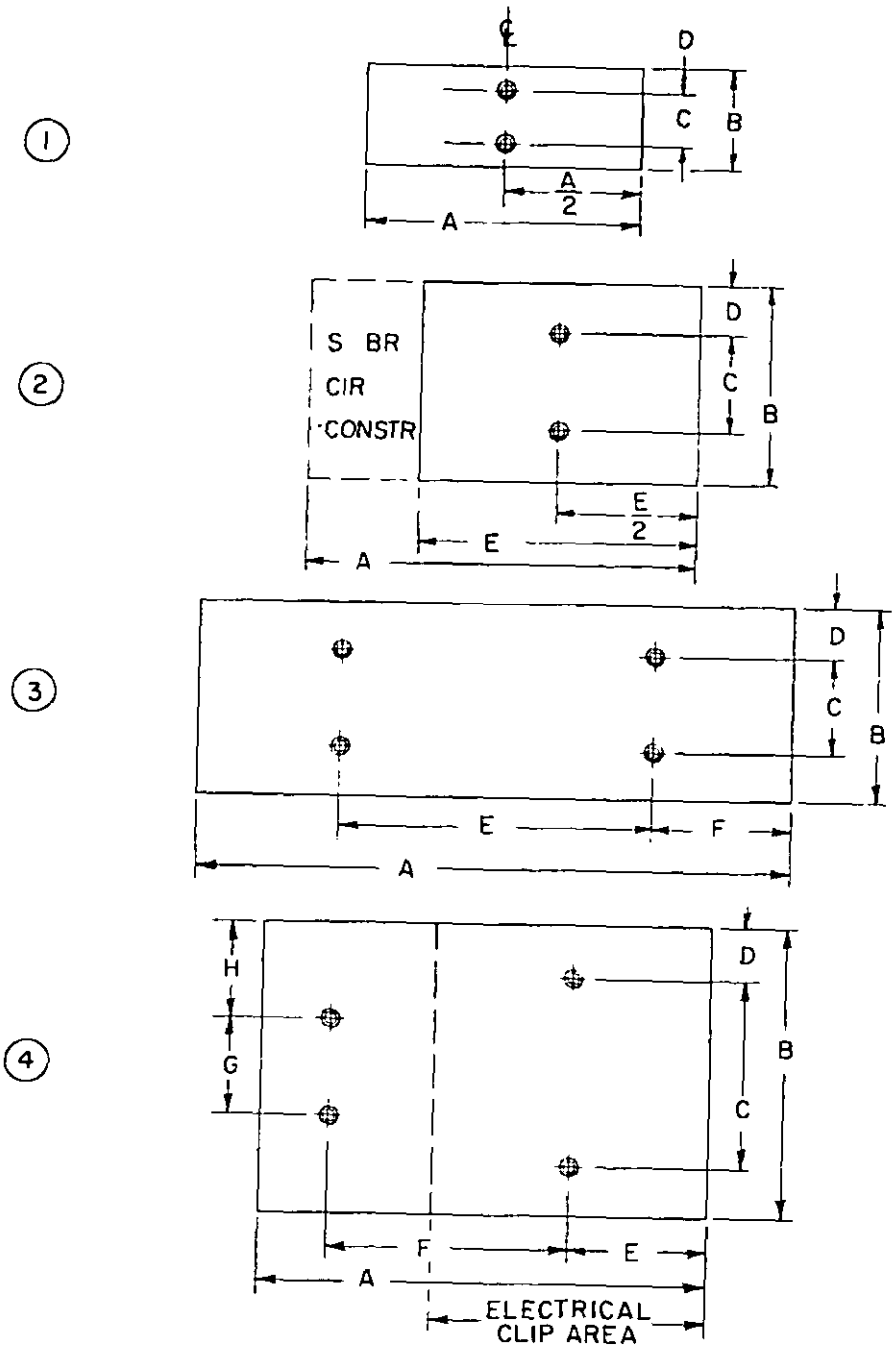


FIGURE 5. Mounting-hole plan.

Source: https://assist.dla.mil -- Downloaded: 202640-19T09:19Z
Check the source to verify that this is the current version before use.

Custodians:
Army - EL
Navy - SH
Air Force - 85

Review activities:
Army - EL, MI, ME, MU
Navy - SH, EC
Air Force - 85, 17
DSA - ES

User activities:
Army - WC, AT, AV
Navy - MC, AS, CG
Air Force - 19

Preparing activity:
Navy - SH

(Project 5920-0247)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:19Z
Check the source to verify that this is the current version before use.