MILITARY SPECIFICATION SHEET

ELECTRON TUBE, MAGNETRON

1/ TYPE 8763

This specification is approved for use by Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the electron tube described herein shall consist of this document and the latest issue of Specification MIL-E-1.

DESCRIPTION: Coaxial, tunable frequency 5,450 to 5,825 MHz, pulse type, integral magnet, 270 kw nominal peak power output.

ABSOLUTE RATINGS:

Parameter:	Ef	if(surge)	If	tk	tpc	rrv	Du	epy	ib	VSWR
Unit:	V	a	A	sec	µs	kv/µs	---	kv	a	---
Maximum:	10.5	30	13	---	3.0	125	0.0012	28	35	1.5:1
Minimum:	---	---	---	300	0.2	70	---	---	15	---
	(Note 1)	(Note 2)			(Note 3)	(Note 4a)				

ABSOLUTE RATINGS:

				Temperature		Pressurization	
Parameter:	Pi	pi	Tuner torque	Body	Input bushing	Input	Output
Unit:	W	kw	in.-oz	°C	°C	psia	psia
Maximum:	1,000	1,000	200	120	270	30	60
Minimum:	---	---	---	---	---	15	---
			(Note 5)	(Note 6)	(Note 6)	(Note 7)	(Note 8)

PHYSICAL CHARACTERISTICS:

Dimensions:	See figure 1	Marking:	See figure 1
Mounting position:	Any	Cooling:	Forced air (see note 9)
Mounting support:	Flange (see figure 1)	Handling:	See note 10
Input coupling:	See figure 1	Weight:	36 pounds nominal
Output coupling:	See figure 1		

TEST CONDITIONS: See notes 1, 3, and 9

Parameter:	Ib	Du	tp(rf)	tpc	rrv	trc
Unit:	mAdc	---	µs	µs	kv/µs	µs
Test condition 1:	21.5	0.0009	---	2.0±0.3	125(min)	0.1(max)
Test condition 2: (Triple pulse - see note 11)	16	0.00063	0.23±0.02	---	125(min)	---

TEST CONDITIONS: See notes 1, 3, and 9

Parameter:	tfc	tr(rf)	tf(rf)	VSWR	F
Unit:	µs	µs	µs	---	MHz
Test condition 1:	0.3(max)	---	---	1.1:1(max)	F1, F3, F5
Test condition 2: (Triple pulse - see note 11)	---	0.05(max) (Note 4b)	0.1(max) (Note 4b)	1.1:1(max)	F1, F3, F5

GENERAL:

(B) First article sample approval - Required (see note 13)
Shelf life - 24 months (see note 14)

Frequency (see note 12)	
F1	5,450 MHz
F2	5,550 MHz
F3	5,650 MHz
F4	5,750 MHz
F5	5,825 MHz

1/ Replaces Varian type No. SFD-341

(B) denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:17Z
Check the source to verify that this is the current version before use.

METHOD	REQUIREMENT OR TEST	NOTES	TEST	CONDITIONS	SYMBOL	LIMITS		UNIT
						MINIMUM	MAXIMUM	
	First article inspection							
4223	Tuning rate	-	1	F1 thru F5	Tuner turns	11	15	Turns
4223	Tuner stop endurance	-	-		Torque	---	50.0	in.-oz
1143	Forced cooling	6, 9, 15, 16	1	F = F3	ΔT (body)	---	70	°C(rise)
4027	Temperature coefficient	6	1	F = F1 and F5; ΔT(body) = 50° to 120°C	ΔF/ΔT	---	0.20	MHz/°C
4302	Frequency change (warmup)	17	1	F = F5	ΔF	---	5	MHz
---	Spurious radiation	18	1		---	---	---	---
1031	Low-frequency vibration	19	-	No voltages applied	---	---	---	---
1042	Shock, specified pulse	20, 21	-		---	---	---	---
4003	Pressurization	22	-	45 psia min at output assembly	---	---	---	---
(B)---	First article life	23	-		---	5,000	---	Hours
---	First article life-test end points:	-	-					
4223	Mechanical tuning fatigue	24	-	No voltages applied	---	500	---	Cycles
4250	Power output	25	1	F = F1 to F5	Po	200	---	W
---	Heater resistance cold	26	-	T (body) = 25°C	Ω	0.150	0.190	Ohm
4308	RF bandwidth	27	1	F = F1, F3, F5	BW	---	2.5/tpc	MHz
4308	Minor lobe ratio	27	1	F = F1, F3, F5	SL	-7	---	dB
4315	Stability (1)	28	1	F = F1, F3, F5	MP	---	0.25	%
4315	Stability (2)	28	2	F = F1, F3, F5	MP	---	0.50	%
4318	Time jitter	29	2	F = F1, F3, F5	tj (σ)	---	3.5	ns/rms
	Quality conformance inspection, part 1	30	-					
4289	Heater current (nonoperating)	-	-	Ef = 9.5 V; tk = 300 (min)	If	10	12	A
4223	Mechanical tuning range	-	1	Low frequency	F	---	5,450	MHz
		-	1	High frequency	F	5,825	---	MHz
4306	Pulse voltage	-	1	F = F1 thru F5	epy	23.0	26.0	kv
4250	Power output (1)	25	1	F = F1 thru F5	Po	225	350	W
4250	Power output (2)	25	2	F = F1 thru F5	Po	157	233	W
4308	RF bandwidth (1)	27	1		BW	---	2.0/tpc	MHz
4308	RF bandwidth (2)	27	2		BW	---	1.8/ tp(rf)	MHz
4308	Minor lobe ratio (1)	27	1		SL	-10	---	dB
4308	Minor lobe ratio (2)	27, 31	2		SL	-9	---	dB
4315	Starting stability	28, 32	1	F = F3	MP	---	0.50	%
4315	Stability (1)	28	1		MP	---	0.05	%
4315	Stability (2)	28, 33	2		MP	---	0.25	%

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:17Z
Check the source to verify that this is the current version before use.

METHOD	REQUIREMENT OR TEST	NOTES	TEST	CONDITIONS	SYMBOL	LIMITS		UNIT
						MINIMUM	MAXIMUM	
	Quality conformance inspection, part 1 -Continued							
4318	Time jitter	29	2		tj	---	2.5	ns
	Quality conformance inspection, part 2							
4310	Frequency pulling figure	-	1		ΔF	---	4.0	MHz
4311	Frequency pushing figure	34	1	ib = 20 to 24a	ΔF/Δib	---	40	kHz
4302	Frequency change (warmup)	9, 17	2		ΔF	---	3.0	MHz
(B)4266	Direct-interelectrode capacitance	-	-		C	17	30	pF
	Quality conformance inspection, part 3							
4551	Intermittent life	35	-		---	---	---	---
---	Intermittent life-test end points:							
4315	Stability (1)	36	-		MP	---	0.10	%
4315	Stability (2)	-	-		MP	---	0.30	%
4250	Power output (1)	-	-		Po	215	---	W
4308	RF bandwidth (1)	-	-		BW	---	2.2/tpc	MHz
4308	Minor lobe ratio (1)	-	-		SL	-9	---	dB
4318	Time jitter	-	-		tj	---	3.0	ns

NOTES:

1. Prior to the application of high voltage, the cathode shall be heated to the required initial operating temperature. This shall be done by applying 9.5 volts ±10 percent for 300 seconds minimum. Heater-voltage is not to be reduced during operation providing average anode power input does not exceed 700 watts. For average anode power input (Pi) of 700 to 1,000 watts the heater voltage shall be determined by the following formula: $Ef = 9.5\left(1-\frac{Pi}{2,850}\right)$ volts (see note 9).

2. The internal impedance of the heater filament supply shall limit the surge current to less than the maximum specified.

3. The characteristics of the applied voltage pulse which will result in proper starting and oscillation of the TUT, as measured into any tube, shall be as follows:

   Long pulse
   (test 1 conditions)

   a. tpv = 2.25 µs ±10 percent.
   b. tfv = 0.65 µs nominal.
   c. Ripple 3.5 percent maximum.
   d. Pulse droop 5 percent maximum.

   Filament transformer WS9609 shall be used. For triple pulse test purposes the following modulator units shall be used: *NAVORD Drawings 2699985 and 2660447-2.* Pulse spacing between each of the 0.23 µs detected rf pulses will (B) be 1.0 ±0.2 µs, measured from leading edge to leading edge at the 70 percent amplitude point. Triple pulse tp (rf), tr(rf), and tf(rf) values are functions of the modulator units used. Testing with these components is to be performed in such a way that the maximum and minimum ratings are not exceeded.

   Time of detected rf pulse (tp(rf)) shall be measured at the half power point (3 dB down from the average value of the essentially flat top of the detected rf pulse, measured using a precision rotary vane type rf attenuator in front of the detecting element).

   Duty cycle (Du) shall be calculated as: Du = tp(rf) x prr for single pulse operation. The duty cycle for triple pulse oscillation shall be calculated as: $Du = (tp(rf)_1 + tp(rf)_2 + tp(rf)_3)) \times prr$.

   Where $tp(rf)_1$, $tp(rf)_2$, and $tp(rf)_3$ are the pulse widths of pulse 1, pulse 2, and pulse 3 of the triple pulse package.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:17Z
Check the source to verify that this is the current version before use.

NOTES: -Continued

4. Pulse characteristics.

   a. The rate of rise of voltage (rrv) shall be measured in accordance with method 4304 except that the steepest tangent to the leading edge of the voltage pulse shall be measured above the 70 percent amplitude point.

   b. The rise time (tr(rf) and fall time (tf(rf) of the detected rf pulses shall be measured between those points on the leading or trailing edge at which the instantaneous rf power levels are 1 dB and 6 dB below the average value of the essentially flat top of the detected rf pulse as measured using a precision rotary vane type rf attenuator in front of the detecting element.

5. The tuner drive shall be capable of supplying a minimum of 50 inch-ounces of torque to the TUT tuning shaft and shall never supply more than 200 inch-ounces of torque including inertial effects.

6. The temperature is to be measured at the point indicated on figure 1.

7. The TUT shall be capable of normal operation without electrical breakdown with the input bushing at normal atmospheric conditions.

8. The gas used for pressurization shall provide insulating properties consistent with the power levels required. The minimum pressure is, therefore, dependent on the type of insulating gas used.

9. The cooling airflow shall be 65 ±5 cfm using a 2.0 ±0.5 inch diameter conduit located 1.0 ±0.25 inch from the tube body which directs the air toward the tube body in the direction shown in figure 1 (side view). The tube mounting shall be nonmetallic. This airflow is necessary to limit the body temperature to a maximum of 120°C at an ambient temperature of 50°C at sea level for power inputs below 800 watts. For power inputs of 800 to 1,000 watts, cooling airflow shall be greater than 80 cfm.

10. Care shall be used in the storage, installation and handling of the tube to avoid imparting vibration or shock in excess of the values for which it is designed to withstand.

11. The three detected rf pulses within each group shall be equal in height within 1 dB.

12. The tuner dial settings for these test frequencies shall be marked on the tube during final testing by the tube manufacturer.

13. First article sample inspection shall conform to the requirements of appendix F of MIL-E-1 and shall consist of performing all tests specified on this tube specification sheet. Invitation for bids should provide that the preparing activity reserves the right to waive the requirements for first article samples as to those bidders offering a product which has been previous procured or tested by the Government, and that bidders offering such products who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending procurement.

14. At any time during the shelf life period the tube shall be capable of being "snapped-on" at normal operating voltages for both test 1 condition and test 2 condition. The "snap-on" test procedure is defined in note 32. The maximum missing pulse count shall be 0.5 percent for test 1 conditions and 0.25 percent for test 2 conditions.

15. The change in body temperature, $\Delta T(body)$, shall be calculated as follows: $\Delta T(body) = T(body)$ (test 1 conditions) $-T(body)$ (Ef = 0, epy = 0). $\Delta T(body)$ shall not exceed the limit specified.

16. Temperature measurements shall be made only after thermal equilibrium has been reached.

17. With the tube operating under test 1 conditions, the frequency shall be allowed to reach thermal equilibrium at F5 or under test 2 conditions, the frequency shall be allowed to reach thermal equilibrium at F4. The TUT shall then be allowed to cool at ambient temperature for a minimum of 1 hour. Following the cooling period, the filament shall be preheated for 5 minutes, then high voltage applied to full value in 30 seconds maximum. Frequency measurements shall be made every 30 seconds for 2 minutes, then at 1 minute intervals until frequency stability is reached. The maximum frequency drift shall be less than the value specified. Frequency stability shall occur within 15 minutes maximum. Stability is defined as the operating condition where the frequency does not vary more than 0.5 MHz within 15 minutes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:17Z
Check the source to verify that this is the current version before use.

NOTES: -Continued

(B) 18. Leakage radiation in any direction shall not exceed 500 microwatts peak per square meter at a distance of 30 meters when the TUT is terminated in a nonradiating load with a VSWR of 1.1 or less. Test to be performed by the Quality Evaluation Laboratory at U.S. Naval Ammunition Depot, Crane, Indiana.

19. The TUT shall be vibrated in each of three mutually perpendicular planes for a period of 1 minute in each plane. The planes of vibration shall be perpendicular to planes A, B, and C as shown on figure 1. At the end of the test, the TUT shall meet the requirements of test 1 conditions of quality conformance inspection, part 1.

20. Prior to, and after completion of this test, the tube shall meet the requirements of quality conformance inspection, part 1, test 1 conditions.

21. The TUT shall be subjected to 18 impact shocks, consisting of three shocks in opposite opposite directions along each of three axes perpendicular to planes, A, B, and C (figure 1).

22. The specified pressure shall be applied to the TUT output. There shall be no leaks as evidenced by metered pressure fall off or by bubbles if the test is performed with the TUT immersed in water. The time of the test shall be 1 minute minimum. The fixture shall be such that the seal area conforms to the seal area of a M3922/62-002(UG148C/U of MIL-E-3922/62.

23. This initial first article life test requires 3 tubes and approximately one year of operation. All tubes shall be cycled to accumulate a minimum of 5,000 rf hours. At approximately 1,000 rf hour intervals, each tube shall meet the requirements of first article life-test end points. Filament transformer WS9609 shall be used.

Tube No. 1 test conditions. The test shall be conducted while the phase of 1.5 minimum VSWR located at a distance of 0.2 ±0.05 meters from the magnetron output flange is uniformly and continually cycled through 360 electrical degrees with a time interval of approximately 30 minutes per cycle. Simultaneously, the magnetron frequency, starting at F1, increasing to F5, then decreasing to F1, shall be changed in approximately 100 megahertz increments each 8 hours. The tube is to be mounted with the cathode in a horizontal position.

Pulse characteristics

Pulse (1)	Pulse (2)
tpc = 2.40 µs	tpc = 0.19 µs
Du = 0.0009	Du = 0.00063
rrv = 130 kv/µs	rrv = 116 kv/µs
Ib = 21.5 mAdc	Ib = 16.0 mAdc

Cycle schedule

Condition	Duration (min)
Heater on	5
Pulse (2)	420
Pulse (1)	15
Off	55
Heater on	5
Pulse (1)	330
Off	55
Heater on	5
Pulse (1)	495
Off	55

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:17Z
Check the source to verify that this is the current version before use.

NOTES: -Continued

Tube No. 2 test conditions. The test shall be conducted while the phase of a 1.5 minimum VSWR located at a distance of 0.2 ±0.05 meters from the magnetron output flange is uniformly and continually cycled through 360 electrical degrees with a time interval of approximately 30 minutes per cycle. Simultaneously, the magnetron frequency, starting at F1, increasing to F5, then decreasing to F1, shall be changed in approximately 100 megahertz increments each 8 hours. The tube is to be mounted with the cathode in a horizontal position.

Pulse characteristics

Oscillation (1)	Short pulse
a. tpc = 2.0 ±0.3 µs	a. tprf = 0.3 µs ±20%
b. Du = 0.0009	b. Du = 0.0002
c. rrv = 125 kv/µs (min)	c. rrv = 125 kv/µs (min)
d. Ib = 21.5 mAdc	d. Ib = 5.3 mAdc
	e. trrf = 0.07 µs (max)
	f. tfrf = 0.2 µs (max)

Cycle schedule

Condition	Duration (hrs)
Heater on	0.1
Oscillation (1)	50
Short pulse	50
Off	1

Tube No. 3 test conditions. The tube shall be operated as tube No. 2 except a fixed non-phasing load of 1.25 maximum VSWR shall be used and F = F3.

Pulse characteristics

Oscillation (1)

a. tpc = 2.0 ±0.3 µs
b. Du = 0.0009
c. rrv = 125 kv/µs (min)
d. Ib = 21.5 mAdc

Cycle schedule

Condition	Duration (min)
Heater on	5
Oscillation (1)	60
Off	40

24. The tuner shaft shall be continuously driven at a speed of 100 ±10 percent rpm. At the completion of the test the TUT shall meet quality conformance inspection part 1 requirements. During the test, the tuning shaft shall not be lubricated. A cycle consists of two complete excursions each in opposite directions through the tuning range of the TUT.

25. The minimum power output requirement must be satisfied over the specified frequency range and is to be recorded at the frequencies specified.

(B) 26. Current in the heater shall be less than 0.1 amperes during measurement.

27. The radio frequency bandwidth and side lobes shall be within the limits specified when a VSWR of 1.5 minimum is introduced in the load at a distance of 0.2 ±0.05 meters from the TUT flange and the phase is adjusted at the start of each measurement to produce maximum degradation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:17Z
Check the source to verify that this is the current version before use.

NOTES: -Continued

28. Stability shall be measured in terms of the average number of output pulses missing, expressed as a percentage of the number of input pulses applied during the period of observation. The missing pulses (MP) due to any causes, are considered to be missing if the rf energy is less than 70 percent of the normal energy level, or is at a frequency greater than plus or minus 5 MHz from the operating frequency. The stability shall be measured when a VSWR of 1.5 minimum is introduced in that phase producing maximum instability. The missing pulse count shall be performed over a 3-minute test interval. The missing pulse count test interval of 3 minutes shall start within 15 seconds after the application of anode voltage.

29. Time jitter is defined as variation in time between a modulator voltage pulse (at the 70 percent point) and the resultant detected rf pulse (at the -3 dB point). The test shall be run on all three pulses.

30. The combined AQL (percent defective) for quality conformance inspection, part 1, shall be 1 percent, inspection level II.

31. The first adjacent side lobe of each of the three rf pulses shall be at least 9.0 dB below the main lobe, and each successive side lobe shall be lower than its preceding one.

32. After the holding period, the anode voltage shall be applied 300 seconds (min) after the application of the standby heater voltage. The anode voltage shall be instantaneously applied to full value. The missing pulse count test interval of 3 minutes shall start within 15 seconds after the application of anode voltage.

33. In lieu of detecting individual pulses in test 2 conditions, a missing pulse detection level of 90 percent of the normal energy level may be used as an alternate method if the energy of the three pulses is intergrated as a group. During each 15 second interval in the 3-minute test time, there shall be no more than 125 missing pulses.

34. This measurement shall be made in such a manner that thermal effects do not introduce appreciable errors.

35. The intermittent life testing plan requires 2 tubes for a period of 10 weeks. Filament transformer WS9609 shall be used. It shall be conducted while the phase of 1.5 minimum VSWR located at a distance of 0.2 $\pm$0.05 meters from the TUT output flange is uniformly and continuously cycled through 360 electrical degrees with a time interval of approximately 30 minutes per cycle. Simultaneously, the TUT frequency, starting at F1, increasing to F5, then decreasing to F1, shall be changed in approximately 100 megahertz increments each 8 hours. The TUT is to be mounted with the cathode in a horizontal position. The rf operation shall be cycled every hour between test 1 conditions and short pulse operation. Short pulse (test 2 conditions) operation shall be adjusted for the following conditions:

    a. tp(rf) = 0.3 µs +20 percent.
    b. Du = 0.0002].
    c. rrv = 125 kV/µs(min).
    d. Ib = 5.3 mAdc.

    Measurements methods described in notes 3 and 4a and air cooling described in note 9 shall be followed. The vendor shall accumulate 640 hours of rf operation time and 720 hours of filament operation time during a 35-day interval. This tube will then be placed on a filament supply for 720 hours. A second tube shall be tested in the reverse sequence. Both tubes shall then meet all requirements of quality conformance inspection, part 3.

36. This test shall be the first test after completion of quality conformance inspection, part 3, intermittent life test.

User activities:
Navy - AS, OS, MC

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5960-N114)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:17Z
Check the source to verify that this is the current version before use.

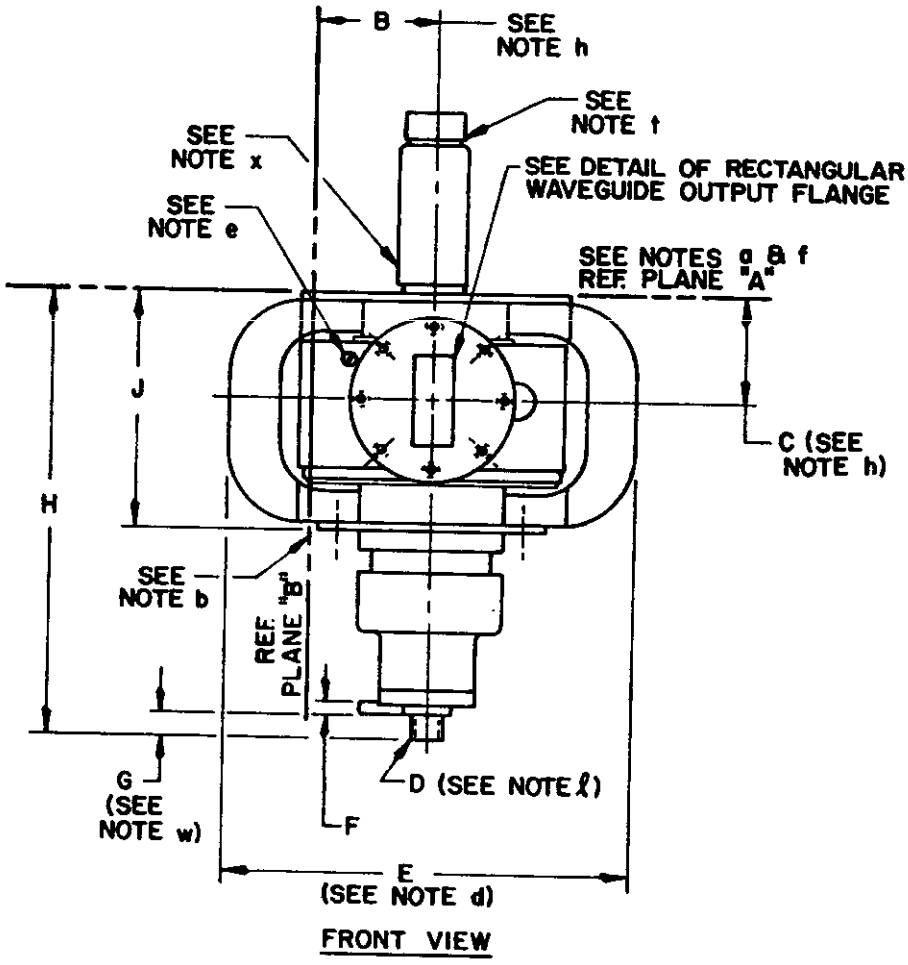


FIGURE 1. Outline drawing of electron tube type 8763.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:17Z
Check the source to verify that this is the current version before use.

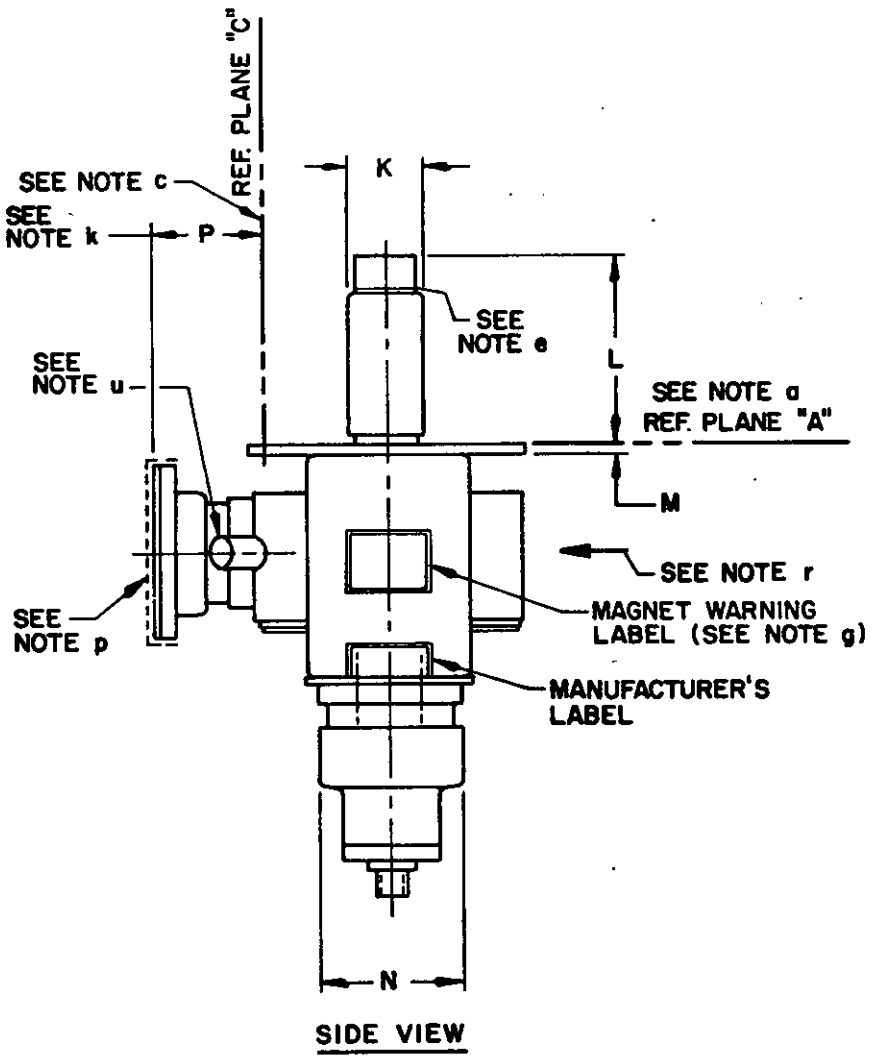


FIGURE 1. Outline drawing of electron tube type 8763 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:17Z
Check the source to verify that this is the current version before use.



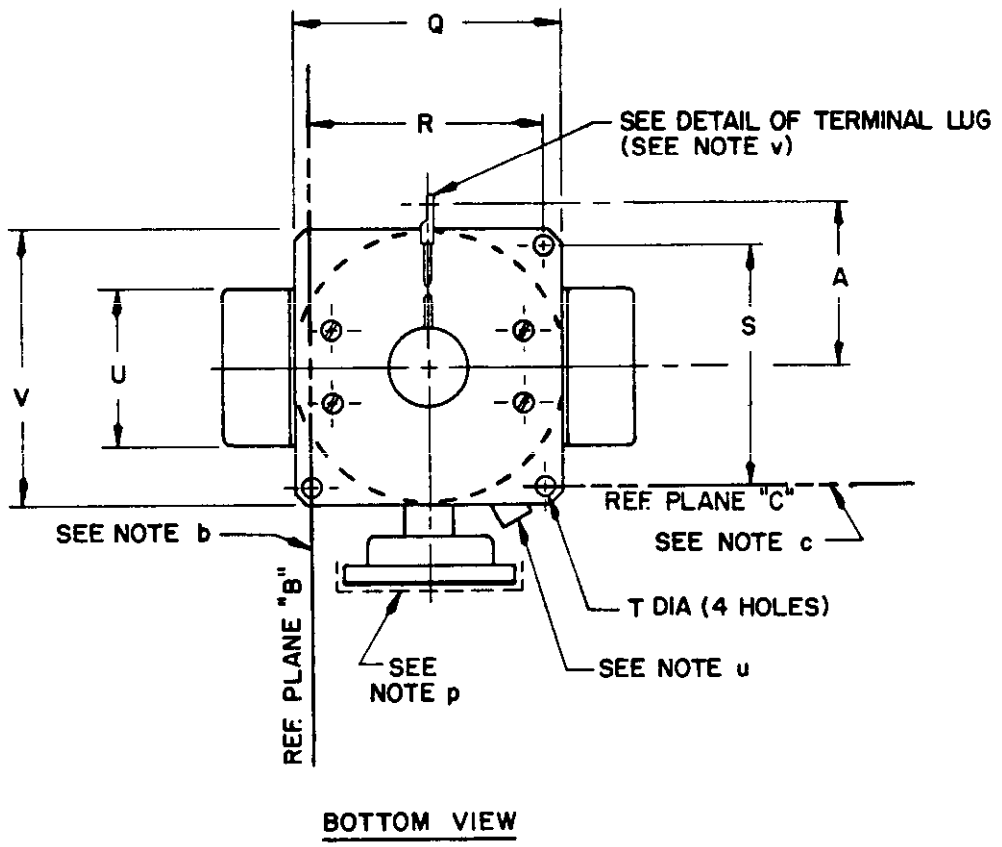


FIGURE 1. Outline drawing of electron tube type 8763 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:17Z
Check the source to verify that this is the current version before use.

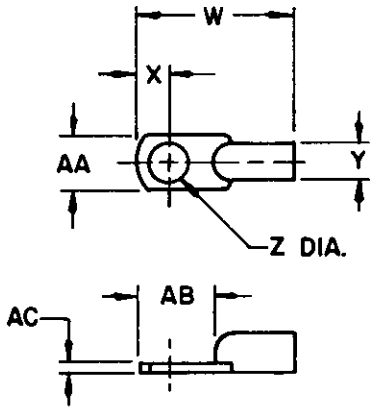

DETAIL OF TERMINAL LUG

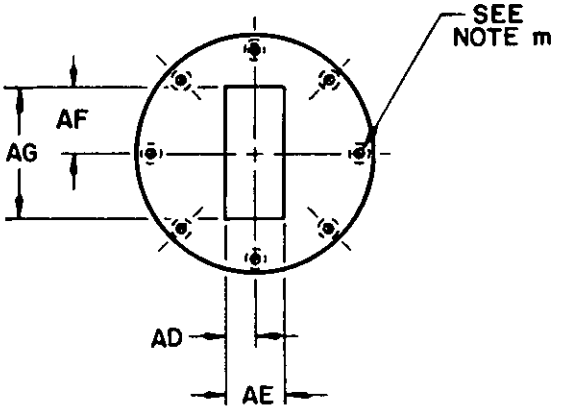

DETAIL OF RECTANGULAR WAVEGUIDE OUTPUT FLANGE
(SEE NOTES n AND s)

FIGURE 1. Outline drawing of electron tube type 8763 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:17Z
Check the source to verify that this is the current version before use.

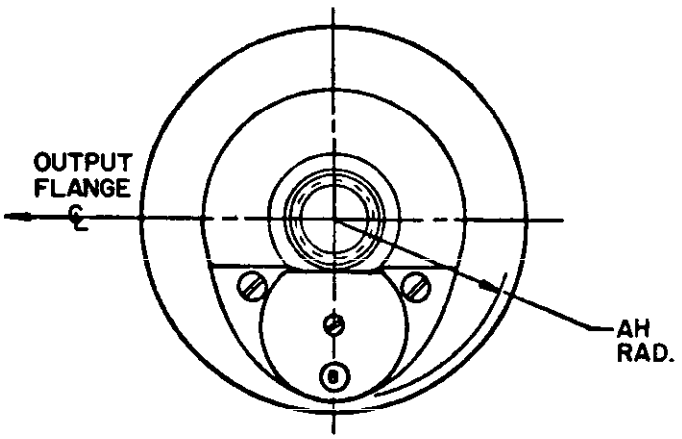


FIGURE 1. Outline drawing of electron tube type 8763 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:17Z
Check the source to verify that this is the current version before use.

Ltr	Dimensions in inches with metric equivalents (mm) in parentheses	
	Minimum	Maximum
First article sample inspection		
E	---	8.906 (226.00)
J	---	5.190 (132.00)
K	---	1.640 (41.70)
N	---	2.940 (74.70)
Q	---	5.550 (141.00)
U	---	3.437 (82.50)
V	---	5.800 (147.50)
Quality conformance inspection, part 1		
A	10.000 (254.00)	11.000 (279.00)
B	2.312 (58.70)	2.562 (65.00)
C	2.244 (57.00)	2.296 (58.40)
P	1.938 (49.30)	2.062 (52.40)
R	4.870 (123.80)	4.880 (124.00)
S	5.120 (130.00)	5.130 (130.30)
T	.336 (8.54)	.352 (8.95)
D	.625-24NS	---
Quality conformance inspection, part 2		
G	.450 (11.43)	---
H	---	9.270 (235.80)
L	---	3.625 (92.10)
Z	.252 (6.40)	.302 (7.67)
Reference dimensions (see note d)		
F	.470 (11.95)	
M	.250 (6.35)	
W	1.062 (27.00)	
X	.247 (6.27)	
Y	.220 (5.59)	
AA	.446 (11.32)	
AB	.585 (14.89)	
AC	.040 (1.02)	
AD	.436 (11.09)	
AE	.872 (22.15)	
AF	.936 (23.80)	
AG	1.872 (47.50)	
AH	1.450 (36.80) RAD.	

FIGURE 1. Outline drawing of electron tube type 8763 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:17Z
Check the source to verify that this is the current version before use.

NOTES:

a. Reference plane "A" is defined as a plane passing along the face of the mounting plate.

b. Reference plane "B" is defined as a plane perpendicular to plane "A" passing through the axis of the holes, as shown at reference plane "A".

c. Reference plane "C" is defined as a plane mutually perpendicular to planes "A" and "B" passing through the axis of the holes, as shown at reference plane "A".

d. Dimensions without tolerances are for information only.

e. Temperature measurements to be made at points indicated.

f. For vibration and shock testing, the planes of testing shall be perpendicular to reference planes "A" - "B" - "C".

g. Warning: Maintain minimum clearance 4 inches between magnetic materials, steel tools, plates, etc., and 12 inches between other magnets.

h. This dimension refers to the center of the rectangular opening of the waveguide.

k. The output flange face is to be parallel to plane "C" within 0.025.

l. Mates with S.S. White flexible shaft No. RY 18-2, or equivalent.

m. Eight holes, No. 10 (.190) -32.

n. Mates with modified M3922/62-002 (UG 148C/U) of MIL-F-3922/62 choke flange (clearance instead of threaded holes).

p. Protective closure.

r. Indicates plane of direction of cooling airflow.

s. For pressurization of the output, "O" ring No. MS90064-16 can be used to effect a hermetic seal to the face of the waveguide flange.

t. The axis of this diameter shall not deviate by more than 0.060 from the mutual center of the four mounting holes.

u. Permanently attached protective closure for the exhaust tubulation of the magnetron will not restrict airflow nor impair serviceability of the magnetron.

v. Brown coded lead identifies the common cathode connection.

w. Applies to turns counter only.

x. This identifies a north seeking pole. This may be tested by observing which compass needle points to the geographic south. The same compass needle will point toward the magnetron north seeking pole when it is brought near the input stem of the magnetron. Care should be taken to insure that the magnetron field does not reverse the polarity of the compass.

FIGURE 1. Outline drawing of electron tube type 8763 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:17Z
Check the source to verify that this is the current version before use.