MILITARY SPECIFICATION

CIRCUIT CARD ASSEMBLY: 11834803 AMMO SELECT

This specification is approved for use by the US Army Armament Research and Development Command (ARRADCOM), and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification establishes the requirements and quality assurance provisions for the Circuit Card Assembly: 11834803 Ammo Select, which is the A7 component of the M21 Ballistic Computer Unit, 11732400.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-F-13926	Fire Control Materiel: General Specification Governing the Manufacture and Inspection of
MIL-I-45607	Inspection Equipment, Acquisition, Maintenance and Disposition of
MIL-STD-45662.	Calibration System Requirements

FSC 1220

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research and Development Command, Attn. DRDAR-QA, Dover, New Jersey 07801 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:28Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-810	Environmental Test Methods

DRAWINGS

ARRADCOM

11834803	Circuit Card Assembly: 11834803 Ammo Select

Inspection Equipment

11750202	Automatic Card and Unit, Test Set
11750424	Adapter, Computer Board - A7
11821457	Fixture Shock, Vertical and Horizontal Plane
11821458	Shock Adapter, Plate Vib Horz-Vert Plane Shock-Z
11821500	Vibration/Shock Test Fixture Computer Unit, FAT
11821520	Automatic Test Assembly Central Processor Unit
18821854	Test Fixture Auto Card, Test Set, Computer, FAT

Packaging Data Sheet

P11834803	Circuit Card Assembly: 11834803

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:28Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Fabrication. The ammunition select circuit card assembly, herein referred to as the assembly, shall be manufactured in accordance with Drawing 11834803 and drawings pertaining thereto and, when assembled, shall meet the requirements of this specification. (See 4.5.1)

3.1.1 Signals. The assembly shall provide the following signals:

	Signal Designation	Signal Nomenclature
a.	APDS, HEAT, HEP/WP, FSDS	Lamp driver bus
b.	AS1, AS3, AS4, AS4A, AS8	Ammunition select bus
c.	BIT ENABLE 2	Built-in test enable 2
d.	MT LAMP, MT BAR LAMP	Moving and stationary lamp drivers

3.1.2 General specification. The following provisions of MIL-F-13926 apply: (See 4.5.1)

a. Order of precedence
b. Dimensions and tolerances
c. Inorganic protective surface finishes
d. Part identification and marking
e. Workmanship

3.1.3 Ambient conditions. Standard ambient conditions shall be as follows:

a.	Temperature	$73^{\circ} \pm 18^{\circ}F$
b.	Relative humidity	50 percent $\pm$ 30 percent
c.	Atmospheric pressure	28.5 + 2.0 $-$ 3.0 in. Hg.

3.2 First article. When specified (see 6.2), the contractor shall furnish sample units for first article inspection and approval (see 4.4 and 6.2).

3.3 Performance. Unless otherwise specified, the assembly shall meet the performance requirements specified herein under standard ambient conditions of 3.1.3.

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:28Z
Check the source to verify that this is the current version before use.

TABLE I. Loads, power and signal sources.

Item	Conditions	Characteristics	Connections
1.0	Loads		Connected between positive terminal of item 2.1 and the following pins:
1.1	Resistor	240 ohms ± 5%, 5w	P1-24B
1.2	Resistor	240 ohms ± 5%, 5w	P1-23B
1.3	Resistor	240 ohms ± 5%, 5w	P1-18A
1.4	Resistor	240 ohms ± 5%, 5w	P1-22A
1.5	Resistor	240 ohms ± 5%, 5w	P1-9A
1.6	Resistor	240 ohms ± 5%, 5w	P1-11A
2.0	Power		Applied between the following points and P1-13A (rtn):
2.1	24.0 vdc (+24v)	Tolerance: ± 1.0 vdc Ripple: 200 mv p-p max	Junction of items 1.1 through 1.6
2.2	15.000 vdc (+15v)	Tolerance: ± 0.150 vdc Ripple: 100 mv p-p max	P1-6A
2.3	-15.000 vdc (-15v)	Tolerance: ± 0.150 vdc Ripple: 100 mv p-p max	P1-21A
3.0	Signal source		
3.1	400 Hz square wave (MR1)	See figure 1	Applied between P1-18 and P1-13A (rtn)
4.0	Interconnection		
4.1		Jumper wire	Connected between pins P1-10B and P1-13B

3.3.1 Lamp driver and ammunition select buses. With loads (items 1.1 through 1.4 of table I) connected, power (items 2.1, 2.2 and 2.3 of table I) applied and the MR1 signal (item 3.1 of table I) applied, the following requirements shall be met: (see 4.6.2.1 and 4.6.3.1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:28Z
Check the source to verify that this is the current version before use.

3.3.1.1 Initial conditions. With the inputs at pins P1-2A, P1-2B, P1-3B and P1-5B open, initial application of power shall generate the output conditions specified for item 1 in table II.

3.3.1.2 Ammunition selection. After the initial application of power, the assembly shall generate the output conditions of table II when the corresponsing input conditions are established for the four items. For each of the four items, the output conditions shall be maintained after the +15 volts direct current (vdc) power (item 2.2 of table 1) is reduced to 0.0 ± 0.1 vdc for 205 ± 5 milliseconds (msec) and then restored to 15 vdc.


3.3.2 BIT ENABLE 2 output. With power (items 2.2 and 2.3 of table I) applied, the assembly shall generate the output conditions of table III when the corresponding input conditions are established for the two items. (See 4.6.2.2 and 4.6.3.2)

TABLE III. Signal conditions - BIT ENABLE 2.

Item	Input at Pin P1-17B 1/	Output at Pin P1-18B 1/
1	0.10 ± 0.01 vdc	13.50 ± 1.50 vdc
2	-5.00 ± 0.50 vdc	-13.50 ± 1.50 vdc

1/ Measured with respect to P1-13A.

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:28Z
Check the source to verify that this is the current version before use.

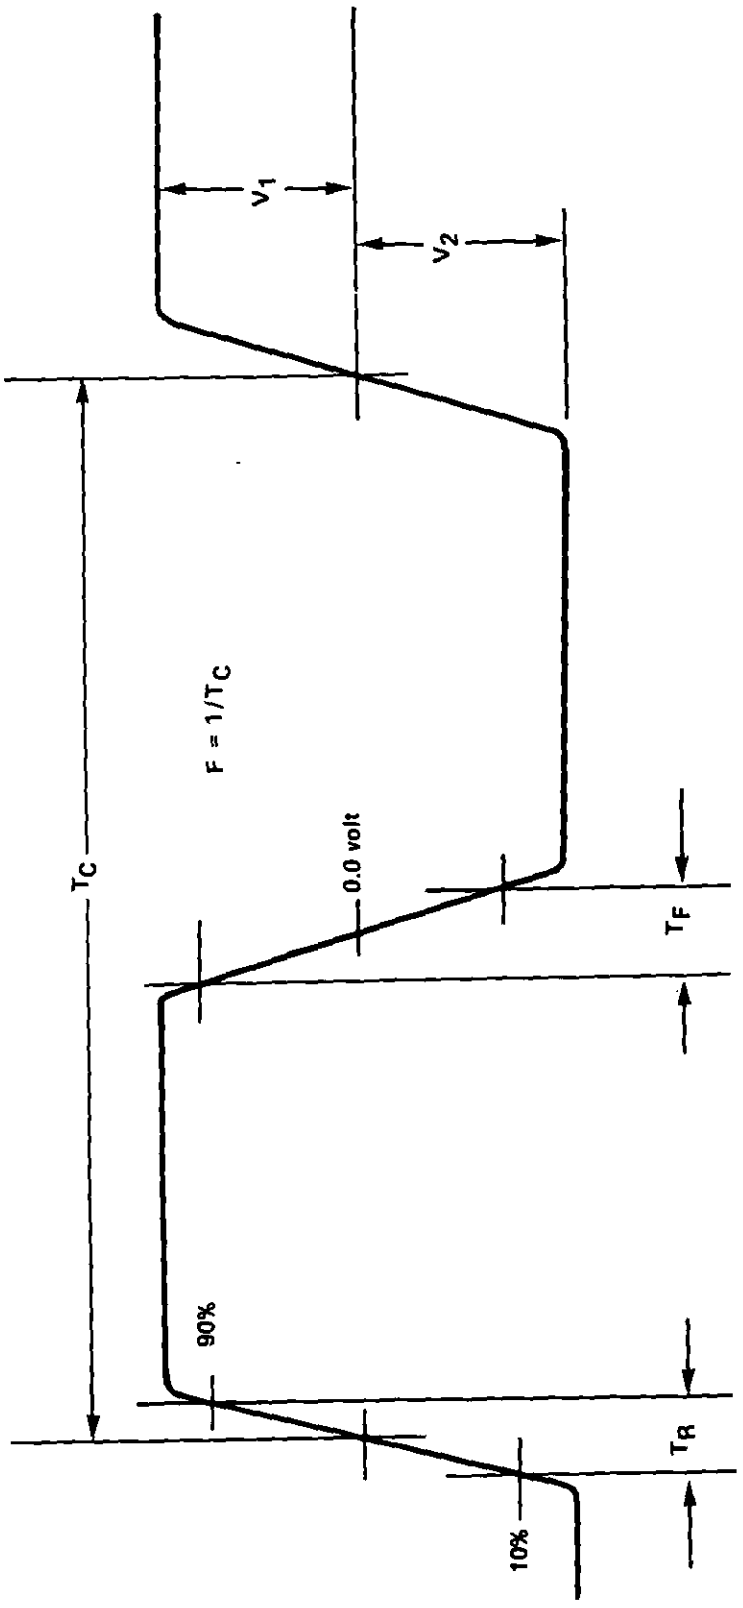

	Standard ambient	140°F	-25°F
V_1	15±0.50 volts	15±0.50 volts	15±0.50 volts
V_2	-15±0.50 volts	-15±0.50 volts	-15±0.50 volts
T_R	0.5 to 5 microsecond	0.5 to 4 microsecond	1 to 6 microsecond
T_F	0.5 to 4 microsecond	0.5 to 4 microsecond	0.5 to 6 microsecond
F	400±1 Hz	402±2 Hz	398±2 Hz

FIGURE 1. MR1 waveform.

Source: https://assist.dla.mil -- Downloaded: 20261O-22T19:28Z
Check the source to verify that this is the current version before use.

TABLE II. Lamp drivers and ammunition select buses, input and output conditions.

Item	Input Conditions 1/				Lamp Driver Bus, Output Conditions 2/ 4/				Ammunition Select Bus, Output Conditions 3/ 4/				
	P1-2B	P1-5B	P1-2A	P1-3B	P1-24B	P1-23B	P1-18A	P1-22A	P1-24A	P1-22B	P1-14A	P1-19A	P1-19B
1	Gnd	Open	Open	Open	2	24	24	24	0.7	-14	-14	-14	-14
2	Open	Gnd	Open	Open	24	2	24	24	-14	0.7	-14	-14	-14
3	Open	Open	Gnd	Open	24	24	2	24	-14	-14	0.7	-14	-14
4	Open	Open	Open	Gnd	24	24	24	2	-14	-14	-14	0.7	0.7

1/ Gnd = 1.0 sec max 100 msec min momentary interconnection with P1-13A.
Open = No connection.

2/ 2 = 1.0 ± 1.0 vdc Measured with respect to P1-10B.
24 = 24.0 ± 2.0 vdc Measured with respect to P1-10B.

3/ 0.7 = 0.70 ± 0.30 vdc Measured with respect to P1-13A.
-14 = -14.00 ± 1.50 vdc Measured with respect to P1-13A.

4/ Each output shall appear 30 to 50 msec after the Gnd input condition is established and shall remain stable after the Gnd condition is terminated.

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:28Z
Check the source to verify that this is the current version before use.

3.3.3 Moving and stationary lamp drivers. With loads (items 1.5 and 1.6 of table I) connected and power (items 2.1 and 2.3 of table I) applied, the assembly shall generate the output conditions of table IV when the corresponding input conditions are established for the two items. (See 4.6.2.3 and 4.6.3.3)

TABLE IV. Signal conditions - moving and stationary lamp drivers.

Item	Input Conditions at Pins 1/		Output Conditions at Pins 2/	
	P1-8B	P1-14B	P1-9A	P1-11A
1	15 vdc	Open	1.0 ± 1.0 vdc	24.0 ± 2.0 vdc
2	Open	15 vdc	24.0 ± 2.0 vdc	1.0 ± 1.0 vdc

1/ 15 vdc = item 2.2, table I.
Open = no connection.

2/ Measured with respect to P1-13A.

3.4 Environmental.

3.4.1 Shock. The assembly shall capable of operating as specified herein after exposure under the conditions of 3.1.3 to three half sine wave shock pulses of 40 ± 4 gravity units (g) for a duration of 18 ± 3 msec applied in each direction along three mutually perpendicular axes. In addition, the assembly shall be capable of withstanding three half sine wave shock pulses of 100.0 ± 10.0 g for a duration of 1.5 ± 0.2 msec applied in each direction along three mutually perpendicular axes. (See 4.6.4.1)

3.4.2 Vibration. The assembly shall be capable of operating as specified herein after exposure under the conditions of 3.1.3 to the vibration profile of figure 2. Duration of exposure shall be not less than 80 minutes in each of three mutually perpendicular axes. (See 4.6.4.2)

3.4.3 Operating temperature. The assembly shall be capable of operating as specified herein over the operating temperature range of -25°F to +140°F. (See 4.6.4.3, 4.6.4.4, 4.6.4.5)

3.4.4 Storage temperature. The assembly shall be capable of operating as specified herein after exposure to storage temperatures ranging from -65°F to +160°F. (See 4.6.4.3, 4.6.4.4 and 4.6.4.5)

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:28Z
Check the source to verify that this is the current version before use.

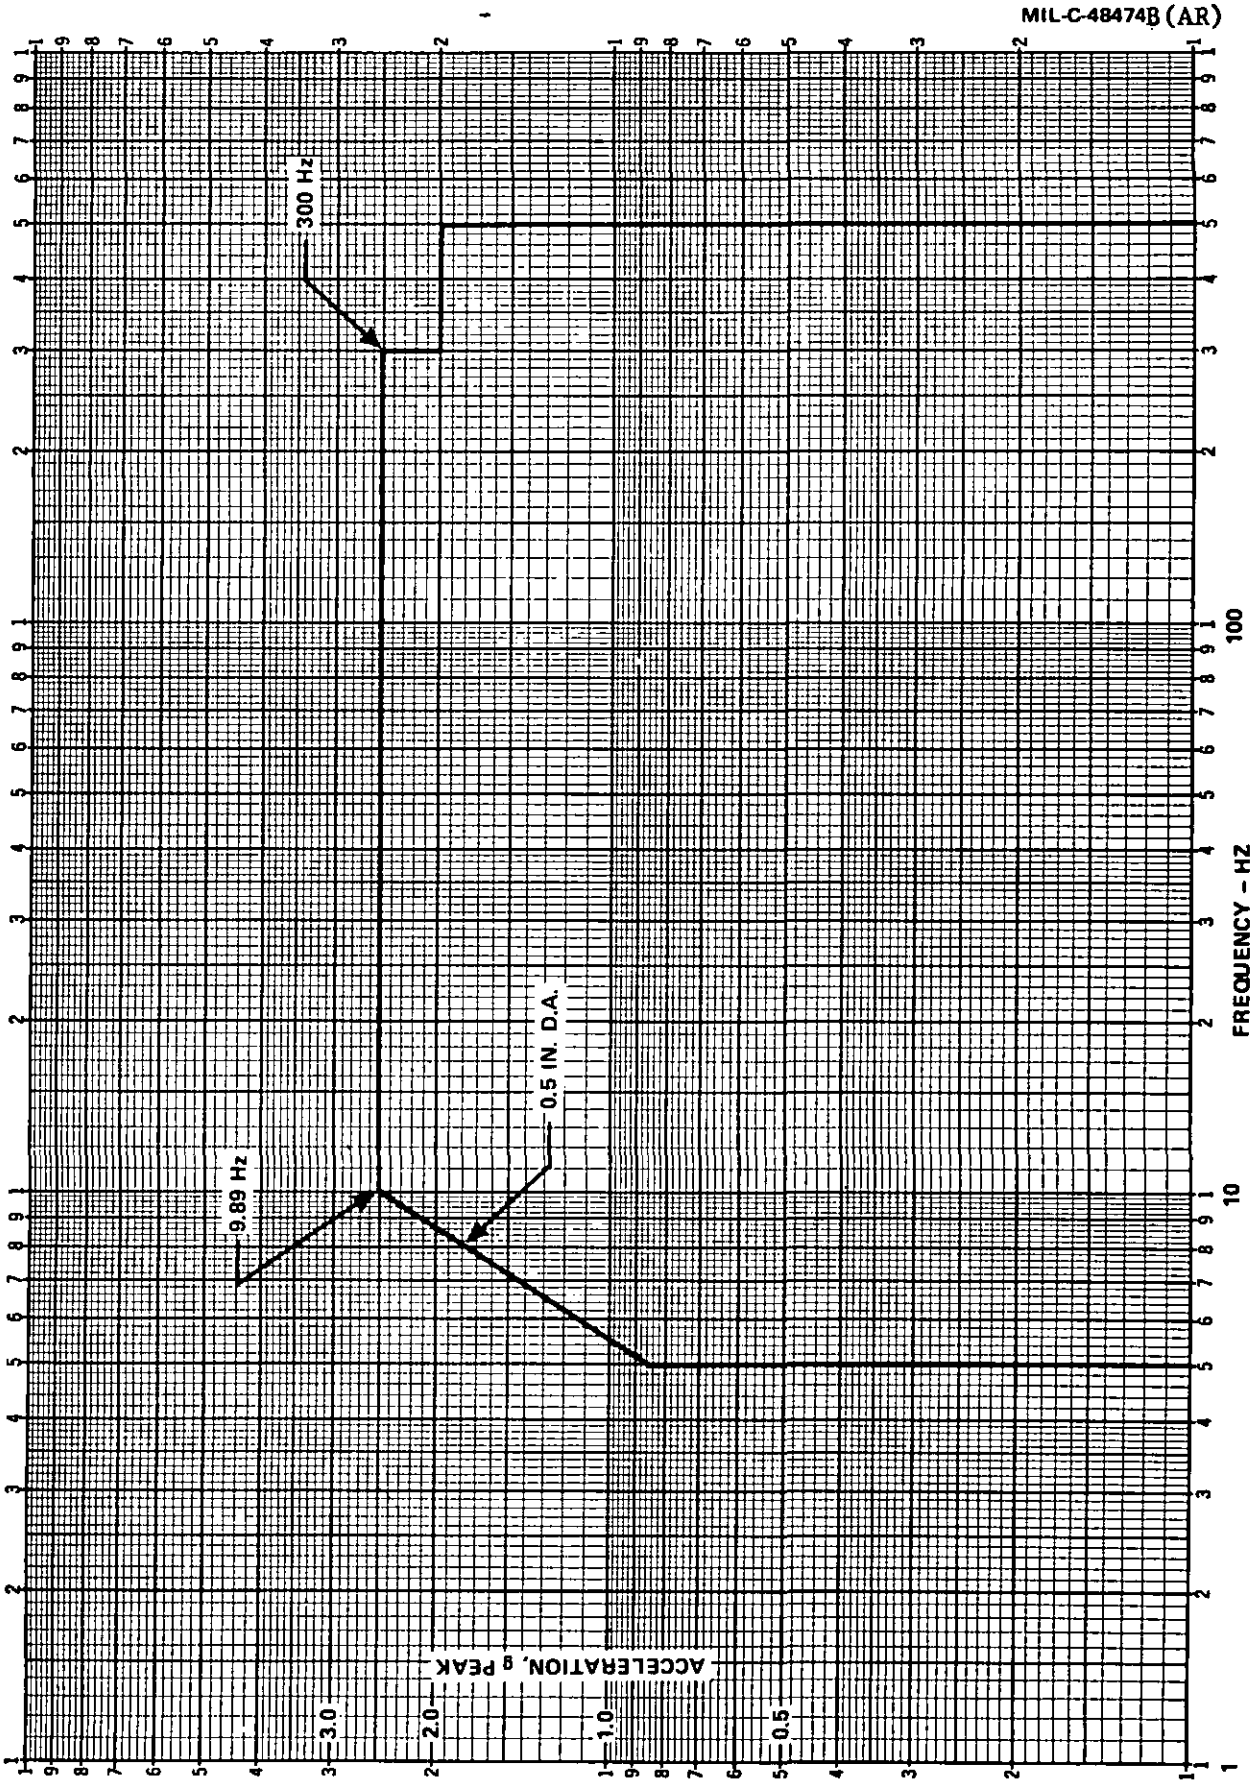


FIGURE 2. Vibration profile.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:28Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for performing all inspection requirements specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable to perform the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth herein where such inspections are deemed necessary to assure that supplies and services conform to the prescribed requirements.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

1. First article inspection (See 4.4).
2. Quality conformance inspection (See 4.5).

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the quality assurance provisions of MIL-F-13926 and the conditions of 3.1.3.

4.4 First article. The requirements for first article approval and the designation of responsibility to either the Government or the contractor for the performance of first article inspection shall be specified in the contract.

4.4.1 Sample. The first article sample shall be three assemblies selected at random by the Government representative from the first fifteen production assemblies.

4.4.2 Inspection. The sample shall be subjected to all the inspections specified in tables V, VI and VII.

4.4.3 Failures. Failure of any assembly to meet any requirement shall be cause for refusal to grant first article approval. The Government reserves the right to terminate first article inspection upon any failure of any assembly to comply with any stated requirement.

4.4.4 Responsibility. The contractor, whether or not responsible, shall inspect the sample for conformance to all contractual requirements and shall submit a record of this inspection with the sample and certificates of conformance for materials. The Government reserves the right to witness inspections of the contractor.

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:28Z
Check the source to verify that this is the current version before use.

TABLE V. Performance tests.

Item	Characteristic	Requirement	Test Procedure
101	Lamp driver and ammunition select buses	3.3.1	4.6.2.1 or 4.6.3.1
102	BIT ENABLE 2 output	3.3.2	4.6.2.2 or 4.6.3.2
103	Moving and stationary lamp drivers	3.3.3	4.6.2.3 or 4.6.3.3

TABLE VI. General tests.

Item	Characteristic	Requirement	Test Procedure
301	Fabrication	3.1	Applicable drawings - Visual
302	General specification	3.1.2	MIL-F-13926 - Visual

TABLE VII. Environmental tests.

Item	Characteristic	Requirement	Test Procedure
303	Shock	3.4.1	4.6.4.1
304	Vibration	3.4.2	4.6.4.2
305	High temperature	3.4.3 and 3.4.4	4.6.4.3
306	Low temperature	3.4.3 and 3.4.4	4.6.4.4
307	Temperature cycling	3.4.3 and 3.4.4	4.6.4.5

4.5 Quality conformance inspection.

4.5.1 Procurement conditions. The following inspection plans shall apply where the assembly is procured for use as a:

	Use	Plan
a.	Logistics spare assembly apart from the next higher assembly	A and C

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:28Z
Check the source to verify that this is the current version before use.

Use	Plan
b. Component assembly of the next higher assembly	B and C

4.5.2 Inspection plan A.

4.5.2.1 General sample and tests. One assembly, as a control sample, shall be selected at random by the Government representative from each 100 assemblies produced and shall be subjected to all the tests in table VI.

4.5.2.2 Environmental sample and tests. Three assemblies, as a control sample, shall be selected at random by the Government representative from each 50 assemblies produced or from each month's production, whichever occurs first. All the tests in table VII shall be applied separately to each assembly in the sample.

4.5.2.3 Acceptance. Where any one assembly of either sample fails to meet any specified requirement, the lot shall be rejected. Rejected lots shall be subject to the provisions of MIL-STD-105.

4.5.3 Inspection plan B.

4.5.3.1 Sample and tests. The sample shall be selected by the Government representative in accordance with the provisions of MIL-STD-105. All the tests in table VI and only the test of item 307 in table VII shall be applied.

4.5.3.2 Acceptance. Acceptance and rejection shall be in accordance with MIL-STD-105.

4.5.4 Inspection plan C.

4.5.4.1 Sample and tests. Each assembly in every lot shall be subjected to all the tests in table V and shall be examined visually for completeness, improper assembly and evidence of poor workmanship.

4.5.4.2 Acceptance. Where any one assembly fails to meet any specified requirement, the defective assembly shall be removed from the lot and resubmitted only after all defects have been corrected.

4.5.5 Inspection equipment. Unless otherwise specified in the contract, the contractor shall supply, maintain and calibrate inspection equipment in accordance with the provisions of MIL-I-45607 and MIL-STD-45662.

4.5.6 Packaging inspection. Sampling and inspection of the preservation packaging, packing and container marking shall be in accordance with the requirements of packaging data sheet P11834803.

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:28Z
Check the source to verify that this is the current version before use.

4.6 Methods of inspection.

4.6.1 Test equipment.

a. Where the assembly is procured as a component of the next higher assembly, the test equipment in table VIII and the procedures of 4.6.2 and 4.6.4 shall be used where specified to perform the required tests.

b. Where the assembly is procured apart from the next higher assembly, the test equipment and procedures of 4.6.3 and suitable equipment and procedures of 4.6.4 shall be used where specified to perform the required tests.

TABLE VIII. Test equipment.

Item	Part Number	Nomenclature
1	11750202	Automatic Card and Unit, Test Set
2	11750424	Adapter, Computer Board - A7
3	11821457	Fixture Shock, Vertical and Horizontal Plane
4	11821458	Shock Adapter, Plate Vib Horz-Vert Plane Shock-Z
5	11821500	Vibration/Shock Test Fixture Computer Unit, FAT
6	11821520	Automatic Test Assembly Central Processor Unit
7	11821854	Test Fixture Auto Card, Test Set, Computer, FAT

4.6.2 Performance tests - component procurement.

4.6.2.1 Lamp driver and ammunition select buses. Use items 1, 2 and 6 of table VIII to determine compliance with 3.3.1.

4.6.2.2 BIT ENABLE 2 output. Use items 1, 2 and 6 of table VIII to determine compliance with 3.3.2.

4.6.2.3 Moving and stationary lamp drivers. Use items 1, 2 and 6 of table VIII to determine compliance with 3.3.3.

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:28Z
Check the source to verify that this is the current version before use.

4.6.3 Performance tests - spare procurement.

4.6.3.1 Lamp driver and ammunition select buses. Connect the assembly in accordance with figure 3.

a. Turn on the power sources specified in 3.3.1.

b. Verify all output conditions of table II, item 1 are met.

c. Momentarily activate FSDS switch and verify all output conditions of table II, item 4 occur after not less than 30 msec and not more than 50 msec.

d. Disconnect +15 vdc for 205 ± 5 msec and verify all output conditions of table II, item 4 are maintained after the voltage is restored.

e. Momentarily activate HEP/WP switch and verify all output conditions of table II, item 3 occur after not less than 30 msec and not more than 50 msec.

f. Disconnect +15 vdc for 205 ± 5 msec and verify all output conditions of table II, item 3 are maintained after the voltage is restored.

g. Momentarily activate HEAT switch and verify all output conditions of table II, item 2 occur after not less than 30 msec and not more than 50 msec.

h. Disconnect +15 vdc for 205 ± 5 msec and verify all output conditions of table II, item 2 are maintained after the voltage is restored.

i. Momentarily activate APDS switch and verify all output conditions of table II, item 1 occur after not less than 30 msec and not more than 50 msec.

j. Disconnect +15 vdc for 205 ± 5 msec and verify all output conditions of table II, item 1 are maintained after the voltage is restored.

4.6.3.2 BIT ENABLE 2 output. Connect the assembly in accordance with figure 3.

a. Turn on the power sources specified in 3.3.2.

b. Set switch S2 to table III item 1 input and verify the associated output.

c. Set switch S2 to table III item 2 input and verify the associated output.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:28Z
Check the source to verify that this is the current version before use.

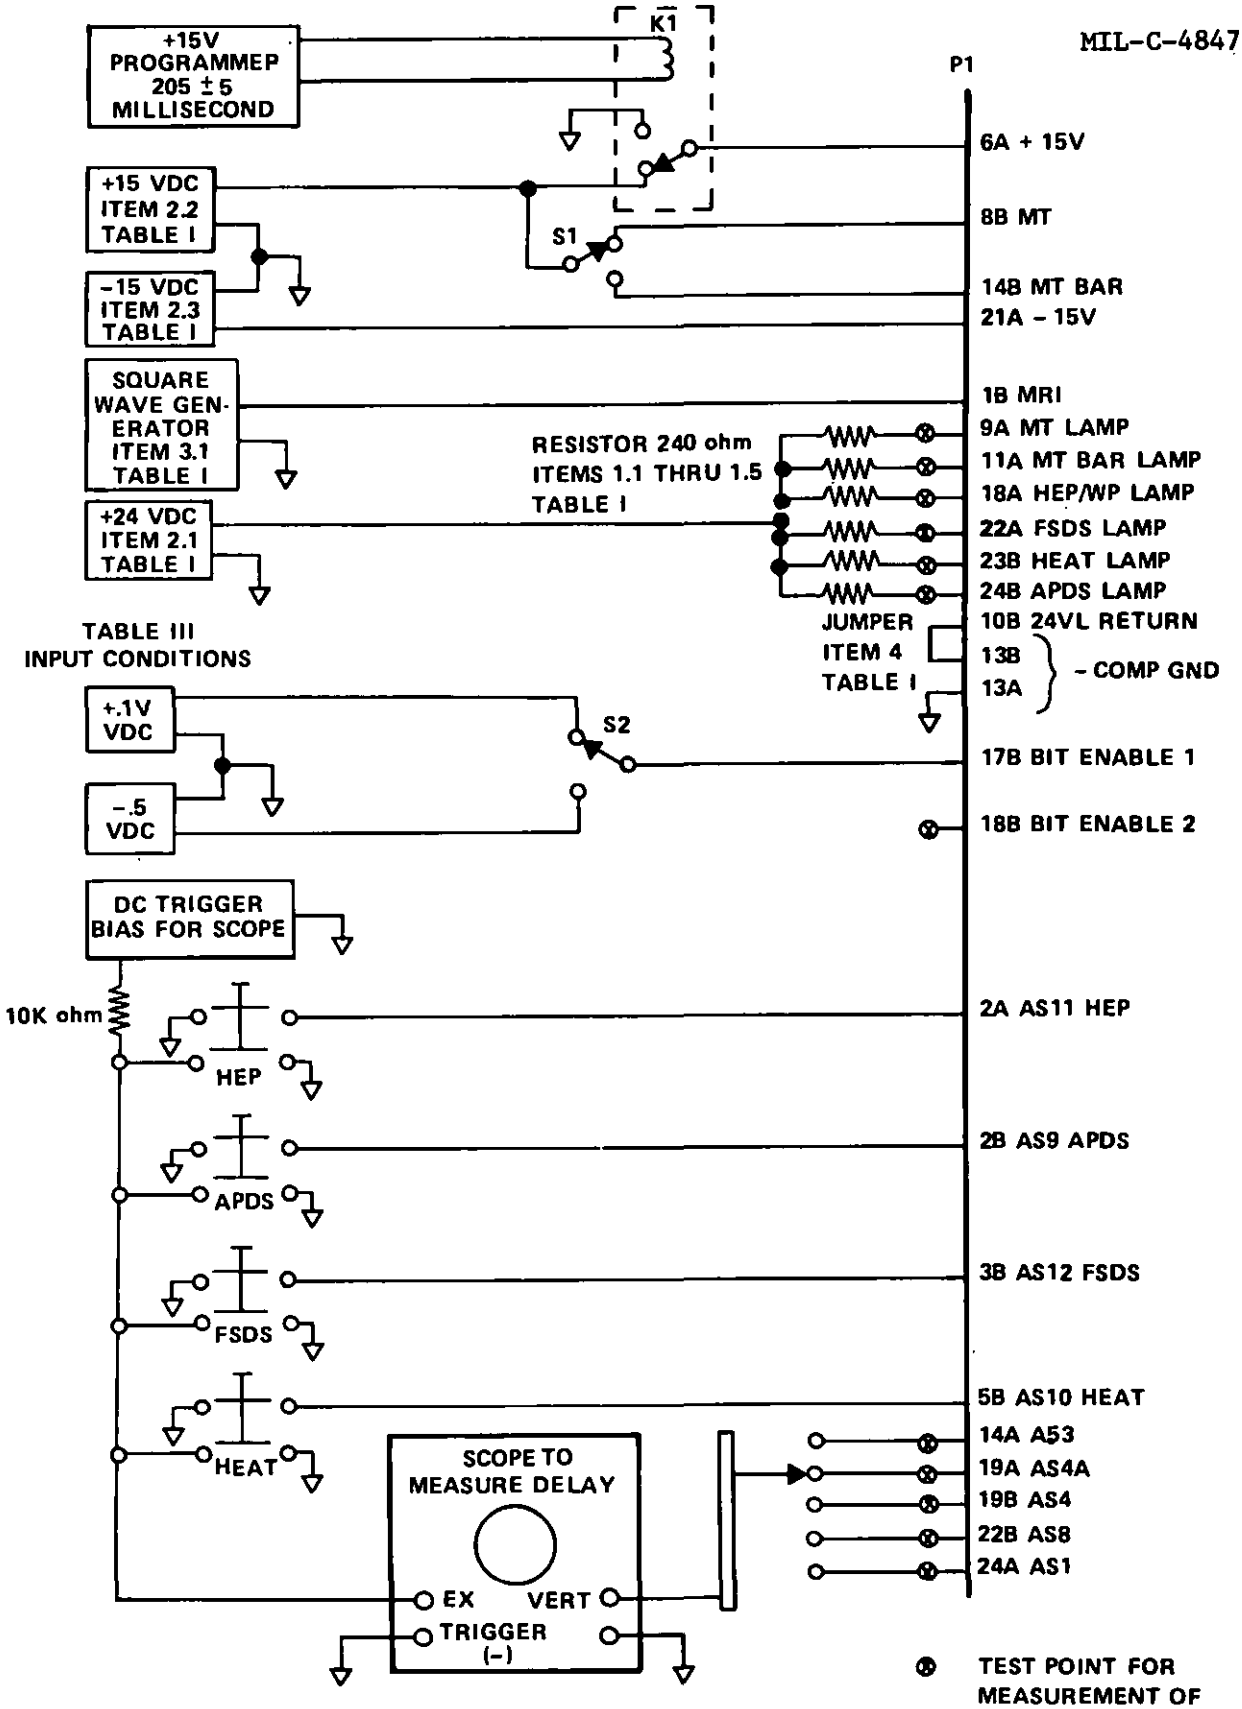


FIGURE 3 Test configuration.

Source: https://assist.dla.mil -- Downloaded: 20261O-22T19:28Z
Check the source to verify that this is the current version before use.

4.6.3.3 Moving and stationary lamp drivers. Connect the assembly in accordance with figure 3.

a. Turn on the power sources specified in 3.3.3.

b. Set switch S1 to table IV item 1 input and verify the associated outputs.

c. Set switch S1 to table IV item 2 input and verify the associated outputs.

4.6.4 Environmental tests.

4.6.4.1 Shock.

4.6.4.1.1 Basic design. Use items 3, 4 and 5 of table VIII or mount the assembly in a suitable shock fixture and subject it to the shock test specified in MIL-STD-810, method 516.2, procedure I, figure 516.2-2. Apply three half sine wave shock pulses in each direction along the three axes. Peak amplitude shall be 40 ± 4g with a time duration of 18 ± 3 msec measured at the 10 percent amplitude points. At the conclusion of this test, subject the assembly to the performance tests of table V.

4.6.4.1.2 High intensity. Use items 3, 4 and 5 of table VIII or mount the assembly in a suitable shock fixture and subject it to the shock test specified in MIL-STD-810, method 516.2, procedure IV, figure 516.2-2. Apply three half sine wave shock pulses in each direction along the three axes. Peak amplitude shall be 100.0 ± 10.0 g with a time duration of 1.5 ± 0.2 msec measured at the 10 percent amplitude points. At the conclusion of this test, subject the assembly to the performance tests of table V.

4.6.4.2 Vibration. Vibration A as specified in 4.6.4.2.1 shall be conducted only for first article inspection. Vibration B as specified in 4.6.4.2.2 shall be conducted only for quality conformance inspection.

4.6.4.2.1 Vibration A. Use items 4 and 5 of table VIII or mount the assembly in a suitable vibration fixture and subject the assembly to the vibration test specified in MIL-STD-810, method 514.2, procedure VIII except that the test level shall be the vibration curve shown in figure 2 and duration of exposure shall be not less than 80 minutes per axis. At the conclusion of this test, subject the assembly to the performance tests of table V.

4.6.4.2.2 Vibration B. This test shall be conducted as in 4.6.4.2.1 except that the period of vibration shall be not less than 15 minutes in each axis.

Source: https://assist.dla.mil -- Downloaded: 20261O-22T19:28Z
Check the source to verify that this is the current version before use.

4.6.4.3 High temperature. Use item 7 of table VIII or suitable equipment and subject the assembly to the high temperature test specified in MIL-STD-810, method 501.2, procedure I. The highest operating temperature shall be 140°F. The performance tests of table V shall be applied.

4.6.4.4 Low temperature. Use item 7 of table VIII or suitable equipment and subject the assembly to the low temperature test specified in MIL-STD-810, method 502.1, procedure I. The storage temperature shall be -65°F. The lowest operating temperature shall be -25°F. The performance tests of table V shall be applied.

4.6.4.5 Temperature cycling. With table I loads 1.1 through 1.6 and power 2.1 through 2.3 applied, subject the assembly to the temperature profile specified in figure 4. After exposure, subject the assembly to the performance tests in table V.

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:28Z
Check the source to verify that this is the current version before use.

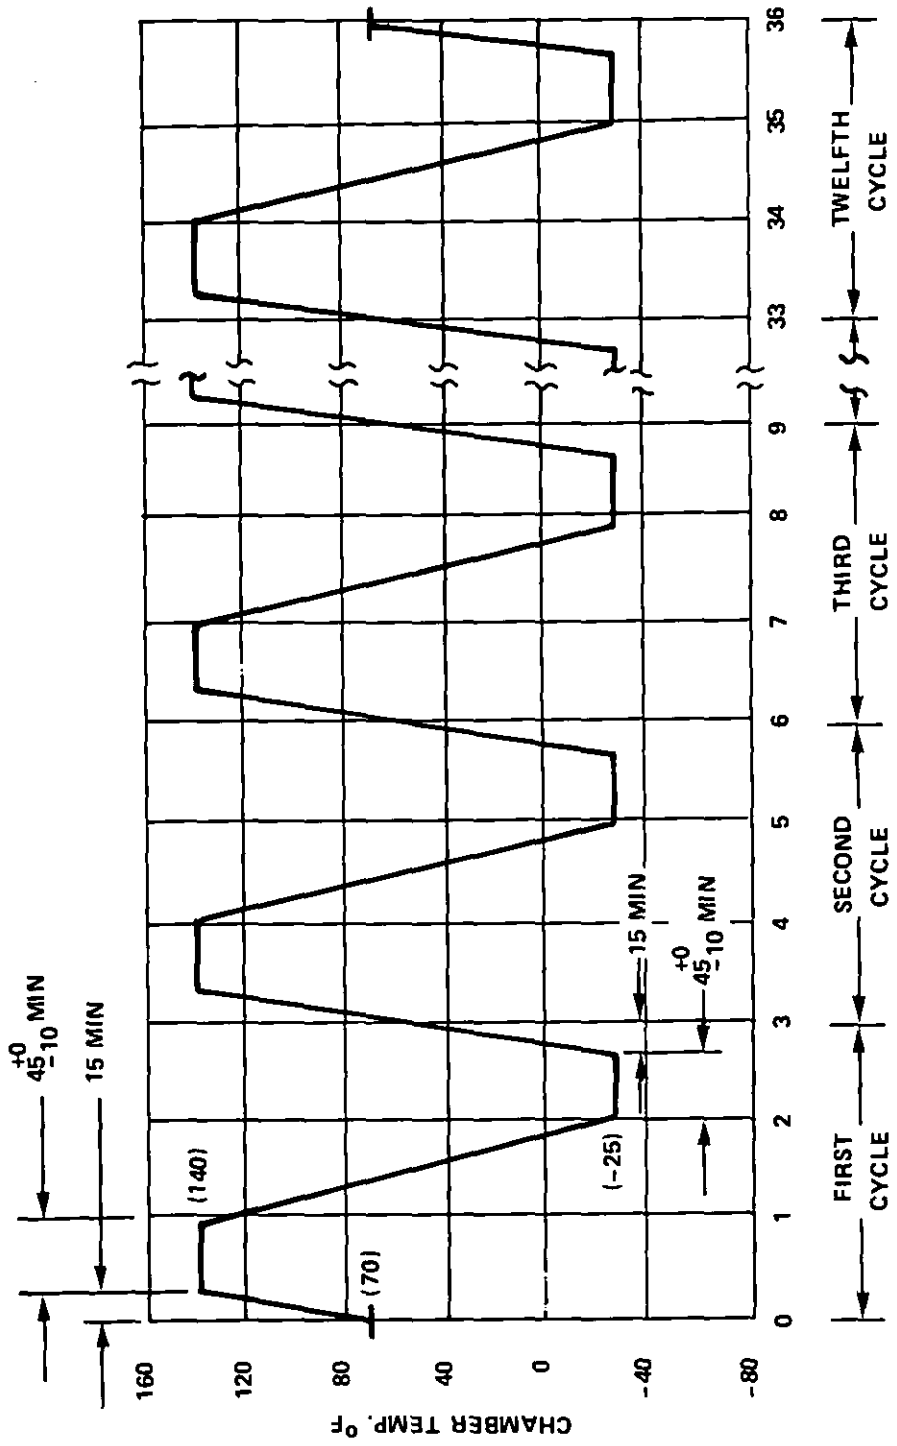


FIGURE 4. Temperature cycling.

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:28Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging, packing and marking. Packaging, packing and marking shall be in accordance with packaging data sheet P11834803. The level of protection shall be as specified in the procurement document. (see 4.5.6)

6. NOTES

6.1 Intended use. The ammunition select circuit card assembly is used in the M21 Ballistic Computer Unit.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.

b. Quantity required and delivery schedules.

c. Special tests and examination as required, the type of inspection required and the activity responsible for testing and its facility.

d. Serialization requirements, if applicable.

e. Requirements for first article sample, including data requirements for certificates of conformance for materials.

f. Applicable packaging data sheet number.

g. Selection of applicable levels of preservation, packaging and packing.

h. Applicable stock number.

6.3 Previous revisions of MIL-C-48474B was for the US Army Armament Research and Development Command's internal use only, and were not forwarded to the Naval Publications and Form Center for publication.

Custodian:
Army-AR

Preparing Activity:
Army-AR
Project 1220-A280

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:28Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US ARMY ARMAMENT RESEARCH & DEVELOPMENT COMMAND
ATTN: DRDAR-QAF
DOVER, NJ 07801

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:28Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-48474B CIRCUIT CARD ASSEMBLY: 11834803 AMMO SELECT

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 78 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:28Z
Check the source to verify that this is the current version before use.