| INCH-POUND |

MIL-C-50785/15A (AR)
27 November 1992
SUPERSEDING
MIL-C-50785/15 (MU)
24 October 1975

MILITARY SPECIFICATION SHEET

CIRCUIT CARD ASSEMBLY: 12000015

(RATE SERIES)

This specification is approved for use by the U.S. Army Armament, Munitions and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-C-50785.

REQUIREMENTS

1 Item definition. This assembly is a single-ended printed circuit board consisting of five operational amplifiers and three divider modules. The assembly is used to generate the rate series input term of the magnet current and torque current voltage circuitry, when installed in the Sight Current Generator Drawing Number 12000239.

2 Major component list. The components of this assembly shall be as specified on the Engineering Parts List (EPL) 12000015.

3 Government furnished property list. Not applicable.

4 Characteristics.

4.1 Performance. The assembly shall be capable of performing requirements a through d when assembled in accordance with Drawing Number 12000015.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:38Z
Check the source to verify that this is the current version before use.

a. Operational amplifiers AR1 and AR2 shall sum and invert the input signals that make up the super elevation term of the torque current voltage circuit.

b. Operational amplifiers AR3 and AR4 in conjunction with transistors Q1 and Q2 shall amplify and scale the range rate input voltage.

c. Dividers U1 and U2 in conjunction with operational amplifiers AR3 and AR4 shall generate the rate series term of the magnet current voltage circuit.

d. Divider U3 and operational amplifier AR5 shall generate the lead angle term of the magnet current voltage circuit.

4.2 Input and output levels.

4.3 Input power. Input power shall be supplied to the assembly as specified in Table I.

TABLE I - INPUT VOLTAGES

PIN	VOLTAGE
14	+15 Vdc ± 2.0 percent
2	-15 Vdc ± 2.0 percent
1	Ground
18	+7 Vdc ± 0.1 percent
3 or 16	Triangle wave -8.50 ± 1.50 Vdc to +8.50 ± 1.50 Vdc within a period of 1.00 millisecond ± 10 percent.
4 or 17	Triangle wave -8.50 ± 1.50 Vdc to + 8.50 ± 1.50 Vdc within a period of 1.00 millisecond ± 10 percent.

4.4 Output levels. The requirements specified in 4.5 through 4.8 shall be met when supplied with the specified voltage input (Vin). The inputs applied to the microcircuits U1, U2 and U3 shall not exceed the electrical requirements specified on Drawing Number 12000091.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:38Z
Check the source to verify that this is the current version before use.

4.5 Pin 7 output. The output between pin 7 and pin one shall be $\frac{V_{38} \times 0.1\ V_4}{-V_{16}} \pm 2.0$ percent $\pm$ 0.021 Vdc, with a Vin applied between pin 19 and pin one.

V_{38} = (0.5385) Vin

V_4 = +7 Vdc $\pm$ 0.1 percent

V_{16} = +0.7 to +7 Vdc

Vin = 0Vdc to +13 Vdc

4.6 Pin 10 output. The output between pin 10 and pin one shall be $\frac{0.7\ V_{38}}{-V_{16}} \pm 2$ percent $\pm$ 0.021 Vdc, with a Vin applied between pin 15 and pin one and +15 Vdc applied between pin 9 and pin one.

V_{38} = (0.7) Vin

V_{16} = +0.7 to +7 Vdc $\pm$ 0.1 percent

Vin = -10 Vdc to +10 Vdc

4.7 Pin 11 output. The output between pin 11 and pin one shall be $\frac{V_{38} \times 0.1\ V_4}{-V_{16}} \pm 4.0$ percent $\pm$ .030 Vdc, with a Vin applied between pin 15 and pin one and +15 Vdc applied between pin 9 and pin one.

V_{38} = output of pin 10

V_{16} = +0.7 to +7 Vdc $\pm$ 1.0 percent

V_4 = +7 Vdc $\pm$ 0.1 percent

Vin = -10 Vdc to +10 Vdc

4.8 Pin 12 output. The output between pin 12 and pin one shall be as specified in a through d.

a. Zero $\pm$ .012 Vdc with zero Vdc applied between pins 15, 21, 22 and pin one, and +15 Vdc applied between pin 9 and pin one.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:38Z
Check the source to verify that this is the current version before use.

b. Vin (-0.185) ± 2.0 percent with Vin of zero to +7 Vdc applied between pin 21 and pin one, zero Vdc applied between pins 15, 22 and pin one, and +15 Vdc applied between pin 9 and pin one.

c. Vin (-0.216) ± 2.0 percent where Vin is the pin 25 output, zero Vdc is applied between pins 15, 21 and pin one, and +15 Vdc applied between pin 9 and pin one.

d. Vin (-0.054) ± 2.0 percent where Vin is the pin 6 output, zero Vdc is applied between pins 15, 21 and pin one, and -15 Vdc applied between pin 9 and pin one.

4.9 Fault isolation test points. The assembly has the following test points available to facilitate fault isolation pin 5, 6, 8, 20, 25, TPI-5. These points are not output pins.

4.10 Physical characteristics. The physical characteristics shall be as specified in drawing 12000015 and the engineering parts list.

5 Test equipment. The test equipment listed below shall be used in the performance of the applicable test methods and procedures as specified in 6.

5.1 Power supply (PS1). The power supply shall be 15 ± 0.1 Vdc, 100 milliamperes (ma) or greater, ripple less than 10 millivolts (mv) rms or 100 mv peak-to-peak.

5.2 Power supply (PS2). The power supply shall be -15 ± 0.1 Vdc, 100 milliamperes (ma) or greater, ripple less than 10 millivolts (mv) rms or 100 mv peak-to-peak.

5.3 Power supply (PS3). The power supply shall be 7.0 ± 0.1 Vdc, 100 milliamperes (ma) or greater, ripple less than 10 millivolts (mv) or 100 mv peak-to-peak.

5.4 Power supply 01 (PS4). The power supply shall generate a triangle wave -8.50 ± 1.50 Vdc to +8.50 ± 1.50 Vdc within a period of 1.00 millisecond ± 10 percent.

5.5 Power supply 02 (PS5). The power supply shall generate a triangle wave -8.50 ± 1.50 Vdc to +8.50 ± 1.50 Vdc within a period of 0.67 millisecond ± 15 percent.

5.6 Power supply (PS6). The power supply shall be zero ± 13 Vdc, with accuracy of adjustment and regulation to ± .01 percent, 10 ma or greater.

5.7 Power supply (PS7). The power supply shall be zero ± 13 Vdc, with accuracy of adjustment and regulation to ± .01 percent, 10 ma or greater.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:38Z
Check the source to verify that this is the current version before use.

5.8 Digital voltmeter (DVM). The digital voltmeter shall have an accuracy and resolution of .01 percent or better from zero to 100 Vdc. Input impedance shall be greater than 10 megohms on all voltage scales.

5.9 Switch (S1). One double pole single throw switch is required.

6 Functional test.

6.1 Test connections. Power supplies PS1 thru PS7 shall be connected to the assembly under test in accordance with Figure 1 using receptacle M24308/1-3 of specification MIL-C-24308-1.

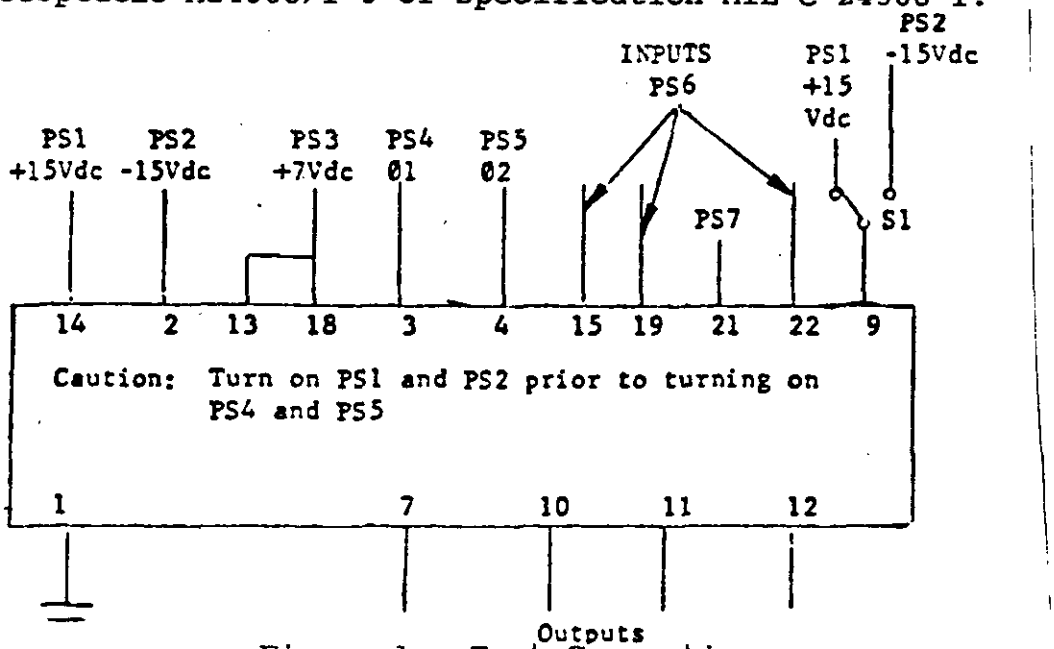


Figure 1. Test Connections

6.2 Test procedure. Compliance with the requirements of 4.4 through 4.8 shall be verified as follows:

a. Connect PS6 to pin 19, connect PS7 to pin 21. Adjust power supplies PS6 and PS7 as specified in Table II. Set S1 to +15 Vdc.

TABLE II - CONNECTIONS

Pin 19 Input Vdc	Pin 21 Input Vdc	Pin 7 Output Vdc
+13 ± 0.007	+7 ± 0.007	-0.7 ± 0.035
0 ± 0.001	+7 ± 0.007	0 ± 0.030
+13 ± 0.007	+0.7 ± 0.007	-7 ± 0.160

b. Connect PS6 to pin 15, connect PS7 to pin 21 adjust power supplies PS6 and PS7 as specified in Table III. Set S1 to +15 Vdc.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:38Z
Check the source to verify that this is the current version before use.

TABLE III - CONNECTIONS

Pin 15 Input Vdc	Pin 21 Input Vdc	Pin 10 Output Vdc
+10 ± 0.007	+7 ± 0.007	-0.7 ± 0.035
0 ± 0.001	+7 ± 0.007	0 ± 0.030
-10 ± 0.007	+0.7 ± 0.007	+7 ± 0.160

c. Connect PS6 to pin 15, connect PS7 to pin 21 adjust power supplies PS6 and PS 7 as specified in Table IV. Set S1 to -15 Vdc.

TABLE IV - CONNECTIONS

Pin 15 Input Vdc	Pin 21 Input Vdc	Pin 10 Output Vdc
+7.5 ± 0.007	+7 ± 0.007	0 ± 0.030
0 ± 0.001	+0.7 ± 0.007	+7 ± 0.160

d. Connect PS6 to pin 15, connect PS7 to pin 21. Adjust power supplies PS6 and PS7 as specified in Table IV. Set S1 to -15 Vdc.

TABLE V - CONNECTIONS

Pin 15 Input Vdc	Pin 21 Input Vdc	Pin 11 Output Vdc
+10 ± 0.007	+7 ± 0.007	0 ± 0.035
0 ± 0.001	+7 ± 0.007	-0.070 ± 0.035

e. Connect PS6 to pin 15, adjust PS6 to +10 ± 0.007 Vdc, set S1 to +15 Vdc. The output measured at pin 12 with the DVM shall be -0.374 ± 0.020 Vdc.

f. Connect PS7 to pin 21, adjust PS6 to +7 ± 0.007 Vdc, set S1 ro +15 Vdc. The output measured at pin 12 with the DVM shall be -1.296 ± 0.030 Vdc.

g. Connect PS6 to pin 22, adjust PS6 to -15 ± 0.007, set S1 to +15 Vdc. The output measured at pin 12 with the DMV shall be -1.512 ± 0.035 Vdc.

h. Set S1 to +15 Vdc. The output measured at pin 12 with the DMV shall be 0 ± 0.012 Vdc.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:38Z
Check the source to verify that this is the current version before use.

7.0 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodian:
Army - AR

Preparing Activity:
Army - AR

(Project No. 1285-A434)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:38Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-C-50785/15A	27 NOVEMBER 1992

3. DOCUMENT TITLE: CIRCUIT CARD ASSEMBLY: 12000015 (RATE SERIES)

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets if needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)
U.S ARMY ARDEC STANDARDIZATION OFFICE	(1) Commercial: (201) 724-6674 (2) AUTOVON: 880-6674
c. ADDRESS (Include Zip Code) ATTN: SMACA-BAC-S PICATINNY ARSENAL, NJ 07806-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

DD Form 1426, OCT 89 — *Previous editions are obsolete.* — 198/290

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:38Z
Check the source to verify that this is the current version before use.