

# HIKVISION



**NO.1  
WORLDWIDE**

**QUARTER 2  
2018** V3.0

[WWW.SPEED4TRADING.COM](http://WWW.SPEED4TRADING.COM)

# TURBO HD

1 Megapixel CCTV

720P Dome				
No	Picture	Model	Specifications	User Price
1	 	<b>DS-2CE56C0T-IRP</b> <b>2.8 MM</b>	<ul style="list-style-type: none"> <li>• 720P@25fps</li> <li>• IR LED 20 Meter 0.1 Lux</li> <li>• Angle 92°</li> <li>• True Day / Night</li> <li>• 1296(H)x732(V)</li> <li>• Plastic</li> </ul>	315
2	 	<b>DS-2CE56C0T-IRMM</b> <b>2.8 MM</b>	<ul style="list-style-type: none"> <li>• 720P@25fps</li> <li>• IR LED 20 Meter 0.1 Lux</li> <li>• Angle 92°</li> <li>• True Day / Night</li> <li>• 1296(H)x732(V)</li> <li>• Plastic</li> </ul>	350
3	 	<b>DS-2CE56C0T-IR</b> <b>2.8 MM</b>	<ul style="list-style-type: none"> <li>• 720P@25fps</li> <li>• IR LED 20 Meter 0.1 Lux</li> <li>• Angle 92°</li> <li>• True Day / Night</li> <li>• 1296(H)x732(V)</li> <li>• IP66 Metal Ball</li> </ul>	400
4	 	<b>DS-2CE56C2T-VFIR3</b> <b>2.8 - 12 MM</b>	<ul style="list-style-type: none"> <li>• 1.3MP 720P@25fps</li> <li>• IR LED 40 Meter 0.01 Lux</li> <li>• True Day / Night</li> <li>• 1280(H)x960(V)</li> <li>• IP66</li> </ul>	1150
5	 	<b>DS-2CE56C5T-IT1</b> <b>3.6 MM</b>	<ul style="list-style-type: none"> <li>• 1.3MP 720P@25fps, OSD Menu</li> <li>• IR LED 40 Meter 0.01 Lux, Low illumination</li> <li>• Angle 70.9°</li> <li>• True Day / Night</li> <li>• 1305(H)x977(V)</li> <li>• IP66</li> </ul>	1000



# TURBO HD

1 Megapixel CCTV

HIKVISION 2018 Q2	720P Bullet				
	No	Picture	Model	Specifications	User Price
	1		DS-2CE16C0T-IRP 3.6 MM	<ul style="list-style-type: none"> <li>• 720P@25fps</li> <li>• IR LED 20 Meter 0.1 Lux</li> <li>• Angle 70.9°</li> <li>• True Day / Night</li> <li>• 1296(H)x732(V)</li> <li>• IP66 Plastic</li> </ul>	350
	2		DS-2CE16C0T-IR 3.6 MM	<ul style="list-style-type: none"> <li>• 720P@25fps</li> <li>• IR LED 20 Meter 0.1 Lux</li> <li>• Angle 70.9°</li> <li>• True Day / Night</li> <li>• 1296(H)x732(V)</li> <li>• IP66 Metal Case</li> </ul>	500
	3		DS-2CE16C0T-IT3 3.6 MM	<ul style="list-style-type: none"> <li>• 720P@25fps</li> <li>• Exir IR 40 Meter 0.01 Lux</li> <li>• True Day / Night</li> <li>• 1296(H)x732(V)</li> <li>• IP66 weatherproof</li> </ul>	750
	4		DS-2CE16C0T-IT3 6 MM		750
	5		DS-2CE16C0T-IT3 8 MM		750
	6		DS-2CE16C0T-IT3 12MM		750
	7		DS-2CE16C0T-IT5 3.6 MM	<ul style="list-style-type: none"> <li>• 720P@25fps</li> <li>• Exir IR 80 Meter 0.01 Lux</li> <li>• True Day / Night</li> <li>• 1296(H)x732(V)</li> <li>• IP66 weatherproof</li> </ul>	910
	8		DS-2CE16C0T-IT5 12 MM		910
	9		DS-2CE16C0T-IT5 16 MM		910
	10		DS-2CE16C2T-IRP 6 MM	<ul style="list-style-type: none"> <li>• 1.3MP 720P@25fps</li> <li>• IR LED 20 Meter 0.1 Lux</li> <li>• Angle 49°</li> <li>• True Day / Night</li> <li>• 1280(H)x960(V)</li> <li>• IP66 Plastic</li> </ul>	575
	11		DS-2CE16C2T-IT3 12 MM	<ul style="list-style-type: none"> <li>• 1.3MP 720P@25fps</li> <li>• Exir IR 40 Meter 0.01 Lux</li> <li>• Angle 22.1°</li> <li>• True Day / Night</li> <li>• 1280(H)x960(V)</li> <li>• IP66 weatherproof</li> </ul>	950
	12		DS-2CE16C2T-VFIR3 2.8 - 12 MM	<ul style="list-style-type: none"> <li>• 1.3MP 720P@25fps</li> <li>• IR LED 40 Meter 0.01 Lux</li> <li>• True Day / Night</li> <li>• 1280(H)x960(V)</li> <li>• IP66 weatherproof</li> </ul>	1150
	13		DS-2CE16C5T-IT3 3.6 MM	<ul style="list-style-type: none"> <li>• 1.3MP 720P@25fps, OSD Menu</li> <li>• Exir IR 40 Meter 0.001 Lux, Low illumination</li> <li>• True Day / Night</li> <li>• 1305(H)x977(V)</li> <li>• IP66 weatherproof</li> </ul>	1000
	14		DS-2CE16C5T-IT3 6 MM		1000

# TURBO HD

2 Megapixel CCTV



















## 1080P Dome

No	Picture	Model	Specifications	User Price
1		DS-2CE56D0T-IRP 2.8 MM	<ul style="list-style-type: none"> <li>• 1080P@25fps</li> <li>• IR LED 20 Meter 0.1 Lux</li> <li>• Angle 92°</li> <li>• True Day / Night</li> <li>• Plastic</li> </ul>	500
2		DS-2CE56D0T-IRMM 2.8 MM	<ul style="list-style-type: none"> <li>• 1080P@25fps</li> <li>• IR LED 20 Meter 0.1 Lux</li> <li>• Angle 92°</li> <li>• True Day / Night</li> <li>• Plastic</li> </ul>	700
3		DS-2CE56D0T-IR 2.8 MM	<ul style="list-style-type: none"> <li>• 1080P@25fps</li> <li>• IR LED 20 Meter 0.1 Lux</li> <li>• Angle 92°</li> <li>• True Day / Night</li> <li>• 1920(H)x1080(V)</li> </ul>	755
4		DS-2CE56D0T-IRM 3.6 MM	<ul style="list-style-type: none"> <li>• 1080P@25fps</li> <li>• IR LED 20 Meter 0.1 Lux</li> <li>• Angle 70.9°</li> <li>• True Day / Night</li> <li>• IP66 Metal Case ( in / out )</li> </ul>	755
5		DS-2CE56D1T-IRMM 2.8 MM	<ul style="list-style-type: none"> <li>• 1080P@25fps, OSD Menu</li> <li>• IR LED 20 Meter 0.01 Lux</li> <li>• Angle 92°</li> <li>• True Day / Night</li> </ul>	715
6		DS-2CE56D1T-VPIR 2.8 MM	<ul style="list-style-type: none"> <li>• 1080P@25fps, OSD Menu</li> <li>• IR LED 30 Meter 0.01 Lux</li> <li>• Angle 92°</li> <li>• True Day / Night</li> <li>• IP66 Metal Case ( in / out ) Vandal Proof</li> </ul>	1250
7		DS-2CE56D1T-IRZ Motorized 2.8 - 12 MM	<ul style="list-style-type: none"> <li>• 1080P@25fps, OSD Menu</li> <li>• IR LED 30 Meter 0.01 Lux</li> <li>• True Day / Night</li> <li>• IP66</li> </ul>	1925
8		DS-2CE56D5T-VFIT3 2.8 - 12 MM	<ul style="list-style-type: none"> <li>• True WDR 120dB</li> <li>• 1080P@25fps, OSD Menu</li> <li>• Exir IR 50 Meter 0.01 Lux</li> <li>• True Day / Night</li> <li>• IP66</li> </ul> 	1925
9		DS-2CE56D7T-ITM 2.8 MM	<ul style="list-style-type: none"> <li>• True WDR 120dB</li> <li>• 1080P@25fps, OSD Menu</li> <li>• Exir IR 20 Meter 0.01 Lux</li> <li>• True Day / Night</li> <li>• IP66</li> </ul> 	1050
10		DS-2CE56D7T-ITM 3.6 MM		1050
11		DS-2CE56D7T-IT3Z Motorized 2.8 - 12 MM	<ul style="list-style-type: none"> <li>• 2 MP True WDR 120dB</li> <li>• 1080P@25fps, OSD Menu</li> <li>• Exir IR 40 Meter 0.01 Lux</li> <li>• True Day / Night</li> <li>• IP66</li> </ul> 	2150

# TURBO HD

2 Megapixel CCTV



















HIKVISION 2018 Q2

1080P Bullet				
No	Picture	Model	Specifications	User Price
12	 	DS-2CE16D0T-IRP 6 MM	<ul style="list-style-type: none"> <li>• 1080P@25fps</li> <li>• IR LED 20 Meter 0.1 Lux</li> <li>• True Day / Night</li> </ul>	575
13		DS-2CE16D0T-IRP 3.6 MM	<ul style="list-style-type: none"> <li>• 1920(H)x1080(V)</li> <li>• IP66 Plastic</li> </ul>	575
14	 	DS-2CE16D0T-IR 6 MM	<ul style="list-style-type: none"> <li>• 1080P@25fps</li> <li>• IR LED 20 Meter 0.1 Lux</li> <li>• True Day / Night</li> <li>• 1920(H)x1080(V)</li> <li>• IP66 Metal Case</li> </ul>	750
15	 	DS-2CE16D0T-IT3 8 MM	<ul style="list-style-type: none"> <li>• 1080P@25fps</li> <li>• Exir IR 40 Meter 0 Lux</li> <li>• True Day / Night</li> <li>• 1920(H)x1080(V)</li> <li>• IP66 weatherproof</li> </ul>	1050
16	 	DS-2CE16D0T-IT5 12 MM	<ul style="list-style-type: none"> <li>• 1080P@25fps</li> <li>• Exir IR 80 Meter 0 Lux</li> <li>• True Day / Night</li> </ul>	1110
17		DS-2CE16D0T-IT5 16 MM	<ul style="list-style-type: none"> <li>• 1920(H)x1080(V)</li> <li>• IP66 weatherproof</li> </ul>	1110
18	 	DS-2CE16D1T-IRP 6 MM	<ul style="list-style-type: none"> <li>• 1080P@25fps, OSD Menu</li> <li>• IR LED 20 Meter 0.1 Lux</li> <li>• True Day / Night</li> <li>• 1920(H)x1080(V)</li> <li>• IP66 Plastic</li> </ul>	750
19	 	DS-2CE16D1T-IT3 8 MM	<ul style="list-style-type: none"> <li>• 1080P@25fps, OSD Menu</li> <li>• Exir IR 40 Meter 0.01 Lux</li> <li>• True Day / Night</li> <li>• 1920(H)x1080(V)</li> <li>• IP66 weatherproof</li> </ul>	1100
20	 	DS-2CE16D1T-IT5 12 MM	<ul style="list-style-type: none"> <li>• 1080P@25fps, OSD Menu</li> <li>• Exir IR 80 Meter 0.01 Lux</li> <li>• True Day / Night</li> <li>• 1920(H)x1080(V)</li> <li>• IP66 weatherproof</li> </ul>	1200
21	 	DS-2CE16D1T-VFIR3 Vari Focal 2.8 - 12 MM	<ul style="list-style-type: none"> <li>• 1080P@25fps, OSD Menu</li> <li>• Exir IR 40 Meter 0.01 Lux</li> <li>• True Day / Night</li> <li>• 1930(H)x1088(V)</li> <li>• IP66 weatherproof</li> </ul>	1400
22	 	DS-2CE16D1T-IR3Z Motorized 2.8 - 12 MM	<ul style="list-style-type: none"> <li>• 1080P@25fps, OSD Menu</li> <li>• Exir IR 40 Meter 0.01 Lux</li> <li>• True Day / Night</li> <li>• 1930(H)x1088(V)</li> <li>• IP66 weatherproof</li> </ul>	1950



# TURBO HD

2 Megapixel CCTV





23	 	<b>DS-2CE16D5T-IR</b> <b>3.6 MM</b>	<ul style="list-style-type: none"> <li>• True WDR 120dB</li> <li>• 1080P@25fps, OSD Menu</li> <li>• IR LED 20 Meter 0.01 Lux</li> <li>• 1930(H)x1088(V)</li> <li>• IP66 Metal Case</li> </ul>		2000
24	 	<b>DS-2CE16D5T-VFIT3</b> <b>Vari Focal</b> <b>2.8 - 12 MM</b>	<ul style="list-style-type: none"> <li>• True WDR, up to 120dB</li> <li>• True Day/Night</li> <li>• OSD menu, 3D DNR, Smart IR</li> <li>• Up to 50m IR distance</li> <li>• IP66 weatherproof</li> </ul>		2800
25	 	<b>DS-2CE16D7T-IT1</b> <b>6 MM</b>	<ul style="list-style-type: none"> <li>• True WDR 120dB</li> <li>• 1080P@25fps, OSD Menu</li> <li>• Exir IR 20 Meter 0.01 Lux</li> <li>• 1930(H)x1088(V)</li> <li>• IP66 weatherproof</li> </ul>		1100
26	 	<b>DS-2CE16D7T-IT3</b> <b>6 MM</b>	<ul style="list-style-type: none"> <li>• True WDR 120dB</li> <li>• 1080P@25fps, OSD Menu</li> <li>• Exir IR 40 Meter 0.01 Lux</li> <li>• 1930(H)x1088(V)</li> <li>• IP66 weatherproof</li> </ul>		1200
27	 	<b>DS-2CE16D7T-IT5</b> <b>8 MM</b>	<ul style="list-style-type: none"> <li>• True WDR 120dB</li> <li>• 1080P@25fps, OSD Menu</li> <li>• Exir IR 80 Meter 0.01 Lux</li> <li>• True Day / Night</li> <li>• 1930(H)x1088(V)</li> <li>• IP66 weatherproof</li> </ul>		1350
28		<b>DS-2CE16D7T-IT5</b> <b>12 MM</b>			1350
29	 	<b>DS-2CE16D7T-IT3Z</b> <b>Motorized</b> <b>2.8 - 12 MM</b>	<ul style="list-style-type: none"> <li>• True WDR 120dB</li> <li>• 1080P@25fps, OSD Menu</li> <li>• Exir IR 40 Meter 0.01 Lux</li> <li>• 1930(H)x1088(V)</li> <li>• IP66 weatherproof</li> </ul>		2150

# TURBO HD




5 Megapixel CCTV

HIKVISION 2018 Q2

## 5MP Dome

No	Picture	Model	Specifications	User Price
1		DS-2CE56H0T-ITPF 2.8 MM	<ul style="list-style-type: none"> <li>• 5 MP (TVI/AHD/CVI/CVBS)</li> <li>• 2592×1944@20fps, OSD Menu</li> <li>• Exir IR 20 Meter 0.01 Lux</li> <li>• Angle 92°</li> <li>• IP67</li> </ul>	1025
2		DS-2CE56H0T-IT3F 3.6 MM	<ul style="list-style-type: none"> <li>• 5 MP (TVI/AHD/CVI/CVBS)</li> <li>• 2592×1944@20fps, OSD Menu</li> <li>• Exir IR 40 Meter 0.01 Lux</li> <li>• Angle 70.9°</li> <li>• IP67</li> </ul>	1150
3		DS-2CE56H1T-ITM 2.8 MM	<ul style="list-style-type: none"> <li>• 2592×1944@20fps, OSD Menu</li> <li>• Exir IR 20 Meter 0.01 Lux</li> <li>• Angle 92°</li> <li>• IP67 Metal Case</li> </ul>	1050
4		DS-2CE56H1T-IT3 3.6 MM	<ul style="list-style-type: none"> <li>• 2592×1944@20fps, OSD Menu</li> <li>• Exir IR 40 Meter 0.01 Lux</li> <li>• Angle 70.9°</li> <li>• True Day / Night</li> <li>• IP67</li> </ul>	1250

## 5MP Bullet

No	Picture	Model	Specifications	User Price
5		DS-2CE16H0T-ITPF 3.6 MM	<ul style="list-style-type: none"> <li>• 5 MP (TVI/AHD/CVI/CVBS)</li> <li>• 2592×1944@20fps, OSD Menu</li> <li>• Exir IR 20 Meter 0.01 Lux</li> <li>• Angle 70.9°</li> <li>• 2560(H)×1944(V)</li> <li>• IP67</li> </ul>	1125
6		DS-2CE16H0T-IT3F 3.6 MM	<ul style="list-style-type: none"> <li>• 5 MP (TVI/AHD/CVI/CVBS)</li> <li>• 2592×1944@20fps, OSD Menu</li> <li>• Exir IR 40 Meter 0.01 Lux</li> <li>• Angle 70.9°</li> <li>• 2560(H)×1944(V)</li> <li>• IP67</li> </ul>	1150
7		DS-2CE16H0T-IT5F 6 MM	<ul style="list-style-type: none"> <li>• 5 MP (TVI/AHD/CVI/CVBS)</li> <li>• 2592×1944@20fps, OSD Menu</li> <li>• Exir IR 80 Meter 0.01 Lux</li> <li>• Angle 49°</li> <li>• 2560(H)×1944(V)</li> <li>• IP67</li> </ul>	1250

# TURBO HD

5 Megapixel CCTV

HIKVISION 2018 Q2

No	Picture	Model	Specifications	User Price
8	 	<b>DS-2CE16H1T-IT</b> <b>3.6 MM</b>	<ul style="list-style-type: none"> <li>• 2592×1944@20fps,OSD Menu</li> <li>• Exir IR 20 Meter 0.01 Lux</li> <li>• Angle 70.9°</li> <li>• 2560(H)×1944(V)</li> <li>• IP67</li> </ul>	1050
9	 	<b>DS-2CE16H1T-IT3</b> <b>6 MM</b>	<ul style="list-style-type: none"> <li>• 2592×1944@20fps,OSD Menu</li> <li>• Exir IR 40 Meter 0.01 Lux</li> <li>• Angle 49°</li> <li>• 2560(H)×1944(V)</li> <li>• IP67 weatherproof</li> </ul>	1250
10	 	<b>DS-2CE16H1T-IT5</b> <b>8 MM</b>	<ul style="list-style-type: none"> <li>• 2592×1944@20fps,OSD Menu</li> <li>• Exir IR 80 Meter 0.01 Lux</li> <li>• Angle 34.5°</li> <li>• 2560(H)×1944(V)</li> <li>• IP67 weatherproof</li> </ul>	1450
11	 	<b>DS-2CE16H1T-IT3Z</b> <b>Motorized</b> <b>2.8 - 12 MM</b>	<ul style="list-style-type: none"> <li>• 2592×1944@20fps,OSD Menu</li> <li>• Exir IR 40 Meter 0.01 Lux</li> <li>• 2560(H)×1944(V)</li> <li>• IP67 weatherproof</li> </ul>	2150
12	 	<b>DS-2CC52H1T-FITS</b> <b>1.1 MM</b>	<ul style="list-style-type: none"> <li>• 2592×1944@12.5fps</li> <li>• 0.01Lux @ (F1.2,AGC ON)</li> <li>• IR cut filter with auto switch</li> <li>• Built-in microphone, 1-ch audio output</li> </ul>	5085





# PIR TURBO HD Camera

HIKVISION 2018 Q2

2MP PIR Camera				
No	Picture	Model	Specifications	User Price
1	 	DS-2CE71D8T-PIRL 2.8 MM	<ul style="list-style-type: none"> <li>• 2 MP True WDR 120dB</li> <li>• 1080P@25fps, OSD Menu</li> <li>• Exir IR 20 Meter</li> <li>• True Day / Night</li> <li>• Angle 92°</li> <li>• 1930(H)x1088(V)</li> <li>• IP67</li> <li>• PIR detection, visual alarm</li> <li>• Ultra-Low Light PIR 0.005 Lux</li> </ul> 	1150
2	 	DS-2CE12D8T-PIRL 3.6 MM	<ul style="list-style-type: none"> <li>• 2 MP True WDR 120dB</li> <li>• 1080P@25fps, OSD Menu</li> <li>• Exir IR 20 Meter</li> <li>• True Day / Night</li> <li>• Angle 92°</li> <li>• 1930(H)x1088(V)</li> <li>• IP67</li> <li>• PIR detection, visual alarm</li> <li>• Ultra-Low Light PIR 0.005 Lux</li> </ul> 	1240
2MP White Supplement Camera				
3	 	DS-2CE16D0T-WL3 3.6 MM	<ul style="list-style-type: none"> <li>• 1080P@25fps</li> <li>• White supplement light 30 Meter</li> <li>• 1920(H)x1080(V)</li> <li>• IP66 Metal Case</li> </ul>	1250
4	 	DS-2CE16D0T-WL5 6 MM	<ul style="list-style-type: none"> <li>• 1080P@25fps</li> <li>• White supplement light 50 Meter</li> <li>• 1920(H)x1080(V)</li> <li>• IP66 Metal Case</li> </ul>	1365
2MP AIRAZH Camera				
5	 	DS-2CE16D9T-AIRAZH Motorized 5 - 50 MM	<ul style="list-style-type: none"> <li>• True WDR 120dB</li> <li>• 1080P@25fps, OSD Menu</li> <li>• Exir IR 120 Meter 0.01 Lux</li> <li>• True Day / Night</li> <li>• 1930(H)x1088(V)</li> <li>• IP66 Metal Case • Bulit-in Heater</li> </ul> 	4800



ملحوظة : الكاميرات لا تشمل الحوامل

PTZ 1 MP

HIKVISION 2018 Q2

HIKVISION 2018 Q2

No	Picture	Model	Specifications	User Price
1		DS-2AE4123TI-D 1 MP 23X	<ul style="list-style-type: none"> <li>• 1/2.8" Progressive Scan CMOS</li> <li>• 1920x720P</li> <li>• 23X Optical Zoom</li> <li>• DWDR</li> <li>• Up to 100m IR distance</li> <li>• 3D intelligent positioning function</li> <li>• Turbo HD and CVBS dual output</li> </ul>	8750
2		DS-2AE4123T-A3 1 MP 23X	<ul style="list-style-type: none"> <li>• 1/3" Progressive Scan CMOS</li> <li>• 1280x720</li> <li>• 23X optical zoom, 16X digital zoom</li> <li>• DWDR</li> <li>• 3D intelligent positioning</li> <li>• Turbo HD and CVBS dual output</li> </ul>	9990
3		DS-2AE5123TI-A 1 MP 23X	<ul style="list-style-type: none"> <li>• 1/3" HD CMOS sensor</li> <li>• 1280*720, 23X Optical Zoom</li> <li>• RS-485 communication diagnosis</li> <li>• UTC (Up the Coax) function</li> <li>• 150m IR distance</li> </ul>	11550
4		DS-2AE5123T-A3 1.3 MP 23X	<ul style="list-style-type: none"> <li>• 1.3MP CMOS Image Sensor</li> <li>• 720P Video Output</li> <li>• 23X optical zoom, 16X digital zoom</li> <li>• Up the Coax function</li> <li>• Privacy Masking, 3D DNR</li> <li>• 3D intelligent positioning</li> </ul>	10500
PTZ 2 MP				
5		DS-2AE4223T-A3 2 MP 23X	<ul style="list-style-type: none"> <li>• 1/2.8" Progressive Scan CMOS</li> <li>• 1920x1080</li> <li>• 23X optical zoom, 16X digital zoom</li> <li>• DWDR</li> <li>• 3D intelligent positioning</li> <li>• Turbo HD and CVBS dual output</li> </ul>	10700
6		DS-2AE4223TI-D 2 MP 23X	<ul style="list-style-type: none"> <li>• 1/3" Progressive Scan CMOS</li> <li>• 1920x1080</li> <li>• 23X Optical Zoom</li> <li>• DWDR</li> <li>• Up to 100m IR distance</li> <li>• 3D intelligent positioning function</li> <li>• Support Turbo HD and BNC output</li> </ul>	9280
7		DS-2AE5223TI-A 2 MP 23X	<ul style="list-style-type: none"> <li>• 2MP CMOS Image Sensor</li> <li>• 1920x1080</li> <li>• 23X optical zoom, 16X digital zoom</li> <li>• DWDR</li> <li>• Up to 150m IR distance</li> <li>• 3D intelligent positioning</li> <li>• Turbo HD and CVBS dual output</li> </ul>	14000
8		DS-2AE7230TI-A 2 MP 30X	<ul style="list-style-type: none"> <li>• 2MP CMOS Image Sensor</li> <li>• Up to 120m IR distance</li> <li>• 30X optical zoom, 16X digital zoom</li> <li>• Support up the coax function</li> <li>• Privacy Masking, 3D DNR, D WDR, EIS</li> <li>• 3D intelligent positioning</li> <li>• True Day&amp;Night</li> </ul>	17000



7100 Series















No	Picture	Model	Specifications	User Price
1	 	DS-7104HGHI-F1	<ul style="list-style-type: none"> <li>• 4 - 8 - 16 Channels HD 1080P Lite</li> <li>• Support (TVI - AHD - CVBS)</li> <li>• HDMI, VGA Outputs (1920 x 1080)</li> <li>• Support H.264+ Compression</li> <li>• 1 SATA support HDD Up to 6 TB</li> <li>• Access by Cloud P2P</li> <li>• Synchronous Playback at 720P Resolution</li> </ul>	1050
2		DS-7108HGHI-F1		1950
3		DS-7116HGHI-F1		3100
4	 	DS-7108HGHI-F1/N	<ul style="list-style-type: none"> <li>• 8 - 16 Channels HD 720P Lite</li> <li>• Support (TVI - AHD - CVBS)</li> <li>• HDMI, VGA Outputs (1920 x 1080)</li> <li>• Support H.264+ Compression</li> <li>• 1 SATA support HDD Up to 6 TB</li> <li>• Access by Cloud P2P</li> <li>• Synchronous Playback at 720P Resolution</li> </ul>	1350
5		DS-7116HGHI-F1/N		2300
6	 	DS-7104HQHI-F1/N	<ul style="list-style-type: none"> <li>• 4 Channels HD 1080P</li> <li>• Interfaces input: 4 video / 1 Audio</li> <li>• Support (TVI - AHD - CVBS)</li> <li>• Channel 1 up to 3MP @ 12fps</li> <li>• HDMI, VGA Outputs (1920 x 1080)</li> <li>• Support H.264+ Compression</li> <li>• 1 SATA support HDD Up to 6 TB</li> <li>• Access by Cloud P2P</li> <li>• Synchronous Playback at 1080P Resolution</li> </ul>	1600
7	 	DS-7104HQHI-K1	<ul style="list-style-type: none"> <li>• 4 - 8 - 16 Channels HD 1080P</li> <li>• Support (TVI - AHD - CVI - CVBS)</li> <li>• Channel 1 up to 3MP @ 12fps DVR 4Port</li> <li>• Channels 1-2 up to 3MP @ 12fps DVR 8Port</li> <li>• Channels 1-4 up to 3MP @ 12fps DVR 16Port</li> <li>• HDMI, VGA Outputs (1920 x 1080)</li> <li>• Support H.265+ Compression</li> <li>• 1 SATA support HDD Up to 6 TB</li> <li>• Access by Cloud P2P</li> <li>• Up to 2-ch 4 MP IP cameras input</li> <li>• Synchronous Playback at 3MP Resolution</li> </ul>	1800
8		DS-7108HQHI-K1		2800
9		DS-7116HQHI-K1		4500








# DVR TURBO HD



7200 Series				
No	Picture	Model	Specifications	User Price
10	 	DS-7204HGHI-F1	<ul style="list-style-type: none"> <li>• Interfaces input: 4 video / 1 Audio,</li> <li>• Support (TVI - AHD - CVBS)</li> <li>• HDMI, VGA Outputs (1920 x 1080)</li> <li>• Support H.264+ Compression</li> <li>• 1 SATA support HDD Up to 6 TB</li> <li>• Access by Cloud P2P</li> <li>• Up to 1-ch 1.3 MP IP cameras input</li> <li>• Synchronous Playback at 720P Resolution</li> </ul>	1750
11	 	DS-7204HGHI-SH	<ul style="list-style-type: none"> <li>• Interfaces input: 4 video / 1 Audio</li> <li>• Support (TVI - CVBS)</li> <li>• HDMI, VGA Outputs (1920 x 1080)</li> <li>• Support H.264 Compression</li> <li>• 1 SATA support HDD Up to 6 TB</li> <li>• Access by Cloud P2P</li> <li>• Up to 1-ch 2 MP IP cameras input</li> <li>• Synchronous Playback at 1080P Resolution</li> </ul>	1850
12	 	DS-7208HGHI-SH	<ul style="list-style-type: none"> <li>• Interfaces input: 8 video / 4 Audio</li> <li>• Support (TVI - CVBS)</li> <li>• HDMI, VGA Outputs (1920 x 1080)</li> <li>• Support H.264 Compression</li> <li>• 1 SATA support HDD Up to 6 TB</li> <li>• Access by Cloud P2P</li> <li>• Up to 2-ch 2 MP IP cameras input</li> <li>• Synchronous Playback at 1080P Resolution</li> </ul>	3300
13	 	DS-7204HQHI-F1/N	<ul style="list-style-type: none"> <li>• Interfaces input: 4 video / 1 Audio</li> <li>• Support (TVI - AHD - CVBS)</li> <li>• Channel 1 up to 3MP @ 12fps DVR 4Port</li> <li>• HDMI, VGA Outputs (1920 x 1080)</li> <li>• Support H.264+ Compression</li> <li>• 1 SATA support HDD Up to 6 TB</li> <li>• Up to 1-ch 2 MP IP cameras input</li> <li>• Synchronous Playback at 1080P Resolution</li> </ul>	2100
14	 	DS-7208HQHI-K2	<ul style="list-style-type: none"> <li>• Interfaces input: 8 video / 1 Audio</li> <li>• Support (TVI - AHD - CVI - CVBS)</li> <li>• HDMI Output 4K, VGA Output (1920 x 1080)</li> <li>• Support H.265+ Compression</li> <li>• 2 SATA support HDD Up to 6 TB</li> <li>• Access by Cloud P2P</li> <li>• Up to 2-ch 4 MP IP cameras input H265+</li> <li>• Synchronous Playback at 3MP Resolution</li> </ul>	3800
15	 	DS-7216HQHI-K2 ( 1 Audio )	<ul style="list-style-type: none"> <li>• Interfaces input: 16 video / 1 Audio</li> <li>• Support (TVI - AHD - CVI - CVBS)</li> <li>• HDMI Output 4K, VGA Output (1920 x 1080)</li> <li>• Support H.265+ Compression</li> <li>• 2 SATA support HDD Up to 6 TB</li> <li>• Access by Cloud P2P</li> <li>• Up to 2-ch 4 MP IP cameras input H265+</li> <li>• Synchronous Playback at 3MP Resolution</li> </ul>	5650
16	 	DS-7216HQHI-K2 ( 16 Audio )	<ul style="list-style-type: none"> <li>• Interfaces input: 16 video / 16 Audio</li> <li>• Support (TVI - AHD - CVI - CVBS)</li> <li>• HDMI Output 4K, VGA Output (1920 x 1080)</li> <li>• Support H.265+ Compression</li> <li>• 2 SATA support HDD Up to 6 TB</li> <li>• Access by Cloud P2P</li> <li>• Up to 2-ch 4 MP IP cameras input H265+</li> <li>• Synchronous Playback at 3MP Resolution</li> <li>• Alarm in/out : 8/4</li> </ul>	7000

17		DS-7204HUHI-K2	<ul style="list-style-type: none"> <li>• Interfaces input: 4 video / 1 Audio</li> <li>• Support (TVI - AHD - CVI - CVBS)</li> <li>• HDMI Output (1920x 1080) , VGA Output (1920x 1080)</li> <li>• Support H.265+ Compression</li> <li>• 2 SATA support HDD Up to 8 TB</li> <li>• Access by Cloud P2P</li> <li>• Up to 2-ch 6 MP IP cameras input H265+</li> <li>• Synchronous Playback at 5MP Resolution</li> </ul>	4180
18		DS-7208HUHI-K2	<ul style="list-style-type: none"> <li>• Interfaces input: 8 video / 4 Audio</li> <li>• Support (TVI - AHD - CVI - CVBS)</li> <li>• HDMI Output 4K, VGA Output (1920x 1080)</li> <li>• Support H.265+ Compression</li> <li>• 2 SATA support HDD Up to 8 TB</li> <li>• Access by Cloud P2P</li> <li>• Up to 2-ch 6 MP IP cameras input H265+</li> <li>• Synchronous Playback at 5MP Resolution</li> <li>• Alarm in/out : 8/4</li> </ul>	5900
19		DS-7216HUHI-K2	<ul style="list-style-type: none"> <li>• Interfaces input: 16 video / 4 Audio</li> <li>• Support (TVI - AHD - CVI - CVBS)</li> <li>• HDMI Output 4K, VGA Output (1920x 1080)</li> <li>• Support H.265+ Compression</li> <li>• 2 SATA support HDD Up to 8 TB</li> <li>• Access by Cloud P2P</li> <li>• Up to 2-ch 6 MP IP cameras input H265+</li> <li>• Synchronous Playback at 5MP Resolution</li> <li>• Alarm in/out : 16/4</li> </ul>	10600









**HIKVISION**  
Innovative Surveillance

**DVR TURBO HD**



7300 Series













No	Picture	Model	Specifications	User Price
20		DS-7324HGHI-SH	<ul style="list-style-type: none"> <li>• 24 - 32 Channels HD 1080P</li> <li>• Interfaces input: 24 - 32 video / 4 Audio</li> <li>• Support (TVI - CVBS)</li> <li>• HDMI, VGA Outputs (1920 x 1080)</li> <li>• Support H.264 Compression</li> <li>• 4 SATA support HDD Up to 6 TB</li> <li>• Access by Cloud P2P</li> <li>• Up to 8-ch 2 MP IP cameras input</li> <li>• Synchronous Playback at 1080P Resolution</li> <li>• Alarm in/out : 16/4</li> </ul>	16450
21		DS-7332HGHI-SH	<ul style="list-style-type: none"> <li>• 24 - 32 video / 4 Audio</li> <li>• Support (TVI - AHD - CVI - CVBS)</li> <li>• Channels 1-4 up to 3MP @ 15fps</li> <li>• 2 HDMI Output 4K, VGA Output 2K</li> <li>• Support H.265+ Compression</li> <li>• 4 SATA support HDD Up to 8 TB</li> <li>• Access by Cloud P2P</li> <li>• Up to 8-ch 4 MP IP cameras input H265+(32CH)</li> <li>• Synchronous Playback at 4MP Resolution</li> <li>• Alarm in/out : 16/4 • Supports POS triggered recording</li> </ul>	19450
22		DS-7324HQHI-K4		21300
23		DS-7332HQHI-K4		25950
24		DS-7316HUHI-K4	<ul style="list-style-type: none"> <li>• Interfaces input: 16 video / 4 Audio</li> <li>• Support (TVI - AHD - CVI - CVBS)</li> <li>• 2 HDMI Output (4K,1080), VGA (1080)</li> <li>• Support H.265+ Compression</li> <li>• 4 SATA support HDD Up to 8 TB</li> <li>• Access by Cloud P2P</li> <li>• Up to 2-ch 8 MP IP cameras input H265+ (18CH)</li> <li>• Synchronous Playback at 5MP Resolution</li> <li>• Alarm in/out : 16/4</li> </ul>	16700



2MP Dome POC				
No	Picture	Model	Specifications	User Price
1		DS-2CE56D0T-IT1E 3.6 MM	<ul style="list-style-type: none"> <li>• 2 MP POC ( Power Over Coaxil )</li> <li>• 1920×1080@25fps</li> <li>• IR LED 20 Meter 0.01 Lux</li> <li>• Angle 70°</li> <li>• True Day / Night</li> <li>• IP66</li> </ul>	1285
2		DS-2CE56D0T-IT1E 2.8MM	<ul style="list-style-type: none"> <li>• 2 MP POC ( Power Over Coaxil )</li> <li>• 1920×1080@25fps</li> <li>• IR LED 20 Meter 0.01 Lux</li> <li>• Angle 92°</li> <li>• True Day / Night</li> <li>• IP66</li> </ul>	1285
3		DS-2CC52D9T-IT3E 2.8 MM	<ul style="list-style-type: none"> <li>• 2 MP POC ( Power Over Coaxil )</li> <li>• True WDR 120dB • HLC</li> <li>• 1920×1080@25fps, OSD Menu</li> <li>• Exir IR 40 Meter 0.01 Lux</li> <li>• Angle 92°</li> <li>• True Day / Night</li> <li>• IP67</li> </ul> 	2900
2MP Bullet POC				
No	Picture	Model	Specifications	User Price
4		DS-2CE16D0T-IRPE 3.6 MM	<ul style="list-style-type: none"> <li>• 2 MP POC ( Power Over Coaxil )</li> <li>• 1920×1080@25fps</li> <li>• IR LED 20 Meter 0.01 Lux</li> <li>• Angle 70.9°</li> <li>• True Day / Night</li> <li>• IP66</li> </ul>	1000
5		DS-2CE16D0T-IT3E 8 MM	<ul style="list-style-type: none"> <li>• 2 MP POC ( Power Over Coaxil )</li> <li>• 1920×1080@25fps</li> <li>• Exir IR 40 Meter 0.01 Lux</li> <li>• Angle 37.7°</li> <li>• True Day / Night</li> <li>• IP66</li> </ul>	1285
6		DS-2CE16D0T-IT5E 12 MM	<ul style="list-style-type: none"> <li>• 2 MP POC ( Power Over Coaxil )</li> <li>• 1920×1080@25fps</li> <li>• Exir IR 80 Meter 0.01 Lux</li> <li>• Angle 25°</li> <li>• True Day / Night</li> <li>• IP66</li> </ul>	1400
7		DS-2CC12D9T-IT5E 6 MM	<ul style="list-style-type: none"> <li>• 2 MP POC ( Power Over Coaxil )</li> <li>• True WDR 120dB • HLC</li> <li>• 1920×1080@25fps, OSD Menu</li> <li>• Exir IR 80 Meter 0.01 Lux</li> <li>• Angle 54°</li> <li>• True Day / Night</li> <li>• IP67</li> </ul> 	3100










5MP Dome POC				
No	Picture	Model	Specifications	User Price
8	 	DS-2CE56H1T-IT1E 2.8 MM	<ul style="list-style-type: none"> <li>• 5 MP POC ( Power Over Coaxil )</li> <li>• 2592×1944@20fps,OSD Menu</li> <li>• Exir IR 20 Meter 0.01 Lux</li> <li>• Angle 92°</li> <li>• True Day / Night</li> <li>• IP67</li> </ul>	1450
9	 	DS-2CE56H1T-IT3E 3.6 MM	<ul style="list-style-type: none"> <li>• 5 MP POC ( Power Over Coaxil )</li> <li>• 2592×1944@20fps,OSD Menu</li> <li>• Exir IR 40 Meter 0.01 Lux</li> <li>• Angle 70.9°</li> <li>• True Day / Night</li> <li>• IP67</li> </ul>	1550
5MP Bullet POC				
No	Picture	Model	Specifications	User Price
10	 	DS-2CE16H1T-IT1E 3.6 MM	<ul style="list-style-type: none"> <li>• 5 MP POC ( Power Over Coaxil )</li> <li>• 2592×1944@20fps,OSD Menu</li> <li>• Exir IR 20 Meter 0.01 Lux</li> <li>• Angle 70.9°</li> <li>• True Day / Night</li> <li>• 2560(H)x1944(V)</li> <li>• IP67</li> </ul>	1470
11	 	DS-2CE16H1T-IT3E 6 MM	<ul style="list-style-type: none"> <li>• 5 MP POC ( Power Over Coaxil )</li> <li>• 2592×1944@20fps,OSD Menu</li> <li>• Exir IR 30 Meter 0.01 Lux</li> <li>• Angle 54°</li> <li>• True Day / Night</li> <li>• 2560(H)x1944(V)</li> <li>• IP67 Metal Case</li> </ul>	1580
12	 	DS-2CE16H1T-IT5E 3.6 MM	<ul style="list-style-type: none"> <li>• 5 MP POC ( Power Over Coaxil )</li> <li>• 2592×1944@20fps,OSD Menu</li> <li>• Exir IR 80 Meter 0.01 Lux</li> <li>• Angle 70.9°</li> <li>• True Day / Night</li> <li>• 2560(H)x1944(V)</li> <li>• IP67 Metal Case</li> </ul>	1750
13	 	DS-2CE16H1T-IT3ZE Motorized 2.8 - 12 MM	<ul style="list-style-type: none"> <li>• 5 MP POC ( Power Over Coaxil )</li> <li>• 2592×1944@20fps,OSD Menu</li> <li>• Exir IR 40 Meter 0.01 Lux</li> <li>• True Day / Night</li> <li>• 2560(H)x1944(V)</li> <li>• IP67 Metal Case</li> </ul>	2600



HIKVISION 2018 Q2

No	Picture	Model	Specifications	User Price
POC DVR				
14	 	DS-7204HQHI-K1/P  <b>poc</b>	<ul style="list-style-type: none"> <li>• 4 Channels 3MP</li> <li>• Interfaces input: 4 video / 1 Audio</li> <li>• Support (TVI - AHD - CVI - CVBS)</li> <li>• HDMI Output 4K, VGA Output(1920x1080)</li> <li>• Support H.265+ Compression</li> <li>• 1 SATA support HDD Up to 6 TB</li> <li>• Up to 1-ch 4 MP IP cameras input H265+</li> <li>• Synchronous Playback at 3MP Resolution</li> </ul>	2400
15	 	DS-7208HQHI-K2/P  <b>poc</b>	<ul style="list-style-type: none"> <li>• 8 Channels 3MP</li> <li>• Interfaces input: 8 video / 1 Audio</li> <li>• Support (TVI - AHD - CVI - CVBS)</li> <li>• HDMI Output 4K, VGA Output (1920x1080)</li> <li>• Support H.265+ Compression</li> <li>• 2 SATA support HDD Up to 6 TB</li> <li>• Up to 2-ch 4 MP IP cameras input H265+</li> <li>• Synchronous Playback at 3MP Resolution</li> </ul>	4700
16	 	DS-7216HQHI-K2/P  <b>poc</b>	<ul style="list-style-type: none"> <li>• 16 Channels 3MP</li> <li>• Interfaces input: 16 video / 1 Audio</li> <li>• Support (TVI - AHD - CVI - CVBS)</li> <li>• HDMI Output 4K, VGA Output(1920x1080)</li> <li>• Support H.265+ Compression</li> <li>• 2 SATA support HDD Up to 6 TB</li> <li>• Up to 2-ch 4 MP IP cameras input H265+</li> <li>• Synchronous Playback at 3MP Resolution</li> </ul>	8050
17	 	DS-7204HUHI-K1/P  <b>poc</b>	<ul style="list-style-type: none"> <li>• 4 Channels 5MP</li> <li>• Interfaces input: 4 video / 4 Audio</li> <li>• Support (TVI - AHD - CVI - CVBS)</li> <li>• HDMI Output 4K, VGA Output(1920x1080)</li> <li>• Support H.265+ Compression</li> <li>• 1 SATA support HDD Up to 8 TB</li> <li>• Up to 2-ch 6 MP IP cameras input H265+</li> <li>• Synchronous Playback at 5MP Resolution</li> </ul>	3450
18	 	DS-7208HUHI-K2/P  <b>poc</b>	<ul style="list-style-type: none"> <li>• 8 Channels 5MP</li> <li>• Interfaces input: 8 video / 4 Audio</li> <li>• Support (TVI - AHD - CVI - CVBS)</li> <li>• HDMI Output 4K, VGA Output(1920x1080)</li> <li>• Support H.265+ Compression</li> <li>• 2 SATA support HDD Up to 8 TB</li> <li>• Up to 2-ch 6 MP IP cameras input H265+</li> <li>• Synchronous Playback at 5MP Resolution</li> </ul>	6300





HIKVISION 2018 Q2	IP 1MP Dome				
	No	Picture	Model	Specifications	User Price
	1		DS-2CD1302D-I 2.8 MM	<ul style="list-style-type: none"> <li>• Up to 1megapixelresolution:(1280 × 720)</li> <li>• 1/4" Progressive CMOS,</li> <li>• Min. Illumination:0.01Lux@ (F1.2, AGC ON) ,0.028Lux @ (F2.0, AGC ON) ,0 Lux with IR</li> <li>• 10 meters IR range, support P2P</li> <li>• Video Bit Rate32 Kbps –8Mbps</li> <li>• Standard:ONVIF, PSIA,CGI,ISAPI,ICR, IP66, DWDR, 3D DNR</li> <li>• Power Supply;12V DC±10%</li> <li>• Operating Conditions-10 °C -40 °C (-14°F -104°F), Humidity 95%</li> </ul>	1200
	2		DS-2CD2110F-IW 2.8 MM	<ul style="list-style-type: none"> <li>• 1.3MP 1/3" Progressive scan CMOS</li> <li>• Support dual streams</li> <li>• Up to 30 meters IR range</li> <li>• -W: Support Wi-Fi</li> <li>• IR cut filter with auto switch</li> <li>• DC12V &amp; PoE</li> <li>• Built-in Micro SD/SDHC/SDXC card slot, up to 128 GB</li> <li>• Ingress Protection level: IP67</li> <li>• IK10</li> </ul>	2000
	IP 1MP Bullet				
	No	Picture	Model	Specifications	User Price
	3		DS-2CD1202D-I3 8 MM	<ul style="list-style-type: none"> <li>• Up to 1megapixelresolution:(1280 × 720)</li> <li>• 1/4" Progressive CMOS,</li> <li>• Min. Illumination:0.01Lux@ (F1.2, AGC ON) ,0.028Lux @ (F2.0, AGC ON) ,0 Lux with IR</li> <li>• 1pcs EXIR LED 30 meters IR range, support P2P</li> <li>• Video Bit Rate32 Kbps –8Mbps</li> <li>• Standard:ONVIF, PSIA,CGI,ISAPI,ICR, IP66, DWDR, 3D DNR, BLC</li> <li>• Power Supply;12V DC±10%</li> <li>• Operating Conditions-30 °C -60 °C (-22°F -140°F), Humidity 95%</li> </ul>	1400
	4		DS-2CD1202D-I3 12 MM	<ul style="list-style-type: none"> <li>• Up to 1megapixelresolution:(1280 × 720)</li> <li>• 1/4" Progressive CMOS,</li> <li>• Min. Illumination:0.01Lux@ (F1.2, AGC ON) ,0.028Lux @ (F2.0, AGC ON) ,0 Lux with IR</li> <li>• 1pcs EXIR LED 30 meters IR range, support P2P</li> <li>• Video Bit Rate32 Kbps –8Mbps</li> <li>• Standard:ONVIF, PSIA,CGI,ISAPI</li> <li>• ICR, IP66, DWDR, 3D DNR, BLC</li> <li>• Power Supply;12V DC±10%</li> <li>• Operating Conditions-30 °C -60 °C (-22°F -140°F), Humidity 95%</li> </ul>	1400
	5		DS-2CD2010F-IW 6 MM	<ul style="list-style-type: none"> <li>• 1.3MP high resolution</li> <li>• HD real-time video</li> <li>• 3D DNR &amp; DWDR &amp; BLC</li> <li>• IR LEDs: up to 30m</li> <li>• IP67</li> <li>• PoE</li> <li>• Built-in Micro SD/SDHC/SDXC card slot, up to 128G</li> </ul>	1990





HIKVISION 2018 Q2

IP 2MP Dome				
No	Picture	Model	Specifications	User Price
6		DS-2CD2120F-I 4 MM	• high resolution,1/2.8" Progressive Scan CMOS • 0.01Lux @ (F1.2, AGC ON) ,0 Lux with IR,0.028 Lux @ (F2.0, AGC ON) • 0 Lux with IR Range:Up to 30m	2100
7		DS-2CD2120F-I 2.8 MM	• Wireless Range:50m(depend on environment) • Video Compression: H.264/MJPEG • Video bit rate:32Kbps~8Mbps	2100
8		DS-2CD2120F-IS 2.8 MM	• IP67, , DWDR, 3D DNR, BLC,ROI. • Built-in Micro SD/SDHC/SDXC slot, up to 128G, • System Compatibility: ONVIF, PSIA, CGI, ISAPI	2100
9		DS-2CD2120F-IWS 2.8 MM	• Power Supply: 12 VDC ± 10%, PoE (802.3af) • Support Mobile Monitoring via EZVIZ P2P	2400
10	 	DS-2CD2520F 2.8 MM	• Up to 2 megapixel (1920 × 1080 @ 30 fps) resolution • 1/2.8" Progressive Scan CMOS • Built-in Micro SD/SDHC/SDXC card slot, up to 64GB • IK10,IR cut filter with auto switch, DWDR, 3D DNR, BLC • Video Bit Rate32 Kbps –8Mbps,One-key reset • Support PoE(802.3af),Power SupplyDC12V	2130
11	 	DS-2CD2720F-I Vari Focal 2.8 - 12 MM	• 1/3" Progressive CMOS, ICR, 0lux with IR, • 1920x1080:25fps(P)/30fps(N), 2.8~12mm VF lens, H.264/MJPEG • dual-stream, IP66, DC12V & PoE, DWDR, 3D DNR, BLC, IR: up to 30m, Support on-board card slot (SD card not included)	3740
12		DS-2CD2720F-IZ Motorized 2.8 - 12 MM	• Vandal-proof, Support Mobile Monitoring via EZVIZ P2P • -Z:Motorized VF lens	4195
13	 	DS-2CD2E20F-W 2.8 MM	• 1/3" Progressive CMOS, Day/night, 0.1lux/F1.2, • 1920x1080:25fps(P)/30fps(N), 4mm lens (2.8/6mm optional), H.264/MJPEG, dual-stream, DC12V & PoE, DWDR, 3D DNR, BLC, Support on-board storage up to 64GB (SD card not included), Support Mobile Monitoring via EZVIZ P2P, Color Lens Cover optional (Black, Silver, Golden) • -W: Built-in Wi-Fi	2500
IP 2MP Bullet				
No	Picture	Model	Specifications	User Price
14	 	DS-2CD2020-I 4 MM	• 2MP 1/2.8" Progressive Scan CMOS • 0.01Lux @ (F1.2, AGC ON) ,0 Lux with IR,0.028Lux @ (F2.0, AGC ON) • 0 Lux with IR	2100
15		DS-2CD2020-I 6 MM	• IR Range: Up to 30m • IP67, DWDR, 3D DNR, BLC,Auto Iris,ROI.	2100
16		DS-2CD2020F-I 4 MM	• Line Crossing, Intrusion Detection, Motion detection • Video Compression: H.264/MJPEG • Video bit rate: 32Kbps~8Mbps	2125
17		DS-2CD2020F-IW 4 MM	• Power Supply: 12 VDC ± 10%, PoE (802.3af) • Standard ONVIF, PSIA, CGI, ISAPI • metallic housing, Support Mobile Monitoring via EZVIZ P2P	2150
Cube Camera				
No	Picture	Model	Specifications	User Price
18	 	DS-2CD2420F-I 2.8 MM	• 1/3" Progressive CMOS, ICR, 0lux with IR, • 1920x1080:25fps(P)/30fps(N), H.264/MJPEG, dual-stream, DC12V & PoE, DWDR, 3D DNR, BLC, IR: up to 10m, Support on-board card slot (SD card not included), Support Mobile Monitoring via EZVIZ P2P	1890
19		DS-2CD2420F-IW 2.8 MM	• -W: Built-in Wi-Fi with WPS	2100
















HIKVISION 2018 Q2

## EASY IP 2.0 PLUS

		IP 4MP Dome			
HIKVISION 2018 Q2	No	Picture	Model	Specifications	User Price
	1	 	DS-2CD2143G0-IS 2.8 MM	<ul style="list-style-type: none"> <li>• 1/3" Progressive Scan CMOS</li> <li>• 2560 ×1440@30fps</li> <li>• Color: 0.01 Lux @ (F1.2, AGC ON), 0.018 Lux @ (F1.6, AGC ON), 0 Lux with IR</li> <li>• H.265+, H.265, H.264+, H.264</li> <li>• Three streams</li> <li>• 120dB WDR</li> <li>• 2 Behavior analyses, and face detection</li> <li>• BLC/3D DNR/ROI</li> <li>• IP67</li> <li>• Built-in micro SD/SDHC/SDXC card slot, up to 128 GB</li> <li>• 3-Axis adjustment</li> </ul> 	CALL
	IP 4MP Bullet				
	No	Picture	Model	Specifications	User Price
HIKVISION 2018 Q2	2	 	DS-2CD2043G0-I 4 MM	<ul style="list-style-type: none"> <li>• 1/3" Progressive Scan CMOS</li> <li>• 2560 ×1440@30fps</li> <li>• Color: 0.01 Lux @ (F1.2, AGC ON), 0.018 Lux @ (F1.6, AGC ON), 0 Lux with IR</li> <li>• H.265+, H.265, H.264+, H.264</li> <li>• Three streams</li> <li>• 120dB WDR</li> <li>• 2 Behavior analyses, and face detection</li> <li>• BLC/3D DNR/ROI</li> <li>• IP67</li> <li>• Built-in micro SD/SDHC/SDXC card slot, up to 128 GB</li> <li>• 3-Axis adjustment</li> </ul> 	CALL
	3	 	DS-2CD2T43G0-I8 6 MM	<ul style="list-style-type: none"> <li>• 1/3" Progressive Scan CMOS</li> <li>• 2560 ×1440@30fps</li> <li>• Color: 0.01 Lux @ (F1.2, AGC ON), 0.018 Lux @ (F1.6, AGC ON), 0 Lux with IR</li> <li>• H.265+, H.265, H.264+, H.264</li> <li>• Three streams</li> <li>• 120dB WDR</li> <li>• 2 Behavior analyses, and face detection</li> <li>• BLC/3D DNR/ROI</li> <li>• IP67</li> <li>• Built-in micro SD/SDHC/SDXC card slot, up to 128 GB</li> <li>• 3-Axis adjustment</li> </ul> 	CALL

# EasyIP 3.0













## 21 series EXIR Dome Camera

No	Picture	Model	Specifications	User Price
1	 	<b>DS-2CD2125FWD-IS</b> <b>2.8 MM</b>	<ul style="list-style-type: none"> <li>• 2 megapixel high resolution</li> <li>• Max. 1920 × 1080 @30fps</li> <li>• <b>Ultra-low light 0.005 Lux</b></li> <li>• H.265, H.265+, H.264+, H.264</li> <li>• 120dB Wide Dynamic Range</li> <li>• 4 behavior analyses and face detection</li> <li>• DC12V &amp; PoE (802.3af)</li> <li>• IR range: up to 30 m</li> <li>• Support on-board storage, up to 128 GB</li> <li>• IP67, IK10</li> </ul> 	3100
2	 	<b>DS-2CD2125FWD-IS</b> <b>4 MM</b>	<ul style="list-style-type: none"> <li>• 2 megapixel high resolution</li> <li>• Max. 1920 × 1080 @30fps</li> <li>• <b>Ultra-low light 0.005 Lux</b></li> <li>• H.265, H.265+, H.264+, H.264</li> <li>• 120dB Wide Dynamic Range</li> <li>• 4 behavior analyses and face detection</li> <li>• DC12V &amp; PoE (802.3af)</li> <li>• IR range: up to 30 m</li> <li>• Support on-board storage, up to 128 GB</li> <li>• IP67, IK10</li> </ul> 	3100
3	 	<b>DS-2CD2125FHWI-I</b> <b>2.8 MM</b>	<ul style="list-style-type: none"> <li>• 2 megapixel high resolution</li> <li>• Max. 1920 × 1080 @30fps</li> <li>• <b>Ultra-low light 0.005 Lux</b></li> <li>• H.265, H.265+, H.264+, H.264</li> <li>• 120dB Wide Dynamic Range</li> <li>• 4 behavior analyses and face detection</li> <li>• DC12V &amp; PoE (802.3af)</li> <li>• IR range: up to 30 m</li> <li>• Support on-board storage, up to 128 GB</li> <li>• IP67, IK10</li> <li>• FHWI model: 50fps/60fps(1920×1080)</li> </ul> 	3350
4	 	<b>DS-2CD2185FWD-I</b> <b>2.8 MM</b>	<ul style="list-style-type: none"> <li>• 8 megapixel high resolution</li> <li>• Max. 3840 × 2160@20fps</li> <li>• H.265, H.265+, H.264+, H.264</li> <li>• 120dB Wide Dynamic Range</li> <li>• 4 behavior analyses and face detection</li> <li>• DC12V &amp; PoE (802.3af)</li> <li>• IR range: 30m</li> <li>• Support on-board storage, up to 128 GB</li> <li>• IP67, IK10</li> </ul> 	CALL
5	 	<b>DS-2CD2185FWD-I</b> <b>4 MM</b>	<ul style="list-style-type: none"> <li>• 8 megapixel high resolution</li> <li>• Max. 3840 × 2160@20fps</li> <li>• H.265, H.265+, H.264+, H.264</li> <li>• 120dB Wide Dynamic Range</li> <li>• 4 behavior analyses and face detection</li> <li>• DC12V &amp; PoE (802.3af)</li> <li>• IR range: 30m</li> <li>• Support on-board storage, up to 128 GB</li> <li>• IP67, IK10</li> </ul> 	CALL



# EasyIP 3.0









## 20 series EXIR Mini Bullet Camera

HIKVISION 2018 Q2	No	Picture	Model	Specifications	User Price
	6	 	DS-2CD2025FWD-I 4 MM	<ul style="list-style-type: none"> <li>• 2 megapixel high resolution</li> <li>• Max. 1920 × 1080 @30fps</li> <li>• <b>Ultra-low light 0.005 Lux</b></li> <li>• H.265, H.265+, H.264+, H.264</li> <li>• 120dB Wide Dynamic Range</li> <li>• 4 behavior analyses and face detection</li> <li>• DC12V &amp; PoE (802.3af)</li> <li>• IR range: up to 30 m</li> <li>• Support on-board storage, up to 128 GB</li> <li>• IP67, IK10</li> </ul> 	2850
	7		DS-2CD2025FWD-I 6 MM		2850
	8	 	DS-2CD2025FHW-I 2.8 MM	<ul style="list-style-type: none"> <li>• 2 megapixel high resolution</li> <li>• <b>Ultra-low light 0.005 Lux</b></li> <li>• H.265, H.265+, H.264+, H.264</li> <li>• 120dB Wide Dynamic Range</li> <li>• 4 behavior analyses and face detection</li> <li>• DC12V &amp; PoE (802.3af)</li> <li>• IR range: up to 30 m</li> <li>• Support on-board storage, up to 128 GB</li> <li>• IP67</li> <li>• FHW model: 50fps/60fps(1920×1080)</li> </ul> 	3250
	9		DS-2CD2025FHW-I 4 MM		3250
	10		DS-2CD2025FHW-I 6 MM		3250
	11	 	DS-2CD2055FWD-I 4 MM	<ul style="list-style-type: none"> <li>• 5 megapixel high resolution</li> <li>• Max. 2560 × 1920@30fps</li> <li>• H.265, H.265+, H.264+, H.264</li> <li>• 120dB Wide Dynamic Range</li> <li>• 4 behavior analyses and face detection</li> <li>• DC12V &amp; PoE (802.3af)</li> <li>• IR range: up to 30 m</li> <li>• Support on-board storage, up to 128 GB</li> <li>• IP67</li> </ul> 	CALL
	12		DS-2CD2055FWD-I 6 MM		CALL
	13	 	DS-2CD2085FWD-I 6 MM	<ul style="list-style-type: none"> <li>• 8 megapixel high resolution</li> <li>• Max. 3840 × 2160@20fps</li> <li>• H.265, H.265+, H.264+, H.264</li> <li>• 120dB Wide Dynamic Range</li> <li>• 4 behavior analyses and face detection</li> <li>• DC12V &amp; PoE (802.3af)</li> <li>• IR range: 30m</li> <li>• Support on-board storage, up to 128 GB</li> <li>• IP67, IK10</li> </ul> 	CALL







# EasyIP 3.0

HIKVISION 2018 Q2

## 2T series EXIR Bullet Camera

No	Picture	Model	Specifications	User Price
14		DS-2CD2T25FWD-I5 4 MM	<ul style="list-style-type: none"> <li>Max. 1920 × 1080 @30fps</li> <li>H.265, H.265+, H.264+, H.264</li> <li>120dB Wide Dynamic Range</li> <li>4 behavior analyses and face detection</li> <li>DC12V &amp; PoE (802.3af)</li> <li>IR range: 50m <b>0.005 Lux</b></li> <li>IP67 • <b>Ultra-low light</b></li> </ul> 	3260
15		DS-2CD2T25FWD-I8 6 MM	<ul style="list-style-type: none"> <li>Max. 1920 × 1080 @30fps</li> <li>H.265, H.265+, H.264+, H.264</li> <li>120dB Wide Dynamic Range</li> <li>4 behavior analyses and face detection</li> <li>DC12V &amp; PoE (802.3af)</li> <li>IR range: 80m <b>0.005 Lux</b></li> <li>IP67 • <b>Ultra-low light</b></li> </ul> 	3415
16		DS-2CD2T25FHWD-I8 12 MM	<ul style="list-style-type: none"> <li>Max. 1920 × 1080 @30fps</li> <li>H.265, H.265+, H.264+, H.264</li> <li>120dB Wide Dynamic Range</li> <li>4 behavior analyses and face detection</li> <li>DC12V &amp; PoE (802.3af)</li> <li>IR range: up to 80 m <b>0.005 Lux</b></li> <li>IP67 • <b>Ultra-low light</b></li> <li>FHWD model: 50fps/60fps(1920×1080)</li> </ul> 	3450
17		DS-2CD2T55FWD-I8 6 MM	<ul style="list-style-type: none"> <li>Max. 2560 × 1920@20fps</li> <li>H.265, H.265+, H.264+, H.264</li> <li>120dB Wide Dynamic Range</li> <li>4 behavior analyses and face detection</li> <li>DC12V &amp; PoE (802.3af)</li> <li>IR range: 80m</li> <li>IP67</li> </ul> 	CALL
18		DS-2CD2T55FWD-I8 12 MM		CALL

## 26 series motorized VF EXIR Bullet Camera

No	Picture	Model	Specifications	User Price
19		DS-2CD2625FHWD-IZS Motorized Auto Focus 2.8 - 12 MM	<ul style="list-style-type: none"> <li>1920 × 1080 resolution</li> <li>H.265, H.265+, H.264+, H.264</li> <li>120dB Wide Dynamic Range</li> <li>BLC/3D DNR/ROI</li> <li>IP67, IK10 • <b>Ultra-low light</b></li> <li>IR range: up to 50 m <b>0.005 Lux</b></li> <li>4 behavior analyses and face detection</li> <li>FHWD model: 50fps/60fps(1920×1080)</li> </ul> 	5800
20		DS-2CD2655FWD-IZS Motorized Auto Focus 2.8 - 12 MM	<ul style="list-style-type: none"> <li>Max. 2944 × 1656@20fps</li> <li>H.265, H.265+, H.264+, H.264</li> <li>120dB Wide Dynamic Range</li> <li>4 behavior analyses and face detection</li> <li>DC12V &amp; PoE (802.3af)</li> <li>IR range: up to 50 m</li> <li>IP67</li> </ul> 	CALL
21		DS-2CD2685FWD-IZS Motorized Auto Focus 2.8 - 12 MM	<ul style="list-style-type: none"> <li>Max. 3840 × 2160@20fps</li> <li>H.265, H.265+, H.264+, H.264</li> <li>120dB Wide Dynamic Range</li> <li>4 behavior analyses and face detection</li> <li>DC12V &amp; PoE (802.3af)</li> <li>IR range: up to 50 m</li> <li>IP67, IK10</li> </ul> 	CALL

# EasyIP 3.0

## 27 series motorized VF EXIR Dome Camera

HIKVISION 2018 Q2









No	Picture	Model	Specifications	User Price
22		<b>DS-2CD2725FWD-IZS</b> <b>Motorized Auto Focus</b> <b>2.8 - 12 MM</b>	<ul style="list-style-type: none"> <li>• 2 megapixel high resolution</li> <li>• <b>Ultra-low light 0.005 Lux</b></li> <li>• H.265, H.265+, H.264+, H.264</li> <li>• 120dB Wide Dynamic Range</li> <li>• BLC/3D DNR/ROI</li> <li>• IR range: up to 30 m</li> <li>• IP67, IK10</li> <li>• 4 behavior analyses and face detection</li> </ul> 	5600
23		<b>DS-2CD2725FHWD-IZS</b> <b>Motorized Auto Focus</b> <b>2.8 - 12 MM</b>	<ul style="list-style-type: none"> <li>• 2 megapixel high resolution</li> <li>• <b>Ultra-low light 0.005 Lux</b></li> <li>• H.265, H.265+, H.264+, H.264</li> <li>• 120dB Wide Dynamic Range</li> <li>• BLC/3D DNR/ROI</li> <li>• IR range: up to 30 m</li> <li>• IP67, IK10</li> <li>• 4 behavior analyses and face detection</li> </ul> 	5850
24		<b>DS-2CD2735FWD-IZS</b> <b>Motorized Auto Focus</b> <b>2.8 - 12 MM</b>	<ul style="list-style-type: none"> <li>• 3 megapixel high resolution</li> <li>• Max. 2048 × 1536 @30fps</li> <li>• <b>Ultra-low light 0.005 Lux</b></li> <li>• H.265, H.265+, H.264+, H.264</li> <li>• 120dB Wide Dynamic Range</li> <li>• 4 behavior analyses and face detection</li> <li>• DC12V &amp; PoE (802.3af)</li> <li>• IR range: up to 30 m</li> <li>• Support on-board storage, up to 128 GB</li> <li>• IP67, IK10</li> </ul> 	CALL
25		<b>DS-2CD2755FWD-IZS</b> <b>Motorized Auto Focus</b> <b>2.8 - 12 MM</b>	<ul style="list-style-type: none"> <li>• 5 megapixel high resolution</li> <li>• Max. 2944 × 1656@20fps</li> <li>• H.265, H.265+, H.264+, H.264</li> <li>• 120dB Wide Dynamic Range</li> <li>• 4 behavior analyses and face detection</li> <li>• DC12V &amp; PoE (802.3af)</li> <li>• IR range: up to 30 m</li> <li>• Support on-board storage, up to 128 GB</li> <li>• IP67</li> </ul> 	CALL
26		<b>DS-2CD2785FWD-IZS</b> <b>Motorized Auto Focus</b> <b>2.8 - 12 MM</b>	<ul style="list-style-type: none"> <li>• 8 megapixel high resolution</li> <li>• Max. 3840 × 2160@20fps</li> <li>• H.265, H.265+, H.264+, H.264</li> <li>• 120dB Wide Dynamic Range</li> <li>• 4 behavior analyses and face detection</li> <li>• DC12V &amp; PoE (802.3af)</li> <li>• IR range: up to 30 m</li> <li>• Support on-board storage, up to 128 GB</li> <li>• IP67</li> </ul> 	CALL




# EasyIP 3.0

## 29 series IR Panoramic Camera


HIKVISION 2018 Q2

No	Picture	Model	Specifications	User Price
27	 	<b>DS-2CD2935FWD-IS</b> <b>1.16 MM</b> 	<ul style="list-style-type: none"> <li>• 3 MP High Resolution</li> <li>• Full 2048 × 1536 @30 fps</li> <li>• H.265+, H.265, H.264+, H.264</li> <li>• 14 Display Modes Supported</li> <li>• Field of View: Horizontal 180°, Vertical 180°</li> <li>• 120 dB Wide Dynamic Range</li> <li>• 4 behavior analyses and face detection</li> <li>• 12 VDC &amp; PoE (802.3af)</li> <li>• EXIR 2.0 with up to 30 ft (8 m) IR range</li> <li>• MicroSD card slot supports up to 128 GB</li> <li>• Audio and Alarm Inputs and Outputs</li> </ul> 	6600
28	 	<b>DS-2CD2955FWD-IS</b> <b>1.05 MM</b> 	<ul style="list-style-type: none"> <li>• 5 MP High Resolution</li> <li>• Full 2560 × 1920 @30 fps</li> <li>• H.265+, H.265, H.264+, H.264</li> <li>• 14 Display Modes Supported</li> <li>• Field of View: Horizontal 180°, Vertical 180°</li> <li>• 120 dB Wide Dynamic Range</li> <li>• 4 behavior analyses and face detection</li> <li>• 12 VDC &amp; PoE (802.3af)</li> <li>• EXIR 2.0 with up to 30 ft (8 m) IR range</li> <li>• MicroSD card slot supports up to 128 GB</li> <li>• Audio and Alarm Inputs and Outputs</li> </ul> 	7700

**HIKVISION****LINE 4****2MP ANPR Ultra-Low Light Bullet Camera**

No	Picture	Model	Specifications	User Price
1		DS-2CD4A26FWD-IZHS/P Motorized 2.8 - 12 MM	<ul style="list-style-type: none"><li>• 1/1.8" Progressive Scan CMOS</li><li>• 1920 × 1080 @ 60fps</li><li>• Ultra-low light</li><li>• IR and white light, optional</li><li>• Auto-iris, support P-iris (-P)</li><li>• Capture rate&gt;99% (certain countries and regions)</li><li>• Recognition rate&gt;98% (certain countries and regions)</li><li>• 120dB WDR</li></ul>	CALL

**6MP Smart IP Indoor Dome Camera**


No	Picture	Model	Specifications	User Price
2		DS-2CD4165F-IZ Motorized 2.8 - 12 MM	<ul style="list-style-type: none"><li>• 1/1.8" Progressive Scan CMOS</li><li>• 6MP@24fps frame rate</li><li>• Slow shutter</li><li>• Digital WDR</li><li>• 3D DNR</li><li>• Audio/Alarm IO</li><li>• Support 128G on-board storage</li><li>• DC12V/PoE</li></ul>	CALL

**HIKVISION**


# LINE 6




## Dual-Lens People Counting Camera

No	Picture	Model	Specifications	User Price
1		IDS-2CD6810F/C 2.0 MM 2.8 MM	<ul style="list-style-type: none"> <li>• Support real-time people entering/exiting/passing by data.</li> <li>• Support statistical traffic report based on configurable time interval (day/week/month/year).</li> <li>• Flash memory storing people counting data</li> <li>• 1/3" progressive scan CMOS sensor</li> <li>• Support Smart Codec, high bandwidth efficiency, low time, delay and optimized bit rate.</li> <li>• Support 3D DNR.</li> <li>• Black and white image</li> <li>• Support two video streams</li> </ul>	CALL

## 6MP Fish-eye Network Camera


No	Picture	Model	Specifications	User Price
2		DS-2CD6362F-I 1.27 MM	<ul style="list-style-type: none"> <li>• 1/1.8" progressive scan CMOS</li> <li>• Support Heat Map</li> <li>• Up to 3072 x 2048 resolution, 30fps</li> <li>• 360° panoramic view</li> <li>• Multiple viewing modes</li> <li>• Virtual PTZ</li> <li>• Up to 15m IR range</li> <li>• Built-in microphone and speaker</li> </ul>	CALL



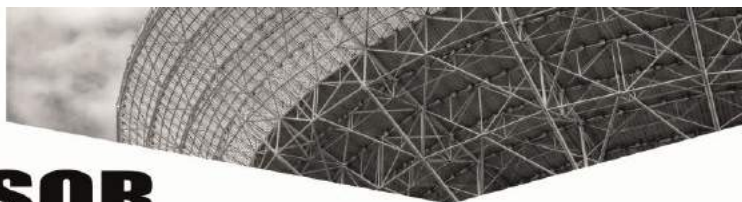


# MULTI- SENSOR


8 MP Multi-Imager Panoramic Dome Camera

No	Picture	Model	Specifications	User Price
1		DS-2CD6986F-H	<ul style="list-style-type: none"> <li>• 1/1.8" Progressive Scan CMOS Sensor</li> <li>• 4 mm x 5 mm Fixed Lens</li> <li>• 180° Horizontal View</li> <li>• Up to 7.3 MP Resolution (4096 × 1800)</li> <li>• Ultra-Low Light</li> <li>• 3D DNR</li> <li>• 128 GB On-Board Storage</li> <li>• 12 VDC/24 VAC/PoE</li> <li>• Audio/Alarm I/O</li> <li>• IP66 Rated</li> <li>• Heater and Fan</li> </ul>	CALL

**HIKVISION**

# Face Recognition

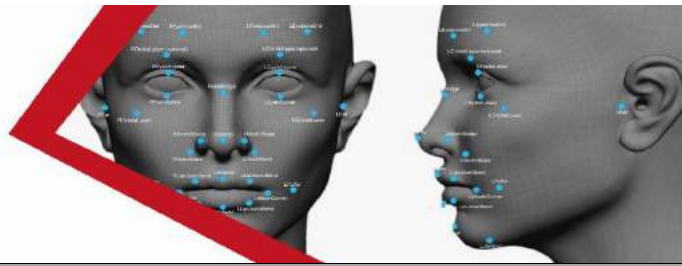


DeepinView Dual-Lens Face Recognition Camera				
No	Picture	Model	Specifications	User Price
1		IDS-2CD8426G0/F-I	<ul style="list-style-type: none"><li>• 1/2.8" Progressive Scan CMOS</li><li>• 1920 × 1080 @ 30fps</li><li>• 120dB WDR</li><li>• H.265+, H.265, H.264+, H.264</li><li>• 5 video streams</li><li>• Face recognition</li><li>• IR range up to 10 m</li></ul>	CALL



## DON'T BE LEFT IN THE DARK!

### DarkFighter Camera Series

HIKVISION 2018 Q2

PTZ 1 MP				
No	Picture	Model	Specifications	User Price
1		DS-2DE2103-DE3/W 1 MP 3X	<ul style="list-style-type: none"> <li>• 1MP 3X Network Mini PTZ Dome Camera</li> <li>• 2.5" bubble mini Pan/Tilt/Zoom camera</li> <li>• 1080x720P HD real-time resolution</li> <li>• 3X zoom, 16X digital zoom</li> <li>• PoE &amp; 12VDC power supply</li> <li>• Built-in MIC, WIFI</li> <li>• Micro SD card local storage</li> <li>• Support EZVIZ cloud P2P</li> <li>• Easy to install and adjust</li> </ul>	3200
2		DS-2DE4120I-D 1.3 MP 20X	<ul style="list-style-type: none"> <li>• 1.3MP 20X Network IR PTZ Dome Camera</li> <li>• 1/3" Progressive Scan CMOS</li> <li>• 1280 x 960</li> <li>• 20X Optical Zoom</li> <li>• D WDR</li> <li>• 3D intelligent positioning</li> <li>• Up to 100m IR distance</li> <li>• 12VDC power supply</li> </ul>	10200
PTZ 2 MP				
3		DS-2DE4220W-AE3 2 MP 20X	<ul style="list-style-type: none"> <li>• 2 MP Indoor 4" 20x Network PTZ Dome</li> <li>• 1/2.8" Progressive Scan CMOS</li> <li>• Up to 1920 x 1080 @ 30 fps</li> <li>• 20x Optical Zoom</li> <li>• DWDR</li> <li>• 3D Intelligent Positioning</li> <li>• IP66 and IK10 Protection</li> <li>• 24 VAC / PoE (Injector Included), 18 W</li> </ul>	10500
4		DS-2DE4A220IW-DE 2 MP 20X	<ul style="list-style-type: none"> <li>• 2MP Network IR mini PTZ Camera</li> <li>• 1/2.8" Progressive Scan CMOS</li> <li>• 1920 x 1080</li> <li>• 20X Optical Zoom</li> <li>• WDR</li> <li>• 3D intelligent positioning function</li> <li>• Support Hik-Connect</li> <li>• Up to 50m IR distance</li> <li>• 12VDC &amp; POE (802.3at, class4)</li> </ul>	11900
5		DS-2DE5220W-AE 2 MP 20X	<ul style="list-style-type: none"> <li>• 2MP 20X Network PTZ Camera</li> <li>• 1/2.8" Progressive Scan CMOS, up to 1920x1080</li> <li>• 25 fps at HD1080p</li> <li>• 3D DNR, D WDR</li> <li>• 3D intelligent positioning</li> <li>• 20X Optical Zoom</li> <li>• IP66 rating</li> </ul>	14800
6		DS-2DE4220IW-DE 2 MP 20X	<ul style="list-style-type: none"> <li>• 1/2.8" Progressive Scan CMOS</li> <li>• 1920 x 1080</li> <li>• 20X Optical Zoom</li> <li>• DWDR</li> <li>• 3D intelligent positioning function</li> <li>• Support Hik cloud P2P</li> <li>• Up to 100m IR distance</li> <li>• 12VDC &amp; POE(802.3at) power supply</li> </ul>	10950









**DARKFIGHTER**

## DON'T BE LEFT IN THE DARK! DarkFighter Camera Series

HIKVISION 2018 Q2











PTZ 2 MP				
No	Picture	Model	Specifications	User Price
7		<b>DS-2DF5220-D4</b> <b>2 MP</b> <b>20X</b>	<ul style="list-style-type: none"> <li>• 1/3" HD CMOS Sensor</li> <li>• 1920 x 1080 Full HD, 20x Optical Zoom</li> <li>• WiFi</li> <li>• Digital WDR</li> <li>• Smart Tracking</li> <li>• Smart Detection</li> <li>• EIS (Electronic Image Stabilization)</li> </ul>	22000
8		<b>DS-2DE7230IW-AE</b> <b>2 MP</b> <b>30X</b>	<ul style="list-style-type: none"> <li>• 2MP 30X Network IR PTZ Camera</li> <li>• 1/2.8" Progressive Scan CMOS, up to 1920x1080</li> <li>• 25 fps at HD1080p</li> <li>• Up to 150m IR distance</li> <li>• 3D DNR, D WDR</li> <li>• 3D intelligent positioning</li> <li>• 30X Optical Zoom</li> <li>• IP66 rating</li> <li>• PoE+/12 VDC Power Supply</li> </ul>	20000
9		<b>DS-2DF8236IX-AEL</b> <b>2 MP</b> <b>36X</b>	<ul style="list-style-type: none"> <li>• 2MP 36x Network IR Speed Dome</li> <li>• 1/1.9" progressive scan CMOS sensor</li> <li>• Up to 1920 x 1080 resolution</li> <li>• 36X Optical Zoom</li> <li>• 0 Lux with IR</li> <li>• Smart Detection • Smart Tracking</li> <li>• 200m IR distance</li> <li>• Optional wiper(-W)</li> <li>• Hi-PoE / 24VAC power supply</li> <li>• Support H.265+/H.265 video compression</li> <li>• Support Rapid Focus</li> </ul>	CALL
10		<b>DS-2PT3326IZ-DE3</b> <b>2 MP</b> <b>Panorama 360°</b> <b>4X</b>	<ul style="list-style-type: none"> <li>• PanoVu series 360°panoramic + PTZ camera</li> <li>• Panoramic Camera</li> <li>• Three 1/2.8" progressive scan CMOS</li> <li>• Up to 3x1920x1080 resolution @30fps</li> <li>• Horizontal field of view: 130°</li> <li>• IR distance: 20m</li> <li>• Tracking PTZ Camera</li> <li>• 1/2.8" progressive scan CMOS</li> <li>• Up to 1920x1080 resolution @30fps</li> <li>• Horizontal field of view: 119°, Horizontal field of view: 61°</li> <li>• 4x Optical Zoom, 16x Digital Zoom</li> </ul>	CALL



## DON'T BE LEFT IN THE DARK!

### DarkFighter Camera Series


HIKVISION 2018 Q2

No	Picture	Model	Specifications	User Price
PTZ 3 MP				
11	 	<b>DS-2DE4A320IW-DE</b> <b>3 MP</b> <b>20X</b>	<ul style="list-style-type: none"> <li>• 3MP Network IR PTZ Camera</li> <li>• 1/2.8" Progressive Scan CMOS</li> <li>• 2048 x 1536</li> <li>• 20X Optical Zoom , 16x Digital Zoom</li> <li>• WDR,3DDNR,HLC,Smart IR</li> <li>• Support Hik-Connect</li> <li>• Up to 50m IR distance</li> <li>• 12VDC &amp; POE (802.3at, class4)</li> </ul>	14100
12	 	<b>DS-2DE7330IW-AE</b> <b>3 MP</b> <b>30X</b>	<ul style="list-style-type: none"> <li>• 3MP 30X Network IR PTZ Camera</li> <li>• 1/2.8" Progressive Scan CMOS</li> <li>• 2048 x 1536@30fps</li> <li>• Up to 150m IR distance</li> <li>• 3D DNR, D WDR</li> <li>• 3D intelligent positioning</li> <li>• 30X Optical Zoom</li> <li>• IP66 rating</li> </ul>	22000
PTZ 4 MP				
13	 	<b>DS-2DF8436IX-AEL</b> <b>4 MP</b> <b>36X</b>	<ul style="list-style-type: none"> <li>• 4MP 36x Network IR Speed Dome</li> <li>• 1/1.9" HD CMOS sensor</li> <li>• Up to 2560 x 1440 resolution</li> <li>• 36X Optical Zoom</li> <li>• 0 Lux with IR</li> <li>• Smart Tracking</li> <li>• Smart Detection</li> <li>• 200m IR distance</li> <li>• Optional wiper(-W)</li> <li>• Hi-PoE / 24VAC power supply</li> <li>• Support H.265+/H.265 video compression</li> </ul>	CALL
PTZ 8 MP				
14	 	<b>DS-2DF8836IX-AEL</b> <b>8 MP</b> <b>36X</b>	<ul style="list-style-type: none"> <li>• 8MP 36x Network IR Speed Dome</li> <li>• 2/3" HD CMOS sensor</li> <li>• Up to 4096 x 2160 resolution</li> <li>• 36X Optical Zoom</li> <li>• 0 Lux with IR</li> <li>• Smart Tracking</li> <li>• Smart Detection</li> <li>• 200m IR distance</li> <li>• Optional wiper(-W)</li> <li>• Hi-PoE / 24VAC power supply</li> <li>• Support H.265+/H.265 video compression</li> </ul>	CALL
15	 	<b>DS-2DF8836I5X-AEL(W)</b> <b>8 MP</b> <b>36X</b>	<ul style="list-style-type: none"> <li>• 8MP 36x Network Laser Speed Dome</li> <li>• 2/3" progressive scan CMOS sensor</li> <li>• 4K 8MP(4096*2160)</li> <li>• 36X Optical Zoom</li> <li>• Smart Tracking</li> <li>• Smart Detection</li> <li>• 500m IR distance</li> <li>• Optional wiper(-W)</li> <li>• Hi-PoE / 24VAC power supply</li> <li>• Support H.265+/H.265</li> </ul>	CALL


# Consumer



## U series IR Mini cube camera



No	Picture	Model	Specifications	User Price
1		DS-2CV2U01FD-IW 2.8 MM <b>1 MP</b>	IR mini cube ,Plastic, Indoor,DWDR1/2.8" Progressive CMOS, ICR, 0lux with IR, 1280x720: 25fps(P)/30fps(N), 2.8mm lens,H.264/MJPEG, dual-stream, 3D DNR, 5m IR, support on-board storage up to 128GB, HIK-Connect cloud service, Build-in microphone and speaker, support two-way audio. Built-in Wi-Fi, 12VDC power supply. Default: No SD card included.	1550
2		DS-2CV2U21FD-IW 2.8 MM <b>2 MP</b>		2000

## Q series IR Mini PT camera








3		DS-2CV2Q01FD-IW 2.8MM <b>1 MP</b>	IR mini PT ,Plastic, Indoor,DWDR 1/4" Progressive CMOS, ICR, 0lux with IR, 1280x720 25fps(P)/30fps(N), 2.8mm lens,H.264/MJPEG, dual-stream, 3D DNR, 5m IR, PT function (Pan: 0° ~ 355°; Tilt: -10° ~ 90°), support on-board storage up to 128GB, HIK-Connect cloud service, Build-in microphone and speaker, support two-way audio. Built-in Wi-Fi, 12VDC power supply. Default: No SD card included.	2190
4		DS-2CV2Q21FD-IW 2.8MM <b>2 MP</b>		2500



## 7100 Series

No	Picture	Model	Specifications	User Price
1		DS-7104NI-SN	<ul style="list-style-type: none"> <li>• 4 - 8 -16 Channels</li> <li>• Support up to 2MP Cameras</li> <li>• Support H264 Compression</li> <li>• 1 Sata HDD up to 4 TB</li> <li>• Incoming Bandwidth 4 ch 25 Mbps - 8 ch 50 Mbps - 16 ch 100 Mbps</li> <li>• Outgoing Bandwidth 40 Mbps</li> <li>• Output : HDMI 1080P - VGA 1080P</li> </ul>	1790
2		DS-7108NI-SN		2000
3		DS-7116NI-SN		2500
4		DS-7108NI-E1/V/W	<ul style="list-style-type: none"> <li>• 8 Channels Wifi Transmission Rate 300 Mbps</li> <li>• Support up to 6MP Cameras</li> <li>• Support H264 Compression</li> <li>• 1 Sata HDD 2.5-inch, 500G / 1T</li> <li>• Incoming Bandwidth 50 Mbps</li> <li>• Outgoing Bandwidth 80 Mbps</li> <li>• Output : HDMI 1080P - VGA 1080P</li> </ul>	3300









## 7600 Series

No	Picture	Model	Specifications	User Price
5		DS-7604NI-E1	<ul style="list-style-type: none"> <li>• 4 - 8 Channels</li> <li>• Support up to 6MP Cameras</li> <li>• Support H264+ Compression</li> <li>• 1 Sata HDD up to 6 TB</li> <li>• Incoming Bandwidth 4CH 40 Mbps / 8CH 80 Mbps</li> <li>• Outgoing Bandwidth 80 Mbps</li> <li>• Output : HDMI 1080P - VGA 1080P</li> </ul>	2150
6		DS-7608NI-E1		2350
7		DS-7604NI-E1/4P	<ul style="list-style-type: none"> <li>• 4 Channels POE</li> <li>• Support up to 6MP Cameras</li> <li>• Support H264+ Compression</li> <li>• 1 Sata HDD up to 6 TB</li> <li>• Incoming Bandwidth 40 Mbps</li> <li>• Outgoing Bandwidth 80 Mbps</li> <li>• Output : HDMI 1080P - VGA 1080P</li> <li>• Alarm and Audio I/O</li> </ul>	3000
8		DS-7608NI-E2	<ul style="list-style-type: none"> <li>• 8 Channels</li> <li>• Support up to 6MP Cameras</li> <li>• Support H264+ Compression</li> <li>• 2 Sata HDD up to 6 TB</li> <li>• Incoming Bandwidth 80 Mbps</li> <li>• Outgoing Bandwidth 80 Mbps</li> <li>• Output : HDMI 1080P - VGA 1080P</li> </ul>	2950
9		DS-7604NI-K1	<ul style="list-style-type: none"> <li>• 4 - 8 - 16 Channels</li> <li>• Support up to 8MP Cameras</li> <li>• Support H265 Compression</li> <li>• 4CH 1 Sata HDD up to 6 TB / 8CH 2 Sata HDD up to 6 TB / 16CH 2 Sata HDD up to 6 TB</li> <li>• Incoming Bandwidth 4CH 40 Mbps / 8CH 80 Mbps / 16CH 160 Mbps</li> <li>• Outgoing Bandwidth 4CH 80 Mbps / 8CH 160 Mbps / 16CH 160 Mbps</li> <li>• Output : HDMI 4K - VGA 1080P</li> <li>• Support various VCA detection alarm and VCA search</li> </ul>	3200
10		DS-7608NI-K2		3800
11		DS-7616NI-K2		4300
12		DS-7604NI-K1/4P	<ul style="list-style-type: none"> <li>• 4 Channels POE</li> <li>• Support up to 8MP Cameras</li> <li>• Support H265 Compression</li> <li>• 1 Sata HDD up to 6 TB</li> <li>• Incoming Bandwidth 40 Mbps</li> <li>• Outgoing Bandwidth 80 Mbps</li> <li>• Output : HDMI 4K - VGA 1080P</li> <li>• Support various VCA detection alarm and VCA search</li> </ul>	3700
13		DS-7608NI-K2/8P	<ul style="list-style-type: none"> <li>• 8 Channels POE</li> <li>• Support up to 8MP Cameras</li> <li>• Support H265 Compression</li> <li>• 2 Sata HDD up to 6 TB</li> <li>• Incoming Bandwidth 80 Mbps</li> <li>• Outgoing Bandwidth 160 Mbps</li> <li>• Output : HDMI 4K - VGA 1080P</li> <li>• Alarm and Audio I/O</li> <li>• Support various VCA detection alarm and VCA search</li> </ul>	6250
14		DS-7616NI-K2/16P	<ul style="list-style-type: none"> <li>• 16 Channels POE</li> <li>• Support up to 8MP Cameras</li> <li>• Support H265 Compression</li> <li>• 2 Sata HDD up to 6 TB</li> <li>• Incoming Bandwidth 160 Mbps</li> <li>• Outgoing Bandwidth 160 Mbps</li> <li>• Output : HDMI 4K - VGA 1080P</li> <li>• P2P Cloud</li> <li>• Alarm and Audio I/O</li> <li>• Support various VCA detection alarm and VCA search</li> </ul>	8500



# NVR





















No	Picture	Model	Specifications	User Price
7700 Series				
15	 	DS-7732NI-K4	<ul style="list-style-type: none"> <li>• 32 Channels</li> <li>• Support up to 8MP Cameras</li> <li>• Support H265 Compression</li> <li>• 4 SATA HDD up to 6 TB</li> <li>• Incoming Bandwidth 256 Mbps</li> <li>• Outgoing Bandwidth 160 Mbps</li> <li>• Output : HDMI 4K - VGA 1080P</li> <li>• P2P Cloud</li> <li>• Alarm and Audio I/O</li> <li>• Support various VCA detection alarm and VCA search</li> </ul>	11500
16	 	DS-7716NI-I4	<ul style="list-style-type: none"> <li>• 16 Channels</li> <li>• Support up to 12MP Cameras</li> <li>• Support H265 Compression</li> <li>• 4 SATA HDD up to 6 TB</li> <li>• Incoming Bandwidth 160 Mbps</li> <li>• Outgoing Bandwidth 256 Mbps</li> <li>• Output : HDMI 4K - VGA 1080P</li> <li>• P2P Cloud</li> <li>• Alarm and Audio I/O</li> <li>• Support various VCA detection alarm and VCA search</li> </ul>	11800
17	 	DS-7716NI-I4/16P	<ul style="list-style-type: none"> <li>• 16 Channels POE</li> <li>• Support up to 12MP Cameras</li> <li>• Support H265 Compression</li> <li>• 4 SATA HDD up to 6 TB</li> <li>• Incoming Bandwidth 160 Mbps</li> <li>• Outgoing Bandwidth 256 Mbps</li> <li>• Output : HDMI 4K - VGA 1080P</li> <li>• P2P Cloud</li> <li>• Alarm and Audio I/O</li> <li>• Support various VCA detection alarm and VCA search</li> </ul>	17000
18	 	DS-7732NI-I4	<ul style="list-style-type: none"> <li>• 32 Channels</li> <li>• Support up to 12MP Cameras</li> <li>• Support H265 Compression</li> <li>• 4 SATA HDD up to 6 TB</li> <li>• Incoming Bandwidth 256 Mbps</li> <li>• Outgoing Bandwidth 256 Mbps</li> <li>• Output : HDMI 4K - VGA 1080P</li> <li>• P2P Cloud</li> <li>• Alarm and Audio I/O</li> <li>• Support various VCA detection alarm and VCA search</li> </ul>	13480

# NVR



9600 Series









REVISION 2018 Q2

No	Picture	Model	Specifications	User Price
19	  	DS-9632NI-I8	<ul style="list-style-type: none"> <li>• 32 Channels</li> <li>• Support up to 12MP Cameras</li> <li>• Support H265 Compression</li> <li>• 8 Sata up to 6 TB</li> <li>• Incoming Bandwidth 320 Mbps</li> <li>• Outgoing Bandwidth 256 Mbps</li> <li>• Output : 2 HDMI ( 4K - 1080P ) - VGA 1080P</li> <li>• P2P Cloud</li> <li>• Alarm and Audio I/O</li> <li>• Support various VCA detection alarm and VCA search</li> </ul>	CALL
20	  	DS-9632NI-I16	<ul style="list-style-type: none"> <li>• 32 Channels</li> <li>• Support up to 12MP Cameras</li> <li>• Support H265 Compression</li> <li>• 16 Sata up to 6 TB</li> <li>• Incoming Bandwidth 320 Mbps</li> <li>• Outgoing Bandwidth 256 Mbps</li> <li>• Output : 2 HDMI ( 4K - 1080P ) - VGA 1080P</li> <li>• P2P Cloud</li> <li>• Alarm and Audio I/O</li> <li>• Support various VCA detection alarm and VCA search</li> </ul>	CALL
21	  	DS-9664NI-I8	<ul style="list-style-type: none"> <li>• 64 Channels</li> <li>• Support up to 12MP Cameras</li> <li>• Support H265 Compression</li> <li>• 8 Sata up to 6 TB</li> <li>• Incoming Bandwidth 320 Mbps</li> <li>• Outgoing Bandwidth 256 Mbps</li> <li>• Output : 2 HDMI ( 4K - 1080P ) - VGA 1080P</li> <li>• P2P Cloud</li> <li>• Alarm and Audio I/O</li> <li>• Support various VCA detection alarm and VCA search</li> </ul>	CALL
22	  	DS-9664NI-I16	<ul style="list-style-type: none"> <li>• 64 Channels</li> <li>• Support up to 12MP Cameras</li> <li>• Support H265 Compression</li> <li>• 16 Sata up to 6 TB</li> <li>• Incoming Bandwidth 320 Mbps</li> <li>• Outgoing Bandwidth 256 Mbps</li> <li>• Output : 2 HDMI ( 4K - 1080P ) - VGA 1080P</li> <li>• P2P Cloud</li> <li>• Alarm and Audio I/O</li> <li>• Support various VCA detection alarm and VCA search</li> </ul>	CALL
23	  	DS-96128NI-I24 Super NVR	<ul style="list-style-type: none"> <li>• 128 Channels</li> <li>• Support up to 12MP Cameras</li> <li>• Support H265 Compression</li> <li>• 24 Sata up to 8 TB</li> <li>• Incoming Bandwidth 576 Mbps</li> <li>• Outgoing Bandwidth 512 Mbps</li> <li>• Output : 2 HDMI ( 4K ) - VGA 1080P</li> <li>• P2P Cloud</li> <li>• Alarm and Audio I/O</li> <li>• Support various VCA detection alarm and VCA search</li> </ul>	CALL
24	  	DS-96256NI-I24	<ul style="list-style-type: none"> <li>• 256 Channels</li> <li>• Support up to 12MP Cameras</li> <li>• Support H265 Compression</li> <li>• 24 Sata up to 8 TB</li> <li>• Incoming Bandwidth 768 Mbps</li> <li>• Outgoing Bandwidth 768 Mbps</li> <li>• Output : 2 HDMI ( 4K ) - VGA 1080P</li> <li>• P2P Cloud</li> <li>• Alarm and Audio I/O</li> <li>• Support various VCA detection alarm and VCA search</li> </ul>	CALL

# NVR















## Blazer Pro Series

HIKVISION 2018 Q2	No	Picture	Model	Specifications	User Price
	26	 	Blazer Express/16/8P	<ul style="list-style-type: none"> <li>• iVMS-embedded iVMS Station,</li> <li>• Blazer Express with 16 default camera channels,</li> <li>• 2 HDDs, 64G SSD for OS&amp;CMS, 1 HDMI and 1 VGA output and ANPR</li> <li>• Cascading by Client supports up to 15 stations.</li> </ul>	CALL
	26	  	Blazer Pro/128/16H	<ul style="list-style-type: none"> <li>• iVMS-embedded All-in-One Server</li> <li>• Blazer Pro with 128 camera VMS licensed</li> <li>• 128GB SSD by default for OS and VMS installation</li> <li>• 16 HDDs for video storage</li> <li>• Recording data rate up to 512 Mbps</li> <li>• 4K decoding and local output support. ANPR, People-counting support</li> </ul>	CALL
	27	  	Blazer Pro/256/16H	<ul style="list-style-type: none"> <li>• iVMS-embedded All-in-One Server</li> <li>• Blazer Pro with 256 camera VMS licensed</li> <li>• 128GB SSD by default for OS and VMS installation</li> <li>• 16 HDDs for video storage</li> <li>• Recording data rate up to 768 Mbps</li> <li>• 4K decoding and local output support. ANPR, People-counting support</li> </ul>	CALL





HIKVISION 2018 Q2

No	Picture	Model	Specifications	User Price
1		DS-3E0105P-E	<ul style="list-style-type: none"><li>• 4-Port 100 Mbps Unmanaged PoE Switch</li><li>• Optional 820 ft (250 m) Extended Transmission Mode</li><li>• 4 x 10/100 Mbps Auto-MDIX Ports</li><li>• IEEE 802.3at/af PoE Compliant</li><li>• 30 Watts per PoE Port, PoE Power Budget 58 W</li><li>• 4 kV Surge Protection</li><li>• 1 Gbps Switching Fabric</li><li>• 448 Kbits RAM Data Buffer</li></ul>	1290
2		DS-3E0318P-E	<ul style="list-style-type: none"><li>• 16-Port 100 Mbps Unmanaged PoE Switch</li><li>• Optional 820 ft (250 m) Extended Transmission Mode</li><li>• 16 x 10/100 Mbps Auto-MDIX Ports</li><li>• IEEE 802.3at/af PoE Compliant</li><li>• Up to 30 Watts per PoE Port, PoE Power Budget 230 W</li><li>• 4 kV Surge Protection</li><li>• 7.2 Gbps Switching Fabric</li><li>• 2.75 Mbits RAM Data Buffer</li></ul>	7660
3		DS-3E0326P-E	<ul style="list-style-type: none"><li>• 24-Port 100 Mbps Unmanaged PoE Switch</li><li>• Optional 820 ft (250 m) Extended Transmission Mode</li><li>• 24 x 10/100 Mbps Auto-MDIX Ports</li><li>• Up to 30 Watts per PoE Port, PoE Power Budget 370 W</li><li>• 4 kV Surge Protection</li><li>• 8.8 Gbps Switching Fabric</li><li>• 2.75 Mbits RAM Data Buffer</li></ul>	10700
Power Adapter				
4		Power	DVE Switching Adapter Model DSA-12PFG-12FUS (120100) Munt: DC12V/1.0A	50
5		Power	input 100-240V 50/60HZ 1.6A	85
UTP Cables				
6		DS-1LN5E-S Cat 5	U/UTP 4Pairs cable-category5E-PVC SheathE484059-Z CM (UL) 4PR 24AWG 75 U/UTP CAT5E VERIFIED TO ANSI/TIA-568-C.2 PVC U/UTP CAT5E-4P- PVC-CM Test Standard: ISO/IEC11801、TIA-568-C.2 YD/T1019Material:Solid-Bare Copper Nom.O.D.(mm):   0.500 up +0.005 down -0.005 Material:   HDPE, Diameter:   0.88±0.03mm	1450
7		DS-1LN6-UU Cat 6	U/UTP 4Pairs cable-category 6- PVC Sheath E484059-Z (UL) CM 4PR 23AWG 75 U/UTP CAT6 VERIFIED TO ANSI/TIA-568-C.2 PVC U/UTP CAT6-4P-PVC-CMTest Standard: ISO/IEC11801 TIA-568-C.2YD/T1019Material:SOLID-Bare Copper Nom.O.D.(mm):   0.565 up +0.005 down -0.005 Material:   HDPE Diameter:   1.02±0.03mm	1830
HDD WD Purple				
8		1TB	  <b>1TB/2TB/4TB/6TB Surveillance Hard Drives</b> WD Purple drives are built for 24/7, always-on, high-definition security systems. With a supported workload rate1, of up to 180 TB/yr and support for up to 64 cameras, WD Purple drives are op timized for surveillance systems. WD Purple surveillance storage also comes with WD's exclusive AllFrame 4K™ technology, so you can confidently create a security system tailored to the needs of your business.	900
9		2TB		1300
10		4TB		2450
11		6TB		4000

HIKVISION 2018 Q2

HIKVISION 2018 Q2

HIKVISION 2018 Q2

HIKVISION 2018 Q2










Model	Picture	Specifications	User Price
DS-KIS202		intercom Kit including DS-KB2411-IM and DS-KH2200 Door Station : Self-adaptive IR supplement , One-touch calling , Pinhole camera with 720 x 576 @ 25 fps ,Unlock controlling Indoor Station : Hands-free video intercom communication , Supports monitoring the door station and the external analog camera , Remote unlocking ,Convenient installation and easy operation Categories: Hikvision, VDP	2950
DS-KD8102-V		3.5-inch Colorful TFT LCD Capacitive Touch Key 1.3 MP Door Station, Plastic, , display resolution: 480 * 320, Camera resolution: HD720P, 25fps(P)/30fps(N), 10M/100M/1000M Self-adaptive Ethernet, Wiegand & RS-485, 8-ch alarm input,4-ch alarm output, IP65, USB 2.0, 12 VDC , Visible Light supplement	9250
DS-KD6002-VM		3.5-inch Physical Touch Key Colorful TFT LCD 1.3 MP Door Station, Aluminum Alloy, display resolution: 480 * 320, Camera resolution: HD720P, 25fps(P)/30fps(N), Wiegand & RS-485, 8-ch alarm input,4-ch alarm output, IP65, USB 2.0, 12 VDC, Visible Light Supplement	10950
DS-KH6210-L		7" Screen Indoor Station, physical push button, 7-Inch Colorful TFT LCD, display resolution: 800 * 480, physical button, 10/100Mbps Ethernet, 2-ch alarm input, Power Over Network Cable/ 12 VDC	2400
DS-KH6310-WL		7" Screen Indoor Station Capacitive Touch Screen, Physical Button ,7-Inch Colorful TFT LCD, display resolution: 800 * 480, 10/100Mbps Ethernet, 2-ch alarm input, Power Over Network Cable/ 12 VDC	3250
DS-KV8102-IP		1.3 MP Villa Door Station, Plastic, Camera resolution: HD720P, 25fps(P), 10M/100M Self-adaptive Ethernet, RS-485, 4-ch alarm input,1-ch alarm output, IP65, 12 VDC, 1-ch Indoor station access, IR Supplement	3450
DS-KV8102-VP		1.3 MP Villa Door Station, Plastic, Camera resolution: HD720P, 25fps(P), 10M/100M Self-adaptive Ethernet, RS-485, 4-ch alarm input,1-ch alarm output, IP65, 12 VDC, 1-ch Indoor station access, Visible Light Supplement	3450
DS-KV8102-IM		1.3 MP Villa Door Station, Aluminum alloy, Camera resolution: HD720P, 25fps(P), 10M/100M Self-adaptive Ethernet, RS-485, 4-ch alarm input,1-ch alarm output, IP65, 12 VDC, 1-ch Indoor station access, IR Supplement	4750
DS-KV8202-IM		1.3 MP Villa Door Station, Aluminum alloy, Camera resolution: HD720P, 25fps(P), 10M/100M Self-adaptive Ethernet, RS-485, 4-ch alarm input,1-ch alarm output, IP65, 12 VDC, 2-ch Indoor station access, IR Supplement	4950
DS-KV8402-IM		1.3 MP Villa Door Station, Aluminum alloy, Camera resolution: HD720P, 25fps(P), 10M/100M Self-adaptive Ethernet, RS-485, 4-ch alarm input,1-ch alarm output, IP65, 12 VDC, 4-ch Indoor station access, IR Supplement	5250
DS-KAW50-1		Power supply for Door station and Villa Door Station, Output: 12 VDC, 4.2A, with Box	2050
DS-KAD606		built-in voltage-stabilized power, 8 x 100Mbps ports(6-ch supporting network cable powering and 2-chcascading LAN interfaces), suitable for indoor station and villa door station	2750
DS-KAD612		built-in voltage-stabilized power, 8 x 100Mbps ports(12-ch supporting network cable powering and 2-chcascading LAN interfaces), suitable for indoor station and villa door station	3300



Monitor				
No	Picture	Model	Specifications	User Price
1		DS-D5021FC 21 inch	21" LCD Monitor; Support 8 bits/10 bits 2-ch LVDS(1920×1080) HD display; Support 170° wide viewing angle; Adopt 3D digital comb filter; True color OSD and user-friendly operation menu; Built-in speaker; Support HDMI/VGA/BNC/Audio Input Interface	5800
2		DS-D5032SC 32 inch	HIKVision 32" LCD Monitor, 1366×768, HDMI/VGA/BNC/CVBS/Audio, Response time: 6ms, 100-240VAC, 1 year warranty	20400
Mount				
No	Picture	Model	Specifications	User Price
3		DS-1602ZJ	Wall Mount For In/Outdoor, Aluminum Alloy, Suitable for speed dome pendent mounting, 97x182x305 mm	280
4		DS-1273ZJ-135	Wall Mounting Bracket for Dome Camera, Aluminum Alloy, Φ136×183.5×230mm, Suitable Model ( DS-2CC52X1P(N)-VP, DS-2CC52X1P(N)-AVPIR2, DS-2CD2712F-I(S), DS-2CD2732F-I(S) )	450
Joystick				
No	Picture	Model	Specifications	User Price
5		DS-1005KI	Power supply and communication by USB port directly, 3D PTZ control and 2 joystick control buttons, Up to 15 programmable buttons are available, Support digital tube to display the input content, Support indicators to show the operation status of keyboard, Compatible with a various kinds of client software and platform software	5250



Mobile Solution				
No	Picture	Model	Specifications	User Price
Analog Solution				
1		DS-2CS58A1P(N)-IRS	700 TVL, 1/3" DIS, 20m IR Distance, ICR, 0.1 Lux/F1.2, 0.3 Lux/F2.2,12 VDC, Smart IR, OSD Menu, Built-in Microphone, Aviation Connector, Wide operating temperature Range (-40°~60°), IP66, (2.8/3.6/6mm Lens, Default: 3.6mm / F2.2 Lens)	CALL
2		AE-VC112T-ITS	720P,Built-in MIC, Plastic sheel, small size, 940nm infrared light without overexposure (3m) 2.1mm (115°) , 2.8mm (90°) CE/FCC/E-MARK	Call
3		AE-VC211T-IRS 2.8MM	1080P, 10m infrared, metal shell, not water-proo,Lens 2.8mm	CALL
HD Solution				
4		DS-MP7504	4-ch video & 4-ch audio input (BNC interface), CH1~CH4: 25/30fps@720p, pluggable Anti-vibration HDD box(2* 2.5" SATA interface, up to 1T for each, 1*USB interface), alarm I/O: 4/3 * Hybrid mode with 1-ch IP input is customizable. It will be officially released in firmware v.4.1.1 around February, 2017	CALL
5		DS-MP7508/GLF/WI	8-ch video & 8-ch audio input (BNC interface), CH1~CH4: 25/30fps@1080p, pluggable Anti-vibration HDD box(2* 2.5" SATA interface, up to 1T for each, 1*USB interface), alarm I/O: 4/3, built-in 4G & GPS & WIFI module * Hybrid mode with up to 8-ch IP input is customizable. It will be officially released in firmware v.4.3.0 around April, 2017	CALL
Body Camera				
6		DS-MH2111/32G	Full HD1080p video, Up to 16MP snapshot, 2-inch LCD screen, Built-in IR illuminators, HDMI output, Built-in GPS & G-sensor & Temperature sensor and Wi-Fi, IP67 weather resistant, 32GB internal storage, 4000mAh Lithium battery for 8 hours operating life	CALL
7		DS-MH2111/32G/GLF	4G(FDD-LTE&WCDMA), Full HD1080p video, Up to 16MP snapshot, 2-inch LCD screen, Built-in IR illuminators, HDMI output, Built-in GPS & G-sensor & Temperature sensor and Wi-Fi, IP67 weather resistant, 32GB internal storage, 4000mAh Lithium battery for 8 hours operating life	CALL
Portable PTZ Dome				
8		MH61711	3G Connection, SD card slot: 128G×2, resolution: 1080P, optical zoom: 30x, WIFI, GPS, Magnetic base for instant installation on car roof 4G connection optional	CALL