MILITARY SPECIFICATION

BALLISTICS COMPUTER, SUBASSEMBLY: 10543600 (GUNNER'S CONTROL UNIT)

1. SCOPE

1.1 This specification covers one type of electromechanical assembly known as Ballistics Computer, Subassembly: 10543600, (Gunner's Control Unit) (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

Military

MIL-F-13926	Fire Control Materiel; General Specification Governing the Manufacture and Inspection of
MIL-P-14232	Parts, Equipment and Tools for Ordnance Materiel: Packaging of
MIL-I-45607	Inspection Equipment, Supply and Maintenance of

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-109	Quality Assurance Terms and Definitions

DRAWINGS

U.S. Army, Frankford Arsenal

F10543600	Ballistics Computer, Subassembly: 10543600 (Gunner's Control Unit)

PACKAGING DATA SHEET

MIL-P-14232/P10543600	Packaging of Gunner's Control Unit 10543600

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:48Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, drawings, and packaging data sheets required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Fabrication.- The Gunner's Control Unit shall be manufactured in accordance with Drawing F10543600 and drawings pertaining thereto.

3.2 General specification.- The contractor shall be responsible for adherence to, and compliance with, the following requirements of MIL-F-13926:

(a) Order of precedence
(b) Dimensions and tolerances
(c) Inorganic protective surface finishes
(d) Part identification and marking
(e) Workmanship

3.3 Environmental.

3.3.1 Storage temperatures.- There shall be no evidence of physical failures such as glass breakage or casting failures due to storage temperatures ranging from -80° to +160° Fahrenheit.

3.3.2 Operating temperature.- The unit shall meet all the requirements of 3.5.2 through 3.5.14 inclusive, while exposed to and thermally stabilized at ambient temperatures of -40° and +150° Fahrenheit.

3.3.3 Vibration.- The slippable scales on the boresight and jump knobs of the unit shall be movable under normal finger pressure, but shall not move under vibration. The unit shall meet the requirements of 3.4.1 through 3.5.14 after being vibrated in a vertical plane for five minutes ±15 seconds of an amplitude of 1/16 inch (1/8 inch total excursion) at a frequency of 30 cycles per second.

3.3.4 Water resistance (sealing).- The interior of the unit shall show no evidence of water damage after being subjected to a simulated rainfall.

3.4 Electrical.

3.4.1 Continuity.- The continuity of the Gunner's Control Unit shall conform to Drawing F10543600.

3.5 Performance.

3.5.1 Input power.- The unit shall meet the requirements of 3.5.2 through 3.5.14 when excited with zero and Pi phase, 9 volts RMS ± 1%,

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:48Z
Check the source to verify that this is the current version before use.

400 CPS ± 1%, connected across pins S and b of 3J3, respectively. 3 volts RMS ± 1%, 400 CPS ± 1%, zero and Pi phase shall be connected across pins d and c respectively. The AC Common shall be connected to pin D of 3J3. Harmonic distortion shall not exceed 2.0%. Variation in harmonic distortion shall not exceed 0.5% during tests. Source impedance of the A.C. supply shall be less than 0.10 ohm. 24VDC ± 1% shall be connected across pins CC and D of 3J3, pin CC to be positive.

3.5.2 Switch lens illumination.- With the D.C. supply applied as specified in 3.5.1, the four ammunition selector switch lenses shall be illuminated. Alternate connection of pins J, K, L, M of 3J3 to pin CC of 3J3, shall increase the intensity of the red, blue, yellow and green lenses respectively. Rheostat 3R5 shall vary the intensity of illumination of the switch lenses.

3.5.3 Control indicator lamps.- When the D.C. supply is applied as specified in 3.5.1, the green indicator lamp shall be illuminated. When pin N of 3J3 is grounded through 100 ohms, the red and green indicator lamps shall alternately be illuminated and extinguished as the override switch is actuated. Rheostat 3R5 shall vary the illumination intensity of the control indicator lamps.

3.5.4 Wind and range dial illumination.- The range and wind dial lamps shall be illuminated when the D.C. supply of 3.5.1 is connected as specified.

3.5.5 Switch resistance.- The maximum switch resistance shall be as indicated in Table I. No external power shall be applied during this test.

TABLE I

SWITCH	RESISTANCE	MEASURED BETWEEN PINS	
3S1	.2 ohm	3J3-D	3J3-E
3S2	.2 ohm	3J3-D	3J3-F
3S3	.2 ohm	3J3-D	3J3-G
3S4	.2 ohm	3J3-D	3J3-H
3S5	.2 ohm	3J3-CC	3J3-X
3S6	.2 ohm	3J3-CC	3J3-Y
3S7	.2 ohm	3J3-CC	3J3-Z
3S8	.2 ohm	3J3-CC	3J3-s
3S10 (Peris & wiper pos.)	.2 ohm	3J5-L	3J5-y
3S10 (Peris. pos.)	.2 ohm	3J5-L	3J5-X

3.5.6 Circuit breaker.- Pin P of 3J3 shall be connected to pin V of 3J3 and pin R of 3J3 shall be connected to pin W of 3J3. The circuit breaker, 3CB1, shall function to open the circuit between these pairs of

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:48Z
Check the source to verify that this is the current version before use.

pins when a 12.5 ampere current is applied. A current of 10 amperes shall be carried without opening the circuit breaker.

3.5.7 Ammunition jump and boresight function generators.- With the A.C. supply of 3.5.1 connected as specified, the function generator output voltage ratios shall agree with the ratio settings listed in Table II for the knob positions given. The knob shall be set to the detent nearest the specified setting. The ratio tolerances listed in Table II include the equivalent of 0.05 mil maximum detent error.

TABLE II

KNOB SETTING	RATIO SETTINGS	RATIO TOLERANCE
Down or Left 7 mils	.422222	±.001388
Down or Left 3 mils	.466666	±.001388
Down or Left 1 mil	.488888	±.001388
Zero	.500000	±.001388
Up or Right 1 mil	.511111	±.001388
Up or Right 3 mils	.533333	±.001388
Up or Right 7 mils	.577777	±.001388

3.5.8 Target lead function.- The target lead network shall be energized as shown on Figure 2. The outputs given in Table III shall be obtained for the specified ranges, with an input of 0.550 volts RMS ± 1.0% 400 CPS ± 1%. The lead network shall be checked for zero and Pi phase inputs. The lead network input shall be zero for the test at 325 meters. A 1.5% shift in gain factor shall be allowed at -40°F and +150° for the gyro temperature coefficient compensation network of the target lead network.

TABLE III

RANGE	RATIO	TOLERANCE
325	.010000 Max.	
500	.102920	±.016000
750	.157100	±.017000
1200	.268160	±.018000
1500	.355386	±.018000
2000	.507773	±.019000
2500	.695500	±.020000
2900	.856526	±.021000

3.5.9 Laser range ready operation.- A resistance of 1256 ohm ± 2% shall be indicated between pins 3J1-HH and 3J2-T when the 1000 meter range relay is unenergized and 3J1-GG is connected to 3J2-T. A maximum resistance of 0.5 ohm shall be indicated between 3J1-HH and 3J2-T when the 1000 meter

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:48Z
Check the source to verify that this is the current version before use.

range relay is energized by applying 21VDC to 3J2-R.

3.5.10 Wind function generator output.- The voltage ratios of the wind function generator, shall agree with the ratios given in Table IV.

TABLE IV

WIND DIAL SETTINGS	RATIO	RATIO TOLERANCE
Right 40 mph	.250000	±.002890
Right 20 mph	.375000	±.002265
Zero	.500000	±.000625
Left 20 mph	.625000	±.002265
Left 40 mph	.750000	±.002890

3.5.11 Output voltages, potentiometer 3R1.- The range indicated on the gunner's control unit shall be within ± 15 meters of the ranges of Table V for the specified output voltage ratios of 3R1-1, 3R1-3, 3R1-4 and within ± 20 meters of the ranges of Table V for the specified output voltage ratios of 3R1-2.

3.5.12 Output voltages, potentiometer 3R2.- The range indicator on the gunner's control unit shall be within ± 5 meters of the ranges of Table V for the specified output voltage ratios.

TABLE V

RANGE IN METERS	VOLTAGE RATIO SETTINGS				
	3R1-1	3R1-2	3R1-3	3R1-4	3R2
475		.069149			
600					.081081
650		.084181			
900				.164783	.162162
1000		.097473	.105184		
1200					.243243
1400	.158571	.172311			
1500				.303550	.324324
1600			.192392		
1800					.405405
2000				.442204	
2100					.486486
2150			.296169		
2400	.370981	.245998			.567567
2500				.607566	
2600			.405926		
2700					.648648
2900			.496042	.732066	.702702
3100					.756757
3200	.620882				
3250			.622698		
3300				.841640	
3400					.837838
3600			.778020	.914085	
3700					.918919

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:48Z
Check the source to verify that this is the current version before use.

3.5.13 Range function generator output.- The output voltages of the range feedback function generator at pin BB of 3J1 shall agree with the ratios listed in Table VI. The function generator shall be excited by applying 24.843 ± 1% volts RMS, 400 CPS ± 1% to pin AA of 3J1.

TABLE VI

RANGE	RATIO	TOLERANCE
3975 meters	.420131	±.000393
3000	.489657	±.000467
2500	.535370	±.000550
2000	.590302	±.000636
1500	.657589	±.000754
1200	.705825	±.000842
1000	.742123	±.000912
500	.851764	±.001137
325	.898305	±.001241

3.5.14 Servo motor.- The servo motor shall drive the range indicator to maximum range when the voltage at 3J1-FF is in phase with the voltage at 3J3-AA. The range indicator shall be driven to minimum range when the voltage at 3J1-FF is 180 degrees out of phase with the voltage applied at 3J3-AA.

3.5.14.1 Slew speed.- The servo motor shall slew from stop to stop in both directions within a maximum of 3.0 seconds at standard temperature.

3.5.14.2 Tachometer output voltage.- When energized as specified for 3.5.14, the tachometer output voltage at pin CC of 3J1, shall be a minimum of 10.0 VAC and in phase with the voltage at FF of 3J1.

3.5.14.3 Output torque.- The slip clutch shall be adjusted to allow clutch slippage when a torque applied to the motor is equal to 75% ± 10% of rated motor stall torque.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 General provisions.- The component and subassembly inspection requirements of MIL-F-13926 form a part of the Quality Assurance Provisions of this specification. Definitions of inspection terms shall be as listed in MIL-STD-109.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:48Z
Check the source to verify that this is the current version before use.

4.2 First article (initial production) submission.- When required by the contract, an initial production sample shall be submitted to a Government approved facility for test and evaluation in accordance with the contract schedule. The sample shall consist of three units. The sample shall be manufactured in the same manner, using the same materials, equipment, processes and procedures as used in regular production. All parts and materials, including packaging and packing, shall be the same as used for regular production and shall be obtained from the same source of supply. After inspection and provisional acceptance at source, the initial production sample shall be inspected at the Government approved facility for all requirements of the drawings and specifications. The Government reserves the right to require new initial production samples until such time as an acceptable sample is submitted.

4.3 Inspection provisions.

4.3.1 Submission of product.- Unless otherwise specified by the contracting officer, inspection lot size, lot formation, and presentation of lots shall be in accordance with "Submission of product" provisions of MIL-STD-105.

4.3.2 Examination and tests.

4.3.2.1 Components and subassemblies.- All components and subassemblies shall be inspected in accordance with the inspection provisions contained in Supplementary Quality Assurance Provisions (SQAP) listed in the List of Inspection Documents (IEL), when provided with the technical data package (TDP). In the absence of SQAP's, the applicable Quality Assurance Provisions of MIL-F-13926 shall apply.

4.3.2.2 Final acceptance inspection.- Subsequent to first article approval, examination and tests related to Section 3 herein shall be performed on a single defect (individual characteristic) basis in accordance with MIL-STD-105 and the sampling plans specified in Tables VII, VIII and IX. Examination and test for packaging and marking shall be in accordance with MIL-P-14232 and Section 5 herein. The tabulated classification of defects in Tables VII, VIII and IX shall constitute the minimum inspection to be performed by the supplier after first article approval and prior to Government acceptance or rejection by item or lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:48Z
Check the source to verify that this is the current version before use.

TABLE VII - CLASSIFICATION OF DEFECTS

CLASS		REQUIREMENT	TEST PROCEDURE
CRITICAL: NONE			
MAJOR: AQL 0.65% Defective			
101.	Vibration	3.3.3	4.6.1.1
102.	Continuity	3.4.1	Applicable Dwgs. Visual - Ohmmeter
103.	Input power	3.5.1	4.6.2
104.	Switch lens illumination	3.5.2	4.6.3
105.	Control indicator lamps	3.5.3	4.6.4
106.	Wind and range dial illumination	3.5.4	4.6.5
107.	Switch resistance	3.5.5	4.6.6
108.	Circuit breaker	3.5.6	4.6.7
109.	Ammunition jump and boresight function gen.	3.5.7	4.6.8
110.	Target lead function	3.5.8	4.6.9
111.	Laser range ready operation	3.5.9	4.6.10
112.	Wind function generator output	3.5.10	4.6.11
113.	Output voltages, potentiometer 3R1	3.5.11	4.6.12
114.	Output voltages, potentiometer 3R2	3.5.12	4.6.12
115.	Range function generator output	3.5.13	4.6.13
116.	Servo motor	3.5.14	4.6.14
117.	Slew speed	3.5.14.1	4.6.15
118.	Tachometer output voltage	3.5.14.2	4.6.16
119.	Output torque	3.5.14.3	4.6.17
MINOR: NONE			

NOTE: Tests of Table VII shall be conducted at a temperature between +60°F and 90°F.

4.3.3 Acceptance and rejection.- Rejected lots shall be screened for all defective characteristics. Removal or correction of defective units and resubmittance of rejected lots shall be in accordance with "Acceptance and Rejection" as specified in MIL-STD-105.

4.4 Special sampling.

4.4.1 General.- One unit shall be selected at random as a special sampling from each 100 produced. The sample shall meet the requirements and tests in Table VIII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:48Z
Check the source to verify that this is the current version before use.

TABLE VIII

CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
301. Fabrication	3.1	Applicable drawing - visual
302. General specification	3.2	MIL-F-13926 - visual

4.4.2 Environmental.- Three units shall be selected at random as samples from each 50 produced, or from each month's production, whichever occurs first. Each sample shall have met the requirements and tests in Table IX.

TABLE IX

CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
303. Storage temperature	3.3.1	4.6.1.2
304. Operating temperatures	3.3.2	4.6.1.3
305. Water resistance (sealing)	3.3.4	4.6.1.4

4.4.3 Failure of sample.- Should any one item of a special sampling fail to meet the specified test requirements, acceptance of the product shall be suspended by the Government until necessary corrections have been made by the contractor and resubmitted samples have been approved (see 4.3.3).

4.5 Inspection equipment.- Except as otherwise provided for by the contract, the contractor shall supply and maintain inspection equipment in accordance with the applicable requirements of MIL-I-45607.

4.5.1 Government furnished inspection equipment.- Where the contract provides for Government furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements specified in MIL-I-45607.

4.5.2 Contractor furnished inspection equipment.

4.5.2.1 Government design.- Unless otherwise specified in the contract, all inspection equipment specified by drawing number in specifications or SQAP forming a part of the contract shall be supplied by the contractor in accordance with applicable technical data listed in the List of Inspection Documents, IEL 10543900.

4.5.2.2 Contractor design.- The contractor shall design and supply inspection equipment compatible with the "Test Methods and Procedures" specified in 4.6 of this specification and with the component inspection procedures specified in "Examination" and "Test Facilities" requirements

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:48Z
Check the source to verify that this is the current version before use.

of MIL-F-13926. Since tolerance of test equipment is normally considered to be within 10% of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions and tolerances used in the design of test equipment shall be so selected and controlled as to insure that the test equipment will reliably indicate acceptability of a product which does not exceed 90% of the prescribed tolerance limit, and permit positive rejection when non-conforming. Construction shall be such as to facilitate routine calibration of test equipment.

4.5.3 Test equipment.- In conjunction with 4.5.2 the Standard Test Equipment listed in Table X shall be utilized in performing the applicable tests of 4.6.

TABLE X

	NOMENCLATURE	DESCRIPTION
1.	D.C. power supply	24 volts ± 1% 20 ampere output
2.	A.C. power supply	115 volts RMS, adjustable, 400 CPS ± 1% 2% maximum harmonic distortion. Variation in harmonic distortion shall not exceed 0.5%. Impedance less than 0.10 ohm from D.C. to 10 KC
3.	Oscilloscope	Sensitivity of 1 mv/cm
4.	A.C. ratio standard	6 digit readout to verify rated settings as specified in 3.5.7, 3.5.8, 3.5.10, 3.5.11, and 3.5.12. Input impedance 500,000 ohms at 400 CPS. Output impedance less than 10 ohms.
5.	Resistance bridge	To test resistance as specified in 3.5.5 and 3.5.9
6.	A.C. voltmeter	Accuracy of ± 0.1% of reading
7.	D.C. voltmeter	Accuracy of ± 0.1% of reading
8.	Motor-torque meter	To test torque as specified in 3.5.14.3

4.6 Test methods and procedures.

4.6.1 Environmental.

4.6.1.1 Vibration.- To determine conformance to 3.3.3 the unit shall be mounted on a suitable mounting apparatus and attached to a vibrating machine or fixture (see 4.5.2) and vibrated at the amplitude, frequency and time specified. After vibration, the unit shall be given a visual-tactile examination for damage and loose

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:48Z
Check the source to verify that this is the current version before use.

parts and scale movement. The unit shall then be subjected to a continuity test and the tests specified in 4.6.2 to 4.6.17 inclusive to determine conformance to the respective requirements referenced therein.

4.6.1.2 Storage temperatures.- To determine conformance to 3.3.1, the unit shall be tested in accordance with Temperature Cycling Procedure II of MIL-F-13926 for the specified temperatures. At the conclusion of these tests, the unit shall show no evidence of damage or deterioration when visually examined.

4.6.1.3 Operating temperatures.- To determine conformance to 3.3.2, the unit shall be placed in appropriate environmental chambers (see 4.5.2). While thermally stabilized at the specified temperatures, the unit shall be subjected to the tests specified in 4.6.2 to 4.6.17 inclusive to determine conformance with the requirements referenced therein.

4.6.1.4 Water resistance.- To determine conformance to 3.3.4, the unit shall be tested in accordance with Rain Procedure I of MIL-F-13926. The unit shall show no evidence of water damage as a result of this test when visually examined.

4.6.2 Input power.- To determine conformance to 3.5.1 when units are subjected to tests 4.6.3 through 4.6.17, the applicable test equipment items of 4.5.3 shall be checked to assure they provide proper power inputs to the terminals specified.

4.6.3 Switch lens illumination.- To determine conformance to 3.5.2, when the specified power is applied, the four lenses shall be observed for a change in intensity of illumination as the various pins are connected to the specified point. Rheostat 3R5 shall vary the illumination of the switch lenses.

4.6.4 Control indicator lamps.- To determine conformance to 3.5.3, the green indicator lamp shall illuminate when the specified power is applied. With pin N of 3J3 connected to pin D of 3J3 through 100 ohms, the override switch shall be actuated and the indicator lamps observed for conformance. Rheostat 3R5 shall vary the illumination of the lamps.

4.6.5 Wind and range dial illumination.- To determine conformance to 3.5.4, the range and wind dial lamps shall be observed for illumination when voltage is applied as specified.

4.6.6 Switch resistance.- To determine conformance to 3.5.5 each switch shall be checked for resistance between the specified pins using equipment specified in 4.5.3. The power sources of 3.5.1 shall be removed during this test.

4.6.7 Circuit breaker.- To determine conformance to 3.5.6, a 10.0 $\pm$ 0.20 ampere load shall be connected across the specified pairs of pins. The circuit breaker shall carry this current but shall function to open the circuit when a load of 12.5 $^{+.20}_{-0}$ ampere load is connected.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:48Z
Check the source to verify that this is the current version before use.

4.6.8 Ammunition jump and boresight function generators.- To determine conformance to 3.5.7, the ratio setting, for each knob at the specified positions, shall correspond to the setting specified in Table II. The test circuit of Figure 1 shall be used.

4.6.9 Target lead function.- To determine conformance to 3.5.8 the target lead network shall be connected and energized as shown in Figure 2 using applicable equipment of 4.5.3. The range dial shall be set to each range specified and the corresponding output voltage ratio checked for conformance within the tolerance band specified. The ratio of lead network input voltage to the 7.5 volt reference shall be .073333 ± .0003 during tests.

4.6.10 Laser range ready operation.- To determine conformance to 3.5.9, the resistance between the specified pins shall be measured with a bridge. The range relay shall be energized by applying 21VDC across 3J2-R and 3J2-T, terminal R being positive with respect to T.

4.6.11 Wind function generator output.- To determine conformance to 3.5.10, the wind dial shall set to each position specified and the corresponding output voltage ratio checked for conformance within the tolerance band specified. The test circuit of Figure 3 shall be used.

4.6.12 Output voltages of resistors 3R1 and 3R2.- To determine conformance to 3.5.11 and 3.5.12, the specified output voltage ratios shall be set and the range indicator observed for conformance to the specified ranges and tolerances of Table V. The test circuit of Figure 4 shall be used.

4.6.13 Range function generator output.- To determine conformance to 3.5.13 after inserting the unit in the test circuit of Figure 5, the output voltages of the gunner's unit range feedback function generator shall be checked for ratio standard settings at the ranges specified in Table VI. The ratio of the reference voltage to the excitation voltage shall be .724550 ± .0001 during the test.

4.6.14 Servo motor.- To determine conformance to 3.5.14, apply 115 VAC ± 1% 400 CPS ± 1% to pins 3J3z and AA for fixed phase excitation. Apply 40 VAC ± 1% 400 CPS ± 1% across 3J1 EE and FF for control phase excitation. Energize K_2 of the gunner's override reed board by applying 21 VDC across 3J3-CC and 3J3-D, pin CC to be positive.

4.6.15 Slew speed.- To determine conformance to 3.5.14.1, the servo motor shall be excited with specified voltage input and the resulting slew speed timed for concurrence.

4.6.16 Tachometer output voltage.- To determine conformance to 3.5.14.2, when energized as specified, the tachometer output voltage shall be checked at the pins specified for concurrence.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:48Z
Check the source to verify that this is the current version before use.

4.6.17 Output torque.- To determine conformance to 3.5.14.3 the motor shall be braked to clutch slippage and the corresponding torque checked for conformance using equipment specified in 4.5.3.

5. PREPARATION FOR DELIVERY

5.1 Packaging, packing and marking.- Packaging, packing and marking shall be in accordance with MIL-P-14232 and Packaging Data Sheet MIL-P-14232/P10543600. The level of protection shall be as specified in the procurement document.

6. NOTES

6.1 Intended use.- The gunner's control unit is intended as a functional component of the electronic analog computer: Computer, Ballistics XM19.

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Selection of applicable levels of preservation, packaging and packing.
(c) Applicable packaging data sheet number (see 5.1).
(d) Applicable stock number.
(e) Order of document precedence.

Custodian:

Army - MU

Preparing activity:

Army - MU

Project No. 1220-A265

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:48Z
Check the source to verify that this is the current version before use.


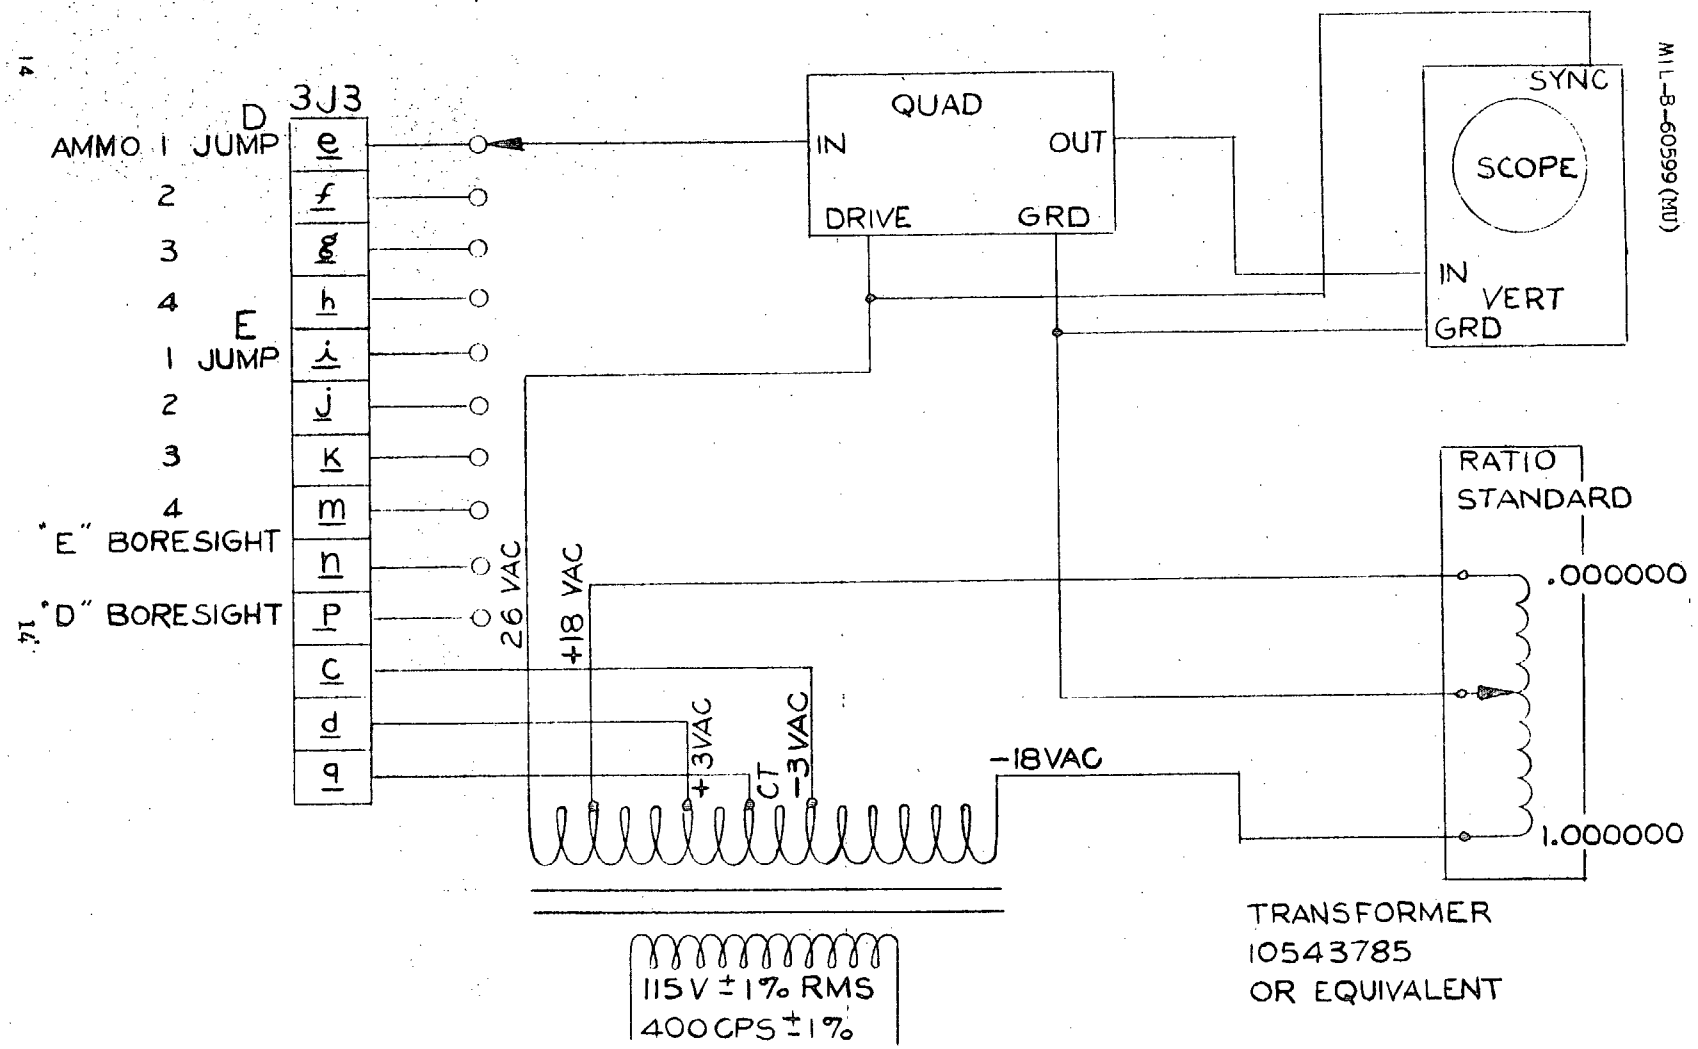


FIG. 1 JUMP AND BORESIGHT FUNCTION GENERATORS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:48Z
Check the source to verify that this is the current version before use.

FIG. 2 TARGET LEAD

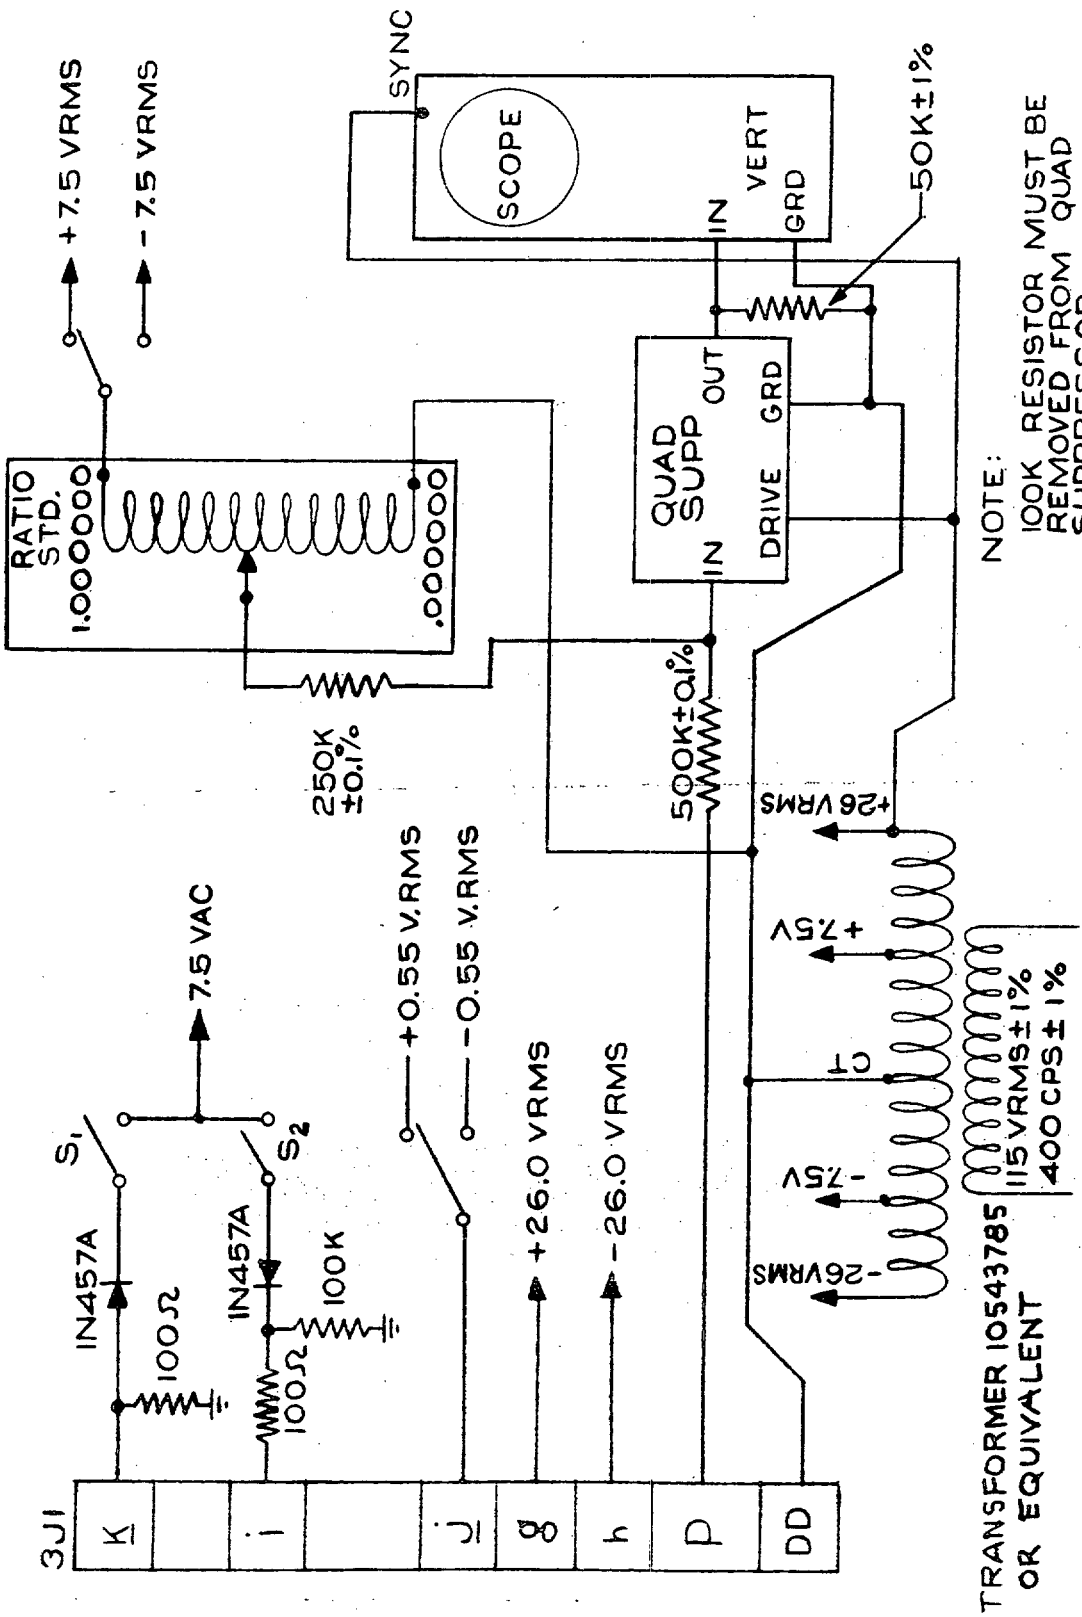

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:48Z
Check the source to verify that this is the current version before use.

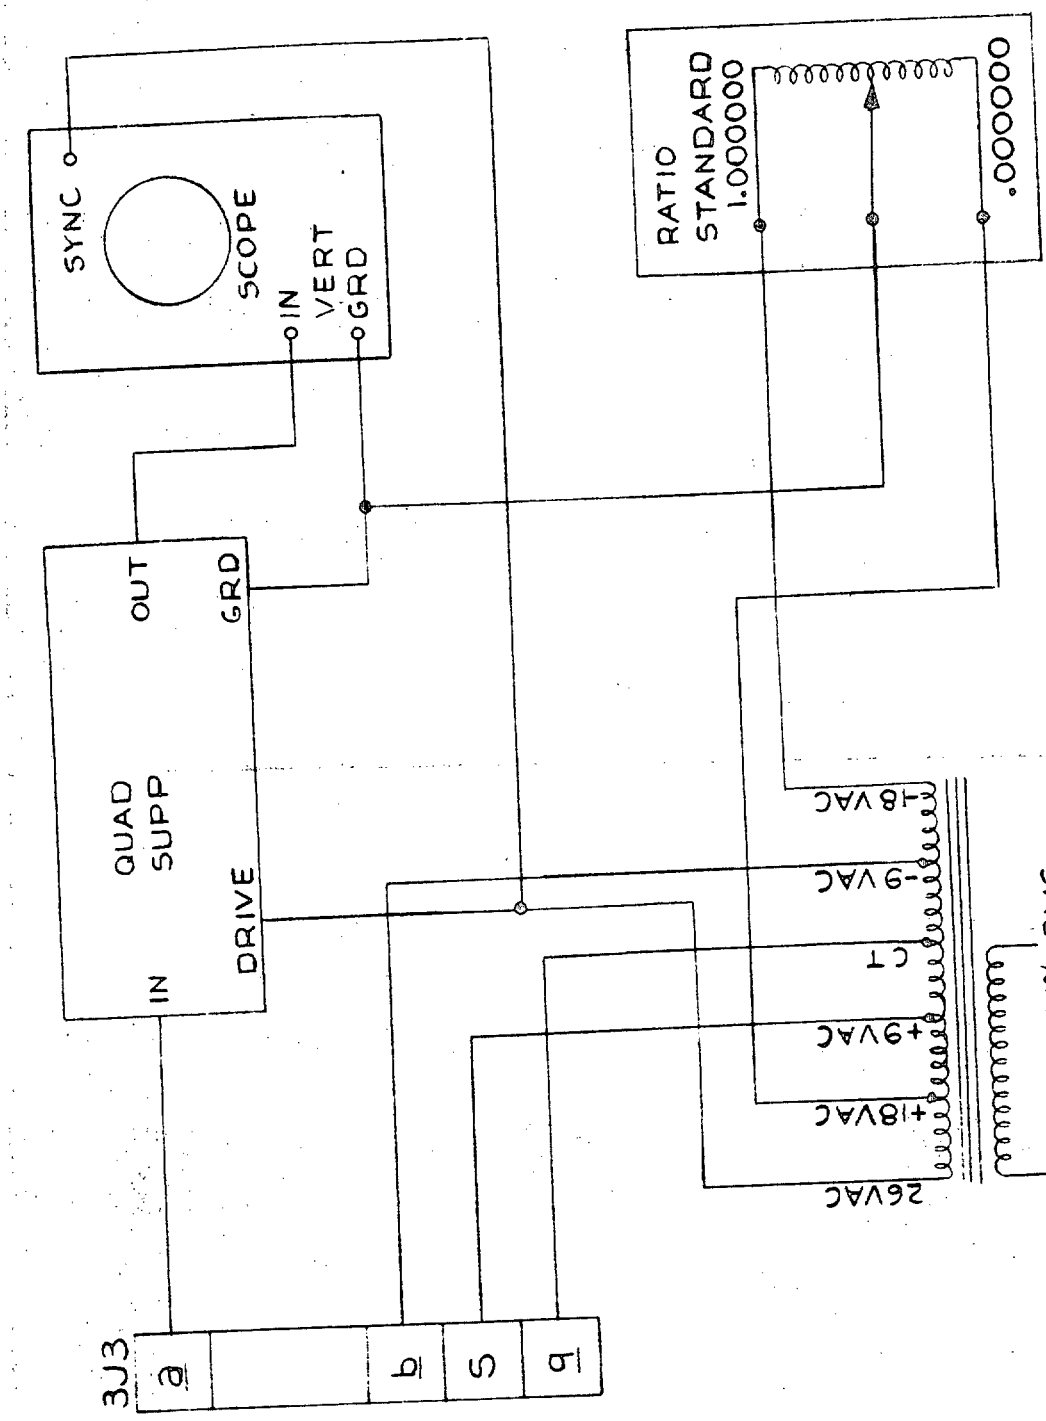


FIG. 3 WIND FUNCTION

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:48Z
Check the source to verify that this is the current version before use.

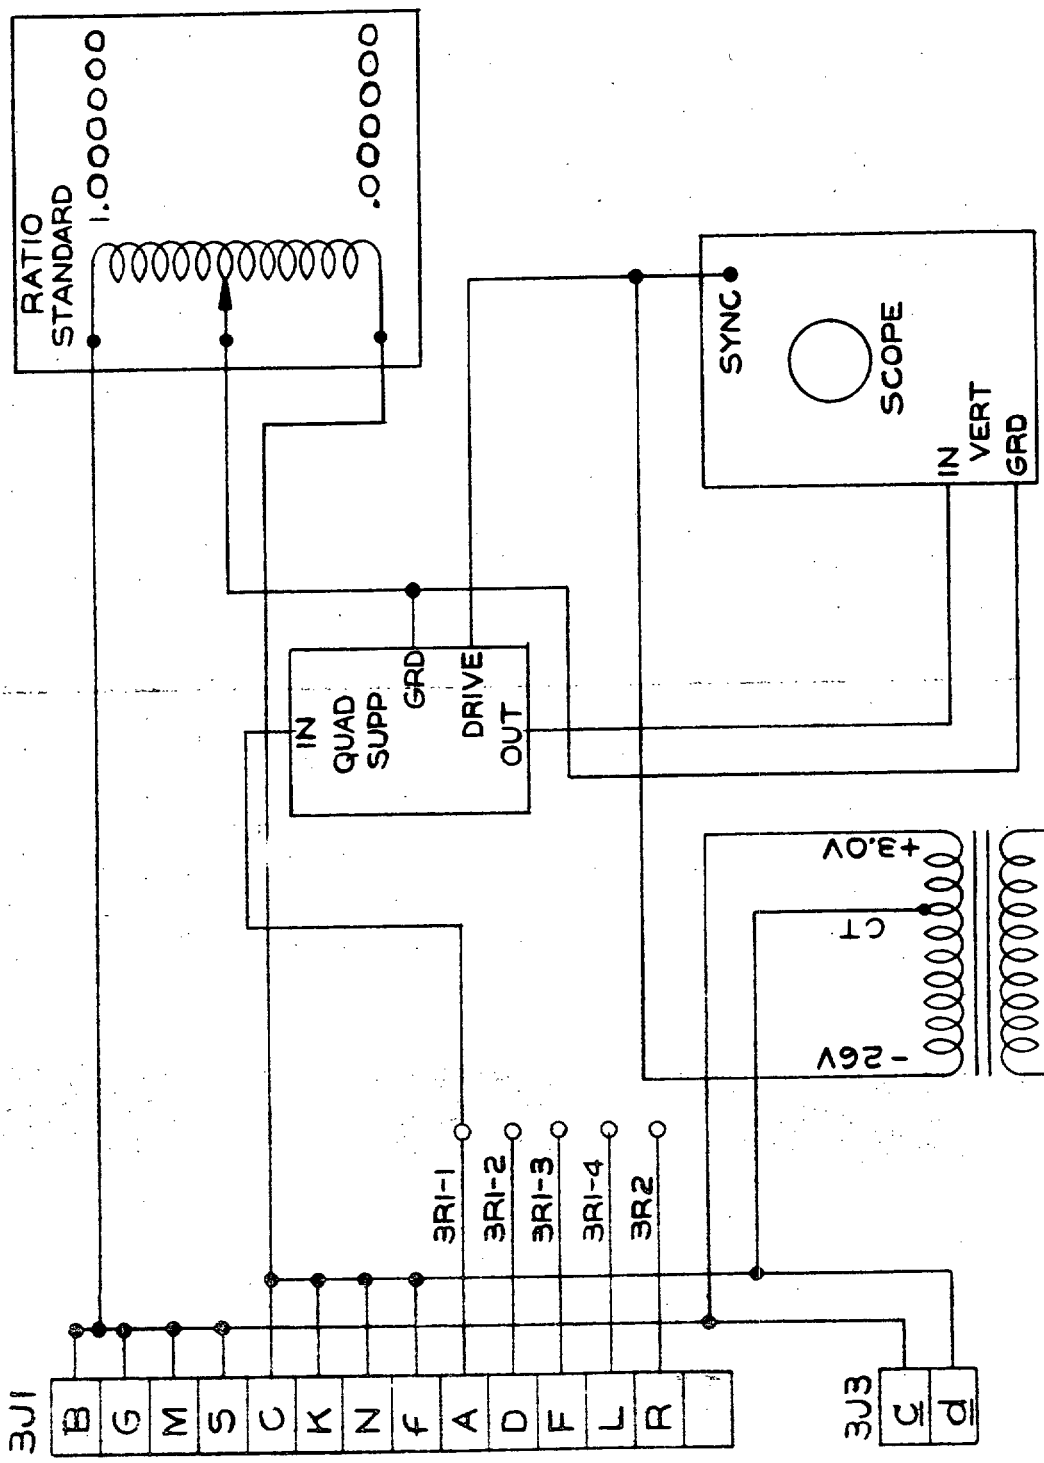


FIG. 4 POTENTIONMETER 3RI AND 3R2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:48Z
Check the source to verify that this is the current version before use.

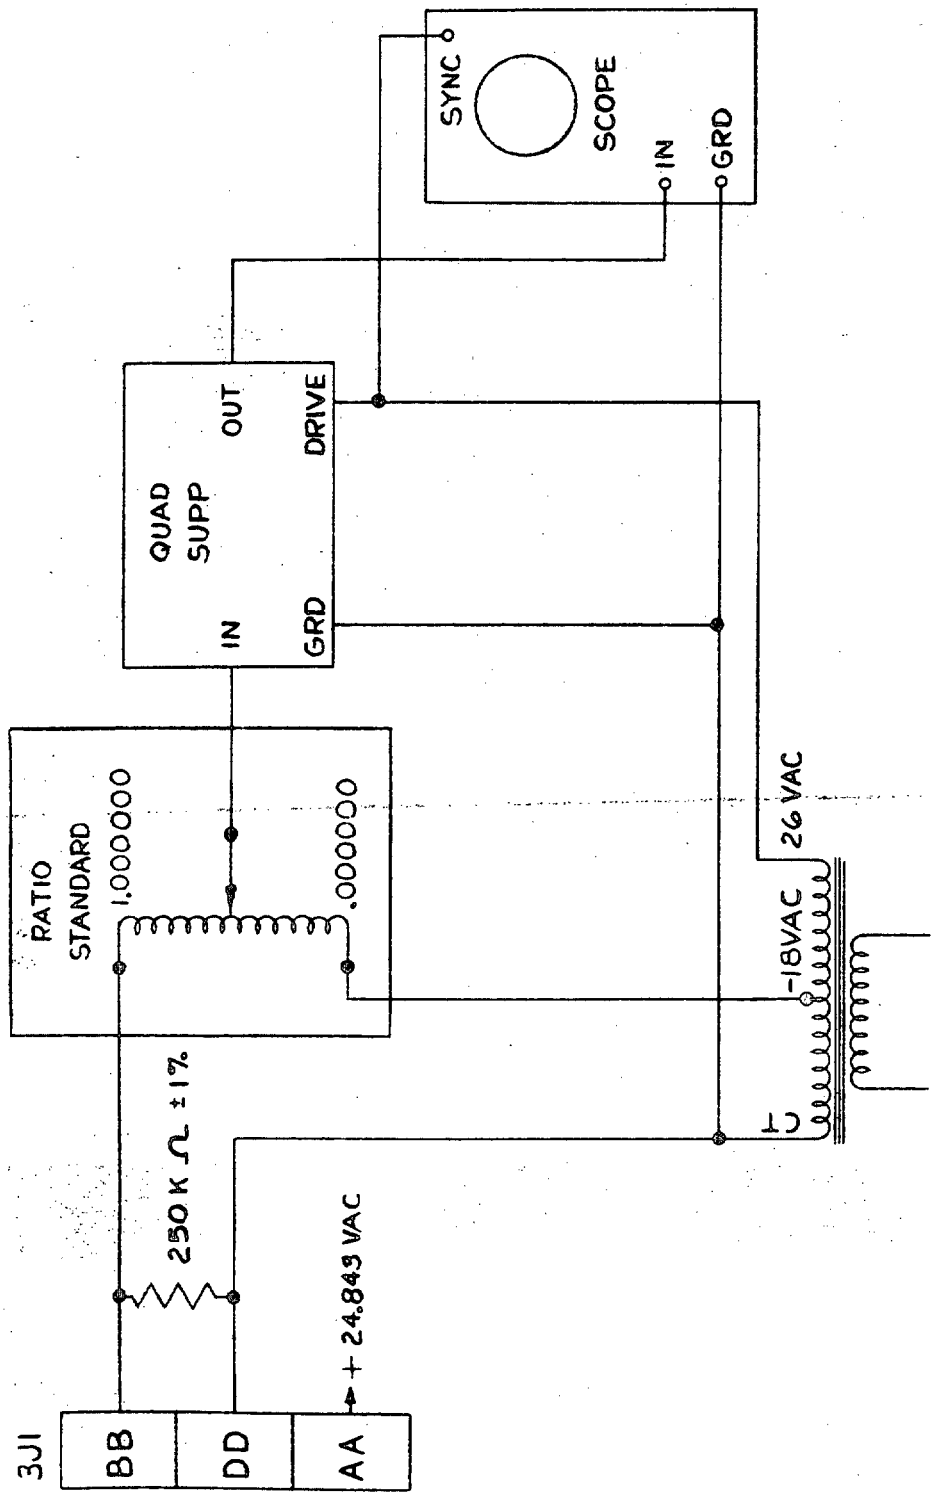


FIG. 5 RANGE OUTPUT

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:48Z
Check the source to verify that this is the current version before use.

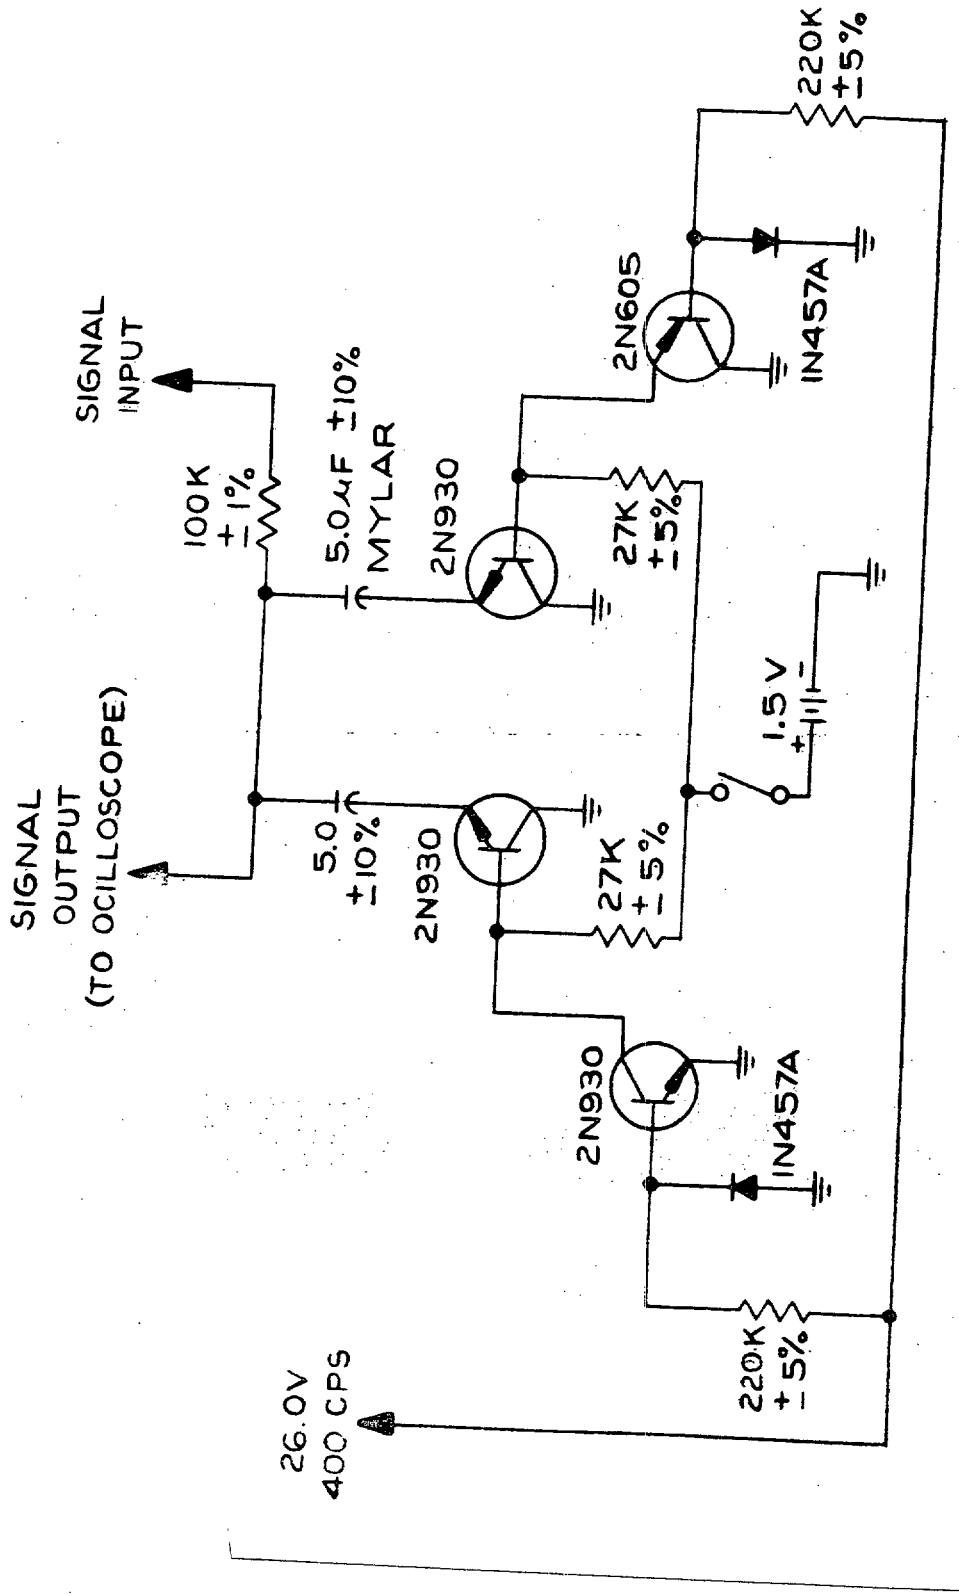


FIG.6 QUADRATURE SUPPRESSOR

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:48Z
Check the source to verify that this is the current version before use.