MILITARY SPECIFICATION SHEET

SWITCH, STEPPING, ONE LEVEL, EIGHT POSITION

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switches described herein shall consist of this document and the latest issue of MIL-S-85377.

This specification sheet covers the following equipment:

Type number	Part number
SWU-60/A	M85377/1-1
SWU-64/A	M85377/1-2


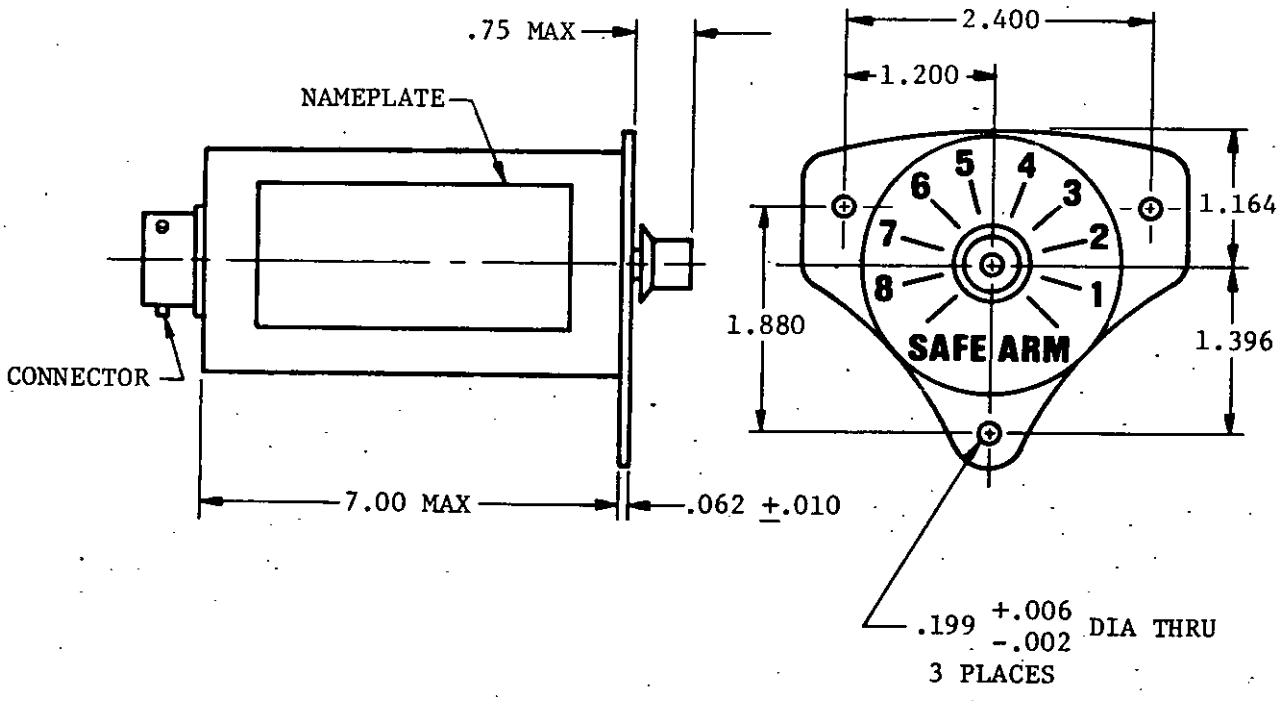


FIGURE 1. Switch.
(Sheet 1 of 2)

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 202610-23T10:44Z
Check the source to verify that this is the current version before use.

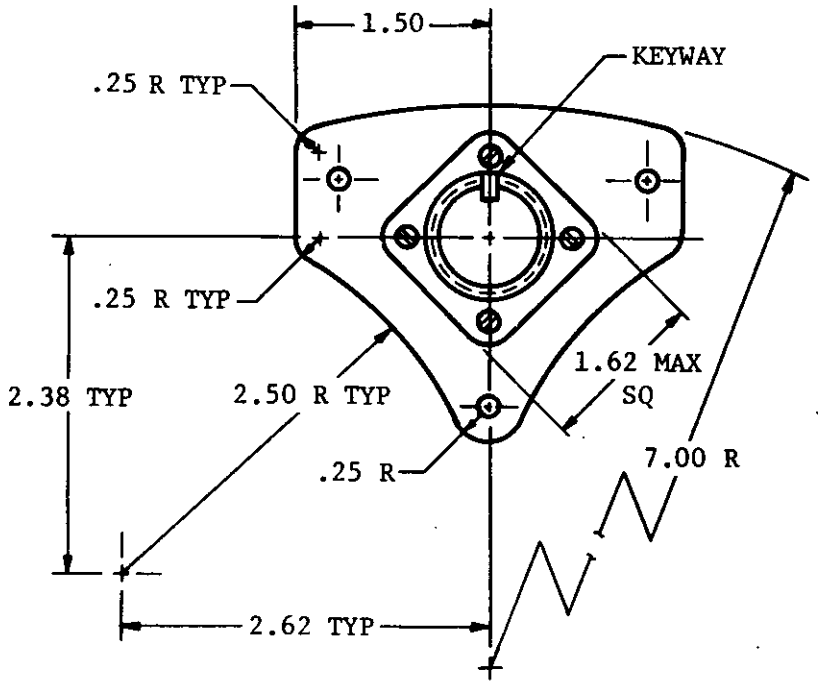

REAR VIEW

NOTES:

1. DIMENSIONS ARE IN INCHES.

2. REMOVE BURRS AND BREAK ALL SHARP EDGES 0.005R MAX.


3. UNLESS OTHERWISE SPECIFIED, TOLERANCES:
   3 PLACE DECIMALS ± 0.010,
   2 PLACE DECIMALS ± 0.03,
   ANGLES ± 0°30'.

4. KNOB ROTATION CCW WHEN VIEWED FROM KNOB END.

5. ALL SWITCHES SHALL BE CHECKED ELECTRICALLY TO INSURE INDEX POSITION OF KNOB IS ALIGNED WITH THE "SAFE" POSITION OF THE INDICATOR LABEL.

FIGURE 1. Switch. - Continued
(Sheet 2 of 2)

Source: https://assist.dla.mil -- Downloaded: 202610-23T10:44Z
Check the source to verify that this is the current version before use.

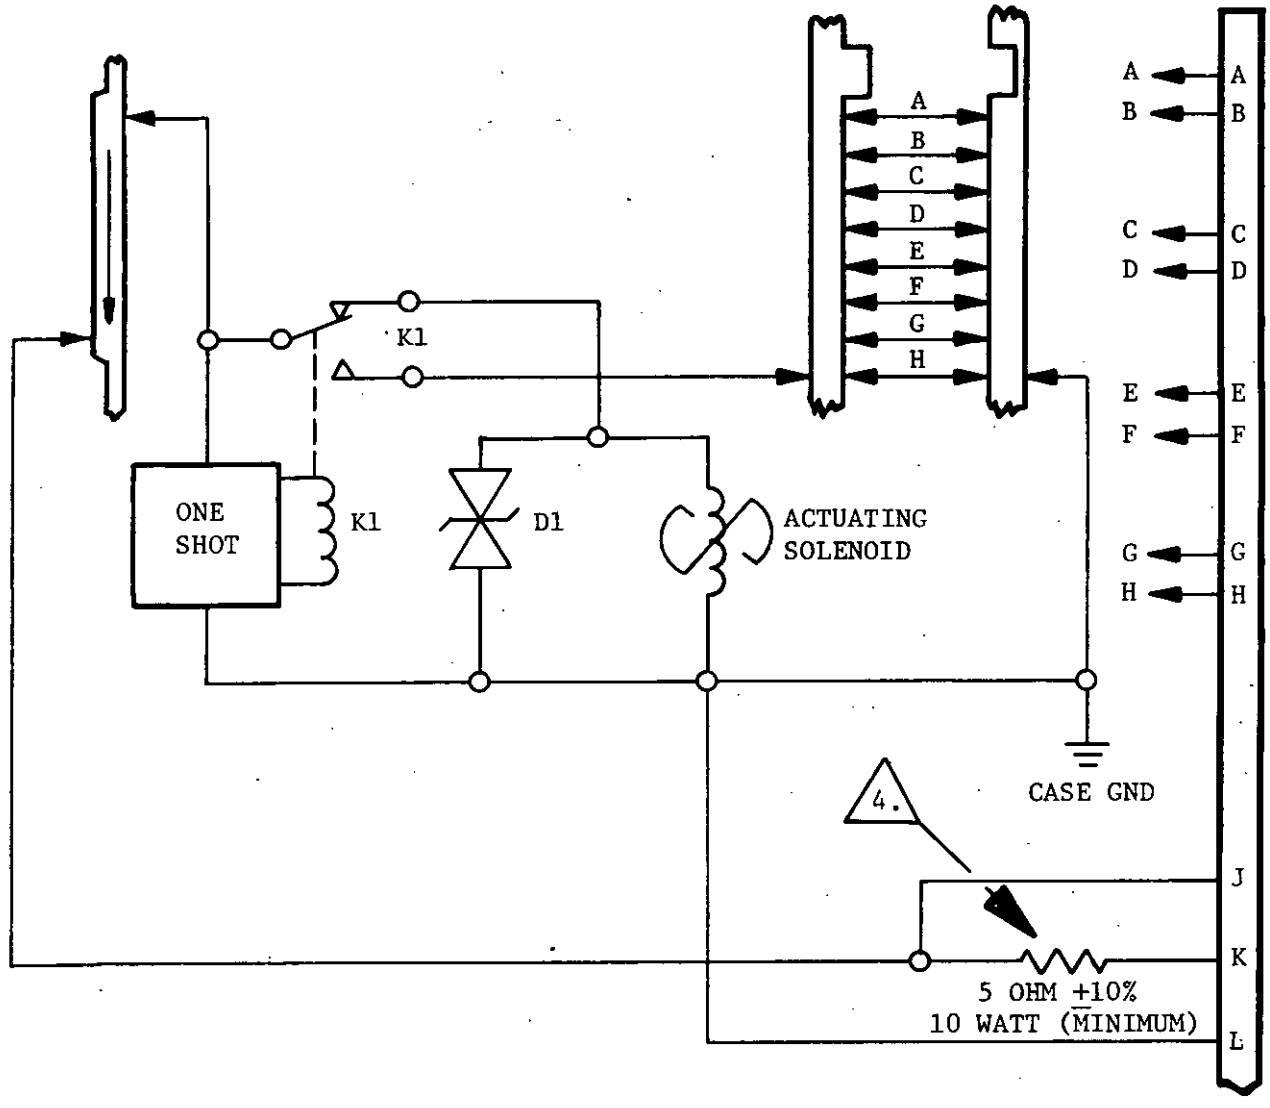


NOTES:

1. ARC SUPPRESSION (D1) REQUIRED FOR SOLENOID.
2. ROTARY SWITCH SHOWN IN ARM POSITION.
3. RELAY (K1) MAY BE REPLACED WITH SOLID STATE DEVICES.
4. 5 OHM RESISTOR USED IN SWU-60/A
   PIN K CONNECTED TO PIN J IN SWU-64/A

FIGURE 2. Block diagram.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

INSERT ARRANGEMENT	14 - 19
SERVICE RATING	1
NUMBER OF CONTACTS	19
CONTACT SIZE	20



CONNECTOR MATES WITH MS3126E-14-19S

SUMMARY OF CONNECTOR INPUTS AND OUTPUTS

FUNCTION	CONNECTOR PIN
FIRE SIGNAL OUTPUT # 1	A
FIRE SIGNAL OUTPUT # 2	B
FIRE SIGNAL OUTPUT # 3	C
FIRE SIGNAL OUTPUT # 4	D
FIRE SIGNAL OUTPUT # 5	E
FIRE SIGNAL OUTPUT # 6	F
FIRE SIGNAL OUTPUT # 7	G
FIRE SIGNAL OUTPUT # 8	H
FIRE SIGNAL INPUT	J
FIRE SIGNAL INPUT	K (INTERNAL 5 OHM RESISTOR FOR SWU-60/A; ELECTRICALLY CONNECTED TO PIN J FOR SWU-64/A)
GROUND	L
NOT USED	M THRU V


NOTES:

1. THE UNUSED PINS SHALL HAVE A MINIMUM OF 1 MEGOHM RESISTANCE TO ANY OTHER INPUT OR OUTPUT PIN AND SHALL BE AVAILABLE FOR FUTURE USE.

2. THE CONNECTOR SHALL NOT BE CONNECTED TO OR DISCONNECTED FROM THE TEST CIRCUIT WHILE POWER IS APPLIED (SWITCH S1 CLOSED).

FIGURE 3. Connector terminal identification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

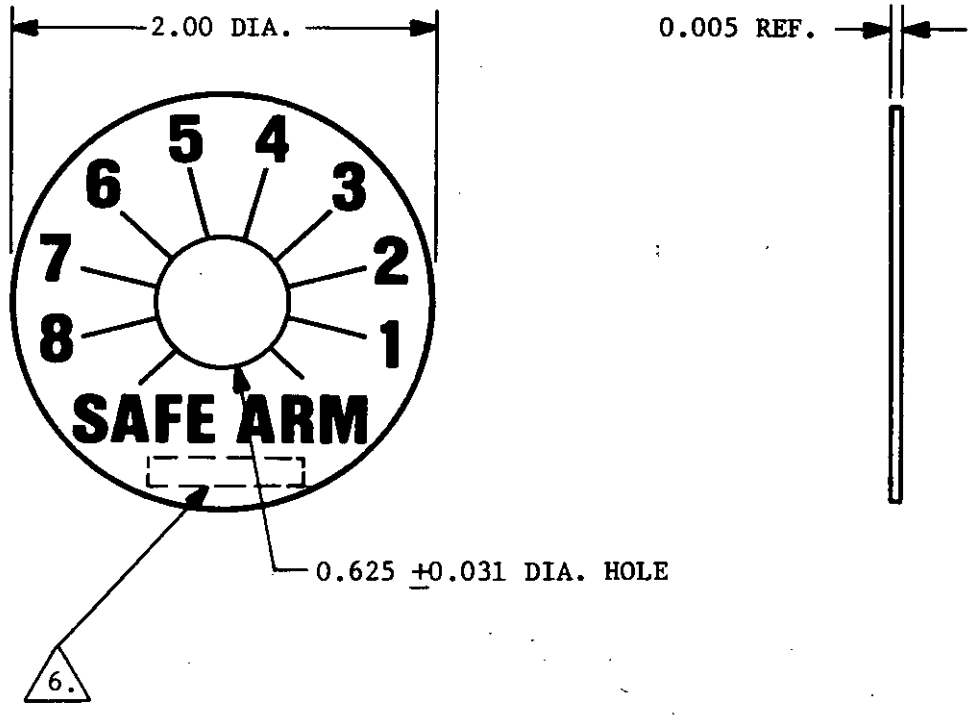


NOTES:

1. MATERIAL: APPROX 0.005 ALUMINUM
2. TO MEET GG-P-455, TYPE II GRADE A, CLASS I.
3. ADHESIVE TYPE: PRESSURE SENSITIVE PERMANENT TYPE
4. COLOR: LETTERS, PADS, AND NUMERALS TO BE NATURAL METAL (ALUM) COLOR. BACKGROUND TO BE BLUE OR BLACK.
5. FINISH: MATTE
6. LABEL SWITCH TYPE:
   SWU-60/A FOR M85377/1-1 SWITCH
   SWU-64/A FOR M85377/1-2 SWITCH

FIGURE 4. Indicator label.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

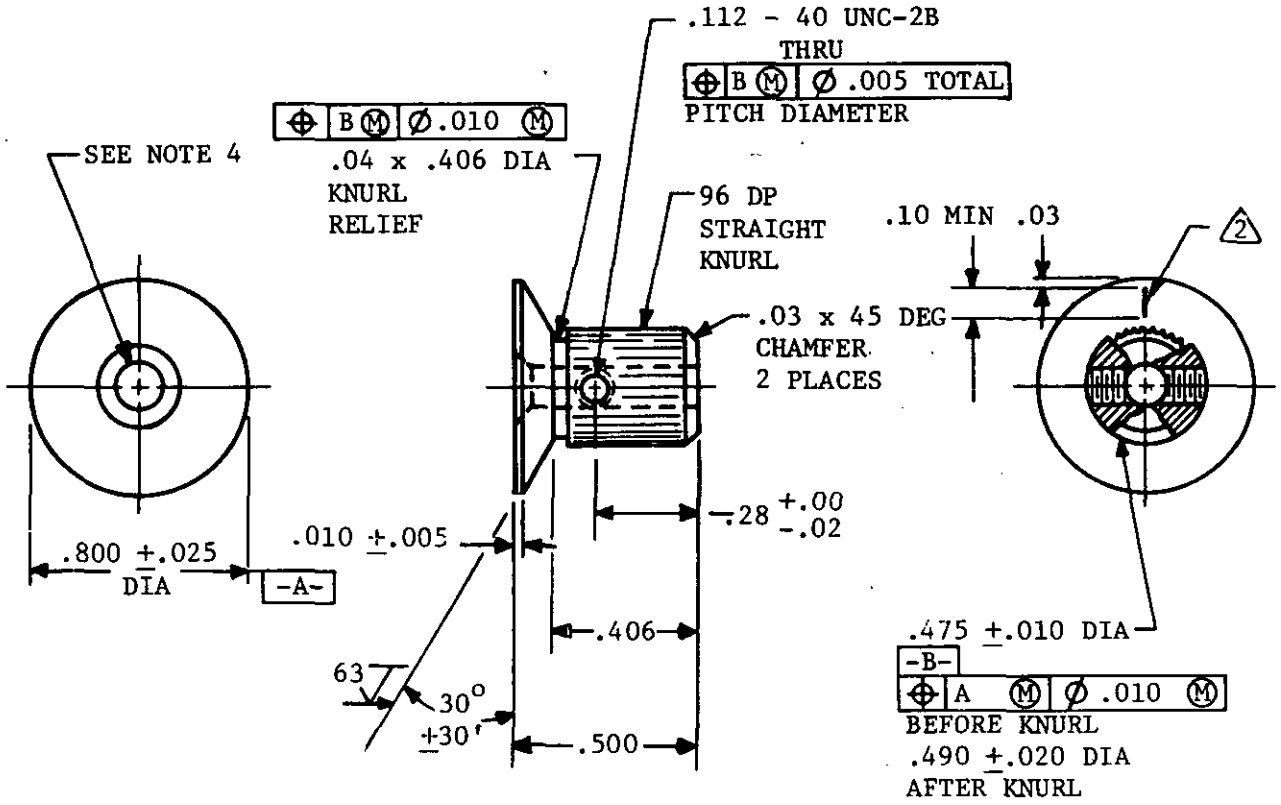


NOTES:

1. FINISH: ANODIC CTG, MIL-A-8625, TYPE II, CLASS I, CLEAR.
2. ENGRAVE INDEX LINE TO LENGTH SHOWN, .015 ±.005 LINE WIDTH, x.010 $^{+.005}_{-.000}$ LINE DEPTH, FILL ENGRAVING WITH MARKING INK (MIL-I-43553, BLACK). LOCATE AS REQUIRED.
3. ATTACH TO SHAFT WITH TWO SET SCREWS PERPENDICULAR TO FLATS OF SHAFT. ALTERNATE METHOD ATTACH WITH PIN THRU KNOB AND SHAFT.
4. SHAFT HOLE DIAMETER SHALL BE OF A NON-INTERFERENCE DIAMETER, STANDARD FIT AND SHALL BE IN TRUE POSITION TO DATUM "A" MMC, WITHIN TOLERANCE DIAMETER OF .005 MMC.
   SHAFT DIAMETER SHALL BE OBTAINED FROM MANUFACTURED SWITCH.
5. DIMENSIONS ARE IN INCHES, BURR REMOVAL AND TOLERANCES SHALL BE AS SPECIFIED IN FIGURE 1.
6. MATERIAL: ALUMINUM.

FIGURE 5. Switch knob.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.


PARTS LIST		
PART NUMBER	PART NAME	REF DES
AS REQUIRED	POWER SOURCE (22.0 TO 31.5 VOLTS D.C., 10 AMP)	V S
AS REQUIRED	SWITCH (SPST, NORMALLY OPEN, 10 AMP CONTACTS)	S1
AS REQUIRED	SWITCH (SPST, 10 AMP CONTACTS)	S2
MS3126E-14-19S	CONNECTOR (19 PINS)	P1
INPUT RESISTANCE - SPECIFIED IN TABLE I		R IN
LOAD RESISTANCE - SPECIFIED IN TABLE I		R L(1 - 8)
INPUT INDUCTANCE - SPECIFIED IN TABLE I		L IN

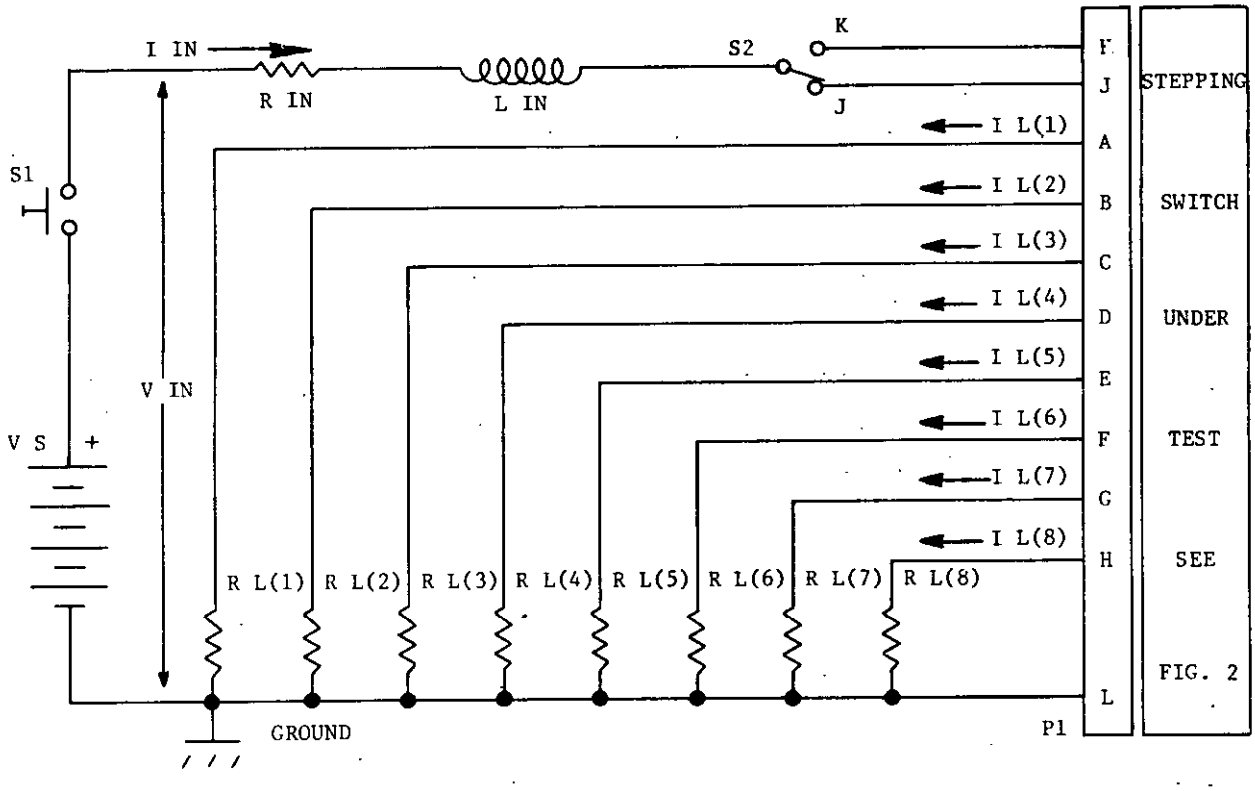

NOTES:
1. R IN INCLUDES LINE RESISTOR, WIRE RESISTANCE, SWITCH CONTACT RESISTANCE, POWER SOURCE RESISTANCE, AND TEST EQUIPMENT RESISTANCE.
2. R L INCLUDES LOAD RESISTOR, WIRE RESISTANCE, SWITCH CONTACT RESISTANCE, AND TEST EQUIPMENT RESISTANCE.
3. L IN INCLUDES LINE INDUCTOR, WIRE INDUCTANCE, POWER SOURCE INDUCTANCE, AND TEST EQUIPMENT INDUCTANCE.
4. SWITCHES S1 AND S2 MAY BE REPLACED BY RELAYS AND/OR SOLID STATE DEVICES.
5. SWITCH UNDER TEST SHALL NOT AUTO-STEP, EXCEPT AS NOTED IN ELECTRICAL REQUIREMENTS, PARAGRAPH 1(G).
6. REMOVING THE OUTPUT LOAD RESISTOR DURING DURATION OF THE FIRE SIGNAL SHALL NOT CAUSE THE SWITCH UNDER TEST TO ADVANCE OR CAUSE THE OUTPUT VOLTAGE TO BE DISCONTINUED.

FIGURE 6. Electrical test circuit for first article, individual, and lot inspection testing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

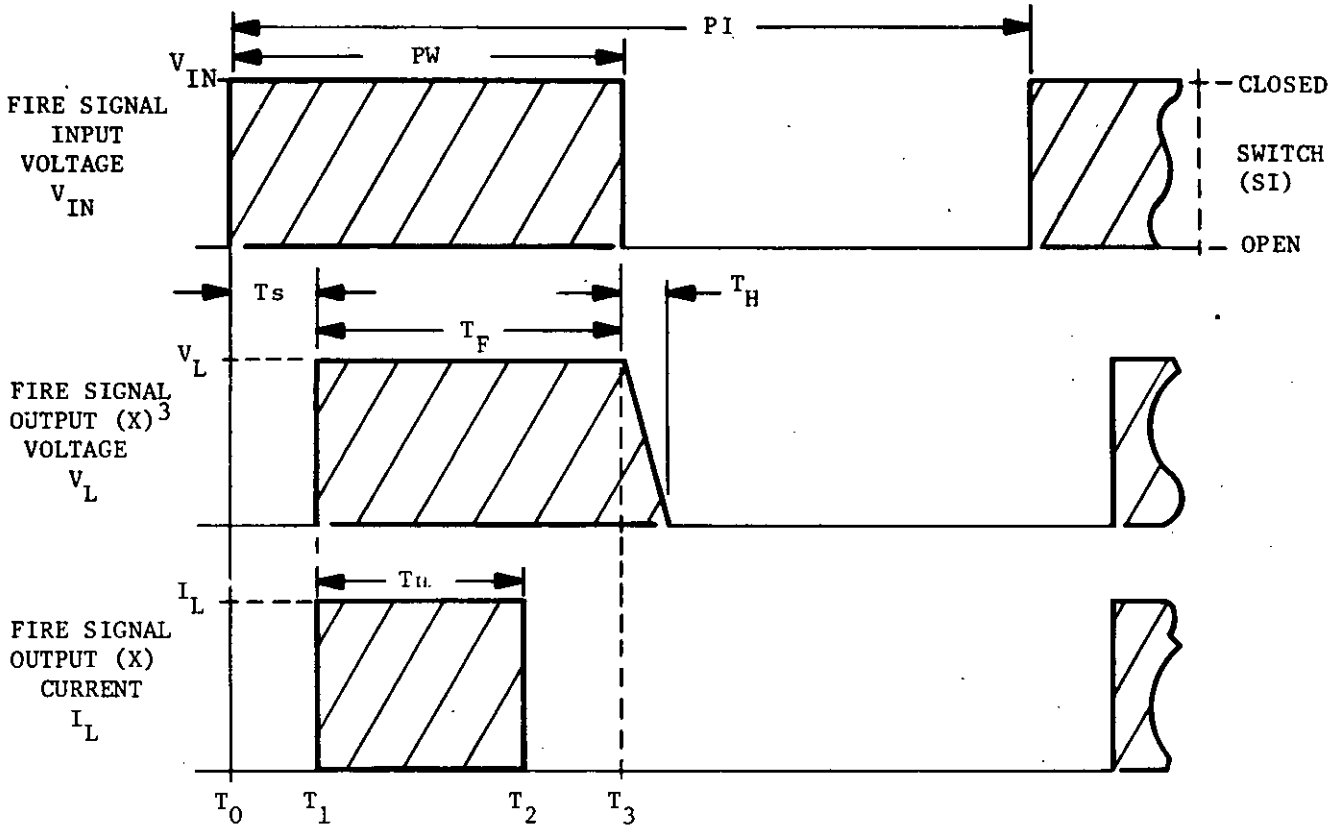


NOTES:


1. INITIAL DELAY (T_S): $5 \leq T_S \leq 30$ MILLISECONDS
2. OUTPUT HOLD TIME (T_H): $0 + \leq T_H \leq 40$ MILLISECONDS (R_L = 10 KOHM)
3. OUTPUT (X): ANY OUTPUT 1 THRU 8.
4. FIRE DWELL TIME (T_F): FIRING SIGNAL DURATION (CONSTANT LOAD).
5. FIRING LOAD REMOVED AT TIME T_2.

FIGURE 7. Switch timing relationships.

Source: https://assist.dla.mil -- Downloaded: 202610-23T10:44Z
Check the source to verify that this is the current version before use.

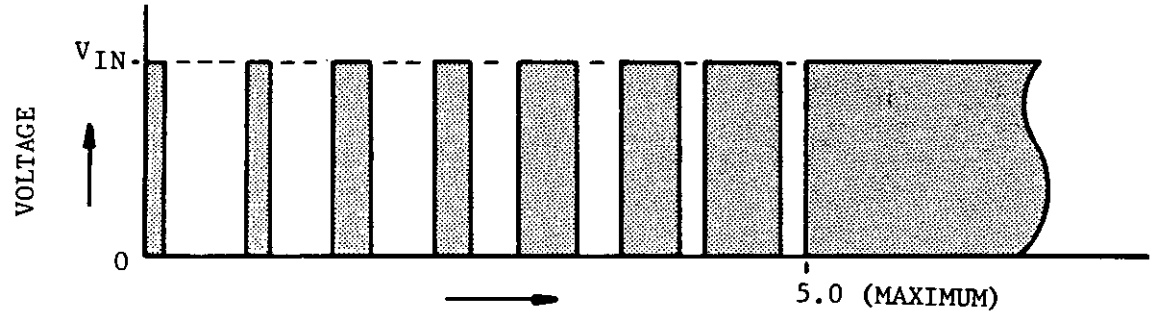


TYPICAL INPUT SWITCH CONTACT BOUNCE

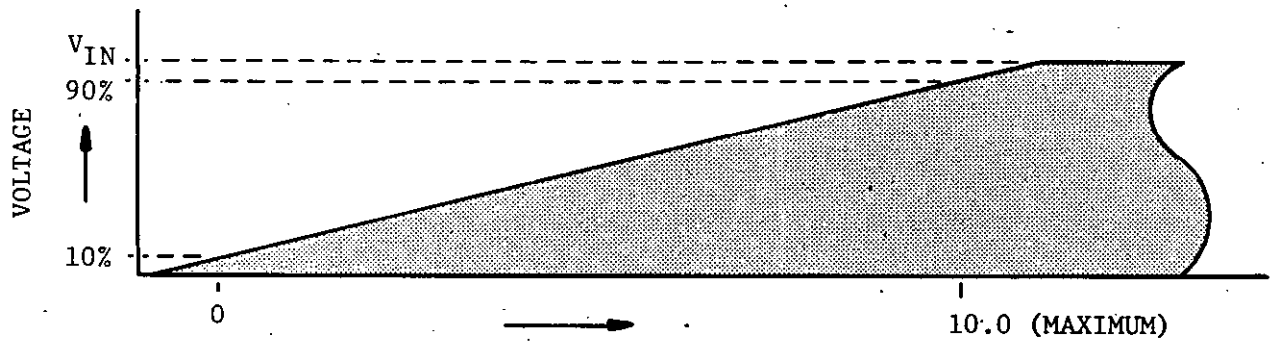

TYPICAL INPUT SLOW RISE

FIGURE 8. Input voltage characteristics.

Source: https://assist.dla.mil -- Downloaded: 202610-23T10:44Z
Check the source to verify that this is the current version before use.

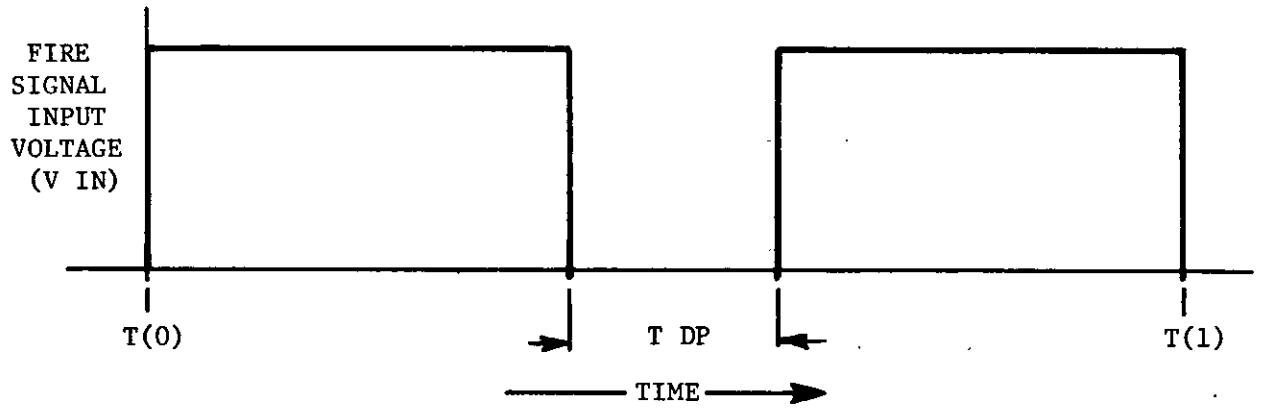

NOTES:

1. FIRE SIGNAL STARTS AT T(0).
2. FIRE SIGNAL ENDS AT T(1).
3. DROPOUT (T DP) LESS THAN 2.0 MILLISECONDS SHALL NOT CAUSE THE SWITCH TO ADVANCE TO NEXT POSITION.
4. DROPOUT (T DP) GREATER THAN 40.0 MILLISECONDS OCCURRING AFTER THE INITIAL DELAY SHALL CAUSE THE SWITCH TO ADVANCE TO NEXT POSITION.
5. DROPOUT CAN OCCUR AT ANY TIME DURING DURATION OF FIRE SIGNAL..

FIGURE 9. Typical dropout characteristics.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

TABLE I. Switch electrical test parameters.

TEST NO	TEST TYPE	TEST PARAMETERS: INPUT: INPUT VOLTAGE V IN VOLTS	INPUT: LINE RESISTANCE R IN OHMS	INPUT: LINE INDUCTANCE L IN MICROH	PULSE: WIDTH PW MS	PULSE: INTERVAL PI MS	PULSE QTY	LOAD: FIRE OUTPUT RESISTANCE R L(1 - 8) OHMS	RESPONSE PARAMETERS: FIRE OUTPUT (OUTPUTS 1 THRU 8): CURRENT I L AMP	TIME TO FIRE T S MINIMUM MS	TIME TO FIRE T S MAXIMUM MS	DWELL T IL MINIMUM MS	MILSPEC TEST REFERENCE: LIFE TEST 4.8	SIMULATED FIRING TEST 4.9.1	SEQUENCE TEST 4.9.5	BY-PASS TEST 4.9.6	OPERATIONAL TEST 4.9.7	REMARKS
		NOTE 4	NOTE 6	NOTE 8				NOTES 5 & 7	NOTE 13			NOTE 11			NOTE 14			NOTES 1 THRU 15 APPLY ALL TESTS
1	SEQUENCE	22.0	5.7	40 MAXIMUM	400 MINIMUM	550 MINIMUM	15	1.1	2.65	5.0	30.0	10.5	X		X		X	
2	PULSE (MINIMUM)	31.5	2.5	150	42	84	9	1.1	6.00	5.0	30.0	10.5	X				X	
3	PULSE	31.5	2.5	150	100	200	15	1.1	6.00	5.0	30.0	10.5					X	
4	PULSE (MINIMUM)	22.0	5.7	150	42	84	9	1.1	2.65	5.0	30.0	10.5					X	
5	PULSE	24.5	7.2	150	100	200	9	1.1	2.40	5.0	30.0	10.5					X	
6	PULSE NOTE 16 (SWITCH NOISE)	31.5	2.5	150	45 +5 NOISE	90	9	1.1	6.00	9.0	35.0	10.5	X	X			X	
7	PULSE NOTE 16 (SWITCH NOISE)	22.0	5.7	150	45 +5 NOISE	90	9	1.1	2.65	9.0	35.0	10.5		X			X	
8	PULSE NOTE 17 (SLOW RISE)	31.5	2.5	150	45 +5 RAMP	90	9	1.1	6.00	7.0	34.0	10.5					X	
9	PULSE NOTE 17 (SLOW RISE)	22.0	5.7	150	45 +5 RAMP	90	9	1.1	2.65	7.0	34.0	10.5	X				X	
10	PULSE NOTE 20 (DROPOUT)	22.0	5.7	150	48 -2 DROPOUT	90	9	1 1	2.65	5.0	33.0	10.5					X	NOTES 18, 19, & 21
11	PULSE (BYPASS)	31.5	2.5	150	100	200	9	SHORT, OPEN, OR 1.1 OHM	6.00	5.0	30.0	10.5 NOTE 24	X			X	X	NOTES 22, 23, & 25
12	PULSE (BYPASS)	22.0	5.7	150	100	200	9	SHORT, OPEN, OR 1.1 OHM	2.65	5.0	30.0	10.5 NOTE 24				X	X	NOTES 22, 23, & 25
13	PULSE (PIN K)	27.5	NOTE 26	150	42	84	9	1 1	NOTE 26	5.0	30.0	10.5					X	S2 SET TO POSITION "K"

Source: https://assist.dla.mil -- Downloaded: 20260-23T10:44Z
Check the source to verify that this is the current version before use.

TABLE I. Switch electrical test parameters. - Continued

NOTES:

1. Abbreviations: MS - milliseconds; AMP - amperes; QTY - quantity; MICROH - microhenry.
2. Tolerance: Resistance ± 0.1 OHM; voltage ± 1 percent; time ± 2 percent; current ± 2 percent; inductance ± 20 percent.
3. Temperature range: -55°C to +71°C, unless otherwise specified.
4. Input voltage rise time: 0.1 MS or less (except Tests No. 8 and 9).
5. Remove 1.1 OHM load after 12 ± 1.5 MS, final load resistance shall be greater than 10K OHMS.
6. Input line resistance includes line resistor, wire resistance, switch contact resistance, power source resistance, and test equipment resistance.
7. Fire load resistance includes load resistor, wire resistance, switch contact resistance, and test equipment resistance.
8. Input line inductance includes line inductor, wire inductance, power source inductance, and test equipment inductance.
9. Set stepping switch knob to "ARM" prior to the start of each test.
10. The stepping switch knob shall stop at the "SAFE" position at the end of each test and shall not advance into the "ARM" position.
11. Maximum fire output dwell is measured only when output load is not removed. Dwell time for a continuous load is continuous (after the initial delay) for the duration of the input power.
12. The stepping switch shall not auto-step, except as noted in electrical requirements, paragraph 1g, and shall not skip any positions. Auto-step is defined as stepping switch advancing to the next position even though fire signal input voltage (V IN) remains valid.
13. Firing current (I L) leakage on the fire output lines shall not exceed 50 milliamperes.
14. The tests from general specification MIL-S-85377 to be performed are indicated by an "X".
15. Input pin "J" used for all tests except as noted.
16. Typical switch noise (contact bounce) is shown in Figure 8.
17. Typical slow rise input is shown in Figure 8. For this test, rise time is 5.0 ± 0.2 MS.
18. A 2 MS dropout can effect fire output "time to fire" and "dwell".
19. A 2 MS dropout shall not cause the stepping switch to advance to the next position as would a new pulse.
20. Typical dropout is shown in Figure 9. For this test, dropout time is 1.9 ± 0.1 MS.
21. Dropouts shall occur at 4 different times (minimum), with a maximum of one dropout per pulse.
22. A shorted fire output shall be 0.1 OHMS and an unloaded output shall be greater than 10K OHMS.
23. Short one odd and one even output. Unload one odd and one even output. Load the remaining outputs with 1.1 OHM.
24. Fire current "dwell time" (T IL) does not apply to unloaded stations.

Source: https://assist.dla.mil -- Downloaded: 202610-23T10:44Z
Check the source to verify that this is the current version before use.

TABLE I. Switch electrical test parameters. - Continued

25. Measure output voltage (V L) at stepping switch output pin for loads greater than 10 OHMS. This minimum output voltage is as follows:

Test number	Minimum output voltage
11	28.0 volts
12	19.0 volts

26. Input line resistance and minimum fire output current values when input pin K is used are as follows:

Type number	Part number	Line resistance OHM	Minimum firing current AMP
SWU-60/A	M85377/1-1	0.7	3.15
SWU-64/A	M85377/1-2	5.7	3.40

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

DESCRIPTION OF OPERATION:

1. This specification sheet defines the technical requirements and operational parameters of a reusable, eight (8) output, line operated, stepping switch, for use in dispensers capable of carrying four (4) or eight (8) flares. The stepping switch consists of an electromechanical switch, required electronic components, and a mechanical housing. A detailed discussion of operation is given in MIL-S-85377, paragraph 3.21. Operation of the major components are described below. A block diagram of the stepping switch is shown in Figure 2.

   a. Electromechanical switch: A rotary solenoid controlled switch is located within the stepping switch housing. This switch consists of a 12 position rotary solenoid ratchet mechanism to allow any of the 12 shaft positions to be selected. The switch distributes the outgoing firing signal in sequence to each of eight (8) electrically actuated cartridges. The switch has one (1) firing deck and one (1) arm deck.

   b. Electronic components: The stepping switch contains electronic components required for controlling the electromechanical switch and the firing outputs.

   c. Mechanical housing: The mechanical housing provides a water tight enclosure for the electromechanical switch and the electronic components. The housing also provides shielding from electromagnetic radiation.

Source: https://assist.dla.mil -- Downloaded: 202610-23T10:44Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Electrical:

1. Input voltage:

   a. Nominal: 27.5 VDC

   b. Input range: 22 to 31.5 VDC.

   c. Input voltage switch contact bounce: Up to 5.0 MS of contact bounce (see Figure 8).

   d. Input voltage rise time: The input voltage rise time shall be 10.0 MS or less (straight line from +10 percent to +90 percent of input voltage - see Figure 8).

   e. Pickup voltage: 22 VDC maximum (5.0 OHM series resistor, input Pin J) over the temperature range of -55°C to +71°C.

   f. Dropout voltage: 0.5 VDC minimum (2.0 OHM series resistor, input Pin J) over the temperature range of -55°C to +71°C.

   g. Dropout time: Voltage dropouts less than 2.0 MS shall not cause the stepping switch to sequence to the next position. However, the stepping switch may sequence if a dropout occurs while attempting to fire a shorted station. Voltage dropouts longer than 40 MS occurring after the initial delay shall cause the stepping switch to sequence to the next position. This requirement applies over the temperature range of -55°C to +71°C. Typical dropout is illustrated in Figure 9.

2. Steady state input current: The steady state input current (measured after the pulse has been applied for a minimum of 50 MS, output unloaded) shall not exceed 150 milliamperes for the full range of input voltage, line resistance, and temperature.

3. Series input resistance (input Pin J): The series input resistance can range from 2.5 OHM to 7.2 OHM for input voltages from 24.5 to 31.5 volts. The resistance can vary from 2.5 OHM to 5.7 OHM for input voltages from 22.0 to 24.0 volts.

4. Series input inductance: The series input inductance can range up to 200 MICROH.

5. Ground: The ground is the negative return for the equipment and shall be capable of carrying 10 AMP current for one minute duration. The enclosure is connected internally to ground.

6. Output pulse width (dwell time): The output current pulse shall be continuous, assuming continuous application of input power and load.

7. Output (load) resistance: The output (load) resistance can range from 0.1 OHM for a shorted load to infinity for an unloaded output. The typical output load ranges from 0.75 OHM to open circuit.

Source: https://assist.dla.mil -- Downloaded: 202640-23T10:44Z
Check the source to verify that this is the currentversion before use.

8. Shorted circuit: The switch shall not be damaged by a shorted output and shall not auto-step except as noted in 1g, above. For test purposes a shorted output shall be 0.20 OHMS maximum, and power shall not be applied in excess of 2.0 seconds (input Pin J).

9. Firing voltage drop (between connector Pin J and selected firing pin): 1.5 volts maximum at 4.0 AMP.

10. Duty cycle: The duty cycle shall be the input pulse "ON - OFF" time. The maximum continous "ON" time shall not exceed 30 seconds in any 5 minute period (firing output loaded 15 MS maximum, except during by-pass test).

11. Externally pulsed stepping speed: The stepping switch shall be capable of following a pulse having a minimum "ON" time of 40 MS and a minimum "OFF" time of 40 MS at any input voltage between 22.0 and 31.5 volts.

12. Contact bounce: Steady output shall occur within the interval specified by the initial delay time. No output shall be permitted on the firing outputs prior to 5 MS after power is applied.

13. Output sequence: The output sequence is listed in Figure 3.

14. Output voltage: For testing purposes the output voltage shall be present (after the initial delay time) for the duration of the input pulse.

15. Initial delay time: The initial delay time shall be 5.0 to 30 MS (measured from application of the input pulse until the firing output occurs).

Source: https://assist.dla.mil -- Downloaded: 202610-23T10:44Z
Check the source to verify that this is the current version before use.

Physical:

1. Enclosure design: The stepping switch shall have a water tight metal case.

2. Dimensions and configuration: The stepping switch dimensions and configuration shall be as specified in Figure 1.

3. Construction: The construction of the stepping switch is specified in this specification sheet and in the general specification MIL-S-85377.

4. Finish: The stepping switch finish shall be yellow lacquer per TT-L-20 over zinc chromate primer per TT-P-1757.

5. Weight: The stepping switch weight, excluding cables, shall not exceed 1.25 pounds.

6. Connector: The stepping switch shall mate with the connector specified in Figure 3.

7. Identification plate: The identification plate is specified in MIL-P-15024/2.

8. Safe/Arm indicator label: The safe/arm position indicator label is shown in Figure 4.

9. Switch knob: The stepping switch knob is shown in Figure 5.

10. Switch knob alignment: The knob shall be installed on the switch shaft such that when the stepping switch is in the safe position, the switch knob index is aligned with the "SAFE" on the safe/arm indicator label and both set screws of the switch knob are perpendicular to the flats of the switch shaft.

11. Unused switch positions: The switch has two unused positions between "SAFE" and "ARM". These positions have the same electrical characteristics as the "SAFE" position including grounding all outputs and interrupting the input power. The "SAFE" position for this stepping switch is the next position after "Fire Signal Output No. 8."

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

Environmental:

1. Environmental conditions: The environmental conditions are specified in MIL-S-85377.

Life:

1. Operating life: The operating life shall be tested by performing 100 cycles of each of five (5) life tests listed in Table I.

Source: https://assist.dla.mil -- Downloaded: 202640-23T10:44Z
Check the source to verify that this is the current version before use.

TESTING:

General:

1. Testing consists of first article, individual, and lot inspection testing on the stepping switch. These tests are conducted as specified in the general specification MIL-S-85377 and are performed by the manufacturer and/or such testing facilities as specified in the contract.

First article, individual and lot inspection testing:

1. Electrical tests: The circuit of Figure 6 shall be used in testing the stepping switch. Table I lists the tests to be performed with required input and output parameters. Additionally, Table I lists minimum and maximum acceptable output parameters for the stepping switch under test. Figure 7 illustrates the timing relationships specified in Figure 6 and in Table I. Typical input voltage characteristics are shown in Figure 8. Input voltage dropout is illustrated in Figure 9. All tests in Table I shall be performed at each of the following temperatures for first article and lot inspection tests:

   a. $+71^{\circ} \pm 2^{\circ}C$
   b. $+23^{\circ} \pm 5^{\circ}C$
   c. $+55^{\circ} \pm 2^{\circ}C$

   All tests in Table I shall be performed at $23^{\circ} \pm 5^{\circ}C$ for individual inspections.

2. Environmental requirements: The stepping switch shall meet all electrical test parameters during and after being subjected to environmental testing.

3. Test sample size shall be determined at the time of procurement, but shall be not less than six (6) stepping switches per lot. Stepping switches used as environmental or life test samples shall not be installed in dispensers. Test sample size for individual inspections shall be 100 percent.

4. Test mounting fixture: The stepping switch shall be mounted on a plate using the mounting holes provided.

5. Sequence test: The switch output firing order shall be checked to ensure that the output sequence is as specified in Figure 3.

6. Test voltage: The test voltage shall be as specified in Table I.

7. Safe and arm tests: The stepping switches shall be tested for 100 percent compliance with safe and arm circuit test requirements.

   a. Safe test.

      (1) The stepping switch shall be connected to the test circuit of Figure 6 and set to the safe position. The firing outputs shall not be loaded (loads (R L) removed). Prior to application of

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

power, the resistance shall be measured between each of the firing output pins and ground using an ohmmeter with low ohm capability. The resistance (excluding test equipment resistance) shall not exceed 0.19 OHM.

(2) The stepping switch shall be connected to the test circuit of Figure 6 and set to the SAFE position. The firing outputs shall be loaded with 1.0 ± 0.1 OHM loads. Each of the firing output pins shall be monitored during the tests using an oscilloscope or other suitable test instrument. When switch S1 is closed, the stepping switch shall not sequence out of the SAFE position and the voltage monitored across each 1.0 ± 0.1 OHM load shall not exceed 50 millivolts. The two test conditions are as follows:

(a) Switch S2 set to Pin J, V S set to 22.0 VDC and R IN set to 5.0 ± 0.1 OHM.

(b) Switch S2 set to Pin J, V S set to 31.5 VDC and R IN set to 2.5 OHM.

b. Arm test.

(1) The stepping switch shall be connected to the test circuit of Figure 6 and set to the ARM position. The firing outputs shall not be loaded (loads (R L) removed). Prior to application of power, the resistance shall be measured between each of the firing output pins and ground using an ohmmeter with low ohm capability. The resistance (excluding test equipment resistance) shall not exceed 0.19 OHM.

(2) The stepping switch shall be connected to the test circuit of Figure 6 and set to the ARM position. The firing outputs shall not be loaded (loads (R L) removed). Prior to application of power, the resistance shall be measured between each of the firing output pins and ground while rotating the stepping switch selector knob through 360° (back to arm). Use an ohmmeter with low ohm capability. The resistance (excluding test equipment resistance) shall not exceed 0.19 OHM, except on the selected output as determined by the switch knob position on the indicator label.

(3) The stepping switch shall be connected to the test circuit of Figure 6 and set to the ARM position. The firing outputs shall be loaded with 1.0 ± 0.1 OHM loads. Each of the firing output pins shall be monitored during the test using an oscilloscope or other suitable test instrument. When switch S1 is closed, the stepping switch shall sequence out of the ARM position into firing position 1. The voltage monitored across each 1.0 ± 0.1 OHM load, except firing position no. 1, shall not exceed 50 millivolts. The voltage at firing position no. 1 shall not exceed 50 millivolts until 5.0 to 30 MS after S1 is closed. Test conditions are as follows:

(a) Switch S2 set to Pin J, V S set to 31.5 VDC and R IN set to 2.5 OHM.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

Associated equipment - The stepping switch shall operate with the following equipment:

1. Flare dispenser (SUU-25 F/A)

2. All aircraft that carry SUU-25 flare dispensers

Preparing activity:
Navy - AS

(Project 5930-N577-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.