MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

TRANSFORMER, SIGNAL, ANALOG, KEY CODE CGR

This amendment forms a part of Military Specification MIL-M-28787/240A(EC), dated 31 January 1983, and is approved for use by the Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 4

TABLE I, Test condition D1-D6, Operating temperature Initial and End-of-life Min columns: Delete "180.5" (two places) and substitute "180.0" (two places).

PAGE 31

FIGURE 11: Delete and substitute new figure 11 as printed on pages 2 and 3 of this amendment.

NOTE: The margin of this amendment is marked with an asterisk to indicate where a change from the previous amendment was made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in this notation. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5963-N659)

Source: https://assist.dla.mil Downloaded: 2026-10-20T16:53Z
Check the source to verify that this is the current version before use.

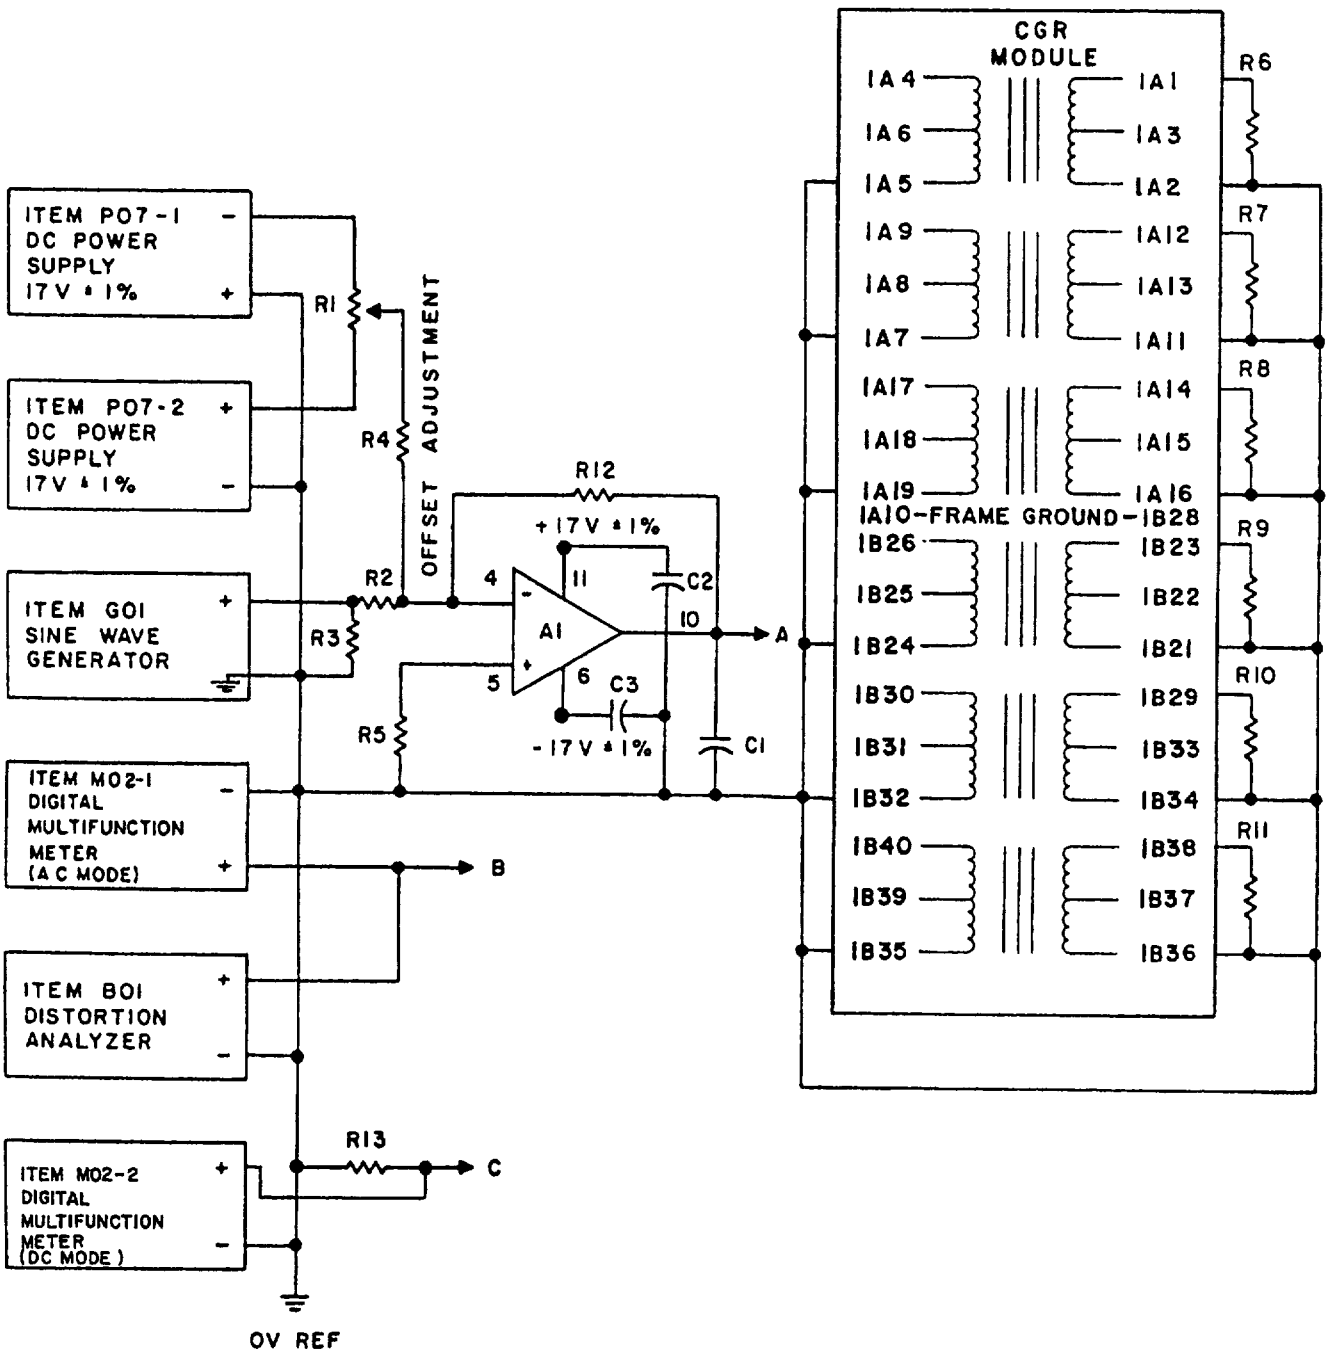


FIGURE 11. Maximum power check (distortion test) test circuit for table X.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:53Z
Check the source to verify that this is the current version before use.

NOTES:
1. R1 = 10 kΩ ±1%, multi-turn, 1/4 W potentiometer.
2. R2 = R12 = 10 kΩ ±1%, 1/4 W.
3. R3 = 600Ω ±5%, 1/4 W.
4. R4 = 200 kΩ ±5%, 1/8 W.
5. R5 = 4.99 kΩ ±1%, 1/8 W.
6. R6-R11 = 2 kΩ ±1%, 1/8 W.
7. R13 = 80Ω ±5%, 1/8 W.
8. C1 = 300 pF ±10%.
9. C2 = C3 = 0.1 µF ±20%.
10. A1 = µA741 operational amplifier.
11. With item G01 set at 0 Vrms output, connect A to C and adjust R1 for a voltage of 168 ±2 mV across R13 as measured by item M02-2. Then disconnect A and C.
12. Connect A and B as specified in table X. Adjust item G01 for item M02-1 readings specified in table X. Using item B01 measure distortion D_T.
13. Measure distortion out of A1 at point A (D_A). Compute distortion (D_M) as follows:

$$D_M = \sqrt{D_T^2 - D_A^2}.$$

Compare D_M to limits specified in table X.

FIGURE 11. Maximun power check (distortion test) test circuit for table X. - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:53Z
Check the source to verify that this is the current version before use.