FEDERAL SPECIFICATION SHEET

FILTER, RADIO FREQUENCY INTERFERENCE

This specification was approved by the Assistant Administrator, Office of Federal Supply and Services, General Services Administration, for the use of all Federal agencies.

The complete requirements for procuring the filters described herein shall consist of this document and the latest issue of W-F-2190/GEN.


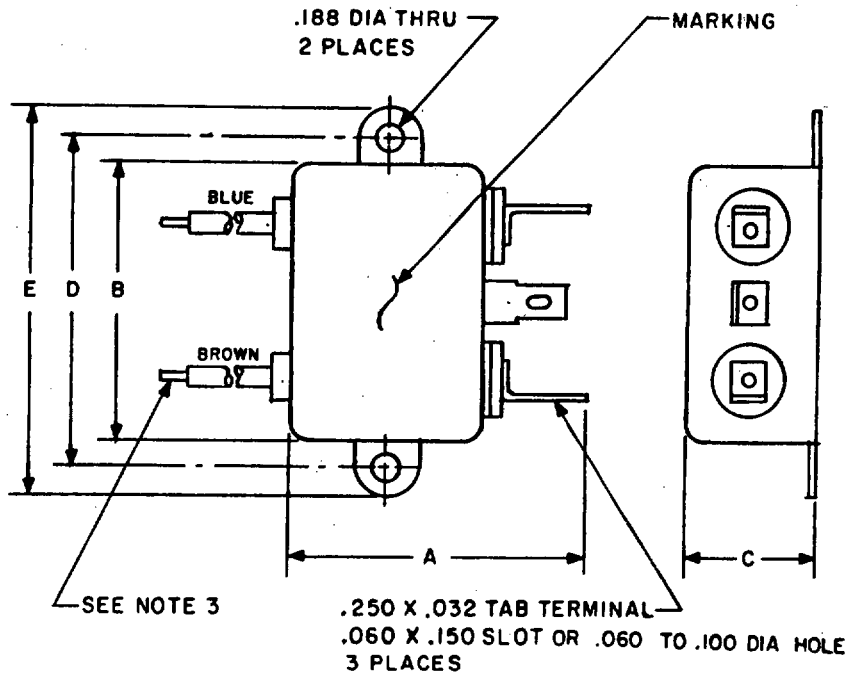


FIGURE 1. Case dimensions and electrical schematics.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:37Z
Check the source to verify that this is the current version before use.

INCHES	MM
.032	.81
.060	1.52
.150	3.81
.188	4.77
.250	6.35

Part number WF2190/2	Maximum dimensions										Electrical schematic
	A		B		C		D		E		
	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	
-01	1.53	38.86	1.75	44.4	0.63	15.9	2.13	54.1	2.50	63.5	A
-02	2.40	60.96	2.00	50.8	0.88	22.3	2.38	60.4	2.78	79.6	B
-03	1.53	38.86	1.75	44.4	0.63	15.9	2.13	54.1	2.50	63.5	A
-04	2.40	60.96	2.00	50.8	0.88	22.3	2.38	60.4	2.78	79.6	B
-05	1.90	48.26	1.75	44.4	0.75	19.0	2.13	54.1	2.50	63.5	A
-06	2.40	60.96	2.00	50.8	1.13	28.7	2.38	60.4	2.78	70.6	B
-07	1.90	48.26	1.75	44.4	0.75	19.0	2.13	54.1	2.50	63.5	A
-08	2.40	38.86	2.00	50.8	1.13	28.7	2.38	60.4	2.78	70.6	B
-09	1.90	48.26	1.75	44.4	1.13	28.7	2.13	54.1	2.50	63.5	A
-10	2.65	67.31	2.00	50.8	1.13	28.7	2.38	60.4	2.78	70.6	B

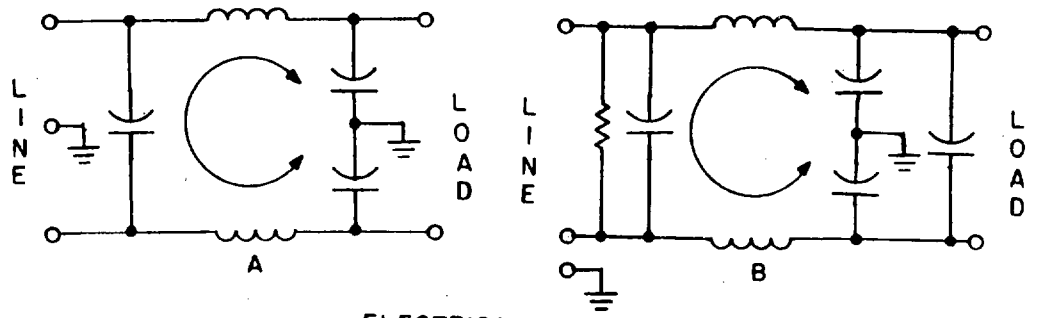

ELECTRICAL SCHEMATICS

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. All wire leads are 4.0 inches long, minimum (101.6 mm) AWG 20 minimum and shall be the color indicated.

FIGURE 1. Case dimensions and electrical schematics - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:37Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimension and electrical schematics: See figure 1.

Operating temperature range: 0°C to +65°C.

Maximum leakage current: As measured from either of the two input or output lines to the filter case, the maximum permissible leakage current shall not exceed 0.65 mA at 125 volts, 60 Hz or 1.25 mA at 250 volts, 50 Hz.

Voltage rating:

Rated at 125 volts, ac, over the frequency range of 0 to 400 Hz.

Rated at 250 volts, ac, over the frequency range of 0 to 60 Hz.

Rated current: See table I.

Insertion loss: In accordance with MIL-STD-220 and table I.

Part number: Shall be in accordance with table I and figure 1.

Substitution data: Filters covered by this specification replace commercial part numbers as specified in table II.

TABLE I. Current ratings and insertion loss.

Part number WF2190/2	Current rating (amperes per line)	Minimum no-load insertion loss (dB) at +25°C in accordance with MIL-STD-220				
		.15 MHz	.20 MHz	.50 MHz	10 MHz	20 MHz
-01	1.0	15	20	30	50	50
-02	1.0	15	20	30	"	"
-03	2.0	10	15	25	"	"
-04	2.0	10	15	25	"	"
-05	3.0	15	20	30	"	"
-06	3.0	15	20	30	"	"
-07	5.0	10	15	25	"	"
-08	5.0	"	"	"	"	"
-09	10.0	"	"	"	"	"
-10	10.0	"	"	"	"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:37Z
Check the source to verify that this is the current version before use.

TABLE II. Substitution data. 1/ 2/

Part number WF2190/2	FSCM 96733	96733	12294	73631	05245
	Vendor part number				
-01	F2B012	F2A012	9679-101-9011	F1100AB01	1B2
-02	F2K012	F2B012	9679-101-9021	F1200AB01	1K2
-03	F2B022	F2A022	9679-101-9012	F1100AB03	2B2
-04	F2K022	F2B022	9679-101-9022	F1200AB03	2K2
-05	F2B032	F2A032	9679-101-9013	F1100AB03	3B2
-06	F2K032	F2B032	9679-101-9023	F1200AB03	3K2
-07	F2B052	F2A052	9679-101-9014	F1100AB06	5B2
-08	F2K052	F2B052	9679-101-9024	F1200AB06	5K2
-09	F2B102	F2A102	9679-101-9015	F1100AB10	10B2
-10	F2K102	F2B102	9679-101-9025	F1200AB10	10K2

TABLE II. Substitution data 1/ 2/ - Continued.

Part number WF2190/2	FSCM 23880	56289	93790	13619	02777	13050	19130
	Vendor part number						
-01	GA2A-1	1JX5101B	APF111LW	RF5400K05	F85003	600B2	RNF-1L2
-02	GA2B-1	1JX5201B	APF121LW	RF5500K01	F85037	605B2	RNF-1P1
-03	GA2A-2	2JX5102B	APF211LW	RF5400K02	F85009	600B2	RNF-2L2
-04	GA2B-2	2JX5202B	APF221LW	RF5500K02	F85043	605B2	RNF-2P2
-05	GA2A-3	3JX5103B	APF311LW	RF5400K03	F85015	600B5	RNF-3L2
-06	GA2B-3	3JX5203B	APF321LW	RF5500K03	F85049	605B5	RNF-3P2
-07	GA2A-5	5JX5104B	APF511LW	RF5400K05	F85021	600B5	RNF-5L2
-08	GA2B-5	5JX5204B	APF521LW	RF5500K05	F85055	605B5	RNF-5P1
-09	GA2A-10	10JX5105B	APF1011LW	RF5400K10	F85027	600B10	RNF-10L2
-10	GA2B-10	10JX5205B	APF1021LW	RF5500K10	F85061	604B10	RNF-10P2

1/ Set of vendor part numbers is not necessarily complete. Additional vendor part numbers will be added as they become available.

2/ CAUTION. Do not use the vendor part number for item procurement. The similar vendor part number may not satisfy the performance requirements specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:37Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:

Army - ER
Navy - EC
Air Force - 85

Review Activities

Army - AR, MI
Navy - SH
Air Force - 11, 17, 99

User Activities

Army - AT, AV, ME
Navy - AS, MC, OS, YD
Air Force - 19

CIVIL AGENCY COORDINATING ACTIVITIES:

GSA - FSS
NCS -
NASA - MSF, LRC, JFK

PREPARING ACTIVITY:

DLA - ES

DOD project 5915-0271-2

U.S. GOVERNMENT PRINTING OFFICE : 1984 - 421-595/3681

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:37Z
Check the source to verify that this is the current version before use.