INCH-POUND
MIL-PRF-55629/3F
21 September 2005
SUPERSEDING
MIL-PRF-55629/3E
12 July 2005

PERFORMANCE SPECIFICATION SHEET

# CIRCUIT BREAKERS, MAGNETIC, UNSEALED TRIP-FREE, DOUBLE POLE (0.2 TO 50 AMPERES)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-55629.

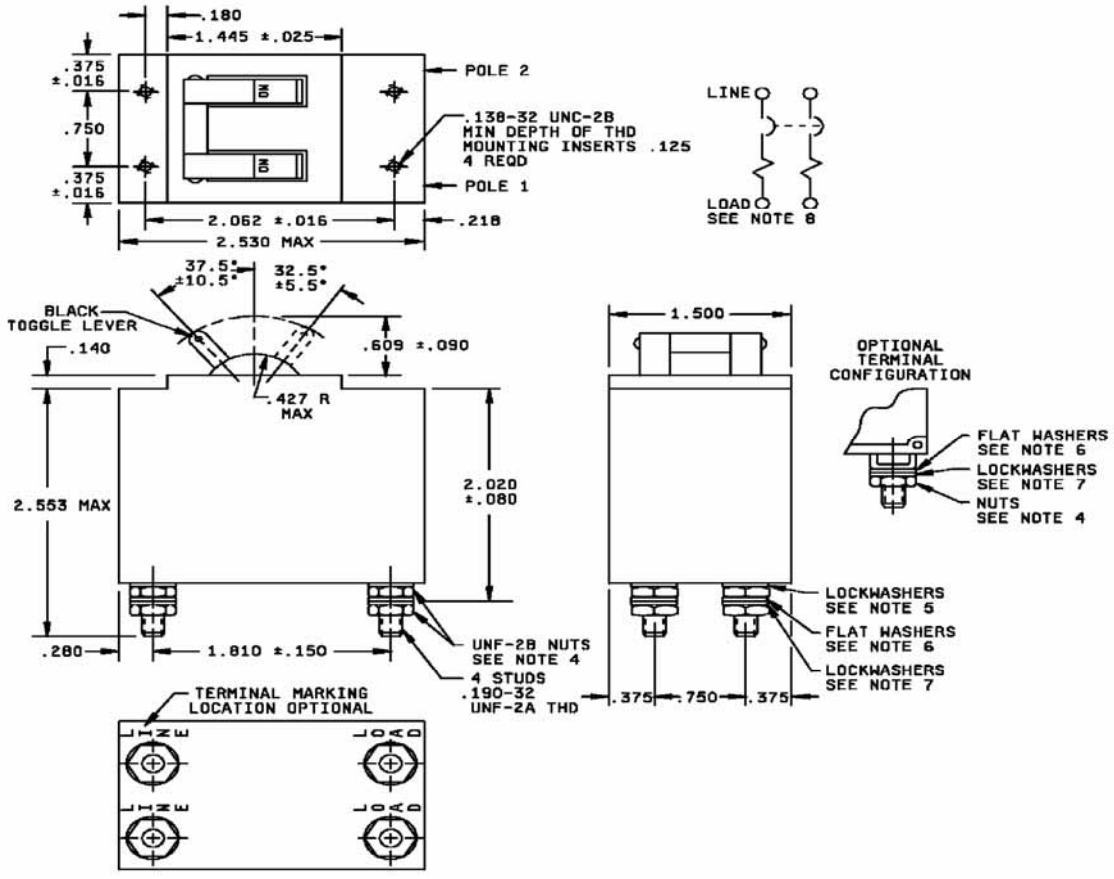



FIGURE 1. Dimensions and configurations (configuration 1).


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

| Inches | mm | Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|---|---|
| .016 | 0.41 | .140 | 3.56 | .280 | 7.11 | 1.810 | 45.97 |
| .025 | 0.64 | .150 | 3.81 | .375 | 9.52 | 2.062 | 52.37 |
| .080 | 2.03 | .180 | 4.58 | .427 | 10.86 | 2.020 | 51.31 |
| .090 | 2.29 | .190 | 4.83 | .609 | 15.47 | 2.530 | 59.44 |
| .125 | 3.18 | .218 | 5.54 | .750 | 19.05 | 2.553 | 64.85 |
| .138 | 3.50 | .280 | 7.11 | 1.445 | 36.70 | | |

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.031 (0.79 mm).
4. Nut-hex: .190 - 32 UNF-2B, .313/.303 across flats, .109 ±.010 thick. Material: Brass (ASTM B121 or equivalent); tin plated (ASTM B545 or equivalent); or stainless steel, for each terminal.
5. Captive washer nut assembly of brass nut, bronze washer, tin plated; or lockwasher, internal or external tooth, NASM35333-107 or MS35335-88 or equivalent.
6. Washer, flat: .378/.368 O.D., .204/.190 I.D., .032 ±.005 thick. Material: Brass (ASTM B121 or equivalent), tin plated (ASTM B545 or equivalent), or phosphor bronze, composition (ASTM B139 or equivalent).
7. Lockwasher, Split: NASM35338-138 or equivalent.
8. Physical item marking of load terminal optional.

FIGURE 1. Dimensions and configurations (configuration 1) – Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

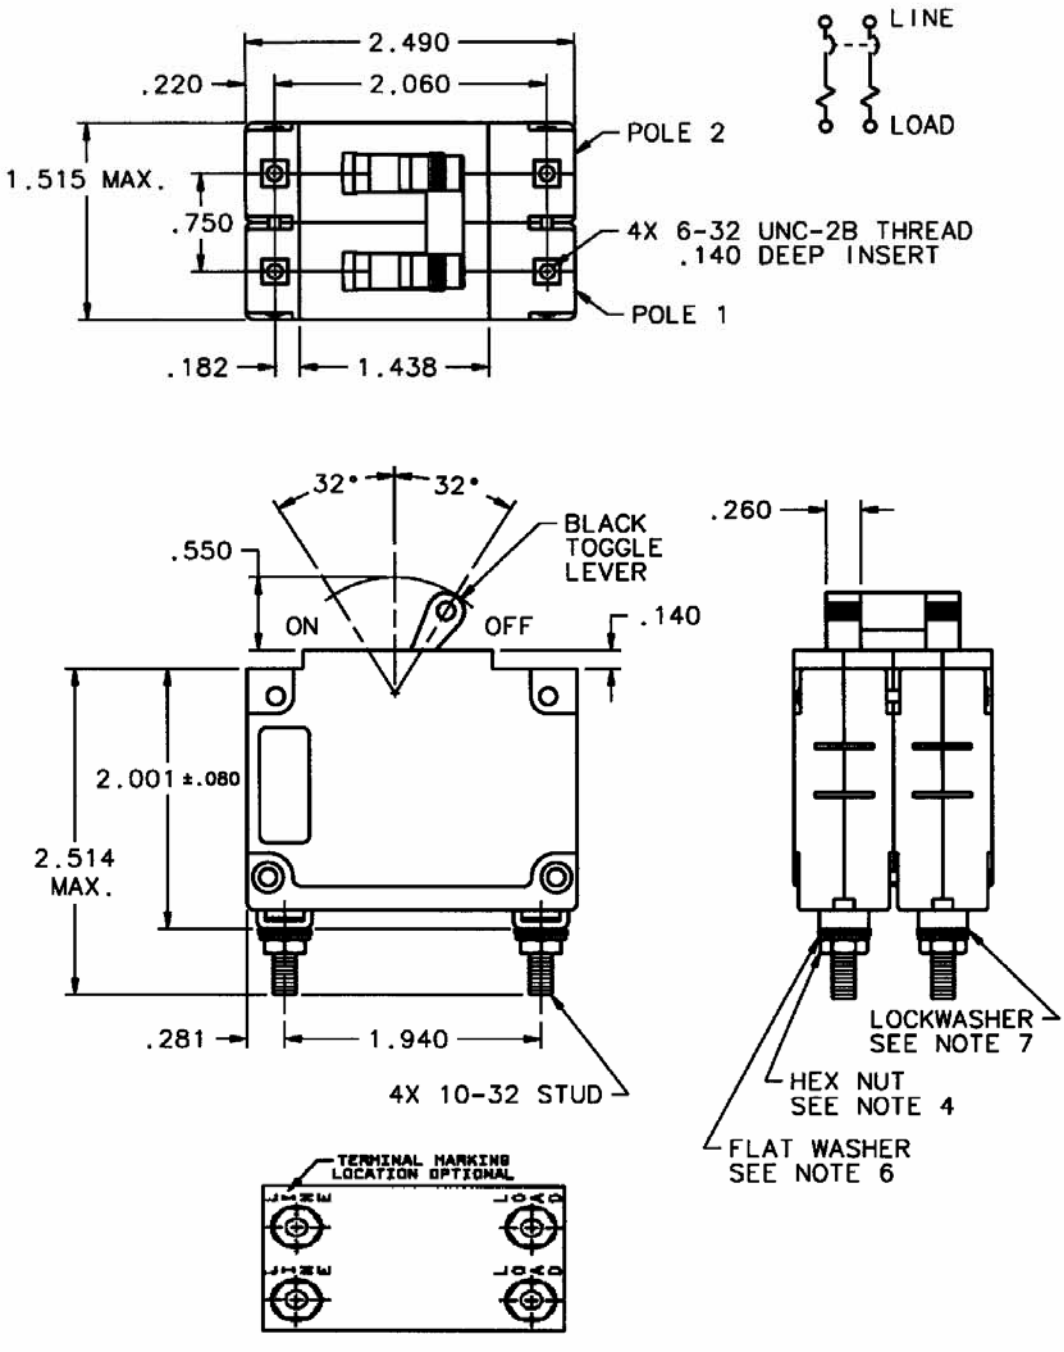



FIGURE 2. Dimensions and configurations (configuration 2).



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

| Inches | mm | Inches | mm |
|---|---|---|---|
| .080 | 2.03 | .750 | 19.05 |
| .140 | 3.56 | 1.438 | 36.32 |
| .182 | 4.62 | 1.515 | 38.48 |
| .220 | 5.59 | 1.940 | 49.28 |
| .260 | 6.60 | 2.001 | 50.83 |
| .281 | 7.14 | 2.060 | 52.32 |
| .550 | 13.97 | 2.490 | 63.25 |
| .514 | 13.06 | 2.514 | 63.86 |

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ± .015 (0.38 mm).
4. Nut-hex: .190 - 32 UNF-2B .313/.303 across flats, .109 ±.010 thick. Material: Brass (ASTM B121 or equivalent); tin plated (ASTM B545 or equivalent); or stainless steel, for each terminal.
5. Captive washer nut assembly of brass nut, bronze washer, tin plated; or lockwasher, internal or external tooth, NASM35333-107 or MS35335-88 or equivalent.
6. Washer, flat: .378/.368 O.D., .204/.190 I.D., .032 ±.005 thick. Material: Brass (ASTM B121 or equivalent), tin plated (ASTM B545 or equivalent), or phosphor bronze, composition (ASTM B139 or equivalent).
7. Lockwasher, split: NASM35338-138 or equivalent.
8. Physical item marking of load terminal optional.
9. For configuration 2, an “L” has been added to the end of the dash number.

FIGURE 2. Dimensions and configurations (configuration 2) - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration: See figure 1 and 2.

Current ratings: See table I.

Voltage ratings: See table II through V. 240 V ac breakers are designed also for use at 120 V ac.

High inrush: Applicable to time delays K, L, M, N, P, R, S, and T. Non-time delays H, I, and J are not high inrush delays.

Tripping-time delays: See tables II through V.

Terminal and mounting hardware: See figure 1.

Terminals: See figure 1.

Actuator strength: 25 pounds.

Actuator operating force: 8 pounds, maximum.

Terminal strength:

Applied load: 30 pounds.

Applied torque: 22 inch-pounds.

Vibration: Energized current shall be 90 percent for characteristics H, I, and J.

Shock: Energized current shall be 90 percent for characteristics H, I, and J.

Interrupting capacities:


2,000 amperes at 50 V dc.

2,000 amperes at 120 V ac, 60 Hz.

1,500 amperes at 120 V ac, 400 Hz.

1,000 amperes at 240 V ac, 60 and 400 Hz.

Part or Identifying Number (PIN): M55629/3- (dash number from table I for circuit breakers with both poles of identical current rating and time delay) or M55629/3- (four letter code from table I for circuit breakers with poles of mixed current ratings or time delay), or both.

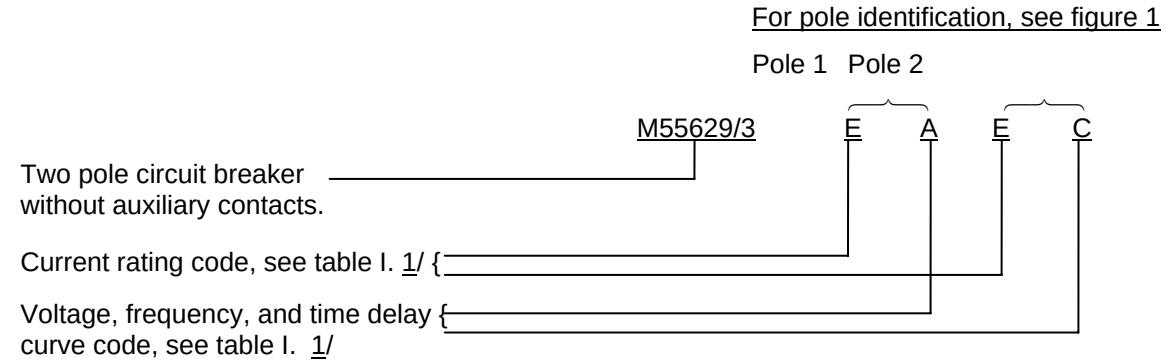


1/ For mixed poles, poles 1 and 2, respectively shall be coded in ascending order of current rating code letter. If both poles have identical current ratings, they shall be coded in ascending order of voltage, frequency, and time delay code letter.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

TABLE I. Circuit breaker dash numbers and applicable characteristics (configuration 1).

| Dash no. | Current rating | | Voltage frequency and tripping time delay code letter (see table II, III, or V) | Resistance or impedance ohms (max.) | | Dash no. | Current rating | | Voltage frequency and tripping time delay code letter (see table II, III, or V) | Resistance or impedance ohms (max.) |
|---|---|---|---|---|---|---|---|---|---|---|
| | (amperes) | Code letter | | | | | (amperes) | Code letter | | |
| 001 | 0.2 | A | A | 32 | | 269 | 0.5 | C | P | 12 |
| 002 | 0.2 | A | B | 32 | | 270 | 0.5 | C | R | 12 |
| 003 | 0.2 | A | C | 34 | | 271 | 0.5 | C | S | 12 |
| 004 | 0.2 | A | D | 34 | | 428 | 0.5 | C | T | 6 |
| 005 | 0.2 | A | E | 72 | | 150 | 0.75 | D | A | 3 |
| 006 | 0.2 | A | F | 72 | | 151 | 0.75 | D | B | 3 |
| 007 | 0.2 | A | G | 72 | | 153 | 0.75 | D | C | 3 |
| 134 | 0.2 | A | H | 32 | | 154 | 0.75 | D | D | 3 |
| 135 | 0.2 | A | I | 34 | | 156 | 0.75 | D | E | 7 |
| 136 | 0.2 | A | J | 72 | | 157 | 0.75 | D | F | 7 |
| 251 | 0.2 | A | K | 32 | | 158 | 0.75 | D | G | 7 |
| 252 | 0.2 | A | L | 32 | | 152 | 0.75 | D | H | 3 |
| 253 | 0.2 | A | M | 34 | | 155 | 0.75 | D | I | 3 |
| 254 | 0.2 | A | N | 34 | | 159 | 0.75 | D | J | 7 |
| 255 | 0.2 | A | P | 72 | | 272 | 0.75 | D | K | 3 |
| 256 | 0.2 | A | R | 72 | | 273 | 0.75 | D | L | 3 |
| 257 | 0.2 | A | S | 72 | | 274 | 0.75 | D | M | 3 |
| 426 | 0.2 | A | T | 34 | | 275 | 0.75 | D | N | 3 |
| 137 | 0.25 | B | A | 21 | | 276 | 0.75 | D | P | 7 |
| 138 | 0.25 | B | B | 21 | | 277 | 0.75 | D | R | 7 |
| 140 | 0.25 | B | C | 23 | | 278 | 0.75 | D | S | 7 |
| 141 | 0.25 | B | D | 23 | | 429 | 0.75 | D | T | 3 |
| 143 | 0.25 | B | E | 43 | | 015 | 1.0 | E | A | 2 |
| 144 | 0.25 | B | F | 43 | | 016 | 1.0 | E | B | 2 |
| 145 | 0.25 | B | G | 43 | | 017 | 1.0 | E | C | 2 |
| 139 | 0.25 | B | H | 21 | | 018 | 1.0 | E | D | 2 |
| 142 | 0.25 | B | I | 23 | | 019 | 1.0 | E | E | 4 |
| 146 | 0.25 | B | J | 43 | | 020 | 1.0 | E | F | 4 |
| 258 | 0.25 | B | K | 21 | | 021 | 1.0 | E | G | 4 |
| 259 | 0.25 | B | L | 21 | | 160 | 1.0 | E | H | 2 |
| 260 | 0.25 | B | M | 23 | | 161 | 1.0 | E | I | 2 |
| 261 | 0.25 | B | N | 23 | | 162 | 1.0 | E | J | 4 |
| 262 | 0.25 | B | P | 43 | | 279 | 1.0 | E | K | 2 |
| 263 | 0.25 | B | R | 43 | | 280 | 1.0 | E | L | 2 |
| 264 | 0.25 | B | S | 43 | | 281 | 1.0 | E | M | 2 |
| 427 | 0.25 | B | T | 23 | | 282 | 1.0 | E | N | 2 |
| 008 | 0.5 | C | A | 6 | | 283 | 1.0 | E | P | 4 |
| 009 | 0.5 | C | B | 6 | | 284 | 1.0 | E | R | 4 |
| 010 | 0.5 | C | C | 6 | | 285 | 1.0 | E | S | 4 |
| 011 | 0.5 | C | D | 6 | | 430 | 1.0 | E | T | 2 |
| 012 | 0.5 | C | E | 12 | | 163 | 1.5 | F | A | .9 |
| 013 | 0.5 | C | F | 12 | | 164 | 1.5 | F | B | .9 |
| 014 | 0.5 | C | G | 12 | | 166 | 1.5 | F | C | .9 |
| 147 | 0.5 | C | H | 6 | | 167 | 1.5 | F | D | .9 |
| 148 | 0.5 | C | I | 6 | | 169 | 1.5 | F | E | 2 |
| 149 | 0.5 | C | J | 12 | | 170 | 1.5 | F | F | 2 |
| 265 | 0.5 | C | K | 6 | | 171 | 1.5 | F | G | 2 |
| 266 | 0.5 | C | L | 6 | | 165 | 1.5 | F | H | .9 |
| 267 | 0.5 | C | M | 6 | | 168 | 1.5 | F | I | .9 |
| 268 | 0.5 | C | N | 6 | | 172 | 1.5 | F | J | 2 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

TABLE I. Circuit breaker dash numbers and applicable characteristics (configuration 1) - Continued.

| Dash no. | Current rating | | Voltage frequency and tripping time delay code letter (see table II, III, or V) | Resistance or impedance ohms (max.) | Dash no. | Current rating | | Voltage frequency and tripping time delay code letter (see table II, III, or V) | Resistance or impedance ohms (max.) |
|---|---|---|---|---|---|---|---|---|---|
| | (amperes) | Code letter | | | | (amperes) | Code letter | | |
| 286 | 1.5 | F | K | .9 | 035 | 3.0 | I | G | .5 |
| 287 | 1.5 | F | L | .9 | 186 | 3.0 | I | H | .3 |
| 288 | 1.5 | F | M | .9 | 187 | 3.0 | I | I | .3 |
| 289 | 1.5 | F | N | .9 | 188 | 3.0 | I | J | .5 |
| 290 | 1.5 | F | P | 2 | 307 | 3.0 | I | K | .3 |
| 291 | 1.5 | F | R | 2 | 308 | 3.0 | I | L | .3 |
| 292 | 1.5 | F | S | 2 | 309 | 3.0 | I | M | .3 |
| 431 | 1.5 | F | T | .9 | 310 | 3.0 | I | N | .3 |
| 022 | 2.0 | G | A | .5 | 311 | 3.0 | I | P | .5 |
| 023 | 2.0 | G | B | .5 | 312 | 3.0 | I | R | .5 |
| 024 | 2.0 | G | C | .5 | 313 | 3.0 | I | S | .5 |
| 025 | 2.0 | G | D | .5 | 434 | 3.0 | I | T | .3 |
| 026 | 2.0 | G | E | .8 | 189 | 3.5 | J | A | .15 |
| 027 | 2.0 | G | F | .8 | 190 | 3.5 | J | B | .15 |
| 028 | 2.0 | G | G | .8 | 192 | 3.5 | J | C | .15 |
| 173 | 2.0 | G | H | .5 | 193 | 3.5 | J | D | .15 |
| 174 | 2.0 | G | I | .5 | 195 | 3.5 | J | E | .35 |
| 175 | 2.0 | G | J | .8 | 196 | 3.5 | J | F | .35 |
| 293 | 2.0 | G | K | .5 | 197 | 3.5 | J | G | .35 |
| 294 | 2.0 | G | L | .5 | 191 | 3.5 | J | H | .15 |
| 295 | 2.0 | G | M | .5 | 194 | 3.5 | J | I | .15 |
| 296 | 2.0 | G | N | .5 | 198 | 3.5 | J | J | .35 |
| 297 | 2.0 | G | P | .8 | 314 | 3.5 | J | K | .15 |
| 298 | 2.0 | G | R | .8 | 315 | 3.5 | J | L | .15 |
| 299 | 2.0 | G | S | .8 | 316 | 3.5 | J | M | .15 |
| 432 | 2.0 | G | T | .5 | 317 | 3.5 | J | N | .15 |
| 176 | 2.5 | H | A | .35 | 318 | 3.5 | J | P | .35 |
| 177 | 2.5 | H | B | .35 | 319 | 3.5 | J | R | .35 |
| 179 | 2.5 | H | C | .35 | 320 | 3.5 | J | S | .35 |
| 180 | 2.5 | H | D | .35 | 435 | 3.5 | J | T | .15 |
| 182 | 2.5 | H | E | .6 | 036 | 4.0 | K | A | .1 |
| 183 | 2.5 | H | F | .6 | 037 | 4.0 | K | B | .1 |
| 184 | 2.5 | H | G | .6 | 038 | 4.0 | K | C | .1 |
| 178 | 2.5 | H | H | .35 | 039 | 4.0 | K | D | .1 |
| 181 | 2.5 | H | I | .35 | 040 | 4.0 | K | E | .3 |
| 185 | 2.5 | H | J | .6 | 041 | 4.0 | K | F | .3 |
| 300 | 2.5 | H | K | .35 | 042 | 4.0 | K | G | .3 |
| 301 | 2.5 | H | L | .35 | 199 | 4.0 | K | H | .1 |
| 302 | 2.5 | H | M | .35 | 200 | 4.0 | K | I | .1 |
| 303 | 2.5 | H | N | .35 | 201 | 4.0 | K | J | .3 |
| 304 | 2.5 | H | P | .6 | 321 | 4.0 | K | K | .1 |
| 305 | 2.5 | H | R | .6 | 322 | 4.0 | K | L | .1 |
| 306 | 2.5 | H | S | .6 | 323 | 4.0 | K | M | .1 |
| 433 | 2.5 | H | T | .35 | 324 | 4.0 | K | N | .1 |
| 029 | 3.0 | I | A | .3 | 325 | 4.0 | K | P | .3 |
| 030 | 3.0 | I | B | .3 | 326 | 4.0 | K | R | .3 |
| 031 | 3.0 | I | C | .3 | 327 | 4.0 | K | S | .3 |
| 032 | 3.0 | I | D | .3 | 436 | 4.0 | K | T | .1 |
| 033 | 3.0 | I | E | .5 | 043 | 5.0 | L | A | .08 |
| 034 | 3.0 | I | F | .5 | 044 | 5.0 | L | B | .08 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

TABLE I. Circuit breaker dash numbers and applicable characteristics (configuration 1) - Continued.

| Dash no. | Current rating | | Voltage frequency and tripping time delay code letter (see table II, III, or V) | Resistance or impedance ohms (max.) | Dash no. | Current rating | | Voltage frequency and tripping time delay code letter (see table II, III, or V) | Resistance or impedance ohms (max.) |
|---|---|---|---|---|---|---|---|---|---|
| | (amperes) | Code letter | | | | (amperes) | Code letter | | |
| 045 | 5.0 | L | C | .08 | 348 | 7.0 | N | S | .07 |
| 046 | 5.0 | L | D | .08 | 439 | 7.0 | N | T | .04 |
| 047 | 5.0 | L | E | .15 | 064 | 8.0 | P | A | .03 |
| 048 | 5.0 | L | F | .15 | 065 | 8.0 | P | B | .03 |
| 049 | 5.0 | L | G | .15 | 066 | 8.0 | P | C | .03 |
| 202 | 5.0 | L | H | .08 | 067 | 8.0 | P | D | .03 |
| 203 | 5.0 | L | I | .08 | 068 | 8.0 | P | E | .06 |
| 204 | 5.0 | L | J | .15 | 069 | 8.0 | P | F | .06 |
| 328 | 5.0 | L | K | .08 | 070 | 8.0 | P | G | .06 |
| 329 | 5.0 | L | L | .08 | 211 | 8.0 | P | H | .03 |
| 330 | 5.0 | L | M | .08 | 212 | 8.0 | P | I | .03 |
| 331 | 5.0 | L | N | .08 | 213 | 8.0 | P | J | .06 |
| 332 | 5.0 | L | P | .15 | 349 | 8.0 | P | K | .03 |
| 333 | 5.0 | L | R | .15 | 350 | 8.0 | P | L | .03 |
| 334 | 5.0 | L | S | .15 | 351 | 8.0 | P | M | .03 |
| 437 | 5.0 | L | T | .08 | 352 | 8.0 | P | N | .03 |
| 050 | 6.0 | M | A | .06 | 353 | 8.0 | P | P | .06 |
| 051 | 6.0 | M | B | .06 | 354 | 8.0 | P | R | .06 |
| 052 | 6.0 | M | C | .06 | 355 | 8.0 | P | S | .06 |
| 053 | 6.0 | M | D | .06 | 440 | 8.0 | P | T | .03 |
| 054 | 6.0 | M | E | .08 | 071 | 9.0 | Q | A | .018 |
| 055 | 6.0 | M | F | .08 | 072 | 9.0 | Q | B | .018 |
| 056 | 6.0 | M | G | .08 | 073 | 9.0 | Q | C | .02 |
| 205 | 6.0 | M | H | .06 | 074 | 9.0 | Q | D | .02 |
| 206 | 6.0 | M | I | .06 | 075 | 9.0 | Q | E | .05 |
| 207 | 6.0 | M | J | .08 | 076 | 9.0 | Q | F | .05 |
| 335 | 6.0 | M | K | .06 | 077 | 9.0 | Q | G | .05 |
| 336 | 6.0 | M | L | .06 | 214 | 9.0 | Q | H | .02 |
| 337 | 6.0 | M | M | .06 | 215 | 9.0 | Q | I | .02 |
| 338 | 6.0 | M | N | .06 | 216 | 9.0 | Q | J | .05 |
| 339 | 6.0 | M | P | .08 | 356 | 9.0 | Q | K | .018 |
| 340 | 6.0 | M | R | .08 | 357 | 9.0 | Q | L | .018 |
| 341 | 6.0 | M | S | .08 | 358 | 9.0 | Q | M | .02 |
| 438 | 6.0 | M | T | .06 | 359 | 9.0 | Q | N | .02 |
| 057 | 7.0 | N | A | .04 | 360 | 9.0 | Q | P | .05 |
| 058 | 7.0 | N | B | .04 | 361 | 9.0 | Q | R | .05 |
| 059 | 7.0 | N | C | .04 | 362 | 9.0 | Q | S | .05 |
| 060 | 7.0 | N | D | .04 | 441 | 9.0 | Q | T | .02 |
| 061 | 7.0 | N | E | .07 | 078 | 10.0 | R | A | .02 |
| 062 | 7.0 | N | F | .07 | 079 | 10.0 | R | B | .02 |
| 063 | 7.0 | N | G | .07 | 080 | 10.0 | R | C | .02 |
| 208 | 7.0 | N | H | .04 | 081 | 10.0 | R | D | .02 |
| 209 | 7.0 | N | I | .04 | 082 | 10.0 | R | E | .04 |
| 210 | 7.0 | N | J | .07 | 083 | 10.0 | R | F | .04 |
| 342 | 7.0 | N | K | .04 | 084 | 10.0 | R | G | .04 |
| 343 | 7.0 | N | L | .04 | 217 | 10.0 | R | H | .02 |
| 344 | 7.0 | N | M | .04 | 218 | 10.0 | R | I | .02 |
| 345 | 7.0 | N | N | .04 | 219 | 10.0 | R | J | .04 |
| 346 | 7.0 | N | P | .07 | 363 | 10.0 | R | K | .02 |
| 347 | 7.0 | N | R | .07 | 364 | 10.0 | R | L | .02 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

TABLE I. Circuit breaker dash numbers and applicable characteristics (configuration 1) - Continued.

| Dash no. | Current rating | | Voltage frequency and tripping time delay code letter (see table II, III, or V) | Resistance or impedance ohms (max.) | Dash no. | Current rating | | Voltage frequency and tripping time delay code letter (see table II, III, or V) | Resistance or impedance ohms (max.) |
|---|---|---|---|---|---|---|---|---|---|
| | (amperes) | Code letter | | | | (amperes) | Code letter | | |
| 365 | 10.0 | R | M | .02 | 385 | 20.0 | U | L | .007 |
| 366 | 10.0 | R | N | .02 | 386 | 20.0 | U | M | .007 |
| 367 | 10.0 | R | P | .04 | 387 | 20.0 | U | N | .007 |
| 368 | 10.0 | R | R | .04 | 388 | 20.0 | U | P | .01 |
| 369 | 10.0 | R | S | .04 | 389 | 20.0 | U | R | .01 |
| 442 | 10.0 | R | T | .02 | 390 | 20.0 | U | S | .01 |
| 085 | 12.5 | S | A | .013 | 445 | 20.0 | U | T | .007 |
| 086 | 12.5 | S | B | .013 | 106 | 25.0 | V | A | .006 |
| 087 | 12.5 | S | C | .015 | 107 | 25.0 | V | B | .006 |
| 088 | 12.5 | S | D | .015 | 108 | 25.0 | V | C | .006 |
| 089 | 12.5 | S | E | .03 | 109 | 25.0 | V | D | .006 |
| 090 | 12.5 | S | F | .03 | 110 | 25.0 | V | E | .007 |
| 091 | 12.5 | S | G | .03 | 111 | 25.0 | V | F | .007 |
| 220 | 12.5 | S | H | .013 | 112 | 25.0 | V | G | .007 |
| 221 | 12.5 | S | I | .013 | 229 | 25.0 | V | H | .006 |
| 222 | 12.5 | S | J | .03 | 230 | 25.0 | V | I | .006 |
| 370 | 12.5 | S | K | .013 | 231 | 25.0 | V | J | .007 |
| 371 | 12.5 | S | L | .013 | 391 | 25.0 | V | K | .006 |
| 372 | 12.5 | S | M | .015 | 392 | 25.0 | V | L | .006 |
| 373 | 12.5 | S | N | .015 | 393 | 25.0 | V | M | .006 |
| 374 | 12.5 | S | P | .03 | 394 | 25.0 | V | N | .006 |
| 375 | 12.5 | S | R | .03 | 395 | 25.0 | V | P | .007 |
| 376 | 12.5 | S | S | .03 | 396 | 25.0 | V | R | .007 |
| 443 | 12.5 | S | T | .015 | 397 | 25.0 | V | S | .007 |
| 092 | 15.0 | T | A | .01 | 446 | 25.0 | V | T | .006 |
| 093 | 15.0 | T | B | .01 | 113 | 30.0 | W | A | .005 |
| 094 | 15.0 | T | C | .011 | 114 | 30.0 | W | B | .005 |
| 095 | 15.0 | T | D | .011 | 115 | 30.0 | W | C | .005 |
| 096 | 15.0 | T | E | .02 | 116 | 30.0 | W | D | .005 |
| 097 | 15.0 | T | F | .02 | 117 | 30.0 | W | E | .006 |
| 098 | 15.0 | T | G | .02 | 118 | 30.0 | W | F | .006 |
| 223 | 15.0 | T | H | .013 | 119 | 30.0 | W | G | .006 |
| 224 | 15.0 | T | I | .015 | 232 | 30.0 | W | H | .005 |
| 225 | 15.0 | T | J | .03 | 233 | 30.0 | W | I | .005 |
| 377 | 15.0 | T | K | .01 | 234 | 30.0 | W | J | .006 |
| 378 | 15.0 | T | L | .01 | 398 | 30.0 | W | K | .005 |
| 379 | 15.0 | T | M | .011 | 399 | 30.0 | W | L | .005 |
| 380 | 15.0 | T | N | .011 | 400 | 30.0 | W | M | .005 |
| 381 | 15.0 | T | P | .02 | 401 | 30.0 | W | N | .005 |
| 382 | 15.0 | T | R | .02 | 402 | 30.0 | W | P | .006 |
| 383 | 15.0 | T | S | .02 | 403 | 30.0 | W | R | .006 |
| 444 | 15.0 | T | T | .011 | 404 | 30.0 | W | S | .006 |
| 099 | 20.0 | U | A | .007 | 447 | 30.0 | W | T | .005 |
| 100 | 20.0 | U | B | .007 | 120 | 35.0 | X | A | .004 |
| 101 | 20.0 | U | C | .007 | 121 | 35.0 | X | B | .004 |
| 102 | 20.0 | U | D | .007 | 122 | 35.0 | X | C | .004 |
| 103 | 20.0 | U | E | .01 | 123 | 35.0 | X | D | .004 |
| 104 | 20.0 | U | F | .01 | 124 | 35.0 | X | E | .005 |
| 105 | 20.0 | U | G | .01 | 125 | 35.0 | X | F | .005 |
| 226 | 20.0 | U | H | .007 | 126 | 35.0 | X | G | .005 |
| 227 | 20.0 | U | I | .007 | 235 | 35.0 | X | H | .004 |
| 228 | 20.0 | U | J | .01 | 236 | 35.0 | X | I | .004 |
| 384 | 20.0 | U | K | .007 | 237 | 35.0 | X | J | .005 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

TABLE I. Circuit breaker dash numbers and applicable characteristics (configuration 1) - Continued.

| Dash no. | Current rating | | Voltage frequency and tripping time delay code letter (see table II, III, or V) | Resistance or impedance ohms (max.) | | Dash no. | Current rating | | Voltage frequency and tripping time delay code letter (see table II, III, or V) | Resistance or impedance ohms (max.) |
|---|---|---|---|---|---|---|---|---|---|---|
| | (amperes) | Code letter | | | | | (amperes) | Code letter | | |
| 405 | 35.0 | X | K | .004 | | 416 | 40.0 | Y | P | .0052 |
| 406 | 35.0 | X | L | .004 | | 417 | 40.0 | Y | R | .0052 |
| 407 | 35.0 | X | M | .004 | | 418 | 40.0 | Y | S | .0052 |
| 408 | 35.0 | X | N | .004 | | 449 | 40.0 | Y | T | .0038 |
| 409 | 35.0 | X | P | .005 | | 127 | 50.0 | Z | A | .003 |
| 410 | 35.0 | X | R | .005 | | 128 | 50.0 | Z | B | .003 |
| 411 | 35.0 | X | S | .005 | | 129 | 50.0 | Z | C | .003 |
| 448 | 35.0 | X | T | .004 | | 130 | 50.0 | Z | D | .003 |
| 238 | 40.0 | Y | A | .0038 | | 131 | 50.0 | Z | E | .004 |
| 239 | 40.0 | Y | B | .0038 | | 132 | 50.0 | Z | F | .004 |
| 241 | 40.0 | Y | C | .0038 | | 133 | 50.0 | Z | G | .004 |
| 242 | 40.0 | Y | D | .0038 | | 248 | 50.0 | Z | H | .003 |
| 244 | 40.0 | Y | E | .0052 | | 249 | 50.0 | Z | I | .003 |
| 245 | 40.0 | Y | F | .0052 | | 250 | 50.0 | Z | J | .004 |
| 246 | 40.0 | Y | G | .0052 | | 419 | 50.0 | Z | K | .003 |
| 240 | 40.0 | Y | H | .0038 | | 420 | 50.0 | Z | L | .003 |
| 243 | 40.0 | Y | I | .0038 | | 421 | 50.0 | Z | M | .003 |
| 247 | 40.0 | Y | J | .0052 | | 422 | 50.0 | Z | N | .003 |
| 412 | 40.0 | Y | K | .0038 | | 423 | 50.0 | Z | P | .004 |
| 413 | 40.0 | Y | L | .0038 | | 424 | 50.0 | Z | R | .004 |
| 414 | 40.0 | Y | M | .0038 | | 425 | 50.0 | Z | S | .004 |
| 415 | 40.0 | Y | N | .0038 | | 450 | 50.0 | Z | T | .003 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

TABLE II. Circuit breaker dash numbers and applicable characteristics (configuration 2).

| Dash no. | Current rating (amperes) | Current rating Code letter | Voltage frequency and tripping time delay code letter (see table II, III, or V) | Resistance or impedance ohms (max.) | Dash no. | Current rating (amperes) | Current rating Code letter | Voltage frequency and tripping time delay code letter (see table II, III, or V) | Resistance or impedance ohms (max.) |
|---|---|---|---|---|---|---|---|---|---|
| 001L | 0.2 | A | A | 52 | 269L | 0.5 | C | P | 12 |
| 002L | 0.2 | A | B | 52 | 270L | 0.5 | C | R | 12 |
| 003L | 0.2 | A | C | 32 | 271L | 0.5 | C | S | 12 |
| 004L | 0.2 | A | D | 34 | 428L | 0.5 | C | T | 6 |
| 005L | 0.2 | A | E | 88 | 150L | 0.75 | D | A | 3 |
| 006L | 0.2 | A | F | 88 | 151L | 0.75 | D | B | 3 |
| 007L | 0.2 | A | G | 88 | 153L | 0.75 | D | C | 3 |
| 134L | 0.2 | A | H | 32 | 154L | 0.75 | D | D | 3 |
| 135L | 0.2 | A | I | 34 | 156L | 0.75 | D | E | 7 |
| 136L | 0.2 | A | J | 72 | 157L | 0.75 | D | F | 7 |
| 251L | 0.2 | A | K | 32 | 158L | 0.75 | D | G | 7 |
| 252L | 0.2 | A | L | 32 | 152L | 0.75 | D | H | 3 |
| 253L | 0.2 | A | M | 34 | 155L | 0.75 | D | I | 3 |
| 254L | 0.2 | A | N | 34 | 159L | 0.75 | D | J | 7 |
| 255L | 0.2 | A | P | 72 | 272L | 0.75 | D | K | 3 |
| 256L | 0.2 | A | R | 72 | 273L | 0.75 | D | L | 3 |
| 257L | 0.2 | A | S | 72 | 274L | 0.75 | D | M | 3 |
| 426L | 0.2 | A | T | 34 | 275L | 0.75 | D | N | 3 |
| 137L | 0.25 | B | A | 26 | 276L | 0.75 | D | P | 7 |
| 138L | 0.25 | B | B | 26 | 277L | 0.75 | D | R | 7 |
| 140L | 0.25 | B | C | 23 | 278L | 0.75 | D | S | 7 |
| 141L | 0.25 | B | D | 23 | 429L | 0.75 | D | T | 3 |
| 143L | 0.25 | B | E | 43 | 015L | 1.0 | E | A | 2 |
| 144L | 0.25 | B | F | 43 | 016L | 1.0 | E | B | 2 |
| 145L | 0.25 | B | G | 43 | 017L | 1.0 | E | C | 2 |
| 139L | 0.25 | B | H | 21 | 018L | 1.0 | E | D | 2 |
| 142L | 0.25 | B | I | 23 | 019L | 1.0 | E | E | 4 |
| 146L | 0.25 | B | J | 43 | 020L | 1.0 | E | F | 4 |
| 258L | 0.25 | B | K | 21 | 021L | 1.0 | E | G | 4 |
| 259L | 0.25 | B | L | 21 | 160L | 1.0 | E | H | 2 |
| 260L | 0.25 | B | M | 23 | 161L | 1.0 | E | I | 2 |
| 261L | 0.25 | B | N | 23 | 162L | 1.0 | E | J | 4 |
| 262L | 0.25 | B | P | 43 | 279L | 1.0 | E | K | 2 |
| 263L | 0.25 | B | R | 43 | 280L | 1.0 | E | L | 2 |
| 264L | 0.25 | B | S | 43 | 281L | 1.0 | E | M | 2 |
| 427L | 0.25 | B | T | 23 | 282L | 1.0 | E | N | 2 |
| 008L | 0.5 | C | A | 7 | 283L | 1.0 | E | P | 4 |
| 009L | 0.5 | C | B | 7 | 284L | 1.0 | E | R | 4 |
| 010L | 0.5 | C | C | 6 | 285L | 1.0 | E | S | 4 |
| 011L | 0.5 | C | D | 6 | 430L | 1.0 | E | T | 2 |
| 012L | 0.5 | C | E | 24 | 163L | 1.5 | F | A | .9 |
| 013L | 0.5 | C | F | 24 | 164L | 1.5 | F | B | .9 |
| 014L | 0.5 | C | G | 24 | 166L | 1.5 | F | C | .9 |
| 147L | 0.5 | C | H | 6 | 167L | 1.5 | F | D | .9 |
| 148L | 0.5 | C | I | 6 | 169L | 1.5 | F | E | 2 |
| 149L | 0.5 | C | J | 12 | 170L | 1.5 | F | F | 2 |
| 265L | 0.5 | C | K | 6 | 171L | 1.5 | F | G | 2 |
| 266L | 0.5 | C | L | 6 | 165L | 1.5 | F | H | .9 |
| 267L | 0.5 | C | M | 6 | 168L | 1.5 | F | I | .9 |
| 268L | 0.5 | C | N | 6 | 172L | 1.5 | F | J | 2 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

TABLE II. Circuit breaker dash numbers and applicable characteristics (configuration 2) - Continued.

| Dash no. | Current rating | | Voltage frequency and tripping time delay code letter (see table II, III, or V) | Resistance or impedance ohms (max.) | Dash no. | Current rating | | Voltage frequency and tripping time delay code letter (see table II, III, or V) | Resistance or impedance ohms (max.) |
|---|---|---|---|---|---|---|---|---|---|
| | (amperes) | Code letter | | | | (amperes) | Code letter | | |
| 286L | 1.5 | F | K | .9 | 035L | 3.0 | I | G | .5 |
| 287L | 1.5 | F | L | .9 | 186L | 3.0 | I | H | .3 |
| 288L | 1.5 | F | M | .9 | 187L | 3.0 | I | I | .3 |
| 289L | 1.5 | F | N | .9 | 188L | 3.0 | I | J | .5 |
| 290L | 1.5 | F | P | 2 | 307L | 3.0 | I | K | .3 |
| 291L | 1.5 | F | R | 2 | 308L | 3.0 | I | L | .3 |
| 292L | 1.5 | F | S | 2 | 309L | 3.0 | I | M | .3 |
| 431L | 1.5 | F | T | .9 | 310L | 3.0 | I | N | .3 |
| 022L | 2.0 | G | A | .5 | 311L | 3.0 | I | P | .5 |
| 023L | 2.0 | G | B | .5 | 312L | 3.0 | I | R | .5 |
| 024L | 2.0 | G | C | .5 | 313L | 3.0 | I | S | .5 |
| 025L | 2.0 | G | D | .5 | 434L | 3.0 | I | T | .3 |
| 026L | 2.0 | G | E | .9 | 189L | 3.5 | J | A | .15 |
| 027L | 2.0 | G | F | .9 | 190L | 3.5 | J | B | .15 |
| 028L | 2.0 | G | G | .9 | 192L | 3.5 | J | C | .15 |
| 173L | 2.0 | G | H | .5 | 193L | 3.5 | J | D | .15 |
| 174L | 2.0 | G | I | .5 | 195L | 3.5 | J | E | .35 |
| 175L | 2.0 | G | J | .8 | 196L | 3.5 | J | F | .35 |
| 293L | 2.0 | G | K | .5 | 197L | 3.5 | J | G | .35 |
| 294L | 2.0 | G | L | .5 | 191L | 3.5 | J | H | .15 |
| 295L | 2.0 | G | M | .5 | 194L | 3.5 | J | I | .15 |
| 296L | 2.0 | G | N | .5 | 198L | 3.5 | J | J | .35 |
| 297L | 2.0 | G | P | .8 | 314L | 3.5 | J | K | .15 |
| 298L | 2.0 | G | R | .8 | 315L | 3.5 | J | L | .15 |
| 299L | 2.0 | G | S | .8 | 316L | 3.5 | J | M | .15 |
| 432L | 2.0 | G | T | .5 | 317L | 3.5 | J | N | .15 |
| 176L | 2.5 | H | A | .35 | 318L | 3.5 | J | P | .35 |
| 177L | 2.5 | H | B | .35 | 319L | 3.5 | J | R | .35 |
| 179L | 2.5 | H | C | .35 | 320L | 3.5 | J | S | .35 |
| 180L | 2.5 | H | D | .35 | 435L | 3.5 | J | T | .15 |
| 182L | 2.5 | H | E | .6 | 036L | 4.0 | K | A | .1 |
| 183L | 2.5 | H | F | .6 | 037L | 4.0 | K | B | .1 |
| 184L | 2.5 | H | G | .6 | 038L | 4.0 | K | C | .1 |
| 178L | 2.5 | H | H | .35 | 039L | 4.0 | K | D | .1 |
| 181L | 2.5 | H | I | .35 | 040L | 4.0 | K | E | .3 |
| 185L | 2.5 | H | J | .6 | 041L | 4.0 | K | F | .3 |
| 300L | 2.5 | H | K | .35 | 042L | 4.0 | K | G | .3 |
| 301L | 2.5 | H | L | .35 | 199L | 4.0 | K | H | .1 |
| 302L | 2.5 | H | M | .35 | 200L | 4.0 | K | I | .1 |
| 303L | 2.5 | H | N | .35 | 201L | 4.0 | K | J | .3 |
| 304L | 2.5 | H | P | .6 | 321L | 4.0 | K | K | .1 |
| 305L | 2.5 | H | R | .6 | 322L | 4.0 | K | L | .1 |
| 306L | 2.5 | H | S | .6 | 323L | 4.0 | K | M | .1 |
| 433L | 2.5 | H | T | .35 | 324L | 4.0 | K | N | .1 |
| 029L | 3.0 | I | A | .3 | 325L | 4.0 | K | P | .3 |
| 030L | 3.0 | I | B | .3 | 326L | 4.0 | K | R | .3 |
| 031L | 3.0 | I | C | .3 | 327L | 4.0 | K | S | .3 |
| 032L | 3.0 | I | D | .3 | 436L | 4.0 | K | T | .1 |
| 033L | 3.0 | I | E | .5 | 043L | 5.0 | L | A | .08 |
| 034L | 3.0 | I | F | .5 | 044L | 5.0 | L | B | .08 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

TABLE II. Circuit breaker dash numbers and applicable characteristics (configuration 2) - Continued.

| Dash no. | Current rating | | Voltage frequency and tripping time delay code letter (see table II, III, or V) | Resistance or impedance ohms (max.) | Dash no. | Current rating | | Voltage frequency and tripping time delay code letter (see table II, III, or V) | Resistance or impedance ohms (max.) |
|---|---|---|---|---|---|---|---|---|---|
| | (amperes) | Code letter | | | | (amperes) | Code letter | | |
| 045L | 5.0 | L | C | .08 | 348L | 7.0 | N | S | .07 |
| 046L | 5.0 | L | D | .08 | 439L | 7.0 | N | T | .04 |
| 047L | 5.0 | L | E | .15 | 064L | 8.0 | P | A | .03 |
| 048L | 5.0 | L | F | .15 | 065L | 8.0 | P | B | .03 |
| 049L | 5.0 | L | G | .15 | 066L | 8.0 | P | C | .03 |
| 202L | 5.0 | L | H | .08 | 067L | 8.0 | P | D | .03 |
| 203L | 5.0 | L | I | .08 | 068L | 8.0 | P | E | .063 |
| 204L | 5.0 | L | J | .15 | 069L | 8.0 | P | F | .063 |
| 328L | 5.0 | L | K | .08 | 070L | 8.0 | P | G | .063 |
| 329L | 5.0 | L | L | .08 | 211L | 8.0 | P | H | .03 |
| 330L | 5.0 | L | M | .08 | 212L | 8.0 | P | I | .03 |
| 331L | 5.0 | L | N | .08 | 213L | 8.0 | P | J | .063 |
| 332L | 5.0 | L | P | .15 | 349L | 8.0 | P | K | .03 |
| 333L | 5.0 | L | R | .15 | 350L | 8.0 | P | L | .03 |
| 334L | 5.0 | L | S | .15 | 351L | 8.0 | P | M | .03 |
| 437L | 5.0 | L | T | .08 | 352L | 8.0 | P | N | .03 |
| 050L | 6.0 | M | A | .06 | 353L | 8.0 | P | P | .063 |
| 051L | 6.0 | M | B | .06 | 354L | 8.0 | P | R | .063 |
| 052L | 6.0 | M | C | .06 | 355L | 8.0 | P | S | .063 |
| 053L | 6.0 | M | D | .06 | 440L | 8.0 | P | T | .03 |
| 054L | 6.0 | M | E | .104 | 071L | 9.0 | Q | A | .028 |
| 055L | 6.0 | M | F | .104 | 072L | 9.0 | Q | B | .028 |
| 056L | 6.0 | M | G | .104 | 073L | 9.0 | Q | C | .025 |
| 205L | 6.0 | M | H | .06 | 074L | 9.0 | Q | D | .025 |
| 206L | 6.0 | M | I | .06 | 075L | 9.0 | Q | E | .05 |
| 207L | 6.0 | M | J | .08 | 076L | 9.0 | Q | F | .05 |
| 335L | 6.0 | M | K | .06 | 077L | 9.0 | Q | G | .05 |
| 336L | 6.0 | M | L | .06 | 214L | 9.0 | Q | H | .02 |
| 337L | 6.0 | M | M | .06 | 215L | 9.0 | Q | I | .02 |
| 338L | 6.0 | M | N | .06 | 216L | 9.0 | Q | J | .05 |
| 339L | 6.0 | M | P | .08 | 356L | 9.0 | Q | K | .018 |
| 340L | 6.0 | M | R | .08 | 357L | 9.0 | Q | L | .018 |
| 341L | 6.0 | M | S | .08 | 358L | 9.0 | Q | M | .02 |
| 438L | 6.0 | M | T | .06 | 359L | 9.0 | Q | N | .02 |
| 057L | 7.0 | N | A | .041 | 360L | 9.0 | Q | P | .05 |
| 058L | 7.0 | N | B | .041 | 361L | 9.0 | Q | R | .05 |
| 059L | 7.0 | N | C | .04 | 362L | 9.0 | Q | S | .05 |
| 060L | 7.0 | N | D | .04 | 441L | 9.0 | Q | T | .02 |
| 061L | 7.0 | N | E | .078 | 078L | 10.0 | R | A | .023 |
| 062L | 7.0 | N | F | .078 | 079L | 10.0 | R | B | .023 |
| 063L | 7.0 | N | G | .078 | 080L | 10.0 | R | C | .02 |
| 208L | 7.0 | N | H | .041 | 081L | 10.0 | R | D | .02 |
| 209L | 7.0 | N | I | .04 | 082L | 10.0 | R | E | .04 |
| 210L | 7.0 | N | J | .07 | 083L | 10.0 | R | F | .04 |
| 342L | 7.0 | N | K | .041 | 084L | 10.0 | R | G | .04 |
| 343L | 7.0 | N | L | .041 | 217L | 10.0 | R | H | .023 |
| 344L | 7.0 | N | M | .04 | 218L | 10.0 | R | I | .02 |
| 345L | 7.0 | N | N | .04 | 219L | 10.0 | R | J | .04 |
| 346L | 7.0 | N | P | .07 | 363L | 10.0 | R | K | .023 |
| 347L | 7.0 | N | R | .07 | 364L | 10.0 | R | L | .023 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

TABLE II. Circuit breaker dash numbers and applicable characteristics (configuration 2) - Continued.

| Dash no. | Current rating | | Voltage frequency and tripping time delay code letter (see table II, III, or V) | Resistance or impedance ohms (max.) | Dash no. | Current rating | | Voltage frequency and tripping time delay code letter (see table II, III, or V) | Resistance or impedance ohms (max.) |
|---|---|---|---|---|---|---|---|---|---|
| | (amperes) | Code letter | | | | (amperes) | Code letter | | |
| 365L | 10.0 | R | M | .02 | 385L | 20.0 | U | L | .007 |
| 366L | 10.0 | R | N | .02 | 386L | 20.0 | U | M | .007 |
| 367L | 10.0 | R | P | .04 | 387L | 20.0 | U | N | .007 |
| 368L | 10.0 | R | R | .04 | 388L | 20.0 | U | P | .01 |
| 369L | 10.0 | R | S | .04 | 389L | 20.0 | U | R | .01 |
| 442L | 10.0 | R | T | .02 | 390L | 20.0 | U | S | .01 |
| 085L | 12.5 | S | A | .015 | 445L | 20.0 | U | T | .007 |
| 086L | 12.5 | S | B | .015 | 106L | 25.0 | V | A | .006 |
| 087L | 12.5 | S | C | .015 | 107L | 25.0 | V | B | .006 |
| 088L | 12.5 | S | D | .015 | 108L | 25.0 | V | C | .006 |
| 089L | 12.5 | S | E | .03 | 109L | 25.0 | V | D | .006 |
| 090L | 12.5 | S | F | .03 | 110L | 25.0 | V | E | .011 |
| 091L | 12.5 | S | G | .03 | 111L | 25.0 | V | F | .011 |
| 220L | 12.5 | S | H | .013 | 112L | 25.0 | V | G | .011 |
| 221L | 12.5 | S | I | .013 | 229L | 25.0 | V | H | .006 |
| 222L | 12.5 | S | J | .03 | 230L | 25.0 | V | I | .006 |
| 370L | 12.5 | S | K | .013 | 231L | 25.0 | V | J | .007 |
| 371L | 12.5 | S | L | .013 | 391L | 25.0 | V | K | .006 |
| 372L | 12.5 | S | M | .015 | 392L | 25.0 | V | L | .006 |
| 373L | 12.5 | S | N | .015 | 393L | 25.0 | V | M | .006 |
| 374L | 12.5 | S | P | .03 | 394L | 25.0 | V | N | .006 |
| 375L | 12.5 | S | R | .03 | 395L | 25.0 | V | P | .007 |
| 376L | 12.5 | S | S | .03 | 396L | 25.0 | V | R | .007 |
| 443L | 12.5 | S | T | .015 | 397L | 25.0 | V | S | .007 |
| 092L | 15.0 | T | A | .01 | 446L | 25.0 | V | T | .006 |
| 093L | 15.0 | T | B | .01 | 113L | 30.0 | W | A | .005 |
| 094L | 15.0 | T | C | .011 | 114L | 30.0 | W | B | .005 |
| 095L | 15.0 | T | D | .011 | 115L | 30.0 | W | C | .006 |
| 096L | 15.0 | T | E | .02 | 116L | 30.0 | W | D | .006 |
| 097L | 15.0 | T | F | .02 | 117L | 30.0 | W | E | .009 |
| 098L | 15.0 | T | G | .02 | 118L | 30.0 | W | F | .009 |
| 223L | 15.0 | T | H | .013 | 119L | 30.0 | W | G | .009 |
| 224L | 15.0 | T | I | .015 | 232L | 30.0 | W | H | .005 |
| 225L | 15.0 | T | J | .03 | 233L | 30.0 | W | I | .005 |
| 377L | 15.0 | T | K | .01 | 234L | 30.0 | W | J | .006 |
| 378L | 15.0 | T | L | .01 | 398L | 30.0 | W | K | .005 |
| 379L | 15.0 | T | M | .011 | 399L | 30.0 | W | L | .005 |
| 380L | 15.0 | T | N | .011 | 400L | 30.0 | W | M | .005 |
| 381L | 15.0 | T | P | .02 | 401L | 30.0 | W | N | .005 |
| 382L | 15.0 | T | R | .02 | 402L | 30.0 | W | P | .006 |
| 383L | 15.0 | T | S | .02 | 403L | 30.0 | W | R | .006 |
| 444L | 15.0 | T | T | .011 | 404L | 30.0 | W | S | .006 |
| 099L | 20.0 | U | A | .008 | 447L | 30.0 | W | T | .005 |
| 100L | 20.0 | U | B | .008 | 120L | 35.0 | X | A | .004 |
| 101L | 20.0 | U | C | .008 | 121L | 35.0 | X | B | .004 |
| 102L | 20.0 | U | D | .008 | 122L | 35.0 | X | C | .005 |
| 103L | 20.0 | U | E | .013 | 123L | 35.0 | X | D | .005 |
| 104L | 20.0 | U | F | .013 | 124L | 35.0 | X | E | .006 |
| 105L | 20.0 | U | G | .013 | 125L | 35.0 | X | F | .006 |
| 226L | 20.0 | U | H | .007 | 126L | 35.0 | X | G | .006 |
| 227L | 20.0 | U | I | .007 | 235L | 35.0 | X | H | .004 |
| 228L | 20.0 | U | J | .01 | 236L | 35.0 | X | I | .004 |
| 384L | 20.0 | U | K | .007 | 237L | 35.0 | X | J | .005 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

TABLE II. Circuit breaker dash numbers and applicable characteristics (configuration 2) - Continued.

| Dash no. | Current rating | | Voltage frequency and tripping time delay code letter (see table II, III, or V) | Resistance or impedance ohms (max.) | | Dash no. | Current rating | | Voltage frequency and tripping time delay code letter (see table II, III, or V) | Resistance or impedance ohms (max.) |
|---|---|---|---|---|---|---|---|---|---|---|
| | (amperes) | Code letter | | | | | (amperes) | Code letter | | |
| 405L | 35.0 | X | K | .004 | | 416L | 40.0 | Y | P | .0052 |
| 406L | 35.0 | X | L | .004 | | 417L | 40.0 | Y | R | .0052 |
| 407L | 35.0 | X | M | .004 | | 418L | 40.0 | Y | S | .0052 |
| 408L | 35.0 | X | N | .004 | | 449L | 40.0 | Y | T | .003 |
| 409L | 35.0 | X | P | .005 | | 127L | 50.0 | Z | A | .004 |
| 410L | 35.0 | X | R | .005 | | 128L | 50.0 | Z | B | .004 |
| 411L | 35.0 | X | S | .005 | | 129L | 50.0 | Z | C | .004 |
| 448L | 35.0 | X | T | .004 | | 130L | 50.0 | Z | D | .003 |
| 238L | 40.0 | Y | A | .0038 | | 131L | 50.0 | Z | E | .004 |
| 239L | 40.0 | Y | B | .0038 | | 132L | 50.0 | Z | F | .004 |
| 241L | 40.0 | Y | C | .0045 | | 133L | 50.0 | Z | G | .004 |
| 242L | 40.0 | Y | D | .0045 | | 248L | 50.0 | Z | H | .003 |
| 244L | 40.0 | Y | E | .0052 | | 249L | 50.0 | Z | I | .003 |
| 245L | 40.0 | Y | F | .0052 | | 250L | 50.0 | Z | J | .004 |
| 246L | 40.0 | Y | G | .0052 | | 419L | 50.0 | Z | K | .004 |
| 240L | 40.0 | Y | H | .0038 | | 420L | 50.0 | Z | L | .004 |
| 243L | 40.0 | Y | I | .0038 | | 421L | 50.0 | Z | M | .004 |
| 247L | 40.0 | Y | J | .0052 | | 422L | 50.0 | Z | N | .003 |
| 412L | 40.0 | Y | K | .0038 | | 423L | 50.0 | Z | P | .004 |
| 413L | 40.0 | Y | L | .0038 | | 424L | 50.0 | Z | R | .004 |
| 414L | 40.0 | Y | M | .0038 | | 425L | 50.0 | Z | S | .004 |
| 415L | 40.0 | Y | N | .0038 | | 450L | 50.0 | Z | T | .003 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

TABLE III. Tripping-time delay (configuration 1). 1/ 2/

| Time delay percent rated current | Tripping-time delay at 25°C ±2°C (tripping time in seconds) | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | 50 V dc | | | | 240 V ac, 60 Hz | | | | 240 V ac, 400 Hz | | | | | |
| | A | | B | | C | | D | | E | | F | | G | |
| | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min |
| 100 | no trip one hour | | no trip one hour | | no trip one hour | | no trip one hour | | no trip one hour | | no trip one hour | | no trip one hour | |
| 125 | 70 | 7 | 7 | .5 | 120 | 10 | 17 | .7 | N/A | N/A | N/A | N/A | N/A | N/A |
| 150 | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | 60 | 5 | 5.8 | .50 | 400 | 40 |
| 200 | 8 | .6 | 1.4 | .13 | 20 | 2.2 | 1.6 | .13 | 20 | 2.1 | 1.9 | .15 | 150 | 9.5 |
| 400 | 1.5 | .15 | .25 | .031 | 2.3 | .3 | .25 | .03 | 3.2 | .4 | .19 | .02 | 19 | 1.9 |
| 600 | .05 | Inst | .12 | Inst | .75 | Inst | .13 | Inst | .19 | Inst | .08 | Inst | 1.6 | Inst |
| 800 | .051 | Inst | .051 | Inst | .16 | Inst | .07 | Inst | .06 | Inst | .05 | Inst | .06 | Inst |
| 1,000 | .026 | Inst | .026 | Inst | .04 | Inst | .04 | Inst | .045 | Inst | .036 | Inst | .043 | Inst |

See footnotes at end of table VIII.





Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

TABLE IV. Tripping-time, high-inrush design (configuration 1). 1/ 3/

| Time delay percent rated current | Tripping-time delay at 25°C ±2°C (tripping time in seconds) | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | 50 V dc | | | | 240 V ac, 60 Hz | | | | | | 240 V ac, 400 Hz | | | | | |
| | K | | L | | M | | N | | T | | P | | R | | S | |
| | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min |
| 100 | no trip one hour | | no trip one hour | | no trip one hour | | no trip one hour | | no trip one hour | | no trip one hour | | no trip one hour | | no trip one hour | |
| 125 | 100 | 10 | 12 | .5 | 120 | 10 | 18 | 1 | 700 | 50 | N/A | N/A | N/A | N/A | N/A | N/A |
| 150 | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | 350 | 32 | 60 | 6 | 5.8 | .6 | 500 | 60 |
| 200 | 20 | 2.5 | 1.5 | .13 | 20 | 3 | 1.6 | .16 | 70 | 10 | 20 | 2.1 | 2 | .2 | 160 | 20 |
| 400 | 2 | .36 | .29 | .031 | 2.3 | .3 | .3 | .04 | 15 | 1.5 | 4 | .4 | .35 | .035 | 19 | 2 |
| 600 | 1 | .13 | .15 | Inst | 1 | .13 | .17 | Inst | 7 | .7 | .6 | Inst | .125 | Inst | 3.5 | .250 |
| 800 | .6 | Inst | .06 | Inst | .6 | Inst | .09 | Inst | 3 | .1 | .06 | Inst | .05 | Inst | .5 | .025 |
| 1,000 | .29 | Inst | .05 | Inst | .29 | Inst | .043 | Inst | 2 | .01 | .045 | Inst | .036 | Inst | .043 | Inst |
| 1,800 4/ | no trip | | no trip | | no trip | | no trip | | no trip | | no trip | | no trip | | no trip | |

See footnotes at end of table VIII.





Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

TABLE V. Tripping-time, standard delay and high-inrush design (configuration 1). 1/ 2/ 3/

| Time delay percent rated current | Tripping-time delay at high and low temperature °C (tripping time in seconds) 5/ | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | 50 V dc | | | | 240 V ac, 60 Hz | | | | | | 240 V ac, 400 Hz | | | | | |
| | A and K | | B and L | | C and M | | D and N | | T | | E and P | | F and R | | G and S | |
| | -40° Max | +85° Min | -40° Max | +85° Min | -40° Max | +85° Min | -40° Max | +85° Min | -40° Max | +85° Min | -40° Max | +85° Min | -40° Max | +85° Min | -40° Max | +85° Min |
| 100 | no trip one hour | | no trip one hour | | no trip one hour | | no trip one hour | | no trip one hour | | no trip one hour | | no trip one hour | | no trip one hour | |
| 125 | 500 | 5 | 100 | .1 | 500 | 1 | 100 | .1 | 8000 | 25 | N/A | N/A | N/A | N/A | N/A | N/A |
| 150 | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | 900 | 12 | 500 | .5 | 100 | .1 | 1500 | 5 |
| 200 | 100 | .1 | 10 | 0.05 | 100 | .05 | 10 | .05 | 500 | 5 | 100 | .1 | 10 | .5 | 500 | .5 |
| 400 | 20 | Inst | 3 | Inst | 20 | Inst | 3 | Inst | 100 | .8 | 20 | Inst | 3 | Inst | 100 | Inst |
| 600 | 5 | Inst | 1 | Inst | 5 | Inst | 1 | Inst | 40 | .1 | 6 | Inst | 1 | Inst | 5 | Inst |
| 800 | 2 | Inst | .5 | Inst | .5 | Inst | .5 | Inst | 10 | .05 | .5 | Inst | .5 | Inst | .5 | Inst |
| 1,000 | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | 3 | .01 | N/A | N/A | N/A | N/A | N/A | N/A |

See footnotes at end of table VIII.





Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

TABLE VI. Tripping-time, standard delay and high-inrush design (configuration 2). 1/ 2/ 3/

| Time delay percent rated current | Tripping-time delay at 25°C ±2°C (tripping time in seconds) | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | 50 V dc | | | | 240 V ac, 60 Hz | | | | | | 240 V ac, 400 Hz | | | | | |
| | A and K | | B and L | | C and M | | D and N | | T | | E and P | | F and R | | G and S | |
| | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min |
| 100 | no trip one hour | | no trip one hour | | no trip one hour | | no trip one hour | | no trip one hour | | no trip one hour | | no trip one hour | | no trip one hour | |
| 125 | 60 | 7 | 6.5 | 0.5 | 120 | 10 | 12 | 0.7 | 700 | 50 | N/A | N/A | N/A | N/A | N/A | N/A |
| 150 | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | 400 | 30 | 70 | 5 | 8 | 0.5 | 400 | 40 |
| 200 | 10 | .6 | 1.2 | 0.13 | 20 | 2.2 | 3 | 0.13 | 150 | 10 | 25 | 2.1 | 1.9 | 0.15 | 150 | 9.5 |
| 400 | 2 | .15 | 0.5 | 0.031 | 3 | 0.3 | 1 | 0.03 | 20 | 1.5 | 5 | 0.4 | 0.4 | 0.02 | 19 | 1.9 |
| 600 | 1 | Inst | 0.25 | Inst | 2 | Inst | 0.3 | Inst | 10 | 0.4 | 2.4 | Inst | 0.25 | Inst | 7 | Inst |
| 800 | 0.5 | Inst | 0.1 | Inst | 0.8 | Inst | 0.15 | Inst | 8 | Inst | 1 | Inst | 0.1 | Inst | 0.4 | Inst |
| 1,000 | 0.1 | Inst | Inst | Inst | 0.25 | Inst | 0.1 | Inst | 6 | Inst | 0.1 | Inst | 0.05 | Inst | 0.043 | Inst |
| 1,800 4/ | no trip | | no trip | | no trip | | no trip | | no trip | | no trip | | no trip | | no trip | |

See footnotes at end of table VIII.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

TABLE VII. Tripping-time, high-low temperature standard delay and high-inrush delay (configuration 2). 1/ 2/ 3/

| Time delay percent rated current | Tripping-time delay at high and low temperature °C (tripping time in seconds) 5/ | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | 50 V dc | | | | 240 V ac, 60 Hz | | | | | | 240 V ac, 400 Hz | | | | | |
| | A and K | | B and L | | C and M | | D and N | | T | | E and P | | F and R | | G and S | |
| | -40° Max | +85° Min | -40° Max | +85° Min | -40° Max | +85° Min | -40° Max | +85° Min | -40° Max | +85° Min | -40° Max | +85° Min | -40° Max | +85° Min | -40° Max | +85° Min |
| 100 | no trip one hour | | no trip one hour | | no trip one hour | | no trip one hour | | no trip one hour | | no trip one hour | | no trip one hour | | no trip one hour | |
| 125 | 500 | 5 | 100 | 0.1 | 700 | 1 | 100 | 0.1 | 8000 | 25 | N/A | N/A | N/A | N/A | N/A | N/A |
| 150 | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | 1600 | 12 | 600 | 0.5 | 100 | 0.1 | 1500 | 5 |
| 200 | 100 | .1 | 10 | 0.05 | 160 | 0.05 | 10 | 0.05 | 1200 | 5 | 130 | 0.1 | 10 | 0.05 | 500 | 0.5 |
| 400 | 20 | Inst | 3 | Inst | 26 | Inst | 3 | Inst | 130 | 0.8 | 32 | Inst | 3 | Inst | 100 | Inst |
| 600 | 5 | Inst | 1 | Inst | 13 | Inst | 1 | Inst | 60 | 0.055 | 26 | Inst | 1 | Inst | 24 | Inst |
| 800 | 2 | Inst | 0.5 | Inst | 2.8 | Inst | 0.5 | Inst | 28 | Inst | 8.4 | Inst | 0.5 | Inst | 3 | Inst |
| 1,000 | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | 10 | Inst | N/A | N/A | N/A | N/A | N/A | N/A |

See footnotes at end of table VIII.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

TABLE VIII. Tripping-time, high-inrush nondelay (configuration 1 and 2). 1/ 2/

| | Tripping-time delay at -40°C ±2°C, +25°C ±2°C, and +85°C ±2°C (tripping time in seconds) | | | | | |
|---|---|---|---|---|---|---|
| Time delay percent rated current | 50 V dc | | 240 V ac, 60Hz | | 240 V ac, 400 Hz | |
| | H (nondelay) | | I (nondelay) | | J (nondelay) | |
| | Max | Min | Max | Min | Max | Min |
| 100 | no trip one hour | | no trip one hour | | no trip one hour | |
| 125 | 0.15 | Inst | 0.15 | Inst | --- | --- |
| 150 | --- | --- | --- | --- | 0.150 | Inst |
| 200 | 0.07 | Inst | 0.05 | Inst | 0.070 | Inst |
| 400 | 0.032 | Inst | 0.022 | Inst | 0.032 | Inst |
| 600 | 0.02 | Inst | 0.017 | Inst | 0.020 | Inst |
| 800 | 0.02 | Inst | 0.017 | Inst | 0.020 | Inst |

1/ Circuit breakers shall not trip at 100 percent rated current. Characteristics A, B, C, D, H, I, K, L, M, and N must trip at 125 percent rated current; E, F, G, J, P, R, and S at 150 percent. Any characteristic may trip between 100 percent and the must-trip value. Instantaneous (Inst) is defined as less than 15 milliseconds.

2/ Voltage, frequency, and tripping-time delay codes A, B, C, D, E, F, G, H, I, and J are standard delays without the high-inrush feature.

3/ Voltage, frequency, and time delay codes K, L, M, N, P, R, S, and T incorporate the high-inrush or transient suppression feature.

4/ High-inrush test shall be performed using one alternation which has a peak value of 1,800 percent of rated current. 400 Hz and dc delays are subjected to a 400 Hz waveform, 60 Hz delays shall be subjected to a 60 Hz waveform.

5/ High and low test temperature tolerances are ±2°C.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

TABLE IX. Supersession and substitution data.

Circuit breakers covered by this specification sheet are substitutable for the manufacturer's PINs as shown below. This information in no way implies that the manufacturer's PIN is substitutable for the military PIN.

| Superseding military PIN | Superseded manufacturers PIN | |
|---|---|---|
| M55629/3-XXX | CAGE 81541 | CAGE 74193 |
| | Type APL-11<br>UPL-11<br>IEL-11 | Type AM2 |
| | The complete PIN consists of the type (above) plus identification codes for comparable internal connections, voltage, frequency, time delay and current rating. | |

Reference documents. In addition to MIL-PRF-55629, this document references the following:

ASTM B121 ASTM B139 ASTM B545 NASM35333 MS35335

NASM35338

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - CR
Navy - EC
Air Force -11
DLA - CC

Review activities:
Army - AV, CR4, MI
Navy - AS, MC, OS
Air Force - 19, 99

Preparing activity:
Army - CR

Agent:
DLA - CC

(Project 5925-2005-05)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.