METRIC
MIL-PRF-32565C
w/ AMENDMENT 2
4 August 2022

SUPERSEDING
MIL-PRF-32565C
w/ AMENDMENT 1
15 February 2022

PERFORMANCE SPECIFICATION

BATTERY, RECHARGEABLE, SEALED, 6T LITHIUM-ION

Comments, suggestions, or questions on this document should be addressed to U.S. Army Ground Vehicle Systems Center, ATTN: FCDD-GVS-SAT MS #268, 6501 E. 11 Mile Road, Warren, MI 48397-5000, or emailed to usarmy.detroit.devcom-gvsc.mbx.standardization@army.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A FSC 6140

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

CONTENTS

PARAGRAPH PAGE

1. SCOPE 1
1.1 Scope 1
1.2 Classification 1
1.2.1 Types 1
1.2.2 Classes 1
1.2.3 Sub-classes 1

2. APPLICABLE DOCUMENTS 2
2.1 General 2
2.2 Government documents 2
2.2.1 Specifications, standards, and handbooks 2
2.2.2 Other Government documents, drawings, and publications 3
2.3 Non-Government publications 5
2.4 Order of precedence 7

3. REQUIREMENTS 7
3.1 Qualification 7
3.2 Materials 7
3.2.1 Recycled, recovered, environmentally preferable, or bio based materials 7
3.2.2 Metals 7
3.2.3 Dissimilar metals 7
3.2.4 Compounds 7
3.3 Manufacturing 8
3.3.1 Physical characteristics 8
3.3.2 Dimensions and weights 8
3.3.3 Electrical interfaces 11
3.3.4 Cells 12
3.3.5 Battery case and accessories 13
3.3.6 Battle override mode 15
3.4 Color and marking 15
3.4.1 Battery color 15
3.4.2 Marking, general 15
3.4.3 Identification markings 16
3.4.4 Instructions and notes 19
3.4.5 Warning markings 19
3.5 Operating requirements 20
3.5.1 Dielectric strength and insulation resistance 20
3.5.2 Operating and storage temperature range 20
3.5.3 Battery voltage 20
3.5.4 Full charge capacity 20
3.5.5 Cranking amps 20
3.5.6 Deep cycle life 20

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

PARAGRAPH PAGE

3.5.7 High temperature deep cycle life 21
3.5.8 Retention of charge 21
3.5.9 Battery storage life 21
3.5.10 Battery service life 21
3.5.11 Charging 21
3.5.12 Jump start power export 21
3.5.13 Jump start power import 22
3.6 Battery management system (BMS) 22
3.6.1 BMS requirements 22
3.6.2 BMS power 22
3.6.3 BMS features 22
3.6.4 Communication interface 23
3.6.5 Monitoring performance characteristics 25
3.6.6 Battery states 28
3.6.7 Built-in tests 31
3.6.8 Long term fault data storage 31
3.6.9 Short term fault data storage 31
3.7 Surges, spikes, and starting operation 31
3.7.1 Voltage surges 31
3.7.2 Voltage spikes 32
3.7.3 Starting operation 32
3.8 Environmental 32
3.8.1 Altitude 32
3.8.2 Attitude 32
3.8.3 Temperature shock 33
3.8.4 Mechanical shock 33
3.8.5 Vibration 33
3.8.6 Immersion 33
3.8.7 Humidity 33
3.8.8 Blowing sand and dust 33
3.8.9 Salt atmosphere 33
3.8.10 Fluid susceptibility 33
3.8.11 Explosive atmosphere 33
3.9 Electromagnetic compatibility/interference 33
3.10 Electrostatic discharge 34
3.11 Safety 34
3.11.1 Cell safety 34
3.11.2 Battery Safety 34
3.12 Lithium battery safety program (U.S. Navy) 36
3.13 Charger compatibility 36
3.14 Workmanship 36
3.15 Product characteristics 36
3.15.1 Paint, protective finishes, and coatings 36

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

PARAGRAPH PAGE

3.15.2 Corrosion resistance 37
3.15.3 Electronic assembly acceptability 37
3.15.4 Hazardous materials 38
3.15.5 Chemical, biological, radiological and nuclear (CBRN) 38
3.16 Defects 38

4. VERIFICATION 40
4.1 Classification of inspections 40
4.1.1 Qualification inspection 40
4.1.2 Conformance inspection 41
4.2 Test equipment and facilities 47
4.2.1 Voltage and current indicating equipment 47
4.2.2 Voltage and current tolerances 47
4.2.3 Resistance tolerances 47
4.2.4 Time of discharge 47
4.3 Inspection conditions 47
4.3.1 Temperature conditions 48
4.3.2 Mounting 48
4.4 Inspection and test methods 48
4.4.1 Engineering analysis 48
4.4.2 Visual and mechanical inspections and tests 48
4.4.3 Potting/sealing compounds, flow and shrinkage 50
4.4.4 Dielectric strength and insulation resistance 50
4.4.5 Operating and storage temperature range 51
4.4.6 Performance tests 51
4.4.7 Battery storage life 55
4.4.8 Battery service life 55
4.4.9 Charging 55
4.4.10 Jump start power export 56
4.4.11 Jump start power import 56
4.5 Battery management system requirements 56
4.5.1 Battery management system 56
4.5.2 BMS power 56
4.5.3 BMS features 56
4.5.4 Communication interface 57
4.5.5 Monitoring performance characteristics 59
4.5.6 Battery states 62
4.5.7 Built-in tests 63
4.5.8 Long term fault data storage 63
4.5.9 Short term fault data storage 63
4.6 Surges, spikes and starting operation 63
4.6.1 Voltage surges 63
4.6.2 Voltage spikes 63
4.6.3 Starting operation 64

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

PARAGRAPH PAGE

4.6.4 Starting current 64
4.7 Environmental 64
4.7.1 Altitude 64
4.7.2 Attitude 65
4.7.3 Temperature shock 65
4.7.4 Mechanical Shock 65
4.7.5 Vibration 65
4.7.6 Immersion 66
4.7.7 Humidity 66
4.7.8 Blowing sand and dust 66
4.7.9 Salt atmosphere 66
4.7.10 Fluid susceptibility 67
4.7.11 Explosive atmosphere 67
4.8 Electromagnetic compatibility/interference 67
4.9 Electrostatic discharge 67
4.10 Safety 68
4.10.1 Cell safety 68
4.10.2 Battery safety 69
4.11 Lithium battery safety program (U.S. Navy) 73
4.12 Charger compatibility 74
4.13 Workmanship 74
4.14 Product characteristics 74
4.14.1 Paint, protective finishes, and coatings 74
4.14.2 Corrosion resistance 74
4.14.3 Electronic assemblies 74
4.14.4 Hazardous materials 74
4.14.5 CBRN 74
4.15 Defects 74

5. PACKAGING 74
5.1 Packaging 74

6. NOTES 75
6.1 Intended use 75
6.2 Acquisition requirements 75
6.3 Definitions 76
6.3.1 Amp hour or ampere-hour 76
6.3.2 Battery 76
6.3.3 Battery capacity 76
6.3.4 Battery case 76
6.3.5 Battery, lithium-ion 76
6.3.6 Battery, secondary 76
6.3.7 Battery service life 76
6.3.8 C rate 76

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

PARAGRAPH PAGE

6.3.9 Cell 76
6.3.10 Charge 76
6.3.11 Charge rate 76
6.3.12 Completed cell assembly 77
6.3.13 Contactor 77
6.3.14 Contractor 77
6.3.15 Controller application 77
6.3.16 Cutoff voltage 77
6.3.17 Cranking 77
6.3.18 Cycle 77
6.3.19 Cycle, deep 77
6.3.20 Cycle life 77
6.3.21 Discharge 77
6.3.22 Discharge rate 77
6.3.23 Electrode 77
6.3.24 Electrolyte 77
6.3.25 Energy 78
6.3.26 Energy density 78
6.3.27 Fully charged batteries 78
6.3.28 Fully discharged batteries 78
6.3.29 Negative terminal 78
6.3.30 Normal upright position 78
6.3.31 Open circuit 78
6.3.32 Open-circuit voltage 78
6.3.33 Positive terminal 78
6.3.34 Power 78
6.3.35 Power density 78
6.3.36 Qualifying Activity 78
6.3.37 Rework 78
6.3.38 Seal 79
6.3.39 Self-discharge 79
6.3.40 Shelf life 79
6.3.41 Softening temperature 79
6.3.42 Stabilize 79
6.3.43 State of charge (estimated) 79
6.3.44 State of charge (SOC) reserve limit 79
6.3.45 State of health (estimated) 79
6.3.46 Terminals 79
6.3.47 Time remaining 79
6.3.48 Voltage, nominal 79
6.4 Qualification 79
6.5 Manufacturing 80
6.6 Specification content 80
6.7 Cell traceability 81

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

PARAGRAPH PAGE

6.8 Product traceability (battery) 81
6.9 Safety data sheets 81
6.10 Shelf life 81
6.11 Transportation 81
6.12 Shipping safety 81
6.13 Battery condition for shipping 82
6.13.1 Operating and charging instructions 82
6.13.2 Caps for protection 82
6.13.3 Maintenance 82
6.13.4 Age documentation 82
6.14 Transportation 82
6.15 Verification inspection 82
6.16 Inspection lot 83
6.17 Test report data 83
6.18 Lithium battery safety program (U.S. Navy) 83
6.18.1 Test data 83
6.18.2 Test vessel 84
6.18.3 Navy test facility 84
6.19 Environmentally preferable material 84
6.20 Additional reference materials 84
6.21 Subject term (key word) listing 84
6.22 Changes from previous issue 85

APPENDIX A: Battery Interface Control Document (ICD) and SAE J1939 Messages 98

A.1 SCOPE 98
A.1.1 Scope 98

A.2 APPLICABLE DOCUMENTS 98
A.2.1 General 98
A.2.2 Government documents 98
A.2.3 Non-Government publications 98

A.3 INTERFACES 98
A.3.1 Location 98
A.3.2 Electrical Interfaces 98
A.3.2.1 Isolation 98
A.3.3 Pin definitions 98
A.3.3.1 Power 99
A.3.3.2 Dormant 99
A.3.3.3 Master power switch 99
A.3.3.4 CAN 100
A.3.3.5 Configuration pins 1-2, baud rate 100
A.3.3.6 Configuration pins 3-6, position identity 101

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

PARAGRAPH PAGE

A.3.3.7 Reset ... 101
A.3.3.8 Common ... 101

A.4 CAN BUS ... 102
A.4.1 CAN bus physical characteristics ... 102
A.4.2 CAN message response ... 102
A.4.3 Primary CAN interface selection ... 102
A.4.4 Heartbeat CAN interface selection ... 102
A.4.5 Bit timing ... 102
A.4.6 BMS J1939 implementation ... 103
A.4.7 NAME of controller application ... 103
A.4.8 Preferred source address ... 103
A.4.9 Arbitrary address capability ... 104

A.5 PROGRAM, CONFIGURATION, AND DATA MEMORY ... 104
A.5.1 Hardware and software version ... 104
A.5.2 Firmware diagnostics ... 105
A.5.3 Firmware update ... 105
A.5.3.1 Stop Start Broadcast ... 106
A.5.4 Configuration defaults ... 106
A.5.5 Configuration overwrite ... 107
A.5.6 CAN message transmission rates ... 107
A.5.7 Application Management Commands and Limits. ... 108
A.5.7.1 Transportability Command ... 108
A.5.7.2 SOC Reserve Limit ... 108
A.5.7.3 Application overcurrent limits and application overcurrent periods ... 109
A.5.8 Long term fault data storage ... 110
A.5.9 Short term fault data storage ... 110
A.5.10 BMS CAN J1939 application layer ... 110
A.5.11 Diagnostics ... 110
A.5.11.1 Diagnostic trouble code lamps ... 110
A.5.11.2 Conversion method ... 110
A.5.11.3 Diagnostic trouble code severity level ... 110
A.5.11.4 SPNs for diagnostics only ... 111
A.5.11.5 DTC fault conditions ... 111

A.6 MESSAGES ... 113
A.6.1 Messages ... 113
A.6.2 SAE J1939 messages ... 113
A.6.3 Battery specific messages ... 114
A.6.4 BMS parameter group number (PGN) and suspect parameter number (SPN) reservation and prohibition ... 115
A.6.5 Proprietary A J1939 PGN Message Definition and Structure ... 115
A.6.6 Proprietary B J1939 PGN message definition and structure ... 121

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

FIGURE PAGE

1. Top view battery dimensions. 86
2. Front view battery dimensions. 87
3. Side view battery dimensions. 88
4. Corrugations by positive post. 89
5. Terminal posts. 89
6. Handles. 90
7. Labels required for top of battery. 91
8. Maintenance advisory tag. 92
9. Battery state map. 92
10. Vehicle starting current. 93
11. Handle test. 94
12. Line of impact. 95
13. Battery impact areas. 96
14. BMS SAE J1939 implementation concept. 97

TABLE PAGE

I. Physical and electrical requirements. 9
II. J1 battery communications interface. 12
III. Preferred source addresses. 24
IV. Performance characteristics. 25
V. Environmental requirements. 32
VI. Visual and mechanical inspection. 39
VII. Inspection requirements. 42
A-I. Hardware version format. 104
A-II. Software version format. 105

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

This specification is approved for use by the U.S. Army Tank-automotive and Armaments Command and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This performance specification contains general requirements for secondary (rechargeable) nominal 24-volt lithium-ion (Li-ion) batteries having the 6T form factor in accordance with STANAG 4015. The batteries described in this specification are intended to be used as power sources for automotive starting, lighting, & ignition (SLI), and auxiliary electronics (such as deep cycle and silent watch operations with the vehicle engine off).

1.2 Classification. The only approved battery classifications (Types, Classes, and Sub-classes combinations) are found in table I.

1.2.1 Types. This specification groups batteries into two types according to their maximum Hazard Severity Level as defined by SAE J2464 for the overcharge abuse, crush, and battery nail penetration safety tests specified in this document. The types of batteries are as follows:

Type 1 - Maximum Hazard Severity Level of 4 for overcharge, crush, and battery nail penetration.

Type 2 - Maximum Hazard Severity Level of 6 for overcharge, crush, and battery nail penetration.

1.2.2 Classes. The classes of the battery are grouped according to cranking amps (no pre-heating).

Class A:
600 A for 30 sec at -18 °C
300 A for 30 sec at -32 °C
200 A for 30 sec at -40 °C

Class B:
1100 A for 30 sec at -18 °C
600 A for 30 sec at -32 °C
400 A for 30 sec at -40 °C

1.2.3 Sub-classes. The sub-classification of the battery are grouped according to minimum capacity.

X55: Minimum capacity of 55 Ah.
X75: Minimum capacity of 75 Ah.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

X90: Minimum capacity of 90 Ah.

1.2.3.1 Long life. The designation LL (for example Type 1-A55LL) can be added to the battery sub-class if the battery meets the following requirements:

a. The battery maintains at least 70 percent of its baseline full charge capacity after 2000 deep cycles as defined in 3.5.6 and 4.4.6.3. Vendor certification is required.

b. The battery maintains at least 70 percent of its baseline full charge capacity after 1000 high temperature deep cycles as defined in 3.5.7 and 4.4.6.4. Vendor certification is required.

c. The battery maintains at least 90 percent of the baseline full charge capacity as determined in 4.4.6.3 during the complete deep cycle life test, excluding failed cycles as defined in 3.5.6 and excluding up to 10 cycles where the battery did not maintain at least 90 percent of full charge capacity but did maintain at least 70 percent of full charge capacity.

d. The battery maintains at least 90 percent of the baseline full charge capacity as determined in 4.4.6.4 during the complete high temperature deep cycle life test, excluding failed cycles as defined in 3.5.7 and excluding up to 5 cycles where the battery did not maintain at least 90 percent of full charge capacity but did maintain at least 70 percent of full charge capacity."

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

INTERNATIONAL STANDARDIZATION AGREEMENTS

AECTP-400	-	Mechanical Environmental Tests

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-DTL-38999	-	Connectors, Electrical Circular, Miniature, High Density, Quick Disconnect (Bayonet, Threaded or Breech Coupling), Environment

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

		Resistant with Crimp Removable Contacts or Hermetically Sealed with Fixed, Solderable Contacts, General Specification for
MIL-DTL-53072	-	Chemical Agent Resistant Coating (CARC) System Application Procedures and Quality Control Inspection

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-130	-	Identification Marking of U.S. Military Property
MIL-STD-202-301	-	Method 301, Dielectric Withstanding Voltage
MIL-STD-202-302	-	Method 302, Insulation Resistance
MIL-STD-461	-	Requirements for the Control of Electromagnetic Interference Characteristics of Subsystems and Equipment
MIL-STD-464	-	Electromagnetic Environmental Effects Requirements for Systems
MIL-STD-889	-	Dissimilar Metals.
MIL-STD-1275	-	Characteristics of 28 Volt DC Input Power to Utilization Equipment in Military Vehicles
MIL-STD-1472	-	Design Criteria Standard for Human Engineering.

(Copies of these documents are available online at https://quicksearch.dla.mil.)

2.2.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

ARMY-TACOM PURCHASE DESCRIPTIONS (ATPD)

ATPD 2404	-	Environmental Conditions for Ground Combat Systems

(Copies of this document are available from U.S. Army RDECOM, Tank Automotive Research, Development and Engineering Center, ATTN: RDTA-SIE-ES-SI MS #268, 6501 E. 11 Mile Road, Warren, MI 48397-5000 or can be requested by sending an email to usarmy.detroit.devcom-gvsc.mbx.standardization@army.mil.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

ARMY TECHNICAL MANUALS

TM-9-6140-200-13	-	Technical Manual Operator and Field Maintenance for Automotive Lead-Acid Storage Batteries

(Copies of this document are available online at https://armypubs.army.mil/.)

CODE OF FEDERAL REGULATIONS

29 CFR 1910.1200	-	Hazardous Substances

(Copies of this document are available online at www.gpoaccess.gov/cfr/index.html.)

DEFENSE FEDERAL ACQUISITION SUPPLIMENT

DFARS 252.211-7003	-	Item Identification and Valuation

(Copies of this document are available online at https://www.acq.osd.mil)

DEPARTMENT OF THE ARMY

ATP 3-11.23	-	Multiservice Tactics, Techniques, and Procedures for Weapons of Mass Destruction Elimination Operations

(Copies of these documents are available online at https://www.army.mil/usapa/index.html.)

ENVIRONMENTAL PROTECTION AGENCY (EPA)

EPA/625/R-96/010b	-	Compendium of Methods for the Determination of Toxic Organic Compounds in Ambient Air, Second Edition.

(Copies of this document are available online at https://www.epa.gov/ttn/amtic/airtox.html.)

NAVAL SEA SYSTEMS COMMAND (NAVSEA)

NAVSEA INSTRUCTION 9310.1	-	Naval Lithium Battery Safety Program
S9310-AQ-SAF-010	-	Technical Manual for Batteries, Navy Lithium Safety Program Responsibilities and Procedures

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

(Copies of these documents may be obtained from the Naval Surface Warfare Center Crane, Indiana 300 Highway 361, Building 3235, Crane, IN 47522-5001.)

TACOM DRAWINGS

12350824	-	Paint System Chemical Agent Resistive Coating

(Copies of these documents can be requested by sending an email to usarmy.detroit.devcom-gvsc.mbx.drawing-request@army.mil.)

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

AMERICAN SOCIETY OF MECANICAL ENGINEERS (ASME)

ASME Y14.38	-	Abbreviations and Acronyms for Use on Drawings and Related Documents.

(Copies of this document are available online at https://www.asme.org.)

ASSOCIATION OF CONNECTING ELECTRONICS INDUSTRIES (IPC)

IPC J-STD-001	-	Requirements for Soldered Electrical and Electronic Assemblies
IPC-A-610	-	Acceptability of Electronic Assemblies

(Copies of these documents are available online at www.ipc.org.)

INTERNATIONAL ORGANIZATION FOR STANDARDS (ISO)

ISO 10012	-	Measurement management systems - Requirements for measurement processes and measuring equipment.
ISO 11898-1	-	Road Vehicles – Controller Area Network (CAN) – Part 1: Data Link Layer and Physical Signaling
ISO 11898-2	-	Road Vehicles – Controller Area Network (CAN) – Part 2: High-Speed Medium Access Unit
ISO/IEC 17025	-	General Requirements for the Competence of Testing and Calibration Laboratories

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

(Copies of this document are available online at https://www.iso.org/iso/home.htm.)

SOCIETY OF AUTOMOTIVE ENGINEERS (SAE)

SAE AMS-STD-595	-	Colors Used in Government Procurement
SAE AS478	-	Identification Marking Methods (DoD Adopted)
SAE J1939	-	Serial Control and Communications Heavy Duty Vehicle Network – Top Level Document
SAE J1939-81	-	Network Management
SAE J2464	-	Electric and Hybrid Electric Vehicle Rechargeable Energy Storage System (RESS) Safety and Abuse Testing.

(Copies of these documents are available online at https://www.sae.org/.)

TECHAMERICA

GEIA-STD-0005-1	-	Performance Standard for Aerospace and High Performance Electronic Systems Containing Lead-Free Solder
GEIA-STD-0005-2	-	Standard for Mitigating the Effects of Tin Whiskers in Aerospace and High Performance Electronic Systems
GEIA-STD-0006	-	Requirements for Using Solder Dip to Replace the Finish on Electronic Piece Parts

(Copies of these documents are available online at www.geia.org.)

UNDERWRITER LABORATORIES (UL)

UL 94	-	Tests for Flammability of Plastic Materials for Parts in Devices and Appliances

(Copies of this document are available online at https://www.ul.com.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

2.4 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Qualification. Batteries furnished under this specification shall be products that are authorized by the Qualifying Activity for listing on the applicable qualified products list before contract award (see 4.1.1 and 6.4).

3.2 Materials. Conformance shall be verified and demonstrated by inspection of contractor records providing objective quality evidence or certification that design, construction, processing, and materials conform to requirements. Applicable records shall include drawings, specifications, design data, receiving inspection records, processing and quality control standards, vendor catalogs and certifications, industry standards, test reports, and rating data.

3.2.1 Recycled, recovered, environmentally preferable, or bio based materials. Recycled, recovered, environmentally preferable, or biobased materials should be used to the maximum extent possible, provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

3.2.2 Metals. All cell or battery metals which do not enter into the basic electrochemical reaction of the cell shall resist, or be treated to resist, corrosion. Vendor certification shall be required.

3.2.3 Dissimilar metals. When dissimilar metals, which would adversely affect battery performance, are used in intimate contact with each other, protection against electrolysis and corrosion shall be applied that is in accordance with MIL-STD-889. Vendor certification shall be required.

3.2.4 Compounds.

3.2.4.1 Insulating compounds.

3.2.4.1.1 Potting/sealing compounds, flow and shrinkage. Insulating, impregnating, potting and sealing compounds used in manufacturing shall be capable of performing their intended purpose under the use conditions described by this specification. Compounds shall not inhibit the operation of any safety features (such as air pressure equalization port, overpressure relief device or heater). When tested in accordance with 4.4.3, the insulating, impregnating, potting and sealing compounds shall not flow at high temperature, and shall not crack or draw away from the sides of a container at low temperature. Any compound used shall be non-flammable and non-toxic (see 3.15.4). Vendor certification shall be required.

3.2.4.1.2 Insulating compounds for electrical connectors, wires, and tabs. All points inside a battery that have positive and negative polarity in close proximity shall have not less

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

than one layer of insulation between the positive and negative. Insulating material, or layers of multiple insulating materials between positive and negative points, shall have the following characteristics at a minimum:

a. Softening temperature: Not less than 150 °C (see 6.3.41).

b. Lengthwise shrinkage: Not greater than 3 percent after application.

c. Thickness: Not less than 0.127 mm.

Material shall not shrink, soften, or crack during any of the tests of this specification with the exception of battery abuse tests (see 4.10.2.8), unless specified otherwise. The material shall be non-flammable, non-toxic, and impervious to the electrolyte of the battery (see 3.15.4). Vendor certification shall be required.

3.2.4.2 Elastomeric materials. All elastomeric materials used in the battery shall show no cracks, blisters or other deterioration, nor cause degradation of battery performance after being tested as specified herein, with the exception of destructive testing. Any elastomeric material used shall be non-flammable and non-toxic (see 3.15.4). Vendor certification shall be required.

3.3 Manufacturing.

3.3.1 Physical characteristics. When examined in accordance with 4.4.2.1 and 4.4.2.2, each cell and battery shall be free of visual and mechanical defects in accordance with 3.16 before and after being subjected to the testing in section 4, excluding test samples subjected to destructive tests as identified in table VII.

3.3.2 Dimensions and weights. When examined in accordance with 4.4.2.3, the dimensions and weights of each battery shall be as defined in figure 1 through figure 4 and in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

TABLE I. Physical and electrical requirements.

Characteristics	Type 1 minimum values (at normal conditions unless specified)			
Classification:	Class A		Class B	
Sub-Classification:	1-A55	1-A75	1-B55	1-B90
Color:	SAE AMS-STD-595 color 33446	SAE AMS-STD-595 color 33446	SAE AMS-STD-595 color 33446	SAE AMS-STD-595 color 33446
Weight (max):	30 kg	30 kg	30 kg	30 kg
Nominal voltage:	24 V	24 V	24 V	24 V
Full charge capacity:	55 Ah (at 22 °C)	75 Ah (at 22 °C)	55 Ah (at 22 °C)	90 Ah (at 22 °C)
Cranking amps (no pre-heating):	1100 A for 30 sec at 55 °C 600 A for 30 sec at -18 °C 300 A for 30 sec at -32 °C 200 A for 30 sec at -40 °C	1100 A for 30 sec at 55 °C 600 A for 30 sec at -18 °C 300 A for 30 sec at -32 °C 200 A for 30 sec at -40 °C	1100 A for 30 sec at 55 °C 1100 A for 30 sec at -18 °C 600 A for 30 sec at -32 °C 400 A for 30 sec at -40 °C	1100 A for 30 sec at 55 °C 1100 A for 30 sec at -18 °C 600 A for 30 sec at -32 °C 400 A for 30 sec at -40 °C
Cranking amps (pre-heating at -18 °C):	1100 A for 30 sec within 15 minutes	1100 A for 30 sec within 15 minutes	1100 A for 30 sec within 10 minutes	1100 A for 30 sec within 10 minutes
Cranking amps (pre-heating at -48 °C):	600 A for 30 sec within 30 minutes	600 A for 30 sec within 30 minutes	1100 A for 30 sec within 30 minutes	1100 A for 30 sec within 30 minutes
Deep cycle life:	1000 cycles at 38 °C 500 cycles at 50 °C	1000 cycles at 38 °C 500 cycles at 50 °C	1000 cycles at 38 °C 500 cycles at 50 °C	1000 cycles at 38 °C 500 cycles at 50 °C
Battery service life:	5 years	5 years	5 years	5 years
Continuous cycling current discharge rating:	120 A	150 A	120 A	180 A
Continuous cycling current charge rating:	60 A	75 A	60 A	90 A
Pulse load rating:	600 A (at 30 seconds)	600 A (at 30 seconds)	1100 A (at 30 seconds)	1100 A (at 30 seconds)
Rapid charging time:	20 minutes	25 minutes	20 minutes	30 minutes
Operating temperature range:	-46 to 71 °C	-46 to 71 °C	-46 to 71 °C	-46 to 71 °C
Storage temperature range:	-54 to 88 °C	-54 to 88 °C	-54 to 88 °C	-54 to 88 °C
Minimum cranking voltage (below 0 °C)	14.4 V	14.4 V	14.4 V	14.4 V
Number of batteries capable of being connected in series	1	1	1	1
Number of batteries capable of being connected in parallel	12	12	12	12
SAE J2464 Hazard Severity Level (battery nail penetration, crush, and overcharge abuse only)	≤ 4	≤ 4	≤ 4	≤ 4
SAE J2464 Hazard Severity Level (battery projectile penetration only)	≤ 6	≤ 6	≤ 6	≤ 6

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

TABLE I. Physical and electrical requirements – Continued.

Characteristics	Type 2 minimum values (at normal conditions unless specified)		
Classification:	Class A		Class B
Sub-Classification:	2-A55	2-A75	2-B90
Color:	SAE AMS-STD-595 color 33446	SAE AMS-STD-595 color 33446	SAE AMS-STD-595 color 33446
Weight (max):	30 kg	30 kg	30 kg
Nominal voltage:	24 V	24 V	24 V
Full charge capacity:	55 Ah (at 22 °C)	75 Ah (at 22 °C)	90 Ah (at 22 °C)
Cranking amps (no pre-heating):	1100 A for 30 sec at 55 °C 600 A for 30 sec at -18 °C 300 A for 30 sec at -32 °C 200 A for 30 sec at -40 °C	1100 A for 30 sec at 55 °C 600 A for 30 sec at -18 °C 300 A for 30 sec at -32 °C 200 A for 30 sec at -40 °C	1100 A for 30 sec at 55 °C 1100 A for 30 sec at -18 °C 600 A for 30 sec at -32 °C 400 A for 30 sec at -40 °C
Cranking amps (pre-heating at -18 °C):	1100 A for 30 sec within 15 minutes	1100 A for 30 sec within 15 minutes	1100 A for 30 sec within 10 minutes
Cranking amps (pre-heating at -48 °C):	600 A for 30 sec within 30 minutes	600 A for 30 sec within 30 minutes	1100 A for 30 sec within 30 minutes
Deep cycle life:	1000 cycles at 38 °C 500 cycles at 50 °C	1000 cycles at 38 °C 500 cycles at 50 °C	1000 cycles at 38 °C 500 cycles at 50 °C
Battery service life:	5 years	5 years	5 years
Continuous cycling current discharge rating:	120 A	150 A	180 A
Continuous cycling current charge rating:	60 A	75 A	90 A
Pulse load rating:	600 A (at 30 seconds)	600 A (at 30 seconds)	1100 A (at 30 seconds)
Rapid charging time:	20 minutes	25 minutes	30 minutes
Operating temperature range:	-46 to 71 °C	-46 to 71 °C	-46 to 71 °C
Storage temperature range:	-54 to 88 °C	-54 to 88 °C	-54 to 88 °C
Minimum cranking voltage (below 0 °C)	14.4 V	14.4 V	14.4 V
Number of batteries capable of being connected in series	1	1	1
Number of batteries capable of being connected in parallel	12	12	12
SAE J2464 Hazard Severity Level (battery nail penetration, crush, and overcharge abuse only)	≤ 6	≤ 6	≤ 6
SAE J2464 Hazard Severity Level (battery projectile penetration only)	≤ 6	≤ 6	≤ 6

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

3.3.3 Electrical interfaces.

3.3.3.1 Terminal posts and threaded sockets. Batteries shall have terminal posts with threaded sockets. The threaded sockets shall be able to maintain a seal during immersion testing (see 3.8.6 and 4.7.6). The threaded socket for the negative terminal post shall have a minimum depth of 13 mm, with a 5/16-18 thread. The threaded socket for the positive terminal post shall have a minimum depth of 13 mm, with a 3/8-16 thread. The positive terminal post shall be embossed by a "+," a "POS," or a "P," and the negative terminal post by a "-," a "NEG," or an "N" as shown in figure 5. The terminal posts design shall be in accordance with figure 5. Location of the threaded sockets on the battery shall be in accordance with figure 1. The area around each threaded socket shall be an electrically conductive pad with a diameter of 27±1 mm (see figure 1). The electrically conductive pad shall be at least 1 mm above the electrically insulating material as described below. The maximum height of the electrically conductive pad shall not extend above the top surface of the battery, including any coatings, by more than 3 mm. The area around the electrically conductive pad shall be made of an electrically insulating material to prevent shorting to the battery case from the cables. This electrically insulating area shall have a radius of at least 26.5 mm from the center of the threaded sockets, and shall not interfere with any markings on the top battery surface. The height of the electrically insulating material shall be no more than 1 mm from the top surface of the battery and no less than flush with the top surface of the battery. An applied torque of up to 28.25 Newton-meter (Nm), in the clockwise direction, shall not cause damage to the threaded sockets, terminal posts, terminal housing, or any other part of the battery. Terminal material shall be compatible with use of standard vehicle lead acid battery clamps and cables. Battery clamps installed on terminal posts shall support the weight of the battery without slipping off of the terminal post. See 4.4.2.4.1 for verification method.

3.3.3.2 Communication interface. A communication interface for the battery shall be provided for controller area networks (CAN) communication, configuration, and other necessary signals for the battery management system. The connector for the unit shall be located on the top of the battery case (see figure 1) and in such a fashion as to avoid moisture or contamination of the connector. The connector shall be MIL-DTL-38999 Series III receptacle, with insert arrangement C35, socket contacts (style S), corrosion resistant steel shell (class K), and normal key position. The connector format and pin out shall be as shown in table II. The connector shall be inspected in accordance with 4.4.2.4.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

TABLE II. J1 battery communications interface.

Signal name	J1 Contacts
Power (PWR)	1
Power (PWR) return	2
Dormant 1	3
Dormant 2	4
Master power switch in	5
Master power switch return	6
CAN _SHLD	7
CAN_A _H	8
CAN_A _L	9
CAN_GND	10
CAN_B _H	11
CAN_B _L	12
Configuration pin 1 (baud rate)	13
Configuration pin 2 (baud rate)	14
Configuration pin 3 (position ID)	15
Configuration pin 4 (position ID)	16
Configuration pin 5 (position ID)	17
Configuration pin 6 (position ID)	18
Reset	19
Common (COM)	20
Reserved	21
Reserved	22

3.3.3.2.1 Isolation, electrostatic discharge, and filtering. Appropriate isolation, electrostatic discharge (ESD) protection, and filtering shall be added to the battery communication interface to meet the requirements of 3.5.1, 3.9, and 3.10. See 4.4.2.4.2.1 for verification method.

3.3.3.2.2 Electrical bonding. The battery shall include the necessary electrical bonding to meet the requirements of 3.9. Conductive surfaces, shields and mechanical interfaces of the battery shall provide electrical continuity in accordance with MIL-STD-464 electrical bonding requirements for control of electromagnetic environment effects. The communication interface connector shell shall be electrically bonded to surfaces of the case or internal electromagnetic shields requiring connection to ground plane. Vendor certification shall be required.

3.3.4 Cells.

3.3.4.1 Cell shorting prevention. Each cell shall be protected from shorting or inadvertent electrical contact with other battery components. Where necessary, each cell case shall have an individual insulating coating or sleeve, or be made from an electrically insulating material. Material selected shall meet the requirements of 3.2.4. Vendor certification shall be required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

3.3.4.2 Cell leakage. No electrolyte leakage shall be allowed outside the cell within the battery. Vendor certification shall be required.

3.3.5 Battery case and accessories.

3.3.5.1 Battery case. The battery case shall be capable of maintaining the specified dimensions during the life of the battery and shall be designed to prevent dimensional expansion that will prevent its removal from equipment (see 4.4.2.3). The battery case shall have a smooth finish free from pitting, blowholes, rough spots, or other deformations (see 4.4.2.1 and 4.4.2.2). The battery case shall be fabricated of material having sufficient strength to withstand the environmental and electrical tests specified herein (see 4.4 and 4.7), and shall be acid resistant or have an acid resistant finish or coating (see 4.14.1). The battery case shall be one color and of the same material. Materials shall be non-toxic when tested in accordance with Test Methods TO14, TO15 and TO17 of EPA/625/R-96/010b (vendor certification required). The battery top and battery bottom faces shall be parallel within 1.5 mm total (see figure 2 and 4.4.2.3). When a non-metallic material is used for the battery case, the material shall be classified in accordance with UL 94, and shall be rated to 5VA classification requirements. To determine conformance, UL 94 test specimens tested as specified in 4.4.2.5.1 for non-metallic case materials shall be required.

3.3.5.1.1 Battery case bottom. The battery shall be supported by the bottom of the case. Point support by feet or other protrusions shall be prohibited. Recesses into the bottom of the case shall not exceed 10 mm in length, 10 mm in width, and 1 mm in depth, excluding fastener recesses. Total area of recesses shall not exceed 40 percent of total bottom surface area. All edges of the case bottom shall be rounded to a minimum of 2 mm radius to prevent damage to equipment during installation. Conformance to this requirement shall be verified through engineering analysis (see 4.4.1), and visual inspection (see 4.4.2).

3.3.5.2 Battery accessories. The dimensions and locations of the accessories shall be as specified in figure 1 through figure 3.

3.3.5.2.1 Overpressure relief device. An overpressure relief device shall be incorporated into the battery case. The device or devices shall be located on the left, right, or both sides of the battery (see figure 3). The overpressure relief device shall not protrude greater than 8 mm from either side of the battery (see figure 2). The overpressure relief device shall be fully contained within the designated overpressure relief device areas (see figure 3). This device shall be designed to release below the bursting pressure of the battery case and above the normal operating pressure of the battery. The design of the battery shall be such that the paths from the individual cell units to the battery overpressure relief device are sufficient to permit the removal of gases. The device shall prevent the entry of liquids into the battery case. The overpressure relief device protrusions shall be designed to prevent its opening from handling or incidental contact. To determine conformance with this requirement, test in accordance with 4.4.2.5.2.

3.3.5.2.2 Air pressure equalization port. The battery shall have a non-removable air pressure equalization port to prevent air pressure imbalance between the inside of the battery and

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

the battery's external environment. The port shall be located on the top of the battery (see figure 1). No portion of the air pressure equalization port shall completely detach from the case. The air pressure equalization port shall withstand temperatures from -54 to 88 °C without cracking, melting or other damage. To determine conformance with this requirement, test in accordance with 4.4.2.5.3.

3.3.5.2.3 Heater(s). Heater(s) shall be incorporated into batteries to improve cold temperature performance. To determine conformance with this requirement, test in accordance with 4.4.2.5.4. The following shall apply for battery heaters (vendor certification required):

a. The battery management system (BMS) shall automatically manage the temperature. Automatic control of the heater(s) shall be activated when the master power switch is "On" in the Operational State, and when the battery is configured with the Automatic Heater Function enabled.

b. Heaters shall be internally powered by the battery and be capable of being powered externally through the battery power terminals by a MIL-STD-1275 28V bus.

c. The heater shall not be operated above 10 °C internal battery temperature. If a higher charge rate than the continuous cycling current charge rating of table I is possible by allowing heater operation above 10 °C, a waiver for the 10 °C cut off requirement may be obtained from the Qualifying Activity.

d. Above 0 °C internal battery temperature, the battery shall be capable of charging (see 3.5.11), whether the automatic heater function is enabled or disabled.

e. All heater components shall be located inside the battery case.

f. Heater elements and wire assemblies shall be electrically insulated and installed in a manner which minimizes potential battery damage due to electrical shorting, sparking, or other electrical hazards.

g. Both primary and secondary (backup) temperature limiting controls shall be incorporated into the battery's heater electrical circuits to prevent overheating and shall be wired in series. If the primary heater control fails, the battery shall not reach a damaging temperature.

h. If heat generated by the battery causes the surface temperature of the battery to exceed the maximum temperature limits for momentary contact as defined by the Thermal contacts hazards section in MIL-STD-1472 under any normal operating condition, the battery shall include a "Caution: Hot Surface" warning label located on the top of the battery in accordance with 3.4.2.1. In accordance with MIL-STD-1472, surface temperatures induced by climatic environment are exempt from this requirement.

3.3.5.2.4 Handles. Handles shall be fabricated from flexible material of the developed length specified in figure 6. A more rigid removable handle may be offered as an option, provided it does not exceed the length or width of the envelope of the handle attachment points

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

on each side of the battery, nor the height of the battery case, and provided that it meets all the other physical requirements for the handles. Handles and attachments shall be undamaged after tested in accordance with 4.4.2.5.5. If knots are used to secure a plastic rope handle, the rope handles shall be attached in a manner to prevent untying, and rope ends shall be sealed to prevent fraying. The material of the handles shall be corrosion resistant to sulfuric acid, which shall be verified through engineering analysis (see 4.4.1). Handle support structures may extend below the handle into the area designated for overpressure relief devices & handle supports (see figure 3). The supports shall not interfere with the overpressure relief devices. The supports shall not protrude more than 8 mm from the side of the battery and shall taper from 8 mm to 0 mm before reaching the bottom of the 15 mm designated area.

3.3.6 Battle override mode. The battery shall have a battle override mode activated by the user allowing for extended operation which could otherwise degrade the battery service life (see 3.5.10), deep cycle life (see 3.5.6), and high-temperature deep cycle life (see 3.5.7) of the battery. Charging or discharging (pulse or continuous operation) of the battery within battle override shall not exceed SAE J2464 Hazard Severity Level 1. The battery shall enter battle override mode when it receives the battle override enable CAN message. When battle override mode is active, the battery's terminal cutoff voltage specified in 4.4.6.1 d shall be lowered to a battle override terminal cutoff voltage selected by the manufacturer. The battle override terminal cutoff voltage selected shall be the lowest possible terminal voltage the battery can permit based on chemistry without irreversible loss of function. The overdischarge safety protection (see 3.6.3.3 b) shall also be adjusted to account for the lower battle override terminal cutoff voltage. Additionally, when battle override mode is active, the over-temperature limit safety protection (see 3.6.3.3 d) shall be raised to the highest temperature the battery can permit based on chemistry such that thermal runaway is avoided. With battle override mode active, the battery shall maintain full functional operation. Vendor certification is required (see 4.4.2.6). The battery shall exit battle override if a battle override enable CAN message has not been received within a timeout period of 5 seconds or if the battle override disable CAN message has been received. Refer to the Appendix A of this specification for further information regarding the information on the CAN bus and its formatting.

3.4 Color and marking.

3.4.1 Battery color. The battery case color shall be in accordance with SAE AMS-STD-595 color ID 33446 confirmed by vendor certification. The color of all visible parts of each battery, including the handle attachment points, shall conform to the specified color. The following battery parts may be excluded from this requirement: the terminal posts and threaded sockets, the electrically conductive pads, the electrically insulating material around the electrically conductive pads, the communication interface, the overpressure relief device(s), the air pressure equalization port, the handles, fasteners or screws attaching the base to the lid, identification markings, warning markings, and instructions (see 4.4.2.1).

3.4.2 Marking, general. Identification markings shall be securely and permanently attached to the battery. Conformance shall be determined by examination and testing for the defects with standard equipment in accordance with 4.4.2.1 and 4.4.2.2. The front of the battery shall have a label with the information specified in 3.4.3.1 (see figure 2). The sides of the battery

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

shall be marked with “6T Li-ion” with letters approximately 25mm in height (see figure 3). The side(s) of the battery which have an overpressure relief device shall also have a label prohibiting removal of the overpressure relief device and include the warning marking of “Upon rupture, hot gases and flame may escape from this area” (see figure 3). The top of the battery shall have the following markings:

a. A specific warning label prohibiting removal of the air pressure equalization port and the communication interface (see figure 7).

b. A label with removable tabs for identifying the "in-service" date (month and year) (see figure 7).

c. The lot number in accordance with SAE AS478.

d. A label with the information specified in 3.4.3.3 (see figure 7).

3.4.2.1 Marking print and color. Each battery shall be provided with a permanent, legible hot-stamped, engraved, etched, decal, label, name plate, or case color contrasting printed marking (black or white) as specified herein and that shall be legible throughout all tests. The identification markings shall use a type size not less than 4.2 mm and the warning markings shall use a type size not less than 6.3 mm. Direct printing on the battery is the preferred method. The markings may be placed on more than one surface. Lettering shall be without serifs (sans-serif) (see 4.4.2.1 and 4.4.2.2).

3.4.2.2 Permanence and durability. Markings examined on received samples and those undergoing the tests in 4.4 shall show no evidence of blistering, delamination, separation, discoloration, chipping, dissolving, softening, illegibility, corrosion, loosening, splitting, flaking, cracking, peeling, warping, or fading (see 4.4.2.1 and 4.4.2.2).

3.4.3 Identification markings.

3.4.3.1 Battery identification marking. The battery identification marking shall contain the following information. The manufacturer shall fill in the information in brackets as shown below. Abbreviations in accordance with ASME Y14.38 and acronyms are permitted. Placement of the statements shown below is flexible (see 4.4.2.1 and 4.4.2.2).

a. BATTERY, RECHARGEABLE

b. Battery Identification Lithium Ion, Non-spillable, Chemistry: [Lithium Iron Phosphate – FeP, Lithium Mixed Metal Oxide – MMO], CLASSIFICATION: [1-A55, 1-A75, 1-B55, 1-B90, 2-A55, 2-A75, or 2-B90][LL (if approved as long life)]

c. Designation [Military and SAE, when applicable].

d. MIL Part No. or PIN :

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

e. Battery Voltage: 24 Volts

f. Full Capacity Rating [_Ah] @ 1C rate: [Full charge capacity from table I.]

g. Full Capacity Rating [_Wh] @ 1C rate: [Max capacity defined by the manufacturer]

h. Cranking Amps at -18, -32, and -40 °C:

i. NSN:

j. Manufacturer's Battery Part Number:

k. Contract or Order Number:

l. Date of Manufacture and Lot Code:

m. Unique Serial Number:

n. MFG Warranty Details:

o. Manufacturer:

p. Manufacturer's CAGE code:

q. MFG Location:

r. Battery weight in pounds:

3.4.3.1.1 Date of battery manufacture and lot code. The lot code shown shall indicate the month, year, and lot number of manufacture of the battery by means of a six digit number in which the first two digits shall indicate the number of the month, the middle two digits shall indicate the year and the last two digits indicate the inspection lot number. Months earlier than the tenth month shall be a single digit preceded by "0". A forward slash "/" shall separate the first two digits from the middle two and a dash "-" shall separate the date code from the lot number. When a battery is completed during the last three working days of a month or the first three working days of the subsequent month, the manufacturer is permitted to use either month as the coded month of manufacture. For example, lot code 04/09-12 indicates the lot was compiled in April 2009 and was the twelfth lot (see 4.4.2.1 and 4.4.2.2).

3.4.3.2 Item unique identification (IUID). Batteries meeting IUID requirements (see DFARS 252.211-7003) or as specified in the contract or delivery order (see 6.2) shall be marked with IUID-compliant 2D Data Matrix symbols in accordance with MIL-STD-130. Markings shall remain legible after all tests (see 4.4.2.1 and 4.4.2.2). Markings shall be on either side of the battery. The following core IUID data elements shall be included:

a. IUID Type

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

b. Concatenated unique item identifier

c. Issuing agency code

d. Enterprise identification number

e. Original part, lot or batch number

f. Current part number

g. Serial number

h. Item description

i. Contractor cage or DUNS number

j. Contract number

k. CLIN/SLIN/ELIN

l. Acquisition cost

m. Acceptance location code

n. Shipment/acceptance date

o. Ship to code

p. Web link to safety data sheet (SDS)

3.4.3.3 Maintenance advisory tag. Figure 8 is an example of the maintenance advisory tag. The maintenance advisory tag shall be placed on the top of the battery (see figure 7). The maintenance advisory tag shall remain legible and remain attached through all testing (see 4.4.2.1 and 4.4.2.2). Unless otherwise specified in the contract, maintenance advisory tag shall include the following:

a. Marked "***RECOVERABLE ITEM***".

b. Marked "ESTIMATED 5 YEAR MINIMUM SERVICE LIFE".

c. Marked "DO NOT DISPOSE WITHOUT TESTING IAW TB".

d. Marked "DO NOT FILL/OPEN (NOT USER SERVICABLE)".

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

e. Marked “USE OF APPROVED TESTING AND CHARGING EQUIPMENT IS REQUIRED”.

f. Marked “IN-SERVICE DATE (MM/YYYY)”. This marking shall be a box with write-in space for the install date, and shall also include removable tabs for the install date.

g. Box marked “CHECK IF RETEST FAILS”. This marking shall be a box with write-in space.

h. Yellow background.

3.4.4 Instructions and notes. The back of each battery shall be marked with complete instructions for operation and charging of the battery. The instructions and notes tag shall remain legible and remain attached through all testing (see 4.4.2.1 and 4.4.2.2). The instructions and notes tag shall include the following:

a. Preferred charging method

b. Alternate charging method if applicable

c. Storage

d. Maintenance (e.g. charge periodically)

3.4.5 Warning markings. All warning markings shall remain legible and remain attached through all testing (see 4.4.2.1 and 4.4.2.2).

3.4.5.1 General warning markings. The following warning markings shall appear in capital letters on the top of each battery:

a. DO NOT INSTALL LITHIUM ION BATTERIES WITH 12 VOLT LEAD ACID BATTERIES.

b. CAUTION: LITHIUM ION BATTERY. RECHARGE PER AUTHORIZED/APPROVED INSTRUCTIONS.

c. DO NOT CRUSH, MUTILATE, SHORT CIRCUIT, REVERSE POLARITY, DISASSEMBLE, BURN, OR DISPOSE OF IN TRASH.

d. CONTACT EMERGENCY SERVICES IF THERE IS INDICATION OF VENTING, BURNING, BULGING, LOCALIZED DISCOLORATION, LEAKAGE, ODORS, OR THE BATTERY IS EXTREMELY HOT TO THE TOUCH.

3.4.5.2 Hazard severity labels. The following warning labels shall appear on the top of batteries having a SAE J2464 Hazard Severity of greater than 4 for any tests except for battery projectile penetration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

a. CAUTION: DO NOT INSTALL IN VEHICLES APPROVED ONLY FOR TYPE 1 BATTERIES.

b. BATTERY CAN PRODUCE FIRE OR FLAME IF ABUSED.

The following warning label shall appear on the top of batteries having a SAE J2464 Hazard Severity of 4 or less for all tests except for battery projectile penetration.

a. BATTERY CAN PRODUCE FIRE OR FLAME IF ABUSED.

3.5 Operating requirements.

3.5.1 Dielectric strength and insulation resistance. The battery and its components shall be tested as specified in 4.4.4. The dielectric strength or leakage current shall not be greater than 0.5 milliamperes RMS and the insulation resistance between them shall not be less than 10 megaohms.

3.5.2 Operating and storage temperature range. The battery shall be required to operate over the following temperature range: -46 to 71 °C. The battery shall be capable of being stored over the following temperature range: -54 to 88 °C. When tested in accordance with 4.4.5, the battery full charge capacity shall not decrease more than 10 percent from the full charge capacity at the start of the test.

3.5.3 Battery voltage. The operational voltage range shall comply with MIL-STD-1275, except minimum cranking voltage as defined in table I. Vendor certification shall be required.

3.5.4 Full charge capacity. Each fully charged battery shall yield a full charge capacity of not less than that specified in table I when tested in accordance with 4.4.6.1. After testing, batteries shall meet the inspection criteria of 3.16 and the dimensional and weight requirements of 3.3.2. The cell or battery temperature shall not exceed the temperature defined by the manufacturer for their battery over-temperature protection as specified in 3.11.2.4 at any time during a capacity test.

3.5.5 Cranking amps. Fully charged batteries shall be capable of maintaining cranking amps as specified in table I when tested as specified in 4.4.6.2. During the cranking tests above 0 °C, the voltage shall not drop below the cranking surge voltage as specified in MIL-STD-1275; otherwise the voltage shall not drop below the voltage specified in table I. After test, the battery shall exhibit a minimum terminal voltage as specified in 3.5.3.

3.5.6 Deep cycle life. The battery shall maintain at least 70 percent of the baseline full charge capacity as determined in 4.4.6.3 during the complete deep cycle life test. The battery shall successfully complete 1000, 100-percent depth of discharge cycles at 38±3 °C, when tested as specified in 4.4.6.3. During any cycle, if the battery does not maintain at least 70 percent of full charge capacity, that cycle shall be considered a failed cycle and shall be repeated. The

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

battery is permitted 10 failed cycles in total during the test. If more than 10 failed cycles occur, or any failed cycles occur consecutively, the test shall be considered a failure.

3.5.7 High temperature deep cycle life. The battery shall maintain at least 70 percent of the baseline full charge capacity as determined in 4.4.6.4 during the complete high temperature deep cycle life test. The battery shall successfully complete 500, 100-percent depth of discharge cycles at 50±3 °C, when tested as specified in 4.4.6.4. During any cycle, if the battery does not maintain at least 70 percent of full charge capacity, that cycle shall be considered a failed cycle and shall be repeated. The battery is permitted 5 failed cycles in total during the test. If more than 5 failed cycles occur, or any failed cycles occur consecutively, the test shall be considered a failure.

3.5.8 Retention of charge. Following not less than 90 calendar days in the Operational State (see 3.6.6.3) with the master power switch "Off" at 40 °C and -18 °C batteries shall provide pulse load rating specified in table I, when tested as specified in 4.4.6.5.

3.5.9 Battery storage life. Each battery shall be capable of not less than two years of warehouse storage, without any maintenance during storage, at a temperature of 22±5 °C (vendor certification required). Batteries stored after full charge in accordance with 4.4.9, under the above conditions shall not lose more than 20 percent of the full charge capacity of the battery, as determined by 4.4.6.1, at the end of a 180 day storage period. The full charge capacity, as defined in table I, shall be recoverable upon recharge after the 180 day storage period (see 4.4.7).

3.5.10 Battery service life. The battery service life shall be five years when operated under normal conditions (see 4.3.1.1). Test in accordance with section 4.4.8.

3.5.11 Charging. Each battery shall be capable of charging from the vehicle electrical power bus defined in MIL-STD-1275. See 4.4.9 for verification.

3.5.11.1 Charge acceptance. The battery shall be capable of being recharged to 90 percent of full charge capacity, in accordance with table I, within 1 hour starting from 0 percent state of charge at 22±5 °C. The battery shall be capable of being recharged to 100 percent of full charge capacity, in accordance with table I, within 1.5 hours starting from 0 percent state of charge at 22±5 °C. See 4.4.9.1 for verification.

3.5.11.2 Rapid charging. The battery shall be capable of being recharged to 90 percent of full charge capacity in accordance with table I, from a 300 amp charging supply starting from zero percent state of charge at 22±5 °C. The charge is to be terminated at the rapid charge time in accordance with table I. See 4.4.9.2 for verification.

3.5.12 Jump start power export. The battery when installed in a vehicle shall not prevent the vehicle from exporting power to jump start another like vehicle. The activation of safety protections (see 3.6.3.3) are not considered a failure of this requirement. Vendor certification is required. See section 4.4.10 for verification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

3.5.13 Jump start power import. The battery when installed in a vehicle shall not prevent the vehicle from importing power to allow a jump start from another like vehicle. The activation of safety protections (see 3.6.3.3) are not considered a failure of this requirement. Vendor certification is required. See section 4.4.11 for verification.

3.6 Battery management system (BMS).

3.6.1 BMS requirements. The battery shall contain an integrated battery management system (BMS). The BMS shall not add volume to the battery that exceeds the dimensional limitations in 3.3.2. Battery firmware shall comply with Motor Industry Software Reliability Association (MISRA), SEI CERT, or equivalent software development guidelines. Exceptions to software development guidelines shall be approved by the Qualifying Activity. Manufacturer certification shall be required. See 4.5.1 for verification.

3.6.2 BMS power. The BMS shall be powered internally from the battery's cells and support being powered externally through the battery power terminals in case of insufficient power from the battery cells, by a MIL-STD-1275 28 V bus. Vendor certification shall be required. See 4.5.2 for verification method.

3.6.3 BMS features. The battery shall support all, but is not limited to, the following BMS features:

3.6.3.1 Monitoring. The battery shall be capable of measuring and communicating battery voltage, battery internal temperatures, and current into or out of the battery. The battery shall be capable of calculating and communicating state of charge (SOC), state of health (SOH), capacity (same as the amount of capacity remaining used in SOC), and time remaining. See 4.5.3.1 for verification method.

3.6.3.2 Equalization. The battery shall perform equalization to properly balance cells, strings, and modules as appropriate to maintain cell life and safety. The battery shall be capable of equalizing the cells at a minimum rate of two percent of the rated full charge capacity of the battery per hour (see table I). At the end of equalization, the difference between the maximum and minimum cell voltages shall not exceed 25 mV. Vendor certification shall be required. See 4.5.3.2 for verification method.

3.6.3.3 Safety protections. The battery shall be protected from, but not limited to, the following conditions. See 4.5.3.3 for verification method.

a. Overcharge

b. Overdischarge

c. Overcurrent or short-circuit

d. Over-temperature

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

e. Low temperature charge protection

3.6.3.4 Enable/disable automatic heaters. The battery shall accept a command on the CAN bus to enable and disable the automatic heating function. Refer to the Appendix A of this specification for further information regarding messages on the CAN bus and its formatting. See 4.5.3.4 for verification method.

3.6.3.5 Contactor(s). The battery shall have a resettable subcomponent(s) with the ability to interrupt and prevent electric current flow through the battery terminals, referred to in this specification as a contactor. The contactor(s) shall be controlled automatically by the BMS. The battery shall accept a command on the CAN bus to alter the state of the contactor. Refer to the Appendix A of this specification for further information regarding messages on the CAN bus and its formatting. The contactor(s) shall be able to switch a minimum of 100,000 times. See 4.5.3.5 for verification method.

3.6.4 Communication interface. The battery shall transmit and receive messages on the CAN bus. The battery shall meet the requirements of SAE J1939 and ISO 11898. Additional information is available in ISO 11898-1 and ISO 11898-2. The communication interface provides the main vehicle interface with the battery. See 4.5.4 for verification method.

3.6.4.1 Configuration pins. The battery shall use specified configuration pins as a means to configure required features (see table II). Refer to Appendix A of this specification for further information regarding the use of configuration pins. See 4.5.4.1 for verification method.

3.6.4.2 Position identity. The battery shall have a position identity. The purpose of the position identity is for the battery to determine and report the battery's position when multiple 6T Li-ion batteries are installed in the vehicle. The position identity shall be determined using configuration pins on the communication interface. Refer to the Appendix A of this specification for further information regarding the use of CAN and configuration pins on the battery communication interface. See 4.5.4.2 for verification method.

3.6.4.3 Dual CAN interfaces. The battery shall be capable of communicating on two independent CAN buses with separate interface connections. One CAN bus interface shall be primary and the other secondary. Refer to the Appendix A of this specification for further information regarding the use of the battery CAN communication interfaces. See 4.5.4.3 for verification method.

3.6.4.4 Baud rate. The primary and secondary CAN bus interfaces of the battery shall be able to communicate at a selectable rate of 250 Kbps, 500 Kbps, and 1 Mbps determined using configuration pins on the communication interface. Refer to the Appendix A of this specification for further information regarding the use of CAN and configuration pins on the battery communication interface. See 4.5.4.4 for verification method.

3.6.4.5 NAME. The battery shall be able to communicate the SAE J1939 NAME on the CAN bus in accordance with SAE J1939. The battery shall support modifying the fields of the battery NAME in maintenance state using the NAME management (NM) message. The

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

NAME function instance field shall be equal to the position identity value (see 3.6.4.2) by default. See 4.5.4.5 for verification method.

3.6.4.6 Preferred source address. The battery shall use a preferred source address based on its position identity, as show in table III. See 4.5.4.6 for verification method.

TABLE III. Preferred source addresses.

Position identity	Source address
0	246
1	245
2	244
3	243
4	242
5	241
6	240
7	239
8	238
9	237
10	236
11	235
12	234
13	233
14	232
15	254

3.6.4.6.1 Arbitrary address capable. The battery shall be arbitrary address capable as specified in SAE J1939. The battery shall also allow enabling or disabling arbitrary address capability using the NM message in accordance with SAE J1939-81, and update the NAME arbitrary address capable field accordingly. See 4.5.4.6.1 for verification method.

3.6.4.6.2 Service configurable source address. The battery shall use a service configurable source address that can be configured by the commanded address (CA) message as the preferred source address in the Maintenance State. When a commanded address message is received on the CAN bus to change the preferred source address, the battery shall disable arbitrary address capability and update the NAME arbitrary address capable field. Refer to the Appendix A of this specification for further information regarding the information on the CAN bus and its formatting. See 4.5.4.6.2 for verification method.

3.6.4.7 Termination resistance. The battery shall not be the terminating device or provide a termination resistance on the CAN bus interfaces. See 4.5.4.7 for verification method.

3.6.4.8 Firmware update over CAN bus. In the Maintenance State, the battery shall allow full firmware update on the CAN bus. The battery firmware update method shall be able to be performed while battery is connected to a vehicle CAN bus. The update procedure shall not require the battery to be disconnected from the vehicle CAN bus. The time needed to

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

transmit the firmware over the CAN bus shall not exceed 15 minutes. See 4.5.4.8 for verification method. See Appendix A for more information regarding firmware updates.

3.6.5 Monitoring performance characteristics. The performance characteristics of the battery are listed in table IV.

TABLE IV. Performance characteristics.

Data	Range	Resolution	Error	Notes
State of charge (%)	0 to 100	0.5	±5 SOC	100 = fully charged 0 = empty
State of health (%)	0 to 100	0.5	±5 SOH	100 = fully healthy 0 = unhealthy
Capacity (Ah)	0 to 250	1	±3	Calculated full capacity of the battery at present conditions at the 1C rate.
Battery voltage (V)	0 to 33	0.05	±0.1	Voltage across external power terminals.
Battery current (A)	0 to ±1,600	0.05	< -400±5 -400 to 400±1 > 400±5	+ value = battery charging - value = battery discharging
Internal battery temperature (°C)	-55 to 105	1	±2	Convert and report also in °F.
Time remaining (hours)	0 – 60 (discharge only)	0.1	N/A	
Bus voltage request (V)	0 to 33	0.05	N/A	Requested voltage for charging the battery.
Open circuit voltage (V)	0 to 33	0.05	±1	Predicted open circuit voltage, under load.
Internal pack voltage (V)	0 to 33	0.05	±0.1	Voltage across internal cell assembly.
Maximum charge current (A)	0 to 300	0.05	-3/+0	Maximum charge current while maintaining functions in Operational State.
Power capability estimation for 10 and 30 seconds (W)	0 to 64255	1	N/A	

3.6.5.1 Calculated parameters. Unless specified otherwise, the battery shall compute and report the following calculated parameters on the CAN bus once every 15 seconds, unless specified otherwise. The battery shall allow disabling or enabling regular interval messaging in

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

Maintenance State, with regular interval messaging enabled by default. The battery shall also be able to report messages containing calculated parameters on the CAN bus when a request (RQST) message is received. When responding to requests, the battery shall not transmit messages at a rate faster than once per second. When request messages are received at a rate faster than once every 15 seconds for a message containing calculated parameters, except the open circuit voltage, maximum charge current, or power capability estimation parameters, the battery shall transmit values from the most recent calculation iteration on the CAN bus. The battery shall calculate the open circuit voltage estimation and maximum charge current parameters on the CAN bus at a rate of once per second, and transmit the most recent calculation on the CAN bus at a selectable message interval rate from 500 milliseconds to 15 seconds. The battery shall calculate the power capability estimation parameters on the CAN bus at a rate of once per second, and transmit on the CAN bus at a selectable message interval rate from 1 second to 15 seconds. Refer to the Appendix A of this specification for further information regarding the data available on the CAN bus and its formatting. See 4.5.5.1 for verification method.

3.6.5.1.1 State of charge (percent). The estimated state of charge shall be communicated on the CAN bus. State of charge estimates shall be adjusted for changes in the battery internal temperature, rate of charge or discharge, and battery health. The maximum value communicated on the CAN bus for estimated state of charge shall not exceed 100 percent. See table IV for accuracy requirement. See 4.5.5.1.1 for verification method.

3.6.5.1.2 State of health (percent). The estimated state of health shall be communicated on the CAN bus. The estimated state of health shall be defined as the ratio of the present full charge capacity of the battery at normal conditions to the rated full charge capacity of table I. The present full charge capacity at normal conditions shall be calculated by normalizing the full charge capacity of the battery at present internal battery temperature and the rate of charge or discharge at the time of calculation to normal conditions. In cases where the present full charge capacity of the battery at normal conditions exceeds rated full charge capacity of table I, the state of health shall be reported as 100 percent. See table IV for accuracy requirement. See 4.5.5.1.2 for verification method.

3.6.5.1.3 Capacity estimation. The calculated full capacity of the battery at present conditions at the 1C rate shall be communicated on the CAN bus. See table IV for accuracy requirement. See 4.5.5.1.3 for verification method.

3.6.5.1.4 Time remaining (at present rate of discharge). The time remaining shall be communicated on the CAN bus. See table IV for accuracy requirement. See 4.5.5.1.4 for verification method.

3.6.5.1.5 Bus voltage request (for charging). The bus voltage request shall be communicated on the CAN bus. See 4.5.5.1.5 for verification method.

3.6.5.1.6 Open circuit voltage. The open circuit voltage shall be communicated on the CAN bus. See table IV for accuracy requirement. See 4.5.5.1.6 for verification method.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

3.6.5.1.7 Maximum charge current. The maximum charge current shall be communicated on the CAN bus. See table IV for accuracy requirement. See 4.5.5.1.7 for verification method.

3.6.5.1.8 Power capability estimation. The battery shall calculate and communicate on the CAN bus the maximum discharge power in watts that the battery can sustain for 10 and 30 seconds while maintaining a voltage above the battery's terminal cutoff voltage specified in 4.4.6.1 d. See table IV for accuracy requirement. See 4.5.5.1.8 for verification method.

3.6.5.2 Measured parameters. The battery shall measure and report the following measured parameters on the CAN bus at a selectable message interval rate from 1 second to 15 seconds, unless specified otherwise. The battery voltage and battery current shall be measured at a rate of once per 500 milliseconds, and transmitted at a selectable rate of 500 milliseconds to 15 seconds. The interval rate for messages containing measured parameters shall be configurable via CAN message when battery is in Maintenance State, with one second interval rate by default. The battery shall allow disabling or enabling recurring interval messaging in Maintenance State, with regular interval messaging enabled by default. The battery shall also be able to report messages containing measured parameters on the CAN bus when a request (RQST) message is received. When responding to requests, the battery shall not transmit messages containing measured parameters at a rate faster than once per second. Refer to the Appendix A of this specification for further information regarding the information on the CAN bus and its formatting. See 4.5.5.2 for verification method.

3.6.5.2.1 Battery voltage (V). Battery voltage shall be communicated in accordance with table IV. See 4.5.5.2.1 for verification method.

3.6.5.2.2 Battery current (A). Battery current shall be communicated in accordance with table IV. See 4.5.5.2.2 for verification method.

3.6.5.2.3 Internal battery temperature (°C). Internal battery temperature shall be communicated in accordance with table IV. See 4.5.5.2.3 for verification method.

3.6.5.2.4 Celsius and Fahrenheit support. Measured parameters containing temperature data shall support reporting in Celsius and Fahrenheit. Refer to the Appendix A of this specification for further information regarding the information on the CAN bus and its formatting. See 4.5.5.2.4 for verification method.

3.6.5.2.5 Internal pack voltage. The internal pack voltage shall be communicated in accordance with table IV. See 4.5.5.2.5 for verification method.

3.6.5.3 Manufacturer specific parameters. For reported parameters other than the ones specified in 3.6.5.1 and 3.6.5.2, the parameters shall be reported on the CAN bus at a selectable rate from 1 second to 15 seconds. The battery shall also be able to report messages containing manufacturer specific parameters on the CAN bus when a request (RQST) message is received. The interval rate shall be configurable for each Parameter Group via CAN message when battery is in Maintenance State, with a default transmission rate of on request (RQST). When

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

responding to requests, the battery shall not transmit messages at a rate faster than once per second in the Operational State. Examples of manufacturer specific parameters are cell voltages (individual, average, minimum, maximum), temperatures (individual, average, minimum, maximum) other than internal battery temperature (such as cell temperature, BMS temperature, contactor temperature, etc.), equalization parameters, built-in test (BIT) results, manufacturer specific battery configuration messages, etc. CAN messages for manufacturer specific parameters shall be defined by the battery manufacturer in the address space permitted. Refer to the Appendix A of this specification for further information regarding the information available on the CAN bus and its formatting. See 4.5.5.3 for verification method.

3.6.5.3.1 Cell voltages. The battery shall report the values of cell voltages on the CAN bus. Cell voltage shall be provided for all individual cells, and shall be a reported as a differential value. Cells at the same potential due to parallel electrical connection are permitted to be measured and reported as a single grouped cell. See 4.5.5.3.1 for verification method.

3.6.5.3.2 Equalization. The battery shall report the status of battery equalization (see 3.6.3.2) on the CAN bus. Information reported shall include state of equalization (such as on/off) for each cell (or group of parallel connected cells), and the maximum and minimum difference between the individual cell (or group of parallel connected cells) voltages in the battery. See 4.5.5.3.2 for verification method.

3.6.5.3.3 Built-in test (BIT) results. The battery shall report BIT results on the CAN bus in accordance with 3.6.7. Faults and failures shall be communicated in the form of diagnostic trouble code (DTC) messages in accordance with SAE J1939 on the CAN bus. See 4.5.5.3.3 for verification method.

3.6.5.3.4 Hardware and software version. The battery shall report the hardware and software version in accordance with SAE J1939 ECU Identification Information (ECUID) and Software Identification (SOFT) messages on the CAN bus. Refer to the Appendix A of this specification for further information regarding the information on the CAN bus and its formatting. See 4.5.5.3.4 for verification method.

3.6.5.3.5 Celsius support. Manufacturer Specific messages containing temperature data shall be reported in Celsius. Refer to the Appendix A of this specification for further information regarding the information on the CAN bus and its formatting. See 4.5.5.3.5 for verification method.

3.6.6 Battery states.

3.6.6.1 Dormant (off) state. The battery shall have a Dormant State for long term storage. The Dormant State shall be activated and deactivated by the dormant pins on the communication interface. The battery shall transition to or from the Dormant State when the change in value on the dormant pins has occurred and remained at a steady value for a minimum of 500 milliseconds. The transition time to or from the Dormant State shall not exceed 10 seconds. The battery terminals shall not provide electrical power to external loads while in the Dormant State. The battery shall enter the Dormant State upon the Protected State timeout and

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

exit when the dormant pins are cycled by floating and then shorting the pins to common. The battery shall enter the Dormant State when there is insufficient power to operate the BMS, and exit the Dormant State when the dormant pins are connected to common and sufficient power is available on the battery power terminals from an external power source. Refer to Appendix A for further information regarding the communication interface. See 4.5.6.1 for verification method.

3.6.6.2 Initialize state. Upon exiting the Dormant State, the battery shall enter the Initialize State. The time to execute initialization and transition to the Operational State shall not exceed 10 seconds. The battery shall run a power-up built-in test (PBIT) at least once during the Initialize State and store the results. See 4.5.6.2 for verification method.

3.6.6.3 Operational state. When the battery enters the Operational State after exiting the Initialize State, the battery shall perform address claim procedures in accordance with SAE J1939 to allow communication to proceed on the CAN interfaces. In the Operational State, the battery shall report the battery's parameters with a regular interval when the master power switch is "On". In the Operational State, the battery shall report the battery's parameters in response to a RQST message. The battery shall not report CAN messages with a regular interval when the master power switch is "Off". The battery shall accept Configuration Messages while in the Operational State, but shall only permit configuration parameter changes that are allowed outside the Maintenance State. When entering the Operational State and the master power switch is "On", or while in the Operational State and the master power switch changes from "Off" to "On", the battery shall report CAN messages with battery voltage, battery current, battery internal temperature, state of charge, state of health, capacity estimation, time remaining, and BIT results and complete transmission in a time not to exceed one second on the CAN bus that is open for transmission. If calculated parameters cannot be calculated within this time period, the battery shall report the values from the most recent measurement cycle. Measurement and calculation of the battery's parameters shall occur as often as necessary to track changes in battery condition, comply with the measurement accuracy specified in table IV, update and report battery parameters for CAN communication, and comply with Battery Safety 3.11.2. The battery shall run continuous built-in test (CBIT) as often as necessary to comply with 3.6.7, and CBIT execution shall not interfere with the normal operation of the battery. The battery terminals shall always be able to provide electrical power to external loads while in the Operational State, except when the battery configuration message with "Command Contactor(s)" parameter set to "Open Contactor(s)" is received on the CAN bus, or standby is enabled (3.6.6.3.1). The battery shall remain in the Operational State as long as the battery voltage is in the acceptable range (see 3.5.3) and safety limits have not been exceeded. See 4.5.6.3 for verification method.

3.6.6.3.1 Standby. Vendor certification is required. The battery shall not provide nor accept electrical power through the battery terminals in the Operational State when standby is enabled. The battery shall meet all other requirements of the Operational State (see 3.6.6.3) when standby is enabled. Standby shall be enabled by the battery configuration message when the battery is in the Operational State, and shall not be enabled in other battery states. The vendor shall certify that the battery meets the retention of charge requirement (see 3.5.8) when standby is enabled and the master power switch is "Off" for the duration of the standby. When

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

the battery configuration message parameter “Standby” has value “Enable Standby” and parameter “Standby Suspend Period” has value 0 minutes or NA, the battery shall complete actions for standby within one second of receiving the command and provide acknowledgement. When the battery configuration message parameter “Standby” has value “Enable Standby” and parameter “Standby Suspend Period” has value one minute or greater, the battery shall wait the amount of time equal to the standby suspend period, and complete actions for standby within one second of the end of the period. The battery shall disable standby, report CAN messages with battery voltage, battery current, battery internal temperature, state of charge, state of health, capacity estimation, time remaining, and BIT results and complete transmission in a time not to exceed one second on the CAN bus that is open for transmission, and provide voltage at the battery power terminals within two seconds when one of the following occur:

a. The master power switch changes from “Off” to “On”.

b. Battery configuration message parameter “Standby” has a value of “Disable Standby”.

c. Battery configuration message parameter “Reset” has value of “Hard Reset”, “Soft Reset” or “Reset Protection”.

d. Battery configuration message parameter “Command Contactor(s)” has a value of “Open Contactor(s)” or “Automatic Contactor Operation”.

e. The battery transitions out of the “Operational State”.

3.6.6.4 Maintenance state. The battery shall enter the Maintenance State when it receives the Maintenance State command on the CAN bus. The battery shall transmit regular interval messages on the CAN bus when the master power switch is “On”, except during a firmware update. The Maintenance State shall have a firmware update capability. The Maintenance State shall accept and execute Configuration messages transferred over the CAN bus, including configuration parameters that are only permitted when the battery is in the Maintenance State. The battery shall exit the Maintenance State when it receives the Exit Maintenance State command over the CAN bus, or timeout of five minutes occurs since the last CAN message addressed to battery was sent. See 4.5.6.4 for verification method.

3.6.6.5 Protected state. The battery shall enter the Protected State when a condition occurs that may cause the battery to operate outside its safety protections (see 3.6.3.3). The battery shall not provide electrical power at the battery’s terminals to external loads when in the Protected State. The battery shall transmit regular interval messages on the CAN bus when the master power switch is “On”. The battery shall send out warning and other information regarding the Protected State over the CAN bus according to Appendix A. The battery shall communicate this information before transitioning to the Protected State, when doing so does not present a safety hazard. The battery shall communicate any applicable faults using diagnostic trouble codes (DTCs). The battery shall transition out of the Protected State when the battery senses that the fault condition has been removed. For faults that cannot be removed automatically or for faults that have a timeout period, the battery shall attempt to transition out of

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

the Protected State when one of the following reset protection methods are used: the battery configuration message parameter "Reset" has a value of "Reset Protection", the master power switch changes from "Off" to "On", or the battery transitions through the Dormant State and completes the Initialize State following a fault occurrence. Figure 9 is a visual representation of the battery state map. See 4.5.6.5 for verification method. Faults requiring a timeout period in excess of 30 seconds shall require approval by the Qualifying Activity.

3.6.6.5.1 Protected state timeout. When the battery is in the Protected State and the battery is unable to remove the fault condition that is preventing the battery from returning to the Operational State or clear the fault with a reset protection method, the battery shall transition to the Dormant State when the master power switch has been in the "Off" state for at least 24 hours.

3.6.7 Built-in tests. The battery shall have provisions to perform built-in tests (BIT) to indicate that the battery and its subsystems are operating properly. BIT shall be performed by means as described below. The battery state of health and state of charge shall be checked when the BIT is performed. BIT diagnostics shall be capable of isolating faults and failures at least to the following ambiguity groups: cells, sensors or battery management system.

3.6.7.1 Power-up built-in test (PBIT). PBIT shall execute automatically as the battery enters the Initialize State. The PBIT shall execute within the time duration of the Initialize State (see 3.6.6.2). See 4.5.7.1 for verification method.

3.6.7.2 Continuous built-in test (CBIT). CBIT shall periodically run under BMS control. CBIT shall not degrade the performance of the battery. See 4.5.7.2 for verification method.

3.6.7.3 BIT diagnostics probability. BIT diagnostics shall meet 95 percent probability of detecting all battery faults. Manufacturer certification shall be required. See 4.5.7.3 for verification method.

3.6.8 Long term fault data storage. Long term data recording of battery fault data shall be stored in non-volatile memory. Long term fault data storage shall support recording the most recent 96 hours of critical fault data. See 4.5.8 for verification method.

3.6.9 Short term fault data storage . Short term fault data shall be stored in volatile or non-volatile memory. See 4.5.9 for verification method.

3.7 Surges, spikes, and starting operation.

3.7.1 Voltage surges. Voltage surges exported by the battery shall be within the limits specified in MIL-STD-1275. The battery shall be capable of importing voltage surges within the limits specified in MIL-STD-1275. The battery shall not cause any excursion outside these limits nor cause damage to other equipment designed to tolerate transients within these limits nor be damaged by surges within these limits. See 4.6.1 for verification method.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

3.7.2 Voltage spikes. Voltage spikes exported by the battery shall be within the limits specified in MIL-STD-1275. The battery shall be capable of importing voltage spikes within the limits specified in MIL-STD-1275. The battery shall not cause any excursion outside exported limits nor cause damage to other equipment designed to tolerate transients within these limits nor be damaged by spikes within imported limits. See 4.6.2 for verification method.

3.7.3 Starting operation. The battery management system shall be capable of operation when subjected to the engine starting disturbance limits of the Starting operation section of MIL-STD-1275 without degradation or damage. See 4.6.3 for verification method.

3.7.3.1 Starting current. The battery shall be capable of providing, at a minimum, the starting current shown in figure 10. See 4.6.4 for verification method.

3.8 Environmental. After being subjected to each one of the environmental tests listed in table V, the battery shall meet the visual and mechanical inspection criteria defined in 3.16 and the full charge capacity requirement defined in 3.5.4. The battery in its fully charged state shall meet the battery voltage requirements as defined in 3.5.3.

TABLE V. Environmental requirements.

Tests	Test paragraph
Low pressure, altitude	4.7.1.1
Rapid decompression	4.7.1.2
Attitude	4.7.2
Temperature shock	4.7.3
Mechanical shock	4.7.4
Vibration	4.7.5
Immersion	4.7.6
Humidity	4.7.7
Blowing dust	4.7.8
Salt atmosphere	4.7.9
Fluid susceptibility	4.7.10
Explosive atmosphere	4.7.11

3.8.1 Altitude.

3.8.1.1 Altitude, operating & non-operating. When tested as specified in 4.7.1.1, the battery shall meet the requirements defined in 3.8. The battery shall not have mass loss of greater than 0.5 percent after completion of the tests.

3.8.1.2 Rapid decompression. When tested as specified in 4.7.1.2, the battery shall meet the requirements defined in 3.8. The battery shall not have mass loss of greater than 0.5 percent after completion of the test.

3.8.2 Attitude. When tested as specified in 4.7.2, the battery shall meet the requirements defined in 3.8. The battery shall be designed for operation in any orientation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

3.8.3 Temperature shock. The battery shall be designed to withstand sudden changes in the temperature range between the low storage temperature and high storage temperature extremes in accordance with ATPD 2404. When tested in accordance with 4.7.3, the battery shall meet the visual and mechanical inspection criteria defined in 3.16.

3.8.4 Mechanical shock. When tested as specified in 4.7.4, the battery shall meet the requirements defined in 3.8.

3.8.5 Vibration. The battery and its subcomponents shall be capable of withstanding vibration environments without sustaining physical or electrical damage. The battery shall maintain a steady voltage and current without loosening of terminal posts, electrolyte/cell leakage, broken connections (damage to wiring, circuit boards, or BMS), broken straps or cells, movement or disassembly of cells, any smoking or evidence of thermal instability, or other damage. When tested as specified in 4.7.5, the battery shall meet the requirements defined in 3.8.

3.8.6 Immersion. The battery shall be designed to withstand complete water immersion. When tested in accordance with 4.7.6, the battery shall meet the requirements defined in 3.8. In addition, it shall show no evidence of leakage of water into cases, and shall exhibit weight gain of not greater than 0.1 percent.

3.8.7 Humidity. The battery shall be capable of operating at a relative humidity from 0 percent to 100 percent including condensation. When tested in accordance with 4.7.7, it shall meet the requirements defined in 3.8. The battery capacity shall not degrade more than three percent from the start of the test.

3.8.8 Blowing sand and dust. When tested in accordance with 4.7.8, the battery shall meet the requirements defined in 3.8.

3.8.9 Salt atmosphere. When tested in accordance with 4.7.9, the battery shall meet the requirements defined in 3.8. Capacities measured before and after test shall be within three percent of each other.

3.8.10 Fluid susceptibility. When tested in accordance with 4.7.10, the battery shall meet the requirements defined in 3.8. Capacities measured before and after test shall be within three percent of each other.

3.8.11 Explosive atmosphere. The battery shall be able to successfully pass the test defined in 4.7.11.

3.9 Electromagnetic compatibility/interference. When tested in accordance with 4.8, the battery shall meet the requirements of CE102, CS101, CS114, CS115, CS116, RE102, and RS103 of MIL-STD-461. When applicable to verify operation of the battery, the battery shall be placed on a resistive load of 3±0.15 ohm and maintain discharge without interruption during the test. During susceptibility tests, the operational performance of the battery shall not be degraded,

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

nor shall it malfunction. Capacities measured before and after test shall be within three percent of each other. Vendor certification shall be required for compliance to applicable requirements of MIL-STD-464 once the batteries are placed in a system. See test defined in 4.8.

3.10 Electrostatic discharge. Batteries shall withstand ESD to ±8 kV contact discharge and an air discharge of ±15 kV from a 150 picofarad capacitor source through a 330 ohm resistor in accordance with MIL-STD-461 CS118 on any surface, panel component or connector, including exposed pins, in both operating and non-operating mode. See test defined in 4.9.

3.11 Safety.

3.11.1 Cell safety.

3.11.1.1 Cell safety abuse tests. The cell shall be characterized in accordance with SAE J2464 and the corresponding Hazard Severity Level reported to the Qualifying Activity. See 4.10.1.1 for verification method.

3.11.1.1.1 Cell overcharge. Cell shall be characterized in accordance with the Overcharge Test (Cell and Module or Pack) section of SAE J2464. See 4.10.1.1.1 for verification method.

3.11.1.1.2 Cell short circuit. Cell shall be characterized in accordance with the Short Circuit Tests (Cell and Module or Pack) section of SAE J2464. See 4.10.1.1.2 for verification method.

3.11.1.1.3 Cell overdischarge. Cell shall be characterized in accordance with the Overdischarge (Forced Discharge) Test (Cell Level and Module) section of SAE J2464. See 4.10.1.1.3 for verification method.

3.11.1.1.4 Cell penetration. Cell shall be characterized in accordance with the Penetration Test (Cell Level or above) section of SAE J2464. Characterization shall be performed at a minimum of 100 percent state of charge, and at 50 percent state of charge. See 4.10.1.1.4 for verification method.

3.11.1.1.5 Cell crush. Cell shall be characterized in accordance with the Crush Test (Cell Level or above) section of SAE J2464. See 4.10.1.1.5 for verification method.

3.11.1.2 Cell leakage. Cells used to build batteries shall not be subject to leakage in storage or use. After testing, cells shall not exhibit leakage indicated by presence of liquid, or solid deposits; additionally, mass loss of test samples shall be not greater than 0.1 percent. See 4.10.1.2 for verification method.

3.11.2 Battery Safety.

3.11.2.1 Battery overcurrent protection. When tested in accordance with 4.10.2.1, the battery shall meet the visual and mechanical inspection criteria defined in 3.16 and the full

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

charge capacity requirement defined in 3.5.4. Capacities measured before and after test shall be within three percent of each other. The battery shall meet the open circuit voltage requirement of 3.5.3 upon removal of the short circuit.

3.11.2.2 Battery overcharge.

3.11.2.2.1 Overcharge abuse. See 4.10.2.2 for verification method

a. Type 1. The battery shall not exceed SAE J2464 Hazard Severity Level 4.

b. Type 2. The battery shall not exceed SAE J2464 Hazard Severity Level 6.

3.11.2.2.2 Overcharge protection. With BMS active and not bypassed, batteries shall be capable of withstanding overcharge conditions. When tested as specified in 4.10.2.3, batteries shall not exceed the voltage limit specified in 3.5.3. Additionally, before and after test, the full charge capacities shall be within three percent of each other.

3.11.2.3 Battery overdischarge protection. Batteries shall provide protection against overdischarge conditions without burning, disassembly, or other failure. When tested as specified in 4.10.2.4 batteries shall not exceed the voltage limit specified in 3.5.3 during overdischarge. Additionally, before and after test, the full charge capacities shall be within three percent of each other.

3.11.2.4 Battery over temperature protection. Each battery shall prevent operation when the battery exceeds temperature defined by manufacturer to ensure safety under conditions of high temperature, overcharge, misuse, or any combination thereof. When tested as specified in 4.10.2.5 the batteries shall meet the capacity requirement of 3.5.4 after dropping below the manufacturers defined over temperature limit.

3.11.2.5 Battery low temperature charge protection. Each battery shall prevent charging at a temperature which would degrade battery safety or life. When tested as specified in 4.10.2.6 the batteries shall meet the capacity requirement of 3.5.4 after reaching safe charge temperature.

3.11.2.6 Battery impact resistance (non-metallic battery case only). When tested as specified in 4.10.2.7 the empty and sealed nonmetallic battery case shall meet the requirements of 3.3.5.1.

3.11.2.7 Battery abuse.

3.11.2.7.1 Battery crush.

a. Type 1. Battery shall be characterized in accordance with the Crush Test (Cell Level or above) section of SAE J2464, and shall not exceed a Hazard Severity Level 4. See 4.10.2.8.1 for verification method.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

b. Type 2. Battery shall be characterized in accordance with the Crush Test (Cell Level or above) section of SAE J2464, and shall not exceed a Hazard Severity Level 6. See 4.10.2.8.1 for verification method.

3.11.2.7.2 Battery penetration.

a. Type 1. Batteries shall not exceed SAE J2464 Hazard Severity Level 4 when their battery cases are penetrated by nail. Batteries shall not exceed SAE J2464 Hazard Severity Level 6 when their battery cases are penetrated by projectile. During projectile penetration testing, the battery shall fail to meet this requirement if Hazard Severity Level is exceeded during testing. See 4.10.2.8.2 for verification method.

b. Type 2. Batteries shall not exceed SAE J2464 Hazard Severity Level 6 when their battery cases are penetrated by nail. Batteries shall not exceed SAE J2464 Hazard Severity Level 6 when their battery cases are penetrated by projectile. During projectile penetration testing, the battery shall fail to meet this requirement if Hazard Severity Level is exceeded during testing. See 4.10.2.8.2 for verification method.

3.11.2.7.3 Battery drop low height. The battery shall be capable of withstanding drops at extreme temperature conditions. When tested in accordance with 4.10.2.8.3, the batteries shall meet the inspection criteria defined in 3.16 and the full charge capacity requirements defined in 3.5.4. Full charge capacities before and after the test shall be within three percent of each other.

3.11.2.7.4 Battery drop high height. The battery shall not exceed SAE J2464 Hazard Severity Level 2 when dropped at extreme temperature conditions. Cell leakage as defined by SAE J2464 Hazard Severity Level 3 is acceptable when confined to the battery case. Venting is not allowed. See 4.10.2.8.4 for verification method.

3.12 Lithium battery safety program (U.S. Navy). The vendor shall provide certification that the battery Type, Class, and Sub-class used for qualification has been evaluated under Navy S9310-AQ-SAF-010. Production of these batteries may be modified under direction of Navy test facility to accommodate required testing. See 4.11 for verification method.

3.13 Charger compatibility. Batteries shall be capable of correctly powering and interfacing with MIL-STD-1275 compliant systems and chargers. The charger shall provide 28.5 +0.25/-0.50 V delivered to the input power terminal of the battery which meets requirements of MIL-STD-1275 (see 4.12).

3.14 Workmanship. Batteries shall be processed in such a manner as to be free from cracked or displaced parts, sharp edges, burrs, and other defects which will affect life, serviceability, or appearance (see 4.13).

3.15 Product characteristics.

3.15.1 Paint, protective finishes, and coatings. The battery shall be cleaned, pre-treated, primed, and top-coated with chemical agent resistant coating (CARC) in accordance with TT-C-

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

490 (for all metal cases) and MIL-DTL-53072 (for non-metallic cases requiring CARC paint, and for all metal cases). No external surfaces of the battery shall be coated with non-CARC paint, or topcoats. The battery case color shall be in accordance with SAE AMS-STD-595 color ID 33446. The following battery parts may be excluded from this requirement: the terminal posts and threaded sockets, the electrically conductive pads, the electrically insulating material around the electrically conductive pads, the communication interface, the overpressure relief device(s), the air pressure equalization port, the handles, fasteners or screws attaching the base to the lid, identification markings, warning markings, and instructions (see 4.4.2.1). Non-metallic battery cases do not require CARC paint if it meets color requirements without non-CARC paint or other topcoat. Non-metallic battery cases shall be CARC paintable. See 4.14.1 for verification method.

3.15.2 Corrosion resistance. Metals and alloys used for the battery case or exposed surfaces shall be corrosion resistant or metallurgically processed to resist corrosion. Dissimilar metal combinations that promote corrosion through galvanic action shall be insulated to prevent corrosion. See 4.14.2 for verification method.

3.15.3 Electronic assembly acceptability. Electronic assemblies in the battery shall be constructed to meet IPC-A-610 and IPC J-STD-001 Class 3 acceptability requirements. See 4.14.3 for verification method.

3.15.3.1 Lead-free control plan. When specified in the contract or order (see 6.2), a lead-free control plan (LFCP) shall be submitted to the contracting office for approval. GEIA-STD-0005-1 or an equivalent shall be used as a basis for preparation of a LFCP. The plan shall address all lead-free solders and finishes in delivered item. A LFCP is not required when lead-free solders and finishes are not used in the delivered item. See 4.14.3 for verification method.

3.15.3.2 Lead-free risk management. When lead-free solders and finishes are used in the assembly of the battery, finishes shall be selected such that harmful effects of tin whiskers resulting from use of lead-free solder shall be addressed and mitigated in accordance with GEIA-STD-0005-2. At a minimum the following mitigations shall be employed when using lead-free solder. See 4.14.3 for verification method.

a. Level 2B risk mitigation strategy.

b. Maintain minimum conductor spacing of >457 microns (typically greater than 25 mil pitch).

c. Use conformal coating. The following coatings are listed in order of perceived effectiveness for tin whisker mitigation: Parylene, Urethane (UR), Acrylic (AR).

d. If unable to obtain leaded component with spacing of at least 457 microns then:

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

(1) Pure tin finishes with less than 457 micron conductor spacing and less than the gap criteria with conformal coating mitigation as listed below shall be hot solder dipped in accordance with GEIA-STD-0006.

I. Parylene conformal coating with validated coverage and gap size, prior to coating, greater than or equal to 150 microns (5.9 mils).
II. UR or AR conformal coating with validated coverage and gap size, prior to coating, greater than or equal to than 250 microns (9.8 mils).

(2) Non tin or tin alloy finishes with less than 457 micron conductor spacing need to be approved by the contracting agency (see 6.2).

3.15.3.3 Notification. It shall be the responsibility of the contractor to document all lead-free parts used (including, but not limited to: termination materials and finishes, printed wiring board finishes, and assembly materials). This documentation shall be provided to the Qualifying Activity upon request.

3.15.4 Hazardous materials. Asbestos, beryllium, radioactive materials, hexavalent chromium, cadmium, mercury, or other highly toxic or carcinogenic materials, as defined in 29 CFR 1910.1200, with the exception of the chemical agent resistant coating (CARC) or if non-hazardous/non-toxic substitute material will not meet performance requirements, shall not be used in the manufacture, assembly, operation or sustainment of this system without prior approval from the Qualifying Activity (see 6.2). Approval will only be granted when valid technical justification is provided. Class I and Class II ozone depleting substances shall not be used. Lead shall not be used without prior approval of the Qualifying Activity. The use of eutectic tin lead solders (Sn60 or Sn63) and beryllium and beryllium alloys for electrical components may be approved by the Qualifying Activity (see 6.2) without justification. Hazardous materials requirements shall apply to any components or parts purchased through a subcontractor or vendor or OEM parts, as well as manufactured parts. See 4.14.4 for verification method.

3.15.5 Chemical, biological, radiological and nuclear (CBRN). The exterior surfaces of the battery shall be decontaminable using the procedures and decontaminants identified in ATP 3-11.23 to negligible risk levels identified in ATPD 2404 after thorough decontamination. The battery shall not produce a SAE J2464 Hazard Severity of greater than 2 during decontamination. See 4.14.5 for verification method.

3.16 Defects. The battery shall be free of any defects during incoming or post-test visual and mechanical inspections (see 4.4.2.1, 4.4.2.2, 4.15, and table VI). It is recommended that contracts allow defects in categories 003, 007, 009, 102, 103, 104, 105, 106, 107, 201, and 202 of table VI be permitted to be reworked during PPI inspection (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

TABLE VI. Visual and mechanical inspection.

Categories (see note)	Applicable to incoming (see 4.4.2.1) or post-test (see 4.4.2.2) inspection	Defects
001	Both	Electrolyte leakage, outside or detectable within the battery.
002	Incoming	Improper molding or assembly causing parts to be inoperative or unsafe in service.
003	Both	Insulation missing or damaged.
004	Both	Crazing of glass in glass to metal seals.
005	Both	Foreign material particles in insulation, potting, or sealing compounds.
006	Post-test	Explosion, flame, fire, venting of solid material, disassembly, cell leakage, or rupture of cell or battery within 24 hours after the completion of the test.
007	Both	Improper operation of safety devices.
008	Both	Abnormal current or voltage fluctuations during any test. Degradation of electrical performance beyond limits specified by the test requirements, if applicable.
009	Both	Loose contacts or parts in battery.
101	Both	Deformed (beyond the specified dimensional limit), damaged or failed parts which are inoperative or malfunction in service.
102	Both	Contact surfaces obstructed so that electrical use is affected. Rust, corrosion, or any type of non-conductive material on contact surfaces.
103	Incoming	Cell or Battery cases: any scratch, gouge, dent, pitting, blowholes, rough spots, burrs, or other deformations on battery surface or in welds.
104	Both	Improper case closure: any gap along glued or welded seams.
105	Incoming	Terminal markings, identification label or operating instructions not as specified (see 3.4.2, 3.4.3, 3.4.3.3, and 3.4.3.2).
106	Both	Marking defects are visible (see 3.4.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

TABLE VI. Visual and mechanical inspection - Continued.

Categories (see note)	Applicable to incoming (see 4.4.2.1) or post-test (see 4.4.2.2) inspection	Defects
107	Both	Battery's normal attachment points (i.e. brackets, flanges, or hold down bars, etc.) shall keep the entire battery intact in the test fixture or final intended assembly.
108	Both	Breakdown of insulation, flashover, arcing, stripping of metal plating from any component part, corrosion of metal parts, or loosening of protective coating from the battery case.
109	Post-test	Marking, scaling, pitting, corrosion, charring, discolored areas, or other deleterious effects on internal and/or external parts of the cell or battery
201	Incoming	Color not as specified.
202	Both	Peeling, flaking, or chipping of plating or finish.

NOTE: Category 0XX defects are critical; category 1XX are major, and category 2XX are minor. These categories are used to qualify the levels of nonconformance. Critical defects affect safety; major defect categories affect use, batteries with minor defects may be serviceable with limitations.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.1.1).

b. Conformance inspection (see 4.1.2).

(1) Initial product inspection (IPI) (see 4.1.2.1).
(2) Periodic production inspection (PPI) (see 4.1.2.2)

4.1.1 Qualification inspection. Qualification inspection for inclusion on the qualified products list (QPL) shall be performed at a laboratory acceptable to the Qualifying Activity. The contractor shall submit sample units produced with same equipment and procedures used in

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

production unless otherwise approved by the Qualifying Activity. Qualification testing shall consist of the following:

a. Sample cells, sample batteries, modified sample batteries, electronic component assemblies, and any component parts shall be submitted for testing in the quantity specified in table VII.

b. Qualification samples shall be subjected to the tests specified in table VII. The qualification samples shall consist of 14 battery samples, 1 modified battery sample, 5 case samples (10 case samples if case is non-metallic), and 1 weighted case sample. Additionally, four battery samples shall be provided as spares.

4.1.1.1 Nonconformance (failures). Nonconformance to any specified requirement, the failure of any test, or the presence of one or more defects shall be cause for rejection and constitute failure of qualification inspection and prohibit incorporation of product into any QPL.

4.1.1.2 Successful qualification inspection. Unless otherwise specified in a contract or purchase order, the successful completion and approval by the Qualifying Activity of qualification inspection does not relieve a prospective contractor from required samples and initial production inspection (IPI) requirements from the first production lot using production design, tooling, and processes, at a location designated or approved by the Qualifying Activity (see 3.1 and 6.4).

4.1.2 Conformance inspection.

4.1.2.1 Initial production inspection (IPI). Unless otherwise specified in the contract or order (see 6.2) the contractor shall perform all IPI tests and inspections on production batteries consisting of test samples from the first production lot using production design, tooling, and processes, at a place designated or approved by the Qualifying Activity. Quantities and component parts shall be as specified in table VII. IPI shall be conducted in accordance with the test requirements specified in table VII, assignment of test samples specified in table VII, and the descriptive paragraphs in section 4 of this specification. Nonconformance to any specified requirement of this specification, the failure of any test, or the presence of one or more defects shall be cause for rejection.

a. The order of testing for IPI shall be established by the contractor and shall be approved by the Qualifying Activity prior to start of any testing by the contractor. Advance planning and provisions shall be made to ensure that each item of the test schedule and sequence shall not have a detrimental effect or preclude the performance of a subsequent test/examination on any test sample.

b. Appropriate advance notice of the test schedule, location(s), or changes shall be provided to the Qualifying Activity, contractor, designated test site/facility, and regulatory agency personnel to allow participation or oversight by each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

4.1.2.2 Periodic production inspection (PPI). PPI shall be done by the contractor in accordance with table VII (with Qualifying Activity oversight).

4.1.2.2.1 PPI general requirements. Examination and testing for each lot shall be completed no later than 21 days from the final day of manufacture of the lot.

4.1.2.2.2 PPI failures. Failure of any sample during examination or testing may be cause for the Qualifying Activity to refuse to accept that lot, and subsequent lots, until it has been proven to the Qualifying Activity's satisfaction that appropriate corrective actions have been implemented.

TABLE VII. Inspection requirements.

Inspection	Requirement paragraph	Test method paragraph	Qual	Conformance		Sample assignment[1]
				IPI	PPI	
Metals	3.2.2	Vendor Cert	X	X		B1-B14 (all)
Dissimilar metals	3.2.3	Vendor Cert	X	X		B1-B14 (all)
Potting/sealing compounds, flow and shrinkage	3.2.4.1.1	Vendor Cert (4.4.3)	X	X		B1-B14 (all)
Insulating compounds for electrical connectors, wires, and tabs	3.2.4.1.2	Vendor Cert	X	X		B1-B14 (all)
Elastomeric materials	3.2.4.2	Vendor Cert	X	X		B1-B14 (all)
Physical characteristics	3.3.1	4.4.2.1, 4.4.2.2	X	X	X	B1-B14 (all)
Dimensions and weights	3.3.2	4.4.2.3	X	X	X	B1-B14 (all)
Terminal posts and threaded sockets	3.3.3.1	4.4.2.4.1	X	X	X	B8/9
Communication interface	3.3.3.2	4.4.2.4.2	X	X		B1-B14 (all)
Isolation, electrostatic discharge, and filtering	3.3.3.2.1	4.4.2.4.2.1	X			B1/2 (4.4.4) B8/9 (4.8, 4.9)
Electrical bonding	3.3.3.2.2	Vendor Cert	X			B1-B14 (all)
Cell shorting prevention	3.3.4.1	Vendor Cert	X	X		B1-B14 (all)
Cell leakage	3.3.4.2	Vendor Cert	X	X		B1-B14 (all)
Battery case	3.3.5.1	Vendor Cert, 4.4.2.5.1	X			C1-C5
Non-metallic case	3.15.1	4.14.1	X			C10
Battery case bottom	3.3.5.1.1	4.4.1, 4.4.2	X	X		C1-C5 B1-B14 (all)
Battery accessories	3.3.5.2	4.4.2.1	X	X		B1-B14 (all)
Overpressure relief device	3.3.5.2.1	Vendor Cert (4.4.2.5.2)	X	X		B1-B14 (all)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

TABLE VII. Inspection requirements - Continued.

Inspection	Requirement paragraph	Test method paragraph	Qual	Conformance		Sample assignment[1]
				IPI	PPI	
Heater(s)	3.3.5.2.3	Vendor Cert, 4.4.2.5.4	X			B6/7/11
Handles	3.3.5.2.4	4.4.2.5.5	X	X		WC1
Battle override mode	3.3.6	Vendor Cert, 4.4.2.6	X			B1-B14 (all)
Battery color	3.4.1	Vendor Cert, 4.4.2.1	X	X		B1-B14 (all)
Marking, general	3.4.2	4.4.2.1, 4.4.2.2	X			B1-B14 (all)
Marking print and color	3.4.2.1	4.4.2.1, 4.4.2.2	X			B1-B14 (all)
Permanence and durability	3.4.2.2	4.4.2.1, 4.4.2.2	X			B1-B14 (all)
Battery identification marking	3.4.3.1	4.4.2.1, 4.4.2.2	X			B1-B14 (all)
Date of battery manufacture and lot code	3.4.3.1.1	4.4.2.1, 4.4.2.2	X			B1-B14 (all)
Item unique identification (IUID)	3.4.3.2	4.4.2.1, 4.4.2.2	X			B1-B14 (all)
Maintenance advisory tag	3.4.3.3	4.4.2.1, 4.4.2.2	X			B1-B14 (all)
Instruction and notes	3.4.4	4.4.2.1, 4.4.2.2	X			B1-B14 (all)
General warning marking	3.4.5.1	4.4.2.1, 4.4.2.2	X			B1-B14 (all)
Hazard severity label	3.4.5.2	4.4.2.1, 4.4.2.2	X			B1-B14 (all)
Dielectric strength and insulation resistance	3.5.1	4.4.4	X			B1/2
Operating and storage temperature range	3.5.2	4.4.5	X	X		B6/7
Battery voltage	3.5.3	Vendor Cert	X	X		B1-B14 (all)
Full charge capacity	3.5.4	4.4.6.1	X	X	X	B1/2/3/4/5/8/ 9/10/12/13
Cranking amps	3.5.5	4.4.6.2	X	X	X	B6/7/11
Deep cycle life	3.5.6	4.4.6.3	X	X		B1/2
High temperature deep cycle life	3.5.7	4.4.6.4	X	X		B3/4
Retention of charge	3.5.8	4.4.6.5	X	X		B10/11
Battery storage life	3.5.9	Vendor Cert, 4.4.7	X	X		B5
Battery service life	3.5.10	Vendor Cert (4.4.8)	X	X		B1-B14 (all)
Charging	3.5.11	4.4.9	X	X	X	B1-B14 (all)
Charge acceptance	3.5.11.1	4.4.9.1	X	X	X	B1-B14 (all)
Rapid charging	3.5.11.2	4.4.9.2	X	X	X	B6-B13
Jump start power export	3.5.12	Vendor Cert (4.4.10)	X	X		B1-B14 (all)
Jump start power import	3.5.13	Vendor Cert (4.4.11)	X	X		B1-B14 (all)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

TABLE VII. Inspection requirements - Continued.

Inspection	Requirement paragraph	Test method paragraph	Qual	Conformance		Sample assignment[1]
				IPI	PPI	
Battery management system (BMS)	3.6.1	4.5.1	X			B1-B14 (all)
BMS power	3.6.2	Vendor Cert (4.5.2)	X	X		B1-B14 (all)
BMS features	3.6.3	4.5.3				B1-B14 (all)
Monitoring	3.6.3.1	4.5.3.1	X	X		B1-B14 (all)
Equalization	3.6.3.2	Vendor Cert (4.5.3.2)	X	X		B1-B14 (all)
Safety protections	3.6.3.3	4.5.3.3	X	X	X	B6/7/8/9/10/11/12
Enable/disable automatic heaters	3.6.3.4	4.5.3.4	X			B1/2
Contactor(s)	3.6.3.5	4.5.3.5	X			B1/2
Communication interface	3.6.4	Vendor Cert (4.5.4)	X	X		B1-B14 (all)
Configuration pins	3.6.4.1	4.5.4.1	X			B1/2
Position identity	3.6.4.2	4.5.4.2	X			B1/2
Dual CAN interface	3.6.4.3	4.5.4.3	X			B1/2
Baud rate	3.6.4.4	4.5.4.4	X			B1/2
NAME	3.6.4.5	4.5.4.5	X			B1/2
Preferred source address	3.6.4.6	4.5.4.6	X			B1/2
Arbitrary address capable	3.6.4.6.1	4.5.4.6.1	X			B1/2
Service configurable source address	3.6.4.6.2	4.5.4.6.2	X			B1/2
Termination resistance	3.6.4.7	4.5.4.7	X			B1/2
Firmware update over CAN bus	3.6.4.8	4.5.4.8	X			B1/2
Monitoring performance characteristics	3.6.5	4.5.5				
Calculated parameters	3.6.5.1	4.5.5.1				
State of charge (%)	3.6.5.1.1	4.5.5.1.1	X			B1-B14 (all)
State of health (%)	3.6.5.1.2	4.5.5.1.2	X			B1-B14 (all)
Capacity estimation	3.6.5.1.3	4.5.5.1.3	X			B1-B14 (all)
Time remaining (at present rate of discharge)	3.6.5.1.4	4.5.5.1.4	X			B1-B14 (all)
Bus voltage request (for charging)	3.6.5.1.5	4.5.5.1.5	X			B1-B14 (all)
Open circuit voltage	3.6.5.1.6	4.5.5.1.6	X			B1-B14 (all)
Maximum charge current	3.6.5.1.7	4.5.5.1.7	X			B1-B14 (all)
Power capability estimation	3.6.5.1.8	4.5.5.1.8	X			B6/7/11
Measured parameters	3.6.5.2	4.5.5.2				
Battery voltage (V)	3.6.5.2.1	4.5.5.2.1	X			B1-B14 (all)
Battery current (A)	3.6.5.2.2	4.5.5.2.2	X			B1-B14 (all)
Internal battery temperature (°C)	3.6.5.2.3	4.5.5.2.3	X			B1-B14 (all)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

TABLE VII. Inspection requirements - Continued.

Inspection	Requirement paragraph	Test method paragraph	Qual	Conformance		Sample assignment[1]
				IPI	PPI	
Celsius and Fahrenheit support	3.6.5.2.4	4.5.5.2.4	X			B1-B14 (all)
Internal pack voltage	3.6.5.2.5	4.5.5.2.5	X			B1-B14 (all)
Manufacturer specific parameters	3.6.5.3	4.5.5.3	X			B1-B14 (all)
Cell voltages	3.6.5.3.1	4.5.5.3.1	X			B1-B14 (all)
Equalization	3.6.5.3.2	4.5.5.3.2	X			B1-B14 (all)
Built-in test (BIT) results	3.6.5.3.3	4.5.5.3.3	X			B1-B14 (all)
Hardware and software version	3.6.5.3.4	4.5.5.3.4	X			B1-B14 (all)
Celsius support	3.6.5.3.5	4.5.5.3.5	X			B1-B14 (all)
Battery states	3.6.6	4.5.6				
Dormant (off) State	3.6.6.1	4.5.6.1	X			B1-B14 (all)
Initialize State	3.6.6.2	4.5.6.2	X			B1-B14 (all)
Operational State	3.6.6.3	4.5.6.3	X			B1-B14 (all)
Standby	3.6.6.3.1	Vendor Cert	X			B1-B14 (all)
Maintenance State	3.6.6.4	4.5.6.4	X			B1-B14 (all)
Protected State	3.6.6.5	4.5.6.5	X			B8/9 (4.10.2.1, 4.10.2.3, 4.10.2.4) B6/7 (4.10.2.5) B1-B14 (all) (4.10.2.6)
Protected State timeout	3.6.6.5.1	4.5.6.5.1	X			B1/2
Built-in tests	3.6.7	4.5.7				
Power-up BIT	3.6.7.1	4.5.7.1	X			B1-B14 (all)
Continuous BIT	3.6.7.2	4.5.7.2	X			B1-B14 (all)
BIT diagnostics probability	3.6.7.3	Vendor Cert (4.5.7.3)	X	X		B1-B14 (all)
Long term fault data storage (non-volatile)	3.6.8	4.5.8	X			B1-B14 (all)
Short term fault data storage (volatile)	3.6.9	4.5.9	X			B1-B14 (all)
Surges, spikes, and starting operation	3.7	4.6				
Voltage surges	3.7.1	4.6.1	X	X		B6/7
Voltage spikes	3.7.2	4.6.2	X	X		B6/7
Starting operation	3.7.3	Vendor Cert (4.6.3)	X	X		B1-B14 (all)
Starting current	3.7.3.1	Vendor Cert (4.6.4)	X	X		B1-B14 (all)
Altitude	3.8.1.1	4.7.1.1	X	X		B6/10
Rapid decompression	3.8.1.2	4.7.1.2	X	X		B7/10

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

TABLE VII. Inspection requirements - Continued.

Inspection	Requirement paragraph	Test method paragraph	Qual	Conformance		Sample assignment[1]
				IPI	PPI	
Attitude	3.8.2	4.7.2	X	X		B10/11
Temperature shock	3.8.3	4.7.3	X	X		B6/7
Mechanical shock	3.8.4	4.7.4	X	X		B8/12
Vibration	3.8.5	4.7.5	X	X		B9/13
Immersion	3.8.6	4.7.6	X	X		B8/9
Humidity	3.8.7	4.7.7	X	X		B12/13
Blowing sand and dust	3.8.8	4.7.8	X	X		B12/13
Salt atmosphere	3.8.9	4.7.9	X	X		B12
Fluid susceptibility	3.8.10	4.7.10	X	X		B13
Explosive atmosphere	3.8.11	4.7.11	X	X		B12/13
Electromagnetic compatibility/interference	3.9	4.8	X	X		B8/9
Electrostatic discharge	3.10	4.9	X	X		B8/9
Cell safety abuse test	3.11.1.1	Vendor Cert (4.10.1.1)	X	X		B1-B14 (all)
Cell overcharge	3.11.1.1.1	Vendor Cert (4.10.1.1.1)	X	X		B1-B14 (all)
Cell short circuit	3.11.1.1.2	Vendor Cert (4.10.1.1.2)	X	X		B1-B14 (all)
Cell over discharge	3.11.1.1.3	Vendor Cert (4.10.1.1.3)	X	X		B1-B14 (all)
Cell penetration	3.11.1.1.4	Vendor Cert (4.10.1.1.4)	X	X		B1-B14 (all)
Cell crush	3.11.1.1.5	Vendor Cert (4.10.1.1.5)	X	X		B1-B14 (all)
Cell leakage	3.11.1.2	Vendor Cert (4.10.1.2)	X	X		B1-B14 (all)
Battery overcurrent protection	3.11.2.1	4.10.2.1	X	X		B8/9
Overcharge abuse[2]	3.11.2.2.1	4.10.2.2	X			MB1
Overcharge protection	3.11.2.2.2	4.10.2.3	X	X		B8/9
Battery overdischarge protection	3.11.2.3	4.10.2.4	X	X		B8/9
Battery over temperature protection	3.11.2.4	4.10.2.5	X	X		B6/7
Battery low temperature charge protection	3.11.2.5	Vendor Cert (4.10.2.6)	X	X		B1-B14 (all)
Battery impact resistance (non-metallic battery case only)	3.11.2.6	4.10.2.7	X			C6-C9
Battery abuse	3.11.2.7	4.10.2.8				
Battery crush[2]	3.11.2.7.1	4.10.2.8.1	X	X		B6/B14
Battery nail penetration[2]	3.11.2.7.2	4.10.2.8.2.1	X	X		B7
Battery projectile penetration[2]	3.11.2.7.2	4.10.2.8.2.2	X	X		B8/9
Battery drop low height	3.11.2.7.3	4.10.2.8.3	X	X		B10

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

TABLE VII. Inspection requirements - Continued.

Inspection	Requirement paragraph	Test method paragraph	Qual	Conformance		Sample assignment[1]
				IPI	PPI	
Battery drop high height[2]	3.11.2.7.4	4.10.2.8.4	X	X		B10/11
Lithium battery safety program (U.S. NAVY)[2]	3.12	4.11	X			
Charger compatibility	3.13	4.12	X	X		B10
Workmanship	3.14	4.13	X	X	X	B1-B14 (all)
Paint, protective finishes, and coatings	3.15.1	4.14.1	X	X		B1-B14 (all)
Corrosion resistance	3.15.2	4.14.2	X	X		B1-B14 (all)
Electronic assemblies	3.15.3	4.14.3	X	X		B1-B14 (all)
Hazardous materials	3.15.4	4.14.4	X	X		B1-B14 (all)
Chemical, biological, radiological and nuclear (CBRN)	3.15.5	4.14.5	X	X		B1-B14 (all)
Defects	3.16	4.15	X	X	X	B1-B14 (all)

NOTES:
1. Acronyms: B: battery sample, C: case sample, WC: weighted case sample, MB: modified battery sample.
2. This is a destructive test and shall be conducted after all other inspections have been completed for the listed assigned battery sample.

4.2 Test equipment and facilities. The tests in this specification shall be conducted in a test facility having a calibration system which complies with ISO/IEC 17025, ISO 10012, or equivalent system as approved by the Qualifying Activity.

4.2.1 Voltage and current indicating equipment. All voltage and current indicating equipment shall be accurate within one percent of the reading.

4.2.2 Voltage and current tolerances. During the charging and discharging of batteries the current and voltage shall be maintained within one percent of the value specified at all times, unless otherwise specified. Unless otherwise specified all discharges shall be continuous.

4.2.3 Resistance tolerances. Resistance shall be accurate within ±0.5 percent for all tests.

4.2.4 Time of discharge. The timing of discharges lasting not longer than one minute shall be maintained to within ±5 percent. All other discharge times shall be accurate within ±1 percent.

4.3 Inspection conditions. Unless otherwise specified, all examinations and tests shall be performed under ambient humidity and ambient atmospheric pressure conditions at normal temperature (see 4.3.1.1). There shall be no more than one hour rest between charge and discharge during a test, unless otherwise specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

4.3.1 Temperature conditions. For Deep cycle life, High temperature deep cycle life, Retention of charge, and Battery storage life tests only, brief temperature excursions outside of the defined test temperature tolerance may occur and will not result in a test non-conformance provided that the total duration for the excursions are less than 5% of the total test time and that the excursions do not exceed double the temperature tolerance. For all other tests, brief temperature excursions outside of the defined test temperature tolerance may occur and will not result in a test non-conformance provided that the total duration for the excursions are less than 1% of the total test time and that the excursions do not exceed double the temperature tolerance.

4.3.1.1 Normal conditions. Normal ambient temperature for tests shall be 22±5 °C.

4.3.1.2 Transitioning between temperatures. When transitioning between temperatures that have a difference greater than 10 °C, the batteries shall remain at the new condition and shall stabilize for not less than 12 hours unless otherwise specified. When transitioning between temperatures that have a difference less than or equal to 10 °C, the batteries shall remain at the new condition and shall stabilize for not less than 6 hours unless otherwise specified. When transitioning between temperatures, the battery shall be in the Operational State with Master Power Switch Off, unless otherwise specified. When transitioning between temperatures where the stabilization time is not fixed but rather defined as a minimum time (ex: "at least" or "not less than"), if a maximum stabilization time is not provided, the stabilization time shall not exceed the minimum time defined by an additional 6 hours, unless otherwise specified.

4.3.2 Mounting. Batteries shall not be altered for mounting purposes to perform the vibration and mechanical shock tests. Where brackets exist, for the sole purpose of mounting the battery, these brackets shall be used. Vibration isolators shall not be used.

4.4 Inspection and test methods.

4.4.1 Engineering analysis. The purpose of engineering analysis is to provide objective evidence as to the ability of the battery to meet performance characteristics where component level testing or inspection is either not required, due to previous experience or testing, or is not feasible due to unrealistic inspection conditions. Analysis may consist of evaluation of data accumulated from inspection, demonstration, test and product design requirements simulation, modeling, interpretation and/or parts similarity. Analysis may include engineering calculations if applicable. The resultant analysis of this data should be organized to provide evidence that a particular requirement has been met.

4.4.2 Visual and mechanical inspections and tests. Reworking of samples shall be permitted as specified in the contract or by approval of the Qualifying Activity (see 3.16).

4.4.2.1 Incoming visual and mechanical inspection. Samples shall be examined to verify that the basic materials, component materials and parts, design and construction, marking and workmanship are in accordance with the requirements of 3.16.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

4.4.2.2 Post-test visual and mechanical inspection. Except where noted, samples shall be examined after testing in section 4 to verify conformance to 3.16.

4.4.2.3 Dimension and weight measurement. To determine conformance to 3.3.2, batteries shall be measured and weighed. All measurements shall include any coating and labels.

4.4.2.4 Electrical interface.

4.4.2.4.1 Terminal posts and threaded sockets. Terminal posts and threaded sockets shall be visually inspected to determine conformance to 3.3.3.1. The electrically conductive pad and the electrically insulating material shall be measured to ensure proper dimensions. Additionally, an increasing torque up to 28.25 Newton-meters (N-m) shall be applied in a direction perpendicular to the axis of the terminal posts and parallel to the top of the battery by a torque indicating device, through a nondestructive battery terminal fitting or other clamping device on the conical section of the terminal posts. This test shall be repeated using a torque wrench on the hex nut portion of the terminal posts. The torque shall be performed in a clockwise direction. To test battery clamp slippage, battery clamps shall be securely attached to each terminal post (see TM-9-6140-200-13, Battery Replacement, Installation Task). The battery shall be suspended by the battery clamps for one hour. The clamps shall not completely slip off the terminal posts during the one hour. The battery clamps for the terminals to be used in the slip testing shall conform to part number A-A-52425-1 (NSN 5940-00-549-6581) for the positive and A-A-52425-2 (NSN 5940-00-549-6583) for the negative. After the torque and battery clamp slippage test has been performed, the same battery shall undergo the immersion test in accordance with 4.7.6.

4.4.2.4.2 Communication interface. Engineering analysis shall be performed on the communication interface to determine conformance to 3.3.3.2.

4.4.2.4.2.1 Isolation, ESD, and filtering. Conformance to 3.3.3.2.1 shall be verified during performance of 4.4.4, 4.8, and 4.9.

4.4.2.5 Battery case and accessories.

4.4.2.5.1 Battery case. To determine conformance to 3.3.5.1, inspect battery cases in accordance with 4.4.2.1 and 4.4.2.3. When a non-metallic material is used for the battery case, the 500W Vertical Burning Test specified in UL 94 shall be performed on test specimen sets cut from the case samples. If there is insufficient number of case samples to cut all test specimens, then the vendor will have to supply additional case samples.

4.4.2.5.2 Overpressure relief device. To determine conformance to 3.3.5.2.1, vendor certification is required.

4.4.2.5.3 Air pressure equalization port. To determine conformance to 3.3.5.2.2, vendor certification is required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

4.4.2.5.4 Heater(s). Conformance to 3.3.5.2.3 shall be verified during performance of 4.4.6.2 b.

4.4.2.5.5 Handles. To determine conformance to 3.3.5.2.4 a weighted battery case (with a weight equal to the max weight specified in table I shall be placed in an environmental chamber with temperature of 88±3 °C for 60 minutes, allowed to return to normal conditions, and again heated at 88±3 °C for 60 minutes. The weighted battery case shall then be removed from the environmental chamber and immediately placed in a test fixture (see figure 11). The case shall be initially set on the removable support, and the angles and initial tautness of the handles shall be set with the support in place. The ballast weight, equal to the max weight specified in table I, shall be placed on top of the weighted case. The support shall then be slowly removed and the weighted case and ballast weight be allowed to hang freely by the handles for 60 seconds. The weighted case shall then be removed and the handles and bond shall be examined for conformance to 3.3.5.2.4. The test shall be repeated at -54±3 °C.

4.4.2.6 Battle override mode. Vendor certification that battery is compliant with 3.3.6 is required.

4.4.3 Potting/sealing compounds, flow and shrinkage. The following test shall be performed on any insulating compounds that may be used in battery construction. Place compound in a container, approximately 76.2 mm wide by 152.4 mm long by 19.1 mm high, to within 12.7 mm of the top and allow curing in accordance with the manufacturer's recommended procedures. Place the container in an environmental chamber in an inverted position and raise the temperature to 93±3 °C. Keep the container inverted at these conditions for not less than 24 hours. The test sample shall meet the requirements of 3.2.4.1. Place the container in an environmental chamber in an inverted position and lower the temperature to -54±3 °C; hold these conditions for not less than eight hours. The test sample shall meet the requirements of 3.2.4.1.1.

4.4.4 Dielectric strength and insulation resistance. To determine conformance to 3.5.1, the following tests shall be performed.

4.4.4.1 Dielectric strength. To verify conformance to 3.5.1, apply an alternating-current potential of 500 volts RMS in accordance with MIL-STD-202-301 for 60 to 65 seconds between the battery electrical contacts listed below.

a. Battery positive terminal and battery case.

b. Battery negative terminal and battery case.

c. All communication interface contacts and connector shell, except power and power return, and positive terminal.

d. All communication interface contacts and connector shell, except power and power return, and negative terminal.

e. All communication interface contacts, except the connector shell, and battery case.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

Note. Test each battery case in not less than three locations and on all surfaces with a case seam other than that on which the battery terminals are located. Paint shall be removed from the test locations on the case in a manner to allow contact with the case material but does not cause damage to the material. For plastic case batteries, measure the insulation resistance of batteries by the use of a copper plate making physical contact with the case. The plate shall exceed the dimensions of the surface to be tested. Place the battery to be tested on the plate so that the plate is visible outside all edges of the surface under test.

4.4.4.2 Insulation resistance. Apply a direct-current potential of 500 volts for 60 to 65 seconds to the components listed in 4.4.4.1. Measure the insulation resistance of the components in accordance with test condition B of MIL-STD-202-302, for 60 seconds. Batteries shall meet the requirements of 3.5.1.

4.4.5 Operating and storage temperature range. To determine conformance to 3.5.2, perform the full charge capacity test of 4.4.6.1 steps a.-d. Charge the battery in accordance with 4.4.9 and place the battery in the Dormant State in an environmental chamber at -51±3 °C for 24 hours. Change environmental chamber temperature to -46±3 °C, and leave the battery in the chamber for 12 hours. Place the battery in the Operational State with master power switch “On” (see 3.6.6.3). Within one minute, begin a one hour discharge of the battery at C/10 at -46±3 °C. Battery voltage shall remain above the minimum voltage specified in 3.5.3 for the entire hour. Repeat test on all samples at 85±3 °C for 24 hours, and 71±3 °C for the 12 hour chamber time and C/10 discharge. Place battery at normal conditions for at least 6 hours. Perform the full charge capacity test of 4.4.6.1 steps a.-d.

4.4.6 Performance tests. For all charges and discharges in this section, unless otherwise specified, the battery shall be in the Operational State with master power switch “On.”

4.4.6.1 Full charge capacity. To determine conformance to 3.5.4, the battery full charge capacity rating (ampere-hours) shall be determined as follows:

a. Discharge battery at 1C rate until the terminal cutoff voltage defined by the battery manufacturer is reached or the battery contactor opens (this voltage shall be compliant with 3.5.3).

b. Allow battery to rest 5 minutes and then charge battery in accordance with 4.4.9.

c. Place battery at normal conditions for at least 6 hours.

d. Discharge battery at 1C rate until the terminal cutoff voltage defined by the battery manufacturer is reached or the battery contactor opens (this voltage shall be compliant with 3.5.3). Record the discharge time, and calculate the capacity in ampere hour.

e. Two additional attempts are permitted of b. through d. to meet full charge capacity requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

f. The capacity obtained from each battery subjected to steps b. through d. shall represent the full charge capacity.

4.4.6.2 Cranking amps. Each battery listed for cranking amps testing in table VII shall undergo all steps listed in sections a. and b. below.

a. No prior heating. Battery heater(s) shall be deactivated for test section a. To determine conformance to 3.5.5, the test for cranking amps at -40, -32, -18, and 55 °C shall be performed as follows:

(1) Charge battery in accordance with 4.4.9.
(2) Place battery in an environmental chamber at a temperature of -40±3 °C. Verify heater is inactive.
(3) The battery shall remain in the environmental chamber at -40±3 °C for at least 12 hours. Discharge the battery at the cranking amps (no pre-heating) rate and time as specified in table I for that temperature. Monitor voltage of battery during test to verify compliance to voltage specified in table I.
(4) Measure and record battery voltage at end of test (see 3.5.3).
(5) If battery voltage during or at the end of test fails to meet the requirements of 3.5.5, it shall be retested as specified in steps (1) through (4). Failure of a battery to pass this second cycle shall be considered as failure to meet the specified requirements.
(6) Allow battery to rest for 5 minutes. Within one minute before the end of the rest, record the reported 30 second battery power capability estimation value. Immediately after the 5 minute rest, discharge the battery at the rate recorded for 30 seconds or until voltage drops below the battery's terminal cutoff voltage specified in 4.4.6.1 d. If the voltage drops below the battery's terminal cutoff voltage specified in 4.4.6.1 d. or battery contactor opens before 30 seconds, this constitutes as a failure of this test.
(7) Allow battery to rest for 5 minutes. Within one minute before the end of the rest record the reported 10 second battery power capability estimation value. Immediately after the 5 minute rest, discharge the battery at the rate recorded for 10 seconds or until voltage drops below the battery's terminal cutoff voltage specified in 4.4.6.1 d. If the voltage drops below the battery's terminal cutoff voltage specified in 4.4.6.1 d. or battery contactor opens before 10 seconds, this constitutes as a failure of this test.
(8) Test in accordance with 4.4.6.1 steps a.-d.
(9) Repeat steps (1) through (8) except temperature shall be -32±3 °C.
(10) Repeat steps (1) through (8) except temperature shall be -18±3 °C.
(11) Repeat steps (1) through (8) except temperature shall be 55±3 °C.

b. With prior heating. To determine conformance to 3.5.5, the test for cranking amps at -18 and -48 °C shall be performed as follows:

(1) Charge battery in accordance with 4.4.9.
(2) Place battery in an environmental chamber at a temperature of -48±3 °C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

(3) The battery shall remain in the environmental chamber at -48±3 °C for at least 12 hours. Initiate heating and allow heater to operate for 30 minutes. Heaters shall be internally powered by the battery only. Ensure heater has been turned off. Within 1 minute of heater termination, discharge the battery at the cranking amps (pre-heating at -48 °C) rate and time as specified in table I. Monitor voltage of battery during test to verify compliance to voltage specified in table I.
(4) Measure and record battery voltage at end of test (see 3.5.3).
(5) If battery fails the test, it shall be retested. The retested battery shall be charged, and shall be retested as specified in (1) through (4). Failure of a battery to pass this second cycle shall be considered as failure to meet the specified requirements.
(6) Test in accordance with 4.4.6.1 steps a.-d.
(7) Repeat steps (1) through (6) except temperature shall be -18±3 °C, and the heater shall run for 15 minutes for Class A or 10 minutes for Class B. The rate and time shall be as specified in table I under cranking amps (pre-heating at -18 °C).

4.4.6.3 Deep cycle life. To determine conformance to 3.5.6, perform the following test procedure:

a. Perform full charge capacity test in accordance with 4.4.6.1. Record the full charge capacity from 4.4.6.1 d. This full charge capacity shall be used to establish the baseline capacity for the 70 percent requirement of 3.5.6.

b. Charge battery in accordance with 4.4.9.

c. Place battery in an environmental chamber and stabilize at a temperature of 38±3 °C.

d. Discharge at the 1C rate to the battery's terminal cutoff voltage specified in 4.4.6.1 d or battery contactor opens. Each discharge in this step, where the battery capacity exceeds the 70 percent requirement of 3.5.6, constitutes completion of one cycle.

e. Allow the battery to rest five minutes.

f. Charge battery in accordance with 4.4.9, except perform at a temperature of 38±3 °C.

g. Allow the battery to rest five minutes.

h. Repeat steps d. through g. for a total of 1000 cycles.

i. Remove from the environmental chamber and stabilize at normal conditions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

j. Perform full charge capacity test in accordance with 4.4.6.1 steps a.-d. Record the full charge capacity from 4.4.6.1 d and compare to baseline capacity from step a.

4.4.6.4 High temperature deep cycle life. To determine conformance to 3.5.7, perform the following test procedure:

a. Perform full charge capacity test in accordance with 4.4.6.1. Record the full charge capacity from 4.4.6.1 d. This full charge capacity shall be used to establish the baseline capacity for the 70 percent requirement of 3.5.7.

b. Charge the battery in accordance with 4.4.9.

c. Place battery in an environmental chamber and stabilize at a temperature of 50±3 °C.

d. Discharge at the 1C rate to the battery's terminal cutoff voltage specified in 4.4.6.1 d. or battery contactor opens. Each discharge in this step, where the battery capacity exceeds the 70 percent requirement of 3.5.7, constitutes completion of one cycle.

e. Allow the battery to rest five minutes.

f. Charge battery in accordance with 4.4.9, except perform at a temperature of 50±3 °C.

g. Allow the battery to rest five minutes.

h. Repeat steps d. through g. for a total of 500 cycles.

i. Remove from the environmental chamber and stabilize at normal conditions.

j. Perform full charge capacity test in accordance with 4.4.6.1 steps a.-d. Record the full charge capacity from 4.4.6.1 d and compare to baseline capacity from step a.

4.4.6.5 Retention of charge. To determine conformance to 3.5.8, each battery listed for retention of charge testing in table VII shall be tested as follows:

a. Charge battery as specified in 4.4.9.

b. Place the battery in an environmental chamber at 40±3 °C for 90 calendar days. Ensure the battery is in the Operational State with master power switch “Off” (see 3.6.6.3). The battery shall be continuously monitored to ensure the battery stays in the Operational State. The signals to the battery communication interface shall not be interrupted for steps b. through e. below.

c. After 90 calendar days, allow battery to stabilize at normal conditions for at least 12 hours but no more than 48 hours.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

d. NOTE: DO NOT RECHARGE BATTERY PRIOR TO NEXT STEP.

e. Perform two successive cranks according to the pulse load rating in table I at normal conditions. There shall be a five minute rest between each of the two cranks, with no recharge in between cranks.

f. Repeat the test, steps a. through e. at -18±3 °C.

4.4.7 Battery storage life. To determine conformance to 3.5.9, perform the following test procedure immediately after the full charge capacity test:

a. Charge the battery in accordance with 4.4.9.

b. Disconnect all connections to the battery and ensure the battery is in the Dormant State. Store the battery for 180 days in a controlled temperature environment at 22±5 °C.

c. After the 180 calendar days, and within 24 hours, without first recharging the battery, perform the full charge capacity test in 4.4.6.1 steps c. and d.

d. Perform the full charge capacity test in 4.4.6.1 steps b.-d.

e. Perform a visual inspection (see 4.4.2.2).

4.4.8 Battery service life. To determine conformance to 3.5.10, vendor certification is required.

4.4.9 Charging. To determine conformance to 3.5.11, the battery temperature is to be stabilized at 22±5 °C before charging commences. Batteries shall be charged using a constant voltage of 28.5±0.25 V. The charge is to be terminated after current tapers to C/20 rate, the battery contactor opens, or 2.5 hours has passed, whichever occurs first. The charging supply shall be capable of providing the continuous cycling current charge rating as specified in table I. If testing on any battery is temporarily stopped for a period of 72 hours or more, the battery shall be given a charge according to this section. A test battery shall not be stored for more than 1 hour after a discharge without charging per this section. When batteries are not on test they shall be placed in the Dormant State.

4.4.9.1 Charge acceptance. To determine conformance to 3.5.11.1, the battery temperature is to be stabilized at 22±5 °C for at least 6 hours.

a. Discharge battery at 1C rate until the terminal cutoff voltage specified in 4.4.6.1 d. is reached or battery contactor opens. Allow the battery to rest for five minutes.

b. The battery shall be charged using a constant voltage of 28.5±0.25 V. The charging supply shall be capable of providing the continuous cycling current charge rating as specified in

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

table I. The charge is to be terminated at 1.5 hours; after current tapers to C/20 rate; or the battery contactor opens, whichever occurs first. Allow the battery to rest for one hour.

c. Discharge battery at 1C rate until the terminal cutoff voltage specified in 4.4.6.1 d. is reached or battery contactor opens. Record the discharge time, and calculate the capacity.

d. Two additional attempts are permitted of a. through c. to meet requirements of 3.5.11.1.

4.4.9.2 Rapid charging. To determine conformance to 3.5.11.2, the battery temperature is to be stabilized at 22±5 °C for at least 6 hours.

a. Discharge battery at 1C rate until the terminal cutoff voltage specified in 4.4.6.1 d. is reached or battery contactor opens. Allow battery to rest for five minutes.

b. The battery shall be charged using a constant voltage of 28.5±0.25 V. The charging supply shall be capable of providing 300 amps. The charge shall be terminated at the Rapid charging time specified in table I; after current tapers to C/20 rate; or the battery contactor opens, whichever occurs first. Allow battery to rest for one hour.

c. Discharge battery at 1C rate until the terminal cutoff voltage specified in 4.4.6.1 d. is reached or battery contactor opens. Record the discharge time, and calculate the capacity.

d. Two additional attempts are permitted of a. through c. to meet requirements of 3.5.11.1.

4.4.10 Jump start power export. Vendor certification that battery is compliant with 3.5.12 is required.

4.4.11 Jump start power import. Vendor certification that battery is compliant with 3.5.13 is required.

4.5 Battery management system requirements.

4.5.1 Battery management system. To determine conformance to 3.6.1 an engineering analysis (see 4.4.1) shall be conducted.

4.5.2 BMS power. Vendor certification that battery is compliant with 3.6.2 is required.

4.5.3 BMS features.

4.5.3.1 Monitoring. Conformance to 3.6.3.1 shall be determined through system testing and engineering analysis maintained and documented throughout the battery lifecycle. See table IV for performance characteristics, and accuracy requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

4.5.3.2 Equalization. Vendor certification that battery is compliant with 3.6.3.2 is required.

4.5.3.3 Safety protections. The conformance to 3.6.3.3 shall be determined by successful protection of the battery during tests in 4.10.2.1, 4.10.2.3, 4.10.2.4, 4.10.2.5, and 4.10.2.6.

4.5.3.4 Enable/disable automatic heaters. To determine conformance to 3.6.3.4, the battery shall be placed in the Maintenance State and sent the battery configuration message with parameter "Automatic Heater Function" value set to "Disable Automatic Heater Function." The battery shall be monitored for positive acknowledgment over the CAN communication bus. The battery shall be sent the configuration message with parameter "Automatic Heater Function" value set to "Enable Automatic Heater Function." The battery shall be monitored for positive acknowledgment over the CAN communication bus.

4.5.3.5 Contactor(s). To determine conformance to 3.6.3.5, the battery shall be placed in the Operational State and sent the battery configuration message with parameter "Command Contactor(s)" value set to "Open Contactor(s)." The battery shall be monitored for positive acknowledgment and contactor(s) state over the CAN communication bus. The voltage at the terminals of the battery shall be monitored to verify that electrical power is not available. The battery shall be sent the configuration message with parameter "Command Contactor(s)" value set to "Automatic Contactor Operation." The battery shall be monitored for positive acknowledgment and contactor(s) state over the CAN communication bus. The voltage at the terminals shall be monitored to verify availability of electrical power. The battery shall be sent the configuration message with parameter "Command Contactor(s)" value set to "Force Contactor(s) Closed." The battery shall be monitored for negative acknowledgment and no change to contactor(s) state over the CAN communication bus. The battery shall be placed in the Maintenance State, and sent the battery configuration message with parameter "Command Contactor(s)" value set to "Force Contactor(s) Closed." The battery shall be monitored for positive acknowledgment and contactor(s) state over the CAN communication bus. The voltage at the terminals shall be monitored to verify availability of electrical power. Vendor certification required for switching a minimum of 100,000 times.

4.5.4 Communication interface. Vendor certification that battery is compliant with SAE J1939 and ISO 11898 is required (see 3.6.4).

4.5.4.1 Configuration pins. To determine conformance to 3.6.4.1, the battery shall be sent a request for "Configuration State Message 1." Response message shall be compared to the state of the configuration pins attached to the communication interface.

4.5.4.2 Position identity. To determine conformance to 3.6.4.2, the battery shall be sent a request for "Configuration State Message 1." Response message shall be compared to the state of the configuration pins attached to the communication interface. The battery shall be sent a RQST message to obtain the SAE J1939 NAME. The function instance of the NAME shall be compared to the position identity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

4.5.4.3 Dual CAN interfaces. To determine conformance to 3.6.4.3, communication of the battery on the CAN interfaces shall be monitored in the Operational State with CAN A configured as the primary interface, and repeated with CAN B configured as the primary interface.

4.5.4.4 Baud rate. To determine conformance to 3.6.4.4, the battery shall be configured to baud rates: 250 Kbps, 500 Kbps, and 1 Mbps. The battery shall be monitored in the Operational State to verify the baud rate over the communication interface CAN bus.

4.5.4.5 NAME. To determine conformance to 3.6.4.5, the battery shall be sent a RQST message to obtain the SAE J1939 NAME, and response message shall be monitored to verify the NAME fields. The battery shall then be placed in the Maintenance State, and the NM Message shall be used to modify each of the NAME fields to a value other than the default. A RQST message for the SAE J1939 NAME shall be sent to the battery, and the response message shall be monitored to verify the NAME fields have been updated.

4.5.4.6 Preferred source address. To determine conformance to 3.6.4.6, the battery shall be have position identity pins set to a position identities between 0 and 15 on subsequent trials. The battery shall be monitored in Operational State to verify that the correct preferred source address is used based on the position identity.

4.5.4.6.1 Arbitrary address capable. Vendor certification that the battery supports SAE J1939 arbitrary address capability shall be required. To determine conformance to 3.6.4.6.1, the battery shall be placed in the Maintenance State, and the arbitrary address capability shall be set to the desired state using the NM message according to the procedures found in SAE J1939-81. The battery NAME arbitrary address capable field shall be verified using the Request Current NAME method in SAE J1939-81 or using the request message for the Address Claimed (AC) message.

4.5.4.6.2 Service configurable source address. To determine conformance to 3.6.4.6.2, the battery shall be placed in the Maintenance State, and given a new preferred source address using the CA message according to SAE J1939-81. The battery source address shall be verified using the Request NAME Address Claim method in SAE J1939-81 or using the request message for the Address Claimed (AC) message.

4.5.4.7 Termination resistance. To determine conformance to 3.6.4.7, the resistance between CAN high and low pins for CAN A and CAN B interfaces shall be measured using a calibrated resistance meter.

4.5.4.8 Firmware update over CAN bus. To determine conformance with 3.6.4.8, the battery shall be configured with baud rate of 250 Kbps and placed in the Maintenance State to perform a firmware update. The non-volatile memory in the battery shall be loaded with data containing a known unique configuration identifier different from the identifier initially resident in the memory (vendor to provide). Correct loading shall be demonstrated by verifying checksums and the configuration identifier stored in memory after reprogramming. It shall be

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

verified that this reprogramming operation is complete within 15 minutes. Test shall be repeated at 500 Kbps and 1 Mbps.

4.5.5 Monitoring performance characteristics. The following tests shall be used to verify the range, resolution, and error requirements of table IV.

4.5.5.1 Calculated parameters. With the battery in the Maintenance State, select and configure the battery transmission rate of messages containing calculated parameters to the transmission rates supported for that message (see Appendix A). The battery shall be monitored in Operational State to verify correct transmission rates as configured for messages containing calculated parameters (see 3.6.5.1). See Appendix A for message transmission rates for each applicable message.

4.5.5.1.1 State of charge (percent). The battery shall be monitored in the Operational State to verify that the state of charge is communicated over the CAN bus within the accuracy tolerances listed in table IV of the actual battery state of charge during performance tests (see 4.4.6 and 3.6.5.1). The Actual State of Charge calculation is for verification of the accuracy of the battery's reported state of charge during testing, and not a requirement for how the battery estimates state of charge. The Actual State of Charge shall be calculated after each qualification test is completed using the following:

$$Actual\ State\ of\ Charge_{\ i} = SOC_0 + \frac{\sum_0^i \left(\frac{Current_i}{N\ Samples\ per\ Hour}\right)}{Actual\ Full\ Charge\ Capacity} \times 100\%$$

Where:

a. $Current_i$ (A) is negative when the battery is discharging, and positive when the battery is charging. SOC_0 is 100 percent when the battery is fully charged in accordance with 4.4.9. When the battery is fully discharged SOC_0 is 0 percent.

b. *Actual State of Charge*$_i$ is the actual state of charge at sample i.

c. *N Samples per Hour* is the sample rate (in samples per hour). This equation shall be adjusted as necessary to account for different sample rates in different test steps.

d. *Actual Full Charge Capacity* (Ah) is the final capacity value of each full charge or discharge and is determined from post test analysis.

e. The *Actual State of Charge*$_i$ is calculated at each data sample during a full charge or discharge and compared to the battery's reported state of charge.

4.5.5.1.2 State of health (percent). The battery shall be monitored in the Operational State to verify that the state of health is communicated over the CAN bus within the accuracy tolerances listed in table IV of the battery state of health during performance tests (see 4.4.6 and

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

3.6.5.1). The actual state of health shall be calculated during qualification testing using the following:

$$Actual\ State\ of\ Health\ = \frac{Measured\ Full\ Charge\ Capacity}{Rated\ Full\ Charge\ Capacity} \times 100\%$$

Where:

a. Measured full charge capacity shall be the total capacity of the battery according to section 3.5.4 at 22±5ºC. State of health reporting range is limited from 0 percent to 100 percent. In cases when measured full capacity exceeds rated full charge capacity, the state of health shall be reported as 100 percent.

b. Rated full charge capacity is the full charge capacity found in table I for the battery class.

4.5.5.1.3 Capacity estimation. The battery shall be monitored in the Operational State to verify that the capacity is communicated over the CAN bus during performance tests (see 4.4.6 and 3.6.5.1).

4.5.5.1.4 Time remaining (at present rate of discharge). The battery shall be monitored in the Operational State to verify that the time remaining is communicated over the CAN bus during performance tests (see 4.4.6 and 3.6.5.1).

4.5.5.1.5 Bus voltage request (for charging). The battery shall be monitored in the Operational State to verify that the bus voltage request is communicated during battery charge over the CAN bus during performance tests (see 4.4.6 and 3.6.5.1).

4.5.5.1.6 Open circuit voltage. The battery shall be monitored in the Operational State to verify that the open circuit voltage is communicated over the CAN bus during performance tests (see 4.4.6 and 3.6.5.1).

4.5.5.1.7 Maximum Charge Current. The battery shall be monitored in the Operational State to verify that the maximum charge current is communicated over the CAN bus during performance tests (see 4.4.6 and 3.6.5.1).

4.5.5.1.8 Power capability estimation. Conformance to 3.6.5.1.8 shall be verified during the cranking amps test (see 4.4.6.2).

4.5.5.2 Measured parameters. With the battery in the Maintenance State, select and configure the battery transmission rate of messages containing measured parameters to the transmission rates supported for that message (see Appendix A). The battery shall be monitored in Operational State to verify correct transmission rates as configured for messages containing measured parameters (see 3.6.5.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

4.5.5.2.1 Battery voltage (V). The battery shall be monitored in the Operational State to verify that the battery voltage within the accuracy tolerances listed in table IV is communicated over the CAN bus and shall be compared to a secondary calibrated voltmeter during performance tests (see 4.4.6 and 3.6.5.2.1).

4.5.5.2.2 Battery current (A). The battery shall be monitored in the Operational State to verify that the battery current within the accuracy tolerances listed in table IV is communicated over the CAN bus and shall be compared to a secondary calibrated ammeter during performance tests (see 4.4.6 and 3.6.5.2.2)

4.5.5.2.3 Internal battery temperature (°C). Engineering analysis of temperature sensing method and hardware shall be used to determine conformance to 3.6.5.2.3

4.5.5.2.4 Celsius and Fahrenheit support. The battery shall be monitored in the Operational State to verify that the battery internal temperature within the accuracy tolerances listed in table IV is communicated over the CAN bus. Temperature reading in Fahrenheit shall be converted and compared to the reading in Celsius to verify equivalence (see 3.6.5.2.4).

4.5.5.2.5 Internal pack voltage. The battery shall be monitored in the Operational State to verify that the internal pack voltage is communicated over the CAN bus during performance tests (see 4.4.6 and 3.6.5.1). Vendor certification of conformance to accuracy tolerances listed in table IV is required.

4.5.5.3 Manufacturer specific parameters. With the battery in the Maintenance State, select and configure the battery transmission rate of messages containing manufacturer specific parameters to the transmission rates supported for that message (see 3.6.5.3). The battery shall be monitored in Operational State to verify correct transmission rates as configured for messages containing manufacturer specific parameters (see 3.6.5.3).

4.5.5.3.1 Cell voltages. The battery shall be monitored in the Operational State to verify that cell voltages are reported on the CAN bus to determine conformance to 3.6.5.3.1. CAN messages containing cell voltages shall be tested in accordance with 4.5.5.3.

4.5.5.3.2 Equalization. The battery shall be monitored in the Operational State to verify that equalization information is reported on the CAN bus to determine conformance to 3.6.5.3.2. CAN messages containing equalization information shall be tested in accordance with 4.5.5.3.

4.5.5.3.3 BIT results. The battery shall be monitored in the Operational State to verify that BIT results are reported on the CAN bus to determine conformance to 3.6.5.3.3. CAN messages containing BIT results shall be tested in accordance with 4.5.5.3. Communication of faults and failures in the form of DTCs shall be verified in tests in 4.10.2 and engineering analysis maintained and documented throughout the battery lifecycle.

4.5.5.3.4 Hardware and software version. The battery shall be placed in the Operational State, and a request message for the SAE J1939 ECUID and SOFT messages shall be made on the CAN bus. The battery shall be monitored to verify that the hardware and

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

software information is communicated on the CAN bus in accordance with 3.6.5.3.4. Repeat with the battery placed in the Maintenance State.

4.5.5.3.5 Celsius support. Testing shall be conducted in accordance with 4.5.5.3 to determine conformance to 3.6.5.3.5. Messages containing manufacturer specific parameters that have temperature data shall be analyzed and verified that the temperatures are reported in Celsius.

4.5.6 Battery states.

4.5.6.1 Dormant (off) State. To determine conformance to 3.6.6.1 the following test shall be performed while the battery is in the Operational State. The mating connector P1, configured according to section A.3.3.2, shall be disconnected from the battery communication interface J1, and a 30 ohm resistor shall be placed on the terminals. The battery terminal voltage shall be monitored to verify the transition time to the Dormant State does not exceed 10 seconds, and the voltage does not exceed 1.0 V after one minute.

4.5.6.2 Initialize State. To determine conformance to 3.6.6.2 the battery terminal voltage shall be monitored as it transitions from the Dormant State to the Operational State to verify that the transition time does not exceed 10 seconds.

4.5.6.3 Operational State. To determine conformance to 3.6.6.3, the battery shall be monitored for the conditions of the Operational State. It shall be verified that the battery provides electrical power at the terminals, CAN messages are reported in response to a RQST and configuration messages, CAN messages are reported on a regular interval when the master power switch is “On”, and CAN messages are not reported on a regular interval when the master power switch is “Off”. It shall also be verified that the time to report battery voltage, battery current, battery internal temperature, state of charge, state of health, time remaining, and BIT results does not exceed one second when entering the Operational State with the master power switch “On” or when in the Operational State and the master power switch changes from “Off” to “On”.

4.5.6.4 Maintenance State. To determine conformance to 3.6.6.4, the battery shall be sent the battery configuration message with Maintenance State parameter with value set to “Enter Maintenance State,” and verify battery provides the positive acknowledgement message. Once in Maintenance State, the battery shall be sent the Maintenance State parameter with value set to “Exit Maintenance State” and verify the battery provides the positive acknowledgement message. To verify Maintenance State timeout functionality, the battery shall be sent the battery configuration message with Maintenance State parameter with value set to “Enter Maintenance State,” and verify battery provides the positive acknowledgement message. Rest for six minutes with no CAN messages addressed the battery being sent. Verify the battery exits the Maintenance State after five minutes from entering the Maintenance State.

4.5.6.5 Protected State. To determine conformance to 3.6.6.5, the battery shall be monitored in 4.10.2.1, 4.10.2.3, 4.10.2.4, 4.10.2.5, and 4.10.2.6 to verify battery transitions to and from the Protected State.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

4.5.6.5.1 Protected state timeout. To determine conformance to 3.6.6.5.1, the battery shall be placed into the Maintenance State, and configured with a SOC reserve limit of 20 percent. The battery shall then be placed into the Operational State, and discharged at the 1C rate until the battery enters the Protected State. Verify battery has entered the Protected State due to SOC reserve limit by observing the DTC message(s) over CAN. The master power switch shall be placed in the "Off" state, and the battery shall rest for 24 hours. Battery terminal voltage shall be monitored to verify the battery remains in the Protected State. If necessary, additional discharges at the C/10 rate followed by 24 hour rest periods shall be performed on the battery if the SOC recovers and the battery returns to the Operational State. Within five minutes of the end of the 24 hour rest, the master power switch shall be placed in the "On" state and the battery shall be observed for inactivity of CAN communication and no terminal voltage for five minutes to verify that the battery has entered the Dormant State. The dormant pins shall be cycled, and the battery shall be observed to verify that the battery exits the Dormant State.

4.5.7 Built-in tests.

4.5.7.1 Power-up BIT. To determine conformance to 3.6.7.1, the battery shall be monitored to verify the battery reports the PBIT results after the battery has transitioned out of the Initialize State.

4.5.7.2 Continuous BIT. To determine conformance to 3.6.7.2, the battery shall be monitored in the Operational State to verify that the battery reports the CBIT results.

4.5.7.3 BIT diagnostics probability. Vendor certification that battery is compliant with 3.6.7.3 is required.

4.5.8 Long term fault data storage . To determine conformance to 3.6.8, the battery manufacturer shall provide a method to determine if most recent 96 hours of long term fault data has been stored successfully in non-volatile memory.

4.5.9 Short term fault data storage . To determine conformance to 3.6.9, the battery manufacturer shall provide a method to determine if short term fault data has been stored successfully in volatile or non-volatile memory.

4.6 Surges, spikes and starting operation.

4.6.1 Voltage surges. To determine conformance to 3.7.1, test as specified in MIL-STD-1275. Conformance to the requirement shall be verified when the Battery in the Operational State and the Master Power Switch Signal is "On", when the Battery in the Operational State and the Master Power Switch Signal is "On" and contactor(s) commanded "Open", and in the Dormant State. No external loads that remove energy (e.g. resistor) from the battery shall be used in the tests.

4.6.2 Voltage spikes. To determine conformance to 3.7.2, test as specified in MIL-STD-1275. The test shall be conducted with the Battery in the Operational State and the

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

Master Power Switch Signal is “On”, the Battery in the Operational State and the Master Power Switch Signal is “On” and contactors commanded “Open”, and in the Dormant State. No external loads that remove energy from the battery (e.g. a resistor) shall be used in the tests.

4.6.3 Starting operation. Vendor certification that the battery is compliant with 3.7.3 shall be required.

4.6.4 Starting current. Vendor certification that battery is compliant with 3.7.3.1 is required.

4.7 Environmental. For all tests in this section, unless otherwise specified, the battery shall be in the Operational State and not charging or discharging.

4.7.1 Altitude.

4.7.1.1 Altitude, operating & non-operating. Each battery listed for altitude testing in table VII shall undergo all steps listed in this test section. To determine conformance to 3.8.1.1, the following test shall be performed:

a. Perform the full charge capacity test of 4.4.6.1 steps a.-d.

b. Rest for five minutes, and then charge according to 4.4.9.

c. Weigh the battery.

d. Run the test specified in the Operating section of ATPD 2404.

e. Stabilize at 22±5 °C for 6 hours.

f. Perform the full charge capacity test of 4.4.6.1 steps a.-d.

g. Weigh the battery.

h. Repeat steps a. through c., then place the battery in Dormant State, and then perform the Non-operating section of ATPD 2404. After finishing the Non-operating test, stabilize the battery in accordance with step e. Switch the battery to Operational State, and perform steps f. and g.

4.7.1.2 Rapid decompression. To determine conformance to 3.8.1.2, perform the following tests:

a. Perform the full charge capacity test of 4.4.6.1 steps a.-d.

b. Rest for five minutes and then charge according to 4.4.9.

c. Weigh the battery.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

d. Place the battery in the Dormant State and perform the test specified in the Rapid decompression section of ATPD 2404.

e. Place the battery in the Operational State and perform the full charge capacity test of 4.4.6.1 steps a.-d.

f. Rest for five minutes and then charge according to 4.4.9.

g. Weigh the battery.

4.7.2 Attitude. To determine conformance to 3.8.2, perform the following test:

a. Invert the battery from its normal upright position (see 6.3.30).

b. Perform the full charge capacity test of 4.4.6.1 steps a.-d.

4.7.3 Temperature shock. To determine conformance to 3.8.3 the following test shall be performed:

a. Charge according to 4.4.9.

b. Run the test specified in the Temperature shock section of ATPD 2404 with the battery in the Dormant State.

c. Place the battery in the Operational State and perform the full charge capacity test of 4.4.6.1 steps a.-d.

4.7.4 Mechanical Shock. To determine conformance to 3.8.4 the following test shall be performed.

a. Perform the full charge capacity 4.4.6.1 steps a.-d.

b. Charge according to 4.4.9.

c. Place the battery in the Dormant State and perform the test in accordance with the basic and functional shock sections of ATPD 2404.

d. Perform the full charge capacity 4.4.6.1 steps a.-d.

4.7.5 Vibration. To determine conformance to 3.8.5, the following test shall be performed:

a. Perform the full charge capacity 4.4.6.1 steps a.-d.

b. Charge according to 4.4.9

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

c. Perform tests in accordance with the ATPD-2404 vibration section. The battery shall meet the vibrational profiles for the Materiel in Turret Bustle Rack or Installed in Turret, and the Light Vehicle – Materiel on Sponson or Installed in Hull sections of AECTP-400.

d. Perform the full charge capacity 4.4.6.1 steps a.-d.

4.7.6 Immersion. To determine conformance to 3.8.6 the following test shall be performed after the terminal posts and threaded sockets test is complete (see 3.3.3.1 and 4.4.2.4.1).

a. Charge battery in accordance with 4.4.9.

b. Weigh the battery.

c. Run the test specified in the leakage (immersion) section of ATPD 2404 for subsystems or equipment located on the hull exterior or engine compartment which may be submerged during fording.

d. After immersion, remove the batteries and dry exterior surfaces. Weigh the battery.

e. Discharge the battery according to 4.4.6.1 d.

4.7.7 Humidity. To determine the conformance to 3.8.7 the following test shall be performed:

a. Perform the full charge capacity 4.4.6.1 steps a.-d.

b. Charge battery in accordance with 4.4.9.

c. Place the battery in Dormant State, and perform test in the Humidity, System storage and transportation section of ATPD 2404.

d. The operational check shall be performed according to the full charge capacity test in 4.4.6.1 steps a.-d with the battery in the Operational State.

4.7.8 Blowing sand and dust. To determine the conformance of 3.8.8 the following test shall be performed:

a. Conduct the test in accordance with the blowing sand internal and blowing dust internal sections of ATPD 2404.

b. Perform the full charge capacity 4.4.6.1 steps a.-d, and check voltage (see 3.5.3).

4.7.9 Salt atmosphere. To determine the conformance of 3.8.9 the following test shall be performed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

a. Perform the full charge capacity 4.4.6.1 steps a.-d.

b. Charge the battery in accordance with 4.4.9.

c. Perform the test in the salt fog section of ATPD 2404.

d. Perform the full charge capacity 4.4.6.1 steps a.-d.

4.7.10 Fluid susceptibility. To determine the conformance of 3.8.10, the following test shall be performed.

a. Perform the full charge capacity 4.4.6.1 steps a.-d.

b. Charge the battery in accordance with 4.4.9.

c. Place the battery in Dormant State and conduct the fluid susceptibility test in accordance with the contamination by fluids section of ATPD 2404.

d. Place the battery in the Operational State and perform the full charge capacity 4.4.6.1 steps a.-d.

4.7.11 Explosive atmosphere. To determine conformance of 3.8.11, the battery shall be subjected to the test method described in the Ignition Protection section of ATPD 2404, while undergoing a charge as described in 4.4.9 without the igniting of the air-vapor mixture.

4.8 Electromagnetic compatibility/interference. To determine the conformance of 3.9, the following test shall be performed.

a. Perform the full charge capacity 4.4.6.1 steps a.-d.

b. Charge the battery in accordance with 4.4.9.

c. Perform the following test procedures of MIL-STD-461 CE102, CS101, CS114, CS115, CS116, RE102, and RS103 with minimum 2.5 meter cable lengths in accordance with MIL-STD-461 interconnecting leads and cables requirements. During tests with the battery placed on a resistive load, the battery shall be placed in the Operational State with the master power switch “On” and voltage shall be maintained above 20.5V. The battery shall be recharged as necessary in accordance with 4.4.9 during tests.

d. Perform the full charge capacity 4.4.6.1 steps a.-d.

4.9 Electrostatic discharge. To determine conformance of 3.10, the following test shall be performed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

a. Perform the following test procedures of MIL-STD-461 CS118. Test surfaces include, but is not limited to each main power terminal, each connector, connector shield, and the battery case. The battery shall be tested in the Dormant State with exposed pins on the J1 receptacle. The battery shall be tested in the Operational State with a test harness with a minimum 1 meter length and shielded conductors connected to the J1 receptacle, with no load and with a resistive load of 3±0.15 ohm on the main power terminals.

b. Verify that the load can be sustained for 1 minute following the test.

c. Verify communications in accordance with 4.4.1.

d. Perform the full charge capacity 4.4.6.1 steps a.-d.

4.10 Safety.

4.10.1 Cell safety. Vendor shall certify that cells used for the battery have been characterized in accordance with the tests specified below.

4.10.1.1 Cell safety abuse tests. Vendor shall certify that cells have been characterized in accordance with SAE J2464 for the tests in this section. Vendor shall report corresponding Hazard Severity Level to the Qualifying Activity.

4.10.1.1.1 Cell overcharge. To determine conformance to 3.11.1.1.1 perform test in accordance with the Overcharge Test (Cell and Module or Pack) section of SAE J2464.

4.10.1.1.2 Cell short circuit. To determine conformance to 3.11.1.1.2 perform test in accordance with the Short Circuit Tests (Cell and Module or Pack) section of SAE J2464.

4.10.1.1.3 Cell over discharge. To determine conformance to 3.11.1.1.3 perform test in accordance with the Overdischarge (Forced Discharge) Test (Cell Level and Module) section of SAE J2464.

4.10.1.1.4 Cell penetration. To determine conformance to 3.11.1.1.4 perform test in accordance with the Penetration Test (Cell Level or Above) section of SAE J2464, at a minimum of 100 and 50 percent state of charge.

4.10.1.1.5 Cell crush. To determine conformance to 3.11.1.1.5 perform test in accordance with the Crush Test (Cell Level or Above) section of SAE J2464.

4.10.1.2 Cell leakage. To determine conformance to 3.11.1.2, the vendor shall certify that the following test has been successfully completed. Any mass loss or visual defects shall be reported.

a. Fully charge the cells in any appropriate manner at the normal conditions of 4.3.1.1.

b. Weigh each cell to the nearest tenth of a milligram.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

c. Store cells at 60±3 °C for not less than 26 days, and not more than 30 days.

d. Remove from high temperature storage and stabilize cells at the normal conditions of 4.3.1.1 for not less than 1 hour.

e. Weigh each cell to the nearest tenth of a milligram.

4.10.2 Battery safety.

4.10.2.1 Battery overcurrent protection. To determine conformance to 3.11.2.1., the following test shall be performed.

a. Perform the full charge capacity test (see 4.4.6.1 steps a.-d).

b. Charge the batteries as specified in 4.4.9 .

c. Short each battery across each pair of positive and negative terminals through an external resistance. External resistance shall be 10±3 milliohms. The resistance shall be removed from the terminals 1 hour after short occurs.

d. Rest five minutes and then measure and record the battery open circuit voltage (OCV).

e. Stabilize batteries at the normal conditions of 4.3.1.1 for not less than 2 hours.

f. Perform the full charge capacity (see 4.4.6.1 steps a.-d).

4.10.2.2 Overcharge abuse. To determine conformance to 3.11.2.2.1, the battery shall be overcharged in accordance with the Overcharge Test (Cell and Module or Pack) section of SAE J2464, with the overcharge voltage limit of 41.25 V for Type 1 or 2.

4.10.2.3 Overcharge protection. To determine conformance to 3.11.2.2.2, the following test shall be performed.

a. Perform the full charge capacity test (see 4.4.6.1 steps a.-d).

b. Charge batteries in accordance with 4.4.9.

c. Apply a voltage of 41.25 volts for no less than 1 hour, while measuring and recording battery voltages continuously or at a sampling rate of not less than once per 60 seconds.

d. Stabilize batteries at normal conditions for not less than 2 hours.

e. Perform the full charge capacity (see 4.4.6.1 steps a.-d).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

4.10.2.4 Battery overdischarge protection. To determine conformance to 3.11.2.3, the following test shall be performed.

a. Perform the full charge capacity test (see 4.4.6.1 steps a.-d).

b. Charge batteries in accordance with 4.4.9.

c. Attempt to overdischarge the batteries at a rate of C/2 below the battery's terminal cutoff voltage.

d. Measure and record battery voltages continuously or at a sampling rate of not less than once per 60 seconds.

e. Stabilize batteries at normal conditions for not less than 2 hours.

f. Charge the batteries in accordance with 4.4.9.

g. Perform the full charge capacity test (see 4.4.6.1 steps a.-d).

h. Repeat step a. through step g. but using the continuous cycling discharge current rating of table I in place of the C/2 discharge rate in step c.

4.10.2.5 Battery over temperature protection. To determine conformance to 3.11.2.4 the following test shall be performed:

a. Charge battery in accordance with 4.4.9.

b. Stabilize the battery at 71±3 °C for not less than 6 hours.

c. Verify the battery is in the Operational State.

d. Raise the temperature to above specific manufacturer's over temperature limit.

e. Verify the battery has transitioned to the Protected State once the reported internal temperature is at or above the manufacturers defined over temperature limit.

f. Measure and record the battery voltage (see 3.5.3).

g. Place battery in an ambient temperature of 22±5 °C and verify that the battery has returned to the Operational State once the reported internal temperature is below the manufacturers defined over temperature limit by no more than 10 °C.

h. Perform the full charge capacity test (see 4.4.6.1 steps a.-d.).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

4.10.2.6 Battery low temperature charge protection. Vendor certification required to determine conformance to 3.11.2.5.

4.10.2.7 Battery impact resistance (non-metallic battery case only). To determine the conformance to 3.11.2.6 the following test shall be performed.

a. Condition the empty battery case in an environmental chamber for at least 4 hours at 71±3 °C.

b. Remove battery from environmental chamber and place the battery case on a flat steel plate, which is not less than 25 cm longer and wider than the case.

c. Drop a free-falling 0.907±0.023 kg solid steel ball one time on the center of every face of the battery case, excluding the handle sides, from a height of 2.29 +0.03 / - 0.005 m within 5 minutes after removal from the environmental chamber. If all battery faces cannot be completed within the 5 minute period, steps a. through c. may be repeated as many times as needed to complete testing on all battery faces within 5 minutes of removal from the environmental chamber.

d. Examine the battery case in accordance with 4.4.2.2.

e. Repeat step a. through d. with a different battery case but use a temperature of -18±3 °C and a height of 1.52 +0.03 / - 0.005 m.

f. Repeat step a. through d. with a different battery case but use a temperature of -40±3 °C and a height of 1.27 +0.03 / - 0.005 m.

4.10.2.8 Battery abuse.

4.10.2.8.1 Battery crush. To determine the conformance to 3.11.2.7.1 the battery shall be characterized in accordance with the Crush Test (Cell Level or Above) section of SAE J2464. One axis shall be the normal upright position (Z axis) with the terminal post adapters installed. Record corresponding Hazard Severity Level.

4.10.2.8.2 Battery penetration. To determine conformance to 3.11.2.7.2 the following tests shall be performed.

4.10.2.8.2.1 Battery nail penetration. The battery shall be characterized in accordance with the penetration test (Cell Level or Above) section of SAE J2464. Record corresponding Hazard Severity Level.

4.10.2.8.2.2 Battery projectile penetration. Two samples, one for test A and one for test B shall be tested as follows:

a. Charge battery in accordance with 4.4.9.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

b. Secure the battery in an upright position to prevent battery movement during testing, and in a manner that shall not impede path of the projectiles.

c. Battery shall be placed on a resistive load of 30±3 ohms no more than 5 minutes before the first shot, and remain on the resistive load until conclusion of the test.

d. Three projectiles shall be fired at the test battery with no more than 90 seconds between the first and third projectile at ambient conditions. Muzzle velocity of the projectiles shall be 728±244 meters per second (mps).

e. For each test listed below, record the date, time, place, ambient temperature, battery voltage (not less often than once per second), temperature of the positive and negative terminal posts (not less often than once per second), any events (smoke, fire, cell activity, or disassembly) along with the event time and associated event severity, and the corresponding Hazard Severity Level.

(1) Test A. The battery shall be shot three times with 7.62 mm armor piercing incendiary (API) projectiles. Each projectile shall be at a 90° angle from the side of the battery along axis 2 (see figure 12). The impact area for the battery shall be at least 40 mm from each edge of the battery (see figure 13.). Each projectile shall be at least 50 mm on center from each of the other two projectiles when striking the side of the battery.
(2) Test B. The battery shall be shot three times with 7.62 mm armor piercing incendiary (API) projectiles. Each projectile shall be at a 90° angle from the front of the battery along axis 1 (see figure 12). The impact area for the battery shall be at least 40 mm from each edge of the battery (see figure 13.). Each projectile shall be at least 50 mm on center from each of the other two projectiles when striking the front of the battery.

All battery projectile penetration testing shall be videoed at not less than 1080p 30 frames per second. Recordings shall continue for 2 hours or until Hazard Severity Level 6 is exceeded.

4.10.2.8.3 Battery drop low height. To determine conformance to 3.11.2.7.3 the following test shall be performed:

a. Perform the full charge capacity test (see 4.4.6.1 steps a.-d.).

b. Charge battery in accordance with 4.4.9, then place batteries in the Dormant State.

c. Stabilize the battery at 85±3 °C for at least 6 hours.

d. Perform the drop at ambient conditions within 10 minutes of step c.

e. The fully charged, upright battery shall be dropped from a height of 30 +2.0 / -0.2 cm measured from the lowest point of the battery onto a concrete surface (see 6.3.30). The bottom of the battery shall be parallel to the concrete surface before being dropped.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

f. Wait at least 24 hours.

g. Perform the full charge capacity test 4.4.6.1 steps a.-d.

h. Charge battery in accordance with 4.4.9.

i. Stabilize the battery at 85±3 °C for at least 6 hours.

j. Perform the drop at ambient conditions within 10 minutes of step i.

k. The fully charged battery shall be suspended from one handle at a height of 30±0.2 cm from the lowest point of the battery to the concrete surface. The battery shall then be dropped onto a concrete surface.

l. Wait at least 24 hours.

m. Perform the full charge capacity test 4.4.6.1 steps a.-d.

n. Repeat steps a. through m. but at -51±3 °C with the same battery.

4.10.2.8.4 Battery drop high height. To determine conformance to 3.11.2.7.4 the following test shall be performed.

a. Charge battery in accordance with 4.4.9.

b. Stabilize the battery at 85±3 °C for at least 6 hours.

c. Perform the drop at ambient conditions within 10 minutes of step b.

d. A fully charged battery shall be dropped, inverted from its normal upright position, on the top face of the battery with both positive and negative terminal posts installed (see 6.3.30). The drop shall be from a height of 2 +0.03 / -0.005 m measured from the lowest point of the inverted battery. The drop shall be performed on a concrete surface. The top of the battery shall be parallel to the concrete surface before being dropped.

e. Wait 24 hours.

f. Record corresponding Hazard Severity Level in accordance with the Hazard Severity Levels and descriptions table of SAE J2464.

g. Repeat steps a. through f. but at -51±3 °C with a different battery.

4.11 Lithium battery safety program (U.S. Navy). To determine conformance to 3.12, vendor certification shall be required. The vender certification shall include Navy S9310-AQ-SAF-010 test results. Devices using this battery will require U.S. Navy safety approval prior to

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

use by Department of Navy users unless such approval has already been granted. Consult with NAVSEA Instruction 9310.1 or Qualifying Activity for further information.

4.12 Charger compatibility. To determine conformance to 3.13, discharge battery at 1C rate until the terminal cutoff voltage specified in 4.4.6.1 d. is reached or battery contactor opens. Connect the battery to a MIL-STD-1275 compliant 28.5 +0.25/-0.50 V charger with a minimum rated output current of 20 Amps. The charge is to be terminated after current tapers to C/20 rate, or the battery contactor opens, whichever occurs first. The charging supply shall be capable of providing the continuous cycling current charge rating as specified in table I. Verify no anomalies occur during operation and charging of the batteries.

4.13 Workmanship. To determine conformance to 3.14, an engineering analysis (see 4.4.1) shall be conducted.

4.14 Product characteristics.

4.14.1 Paint, protective finishes, and coatings. To determine conformance to 3.15.1 an engineering analysis (see 4.4.1) shall be conducted. For non-metallic, non-CARC painted batteries only, the exterior surfaces and mating joints of the battery case samples assigned to this test in table VII, shall be coated with CARC paint and primers in accordance with MIL-DTL-53072 by the vendor. The exterior surfaces and mating joints of the test samples shall be examined to assure that no surface or mating joint demonstrates joint sealing failures, interior deformation, surface degradation, or shrinkage has occurred as a result of the CARC exposure/coating after 12, 24, 72, and 168 hour periods.

4.14.2 Corrosion resistance. To determine conformance to 3.15.2 an engineering analysis (see 4.4.1) shall be conducted. This analysis shall consider corrosion between lead battery clamps and the terminal posts.

4.14.3 Electronic assemblies. To determine conformance to 3.15.3 an engineering analysis (see 4.4.1) shall be conducted.

4.14.4 Hazardous materials. To determine conformance to 3.15.4 an engineering analysis (see 4.4.1) shall be conducted.

4.14.5 CBRN. To determine conformance to 3.15.5 an engineering analysis (see 4.4.1) shall be conducted.

4.15 Defects. To determine conformance to 3.16, conduct a visual inspection (see 4.4.2) or measurement with standard inspection equipment.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the military service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The batteries covered by this specification are used in a variety of military land vehicles, aircraft, seagoing vessels, electronic and communications equipment, and for other military power requirements. The batteries are capable of storage and use under wide temperature ranges and are subjected to severe environmental conditions, including exposure for prolonged periods to extreme seagoing environments not encountered in civilian applications.

6.2 Acquisition requirements. Procurement documents should specify the following:

a. Title, number, and date of the specification.

b. Type, class, and sub-class (see 1.2).

c. Assist online database should be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1).

d. Whether or not IUID is required (see 3.4.3.2).

e. If a lead-free control plan is required (see 3.15.3.1).

f. Non tin or tin alloy finishes with less than 457 micron conductor spacing need to be approved by the contracting agency (see 3.15.3.2).

g. If approval is required (see 3.15.4).

h. A list of defects for which rework is permitted (see 3.16).

i. If IPI is not required (see 4.1.2.1).

j. Packaging see 5.1.

k. Shelf life requirements (see 6.10).

*Note. It is recommended that defects in categories 003, 007, 009, 102, 103, 104, 105, 106, 107, 108, 201, and 202 of table VI be permitted to be reworked during Group A Inspection and that the list be included in the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

6.3 Definitions.

6.3.1 Amp hour or ampere-hour. A unit of measurement of a battery's electrical storage capacity. Current multiplied by time in hours equals ampere-hours. One ampere-hour is equal to a current of one ampere flowing for one hour. One ampere-hour (Ah) is equal to 1,000 milliampere-hour (mAh).

6.3.2 Battery. An electrochemical device used to store energy. The general term for a single cell, or a group of cells connected together either in a series or parallel configuration.

6.3.3 Battery capacity. The number of ampere-hours which can be delivered by a battery on a single (dis)charge. The battery capacity is determined by a number of factors, including the cutoff voltage, discharge rate, temperature, method of charge and the age and life history of the battery.

6.3.4 Battery case. The battery case is defined as all parts of the outer protective covering (including battery cover or lid, if present) in which the completed cell assembly is contained.

6.3.5 Battery, lithium-ion. The lithium-ion (or Li-ion) battery is a rechargeable battery characterized by lithium ions moving through the electrolyte from the negative electrode to the positive electrode in discharging and reverse when charging. The negative electrode is made from insertion material (examples include hard carbon or graphite) and the electrolyte is a lithium salt in an organic solvent. The positive electrode consists of a material where lithium ions can be reversibly inserted and removed.

6.3.6 Battery, secondary. A battery that is intended to be discharged and recharged many times in accordance with the manufacturer’s recommendations.

6.3.7 Battery service life. The expected calendar life of the battery when installed as new and operated under normal conditions (see 4.3.1.1).

6.3.8 C rate. A C rate is a current rate (in amperes) at which a fully charged battery is fully discharged in one hour. Thus, C rate for a 100 Ah battery would be 100 A. Different multiples of the C rate are calculated by multiplying a factor by the C rate. For example for a 100 Ah battery, 2C rate would be 200 A, C/5 rate would be 20 A and C/10 would be 10 A. For the tests in this specification, C rates are based on the full charge capacity in table I.

6.3.9 Cell. An electrochemical device, composed of positive and negative electrodes and electrolyte, which is capable of storing electrical energy.

6.3.10 Charge. The conversion of electric energy, provided in the form of a current, into chemical energy within the cell or battery.

6.3.11 Charge rate. The current in amperes at which the battery is charged.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

6.3.12 Completed cell assembly. The total number of cells used within a complete battery along with the intercell connections.

6.3.13 Contactor. A reusable device that interrupts the flow of electric current. A contactor may be an electromechanical or a solid-state electrical device, which is actuated by an on/off control signal.

6.3.14 Contractor. The contractor is the entity that enters into a contractual agreement with the U.S. Government. Contractor may or may not be the manufacturer, but for purposes of this document, the terms contractor, vendor, and manufacturer are interchangeable.

6.3.15 Controller application. The software within a particular controller is the "Controller Application". A controller is made up of the software and hardware within an Electronic Control Unit (ECU) that performs a particular control function. An ECU may serve as one or more controllers and hence may contain one or more controller applications. See SAE J1939 for additional information.

6.3.16 Cutoff voltage. The prescribed lower-limit voltage at which battery discharge is considered complete.

6.3.17 Cranking. Attempting to start a vehicle's engine by energizing the electric starter with a power pulse.

6.3.18 Cycle. One sequence of charge and discharge.

6.3.19 Cycle, deep. A cycle in which the discharge is continued until the battery reaches its cutoff voltage, 100 percent depth of discharge.

6.3.20 Cycle life. For rechargeable batteries, the total number of charge/discharge cycles the cell can sustain before its capacity is significantly reduced. The cycle of a battery is greatly influenced by the depth of the discharge and the method of recharging.

6.3.21 Discharge. The conversion of the chemical energy of the battery into electric energy.

6.3.22 Discharge rate. The current in amperes at which the battery is discharged.

6.3.23 Electrode. An electrical conductor through which an electric current enters or leaves a conducting medium. In a cell, an electrode is an electrical conductor at the surface of which a change occurs from conduction by electrons to conduction by ions.

6.3.24 Electrolyte. The ionically conductive material within a battery which transports charged atoms (ions) between the electrodes. Lithium-ion batteries most commonly use an electrolyte comprised of lithium salt in an organic solution.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

6.3.25 Energy. Expressed as capacity in ampere-hours times the battery voltage, or watt-hours.

6.3.26 Energy density. The ratio of cell energy to volume (Watt-hours per liter). The term 'energy density' is also commonly used for the ratio of cell energy to mass (Watt-hours per kilogram), although the more accurate term for this characteristic is 'specific energy.'

6.3.27 Fully charged batteries. Batteries will be considered fully charged when charged in accordance with 4.4.9.

6.3.28 Fully discharged batteries. A fully discharged battery or cell will have been discharged to show an output of voltage equal to its cutoff voltage.

6.3.29 Negative terminal. The terminal of a battery from which electrons flow in the external circuit during discharge.

6.3.30 Normal upright position. The battery case orientated with the threaded sockets (terminals) facing upwards with respect to the earth's surface.

6.3.31 Open circuit. The condition of a battery which is neither on charge nor on discharge (as in, disconnected from a circuit).

6.3.32 Open-circuit voltage. The difference in potential between the terminals of a battery when the circuit is open (a no-load condition).

6.3.33 Positive terminal. The terminal of a battery toward which electrons flow through the external circuit during discharge.

6.3.34 Power. The (dis)charge rate in amperes multiplied by battery voltage in volts, or watts.

6.3.35 Power density. The power in watts divided by the volume in liters of the battery.

6.3.36 Qualifying Activity. The Government activity that conducts qualified products list (QPL) qualification for the 6T Li-ion battery. The Qualifying Activity for the 6T Li-ion battery is the Ground Vehicle Systems Center (GVSC) Domestic Standardization Office. This office may be contacted at U.S. Army Ground Vehicle Systems Center, ATTN: ATTN: FCDD-GVS-SAT MS #268, 6501 E. 11 Mile Road, Warren, MI 48397-5000 or by email to usarmy.detroit.devcom-gvsc.mbx.standardization@army.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST online database at https://assist.dla.mil.

6.3.37 Rework. Correcting of defective, failed, or nonconforming items, during or after inspection. Rework includes all follow-on efforts such as disassembly, repair, replacement, re-assembly, etc.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

6.3.38 Seal. A device or substance that is used to join two things together so as to prevent them from coming apart or to prevent anything from passing between them.

6.3.39 Self-discharge. Discharge that takes place while the battery is in an open-circuit condition.

6.3.40 Shelf life. The period of time (measured from date of manufacture) at a storage temperature, after which the battery retains a specified percentage of its original energy content.

6.3.41 Softening temperature. The softening temperature of insulation is the temperature at which it will distort under a reasonable amount of pressure when tested in accordance with the heat distortion test of ASTM D2633.

6.3.42 Stabilize. Stabilization is the process of allowing a test article to transition to a new temperature over a period of time.

6.3.43 State of charge (estimated). The estimated state of charge is a calculated estimate reported by the battery. It is the ratio of the amount of capacity remaining in a battery to the present full charge capacity. A battery at 25 percent state of charge has 25 percent capacity remaining versus what it could give if fully charged.

6.3.44 State of charge (SOC) reserve limit. SOC reserve limit is a predetermined SOC value to allow vehicle integrators to reserve battery energy for engine starting purposes (see A.5.7.2).

6.3.45 State of health (estimated). The state of health is defined as the ratio of the present full charge capacity of the battery at normal conditions to the rated full charge capacity of table I. Example: If measured full charge capacity has degraded to 44 amp hours for a 55 amp hour rated full charge capacity battery, the state of health would be considered 80 percent. The end of life state of health will be determined by the vehicle platform.

6.3.46 Terminals. A point at which current enters or leaves a cell, battery, or circuit. The parts of a cell, battery, or circuit to which the external electric circuit is connected.

6.3.47 Time remaining. Time remaining is the amount of time the battery has at its present state of charge before it reaches the SOC reserve limit (see A.5.7.2) under present discharge conditions.

6.3.48 Voltage, nominal. A reference voltage used to describe batteries or cells.

6.4 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Products List QPL No. 32565 whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from U.S. Army Tank-Automotive Research, Development and Engineering Center, ATTN: FCDD-GVS-SAT MS #268, 6501 E. 11 Mile Road, Warren, MI 48397-5000 or by email to usarmy.detroit.devcom-gvsc.mbx.standardization@army.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST online database at https://assist.dla.mil. An online listing of products qualified to this specification may be found in the Qualified Products Database (QPD) at https://assist.dla.mil.

6.5 Manufacturing. Based on the test and field history of Government battery procurements, control of the following processes in production are critical to the safe performance of the batteries delivered to the Government:

a. Control of contaminants in basic cell components.

b. Control of the electrolyte mixing process to ensure no contaminants are introduced, no overheating occurs during mixing, and each batch contains the proper proportions of each component.

c. Control of the minimum amount of carbon needed in each positive electrode. Control of electrode alignment during the core winding operation for circular cells.

d. Avoiding use of tapes or sealing methods on the electrode core wind (or "jelly roll") as a means of facilitating automated assembly operations. Sealing of the core wind results in excessive stress on cell internal connections during vibration testing.

e. Providing strong weld adhesion of the positive tab inside the cell and adequate stress relief on the positive electrode tab inside each cell, to include restricting re-work of rejected weld connections.

f. Control of all cell closure processes, including the control of weld burrs that could damage insulating materials inside batteries.

g. Controls for weld burrs on cell top-shell welds with a potential to cut through cell insulation and shorting a cell against an adjacent cell.

h. Assurance that heat-shrink insulating materials will perform as specified and control of their application to ensure proper insulation.

i. Control of the sealing process for battery cases to ensure the watertight integrity of the battery.

6.6 Specification content. Users of this document are cautioned that experience has shown the need to assess the safety characteristics and safety assurance needs of each Li-ion battery electro-chemistry independently prior to establishing the minimum requirements for

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

safety assurance. The system safety risk assessment techniques of MIL-STD-882 are recommended as a source for determining the safety assurance needs of Li-ion battery electro-chemistries.

6.7 Cell traceability. A traceability system for battery cells should be maintained. All cells delivered individually or as part of a battery to this specification should be identified such that they are traceable through a manufacturer identification number, or other identification marking, through which the manufacturing date, lot code, cell chemistry, or other applicable information can be determined.

6.8 Product traceability (battery). A traceability system for batteries or battery lots should be maintained. The traceability system should include, as a minimum, the completion of each step required in the design (when applicable), fabrication, assembly, test and any applicable qualified rework procedure. Further, traceability should be maintained in order to determine that batteries have passed the applicable screening, qualification, and quality conformance inspections.

6.9 Safety data sheets. Contracting officers will require copies of completed safety data sheets prepared in accordance with FED-STD-313. The pertinent Government mailing addresses for submission of data are listed in FED-STD-313. Note that 29 CFR 1910.1200 requires that the safety data sheet for each hazardous chemical used in an operation must be readily available to personnel using the material.

6.10 Shelf life. This specification covers items where the assignment of a Federal shelf-life code is a consideration. Specific shelf-life requirements should be specified in the contract or purchase order, and should include, as a minimum, shelf-life code, shelf-life package markings in accordance with MIL-STD-129 or FED-STD-123, preparation of a materiel quality storage standard for type II (extendible) shelf-life items, and a minimum of 85 percent shelf-life remaining at time of receipt by the Government. These and other requirements, if necessary, are in DoD 4140.27-M, Shelf-life Management Manual. The shelf-life codes are in the Federal Logistics Information System Total Item Record. Additive information for shelf-life management may be obtained from DoD 4140.27-M, or the designated shelf-life points of contact (POC). The POC should be contacted in the following order: the Inventory Control Points that manage the item then the DoD Service and Agency administrators for the DoD Shelf-Life Program. Appropriate POCs for the DoD Shelf-Life Program can be contacted through the DoD Shelf-Life Management website: https://www.shelflife.hq.dla.mil/.

6.11 Transportation. All transportation of Li-ion cells and batteries in the public domain is controlled by federal law regulating shipment of hazardous materials. The general regulations are stated in 49 CFR 172.101 and 173.185. Any deviation from the methods described in the CFR must be approved before shipment in the form of an "Exemption" by the Office of Hazardous Material Safety Research and Special Programs Administration, U.S. Department of Transportation, Washington, DC 20590.

6.12 Shipping safety. Each battery should be shipped in accordance with safety requirements per Department of Transportation (DOT) & United Nations (UN) regulations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

6.13 Battery condition for shipping.

6.13.1 Operating and charging instructions. Each battery should be furnished with complete instructions for storage, handling, maintenance, operation and charging of the battery including preferred and alternate charging methods. A safety data sheet (SDS) should also be furnished.

6.13.2 Caps for protection. Batteries should be supplied with a cap over the CAN port, the threaded sockets, and the terminal posts, if installed, for shorting prevention and dust resistance. The cap should be snug-fitting and should be removable by hand at temperatures listed below. The material used for the cap should be non-toxic, non-flammable and non-conductive and should withstand temperatures from -54 to 88 °C without shrinkage or cracking. The cap should not leave any residue on the battery contacts nor have any adverse effect on the connection interface. They should also act to insulate terminals/leads from accidental shorting. The cap should be either black, closely match the color of the battery, or represent the terminal colors (red = positive, & black = negative). Cap compliance to these requirements should be vendor certified. The caps should also prevent dust entry.

6.13.3 Maintenance. After delivery from the manufacturer, batteries should not require the addition of any electrolyte nor require any maintenance in meeting the provisions of this specification. However, they may still require a charge before initial issue because of long storage times and self-discharge. The battery may require capacity checks, charging before initial issue, and recharging after deep discharge.

6.13.4 Age documentation. The manufacturer should provide certification with each delivery of cells or batteries in order to meet the following:

a. The maximum age of cells or cells assembled into batteries, from the time of their initial manufacture to the time of their assembly into batteries should not be greater than 180 days.

b. Batteries or cells should be submitted for Government testing within 30 days of battery assembly.

6.14 Transportation. Batteries and cells should be tested in accordance with applicable U.S. DOT & U.N. Manual of Tests and Criteria shipping regulations and meet the requirements therein.

6.15 Verification inspection. Verification by the Government will be limited to the amount deemed necessary to determine compliance with the contract and will be limited in severity to the definitive quality assurance provisions established in this specification and the contract. The amount of verification inspection by the Government will be adjusted to make maximum utilization of the contractor's quality control system and the quality history of the product.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

6.16 Inspection lot. The inspection lot is the quantity of batteries (exclusive of the number of batteries required as samples) produced at any one place of manufacture on any one contract presented to the Government for acceptance. The formation of lots, batches, their size, and the manner in which each lot or batch is to be presented and identified by the supplier should be designated or approved by the Government.

6.17 Test report data. Test report data should be specified in the contract in accordance with SD-6, Provisions Governing Qualification. The following data points will be necessary for Qualifying Activity review and should be included in qualification test reports:

a. Certifications, where required.

b. Whenever there is a service or ampere hour requirement, include the following:

(1) Initial open circuit voltage (IOCV)
(2) Initial loaded voltage (ILV)
(3) Battery or cell voltage, current, capacity, energy, and temperature recorded at regular intervals. Interval should be service requirement or shorter.
(4) The time elapsed between initial voltage and final voltage.

c. Record how low a battery is discharged in volts, particularly when below terminal cutoff voltage.

d. Record the charge and discharge rates and voltage limits.

e. Record date and time that any portion of test is initiated in the test report including initiation and duration of time at test temperature.

f. When a requirement limit is specified, record the final quantitative figure.

6.18 Lithium battery safety program (U.S. Navy). Potential offerors and contractors should be aware that passing the test criteria specified herein for the U.S. Navy Lithium Battery Safety Program will not constitute a safety approval for the battery by the U.S. Navy. In accordance with S9310-AQ-SAF-010, Navy department users must still apply for battery safety approvals based on the NSN of the battery intended for use, as well as both the intended Navy platform and each specific using end item.

6.18.1 Test data. The intent of including U.S. Navy Lithium Battery Safety Program requirements in this specification are primarily to give manufacturers visibility into the essential safety characteristics needed by the U.S. Navy. Until now, the tests were performed in evaluating system or device safety without any knowledge of these requirements by battery manufacturers. Additionally, these requirements will provide the Navy with test data on file when assessing applications for safety approvals. The data provided will be used for engineering assessments that are capable of providing recommendations for safer battery compartments in battery-using devices.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

6.18.2 Test vessel. Due to the need to record pressure changes during test, the Navy safety tests require use of a test "vessel", defined as a sealed container larger than the battery under test. A calculation of the remaining void space inside the vessel containing the battery under test will be needed for proper interpretation of the pressure readings.

6.18.3 Navy test facility. The Department of Defense has a preference for having the tests described by S9310-AQ-SAF-010 conducted in a U.S. Navy test facility. Potential offerors are cautioned to review solicitations for such requirements. Should testing at a Navy facility be required, offerors will need to obtain a quote for Navy testing in order to respond to the solicitation. Points of contact in the Navy for the quote will be identified in the solicitation documentation. Offerors will need to assure that Navy testing costs are covered in their price proposal.

6.19 Environmentally preferable material. Use of the materials on the list should be minimized or eliminated unless needed to meet the requirements specified herein.

6.20 Additional reference materials. The following reference materials may be beneficial to the user:

a. MIL-DTL-53039, Coating, Aliphatic Polyurethane, Single Component, Chemical Agent Resistant

b. MIL-DTL-64159, Coating, Water Dispersible Aliphatic Polyurethane, Chemical Agent Resistant

c. MIL-STD-1686, Electrostatic Discharge Control Program for Protection of Electrical and Electronic Parts, Assemblies and Equipment (Excluding Electrically Initiated Explosive Devices)

d. MIL-HDBK-454, General Guidelines for Electronic Equipment

e. 49 CFR 173.159, Batteries, Wet

f. IPC-2222, Sectional Design of Rigid Organic Printed Boards

g. SAE J537, Storage Batteries (DoD Adopted)

h. SAE J930, Storage Batteries for Off -Road Work Machines

i. SAE J2284-2, High Speed CAN (HSC) for Vehicle Applications at 250 Kbps

6.21 Subject term (key word) listing.


24V
Automotive
Battery Management System

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

Cranking
Deep Cycle
Li-ion
Starting Lighting Ignition

6.22 Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

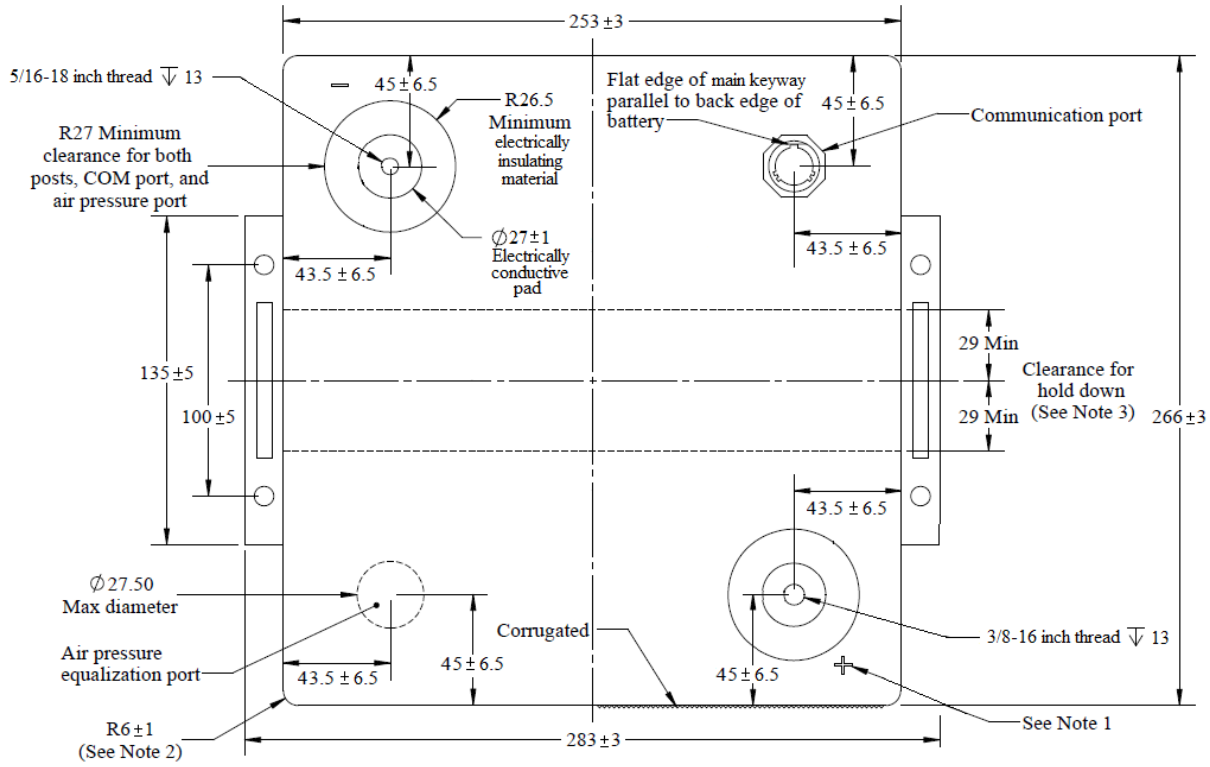

NOTES:
1. Polarity markings shall be embossed on the top side of the battery near each threaded socket with a "-," a "NEG," or an "N" for negative and a "+," a "POS," or a "P" for positive.
2. Chamfer or continuous radius providing equivalent clearance is permitted.
3. The clearance for hold down is intended to illustrate a clear area on the battery available for hold downs, and not to imply any specific required design for the platform specific hold downs

FIGURE 1. Top view battery dimensions.


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

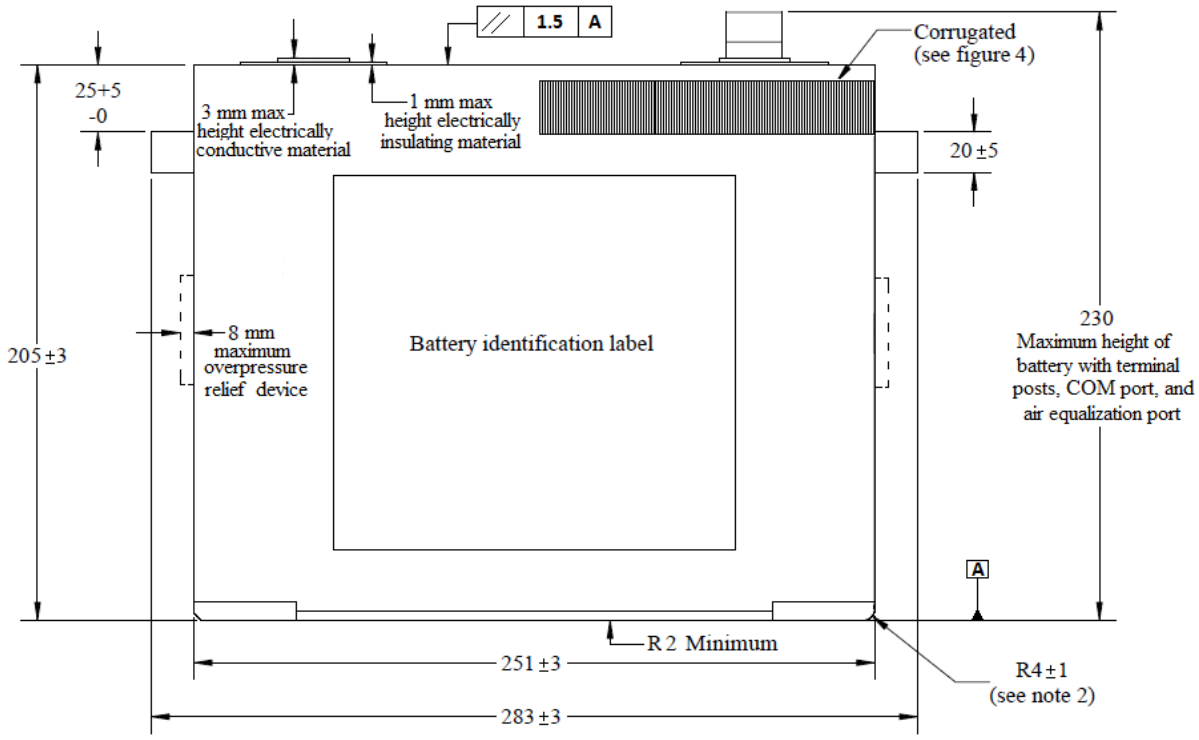

NOTES:
1. Ribbing and detailing sides of batteries optional.
2. Chamfer or continuous radius providing equivalent clearance is permitted.

FIGURE 2. Front view battery dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

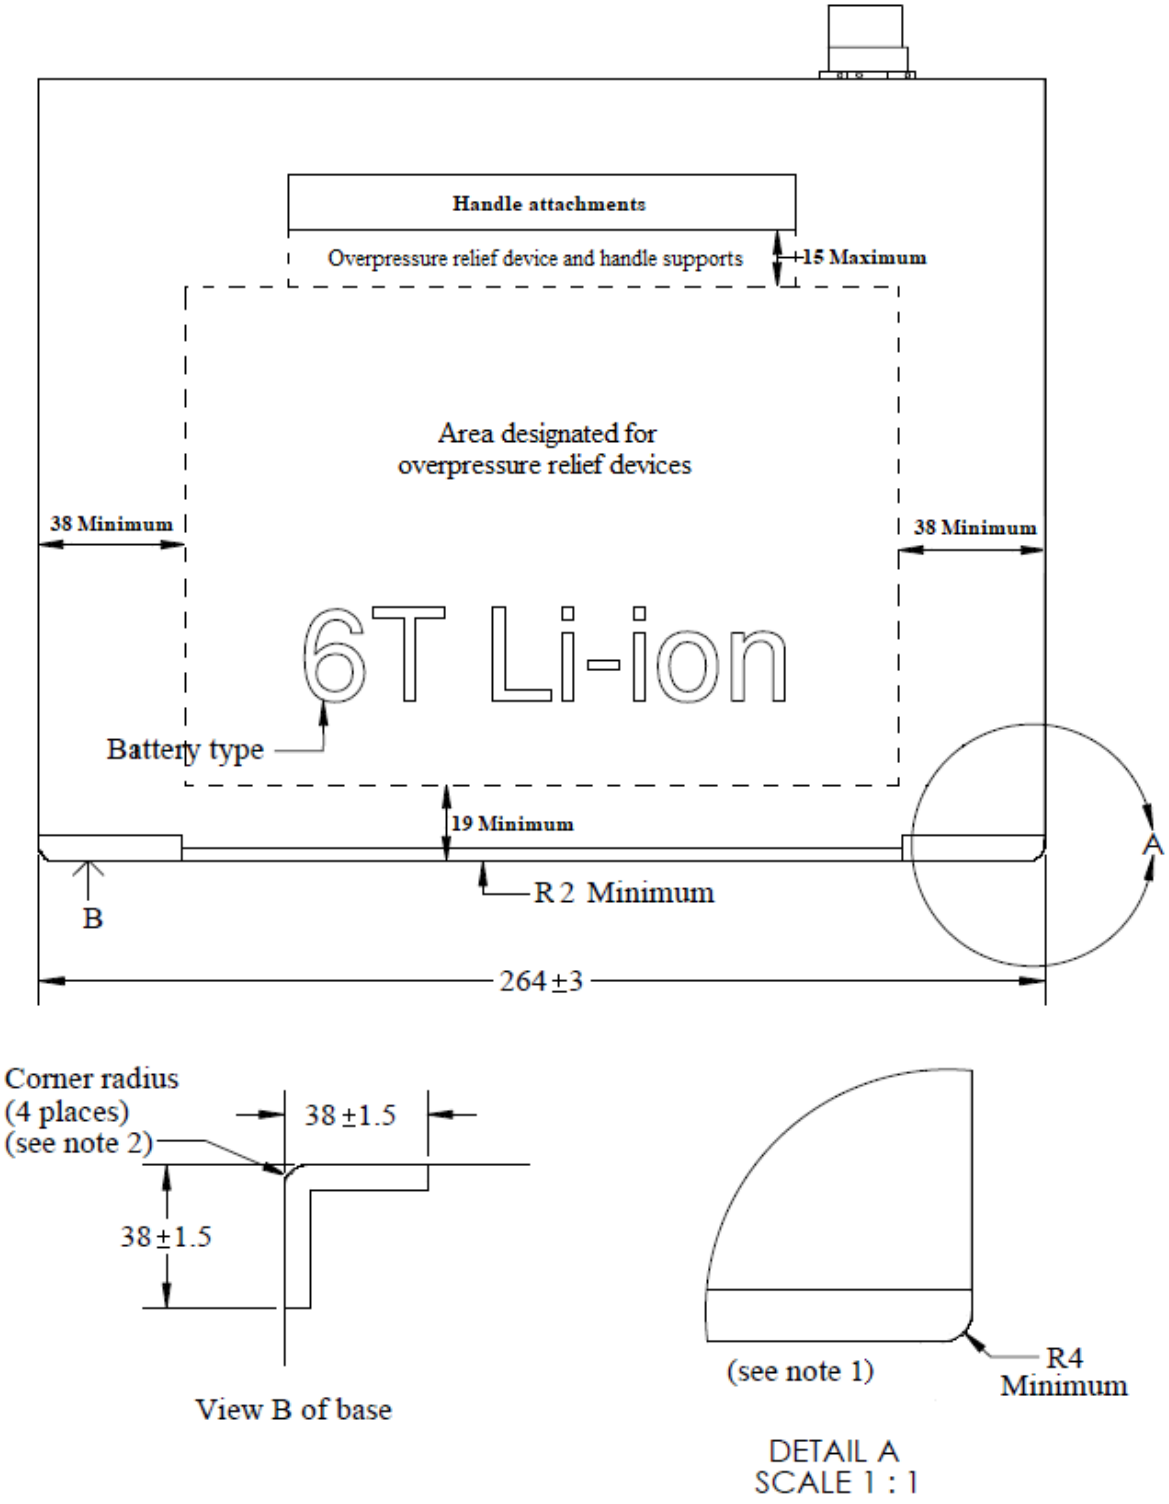

NOTE:
1. Ribbing and detailing on sides of battery is optional.
2. Chamfer or continuous radius providing equivalent clearance is permitted.

FIGURE 3. Side view battery dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

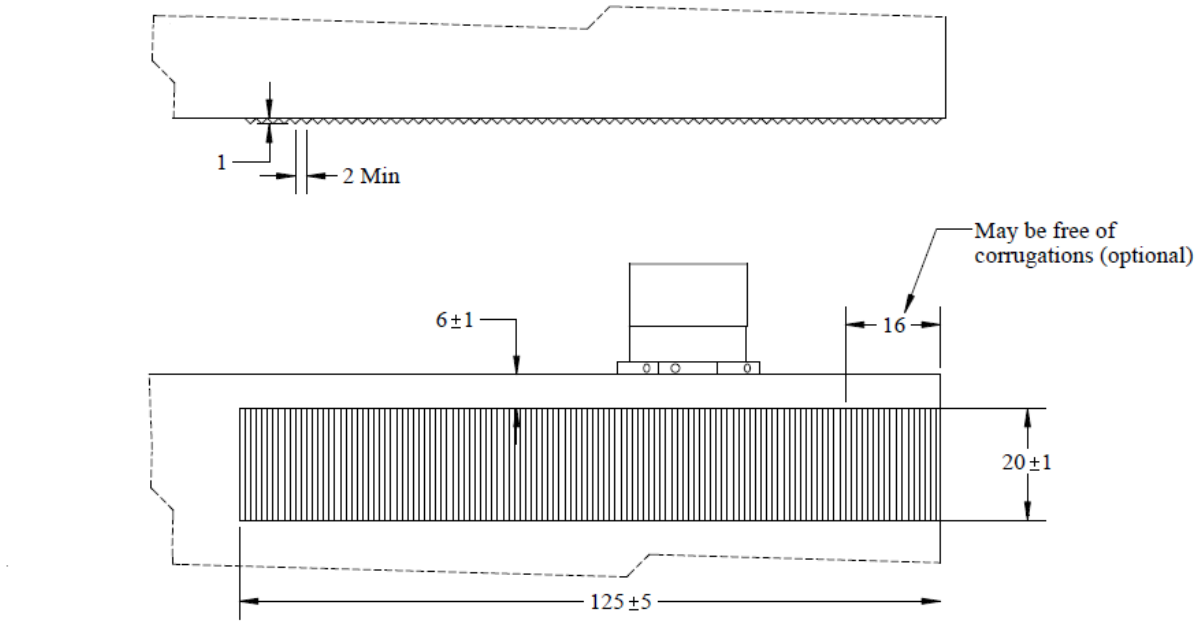


FIGURE 4. Corrugations by positive post.

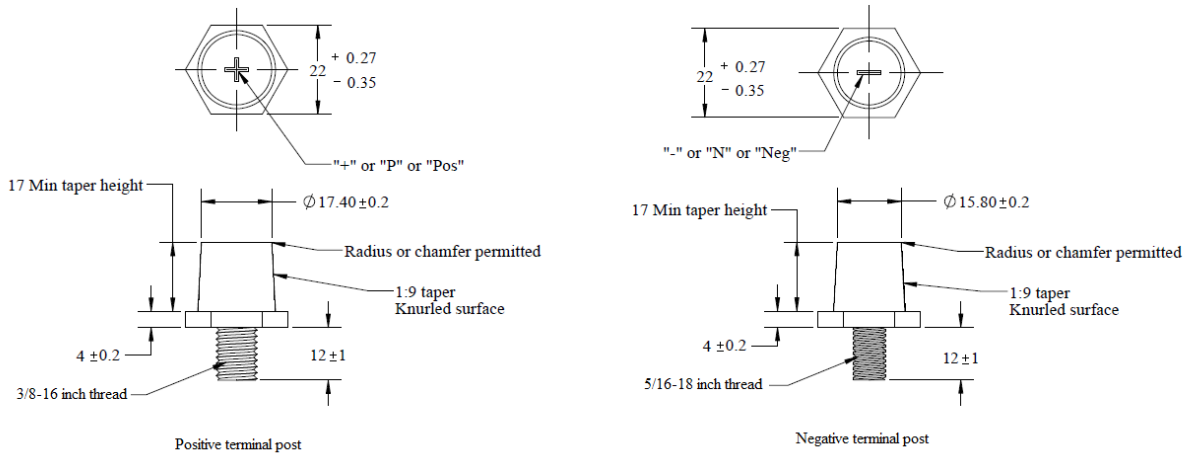


FIGURE 5. Terminal posts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

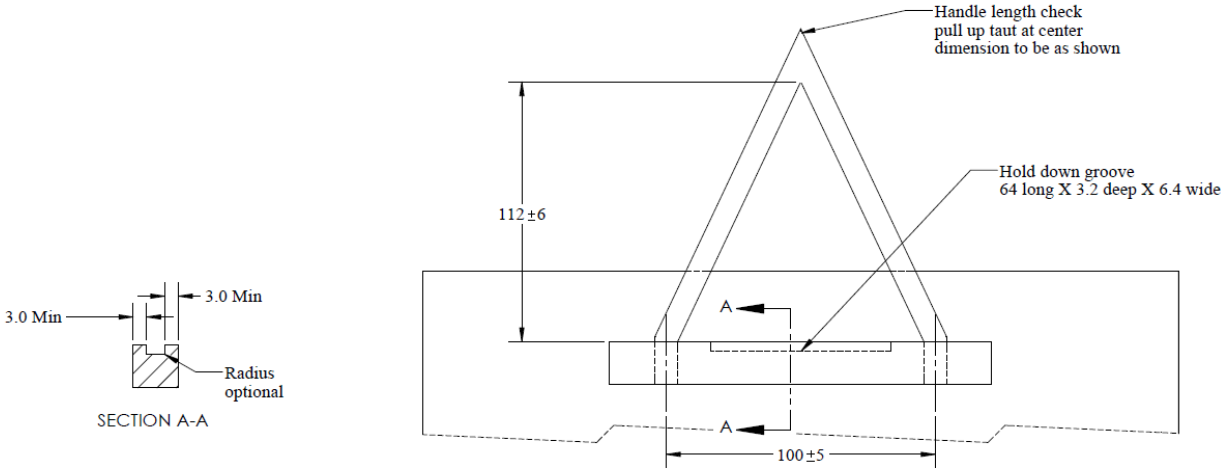


FIGURE 6. Handles.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.


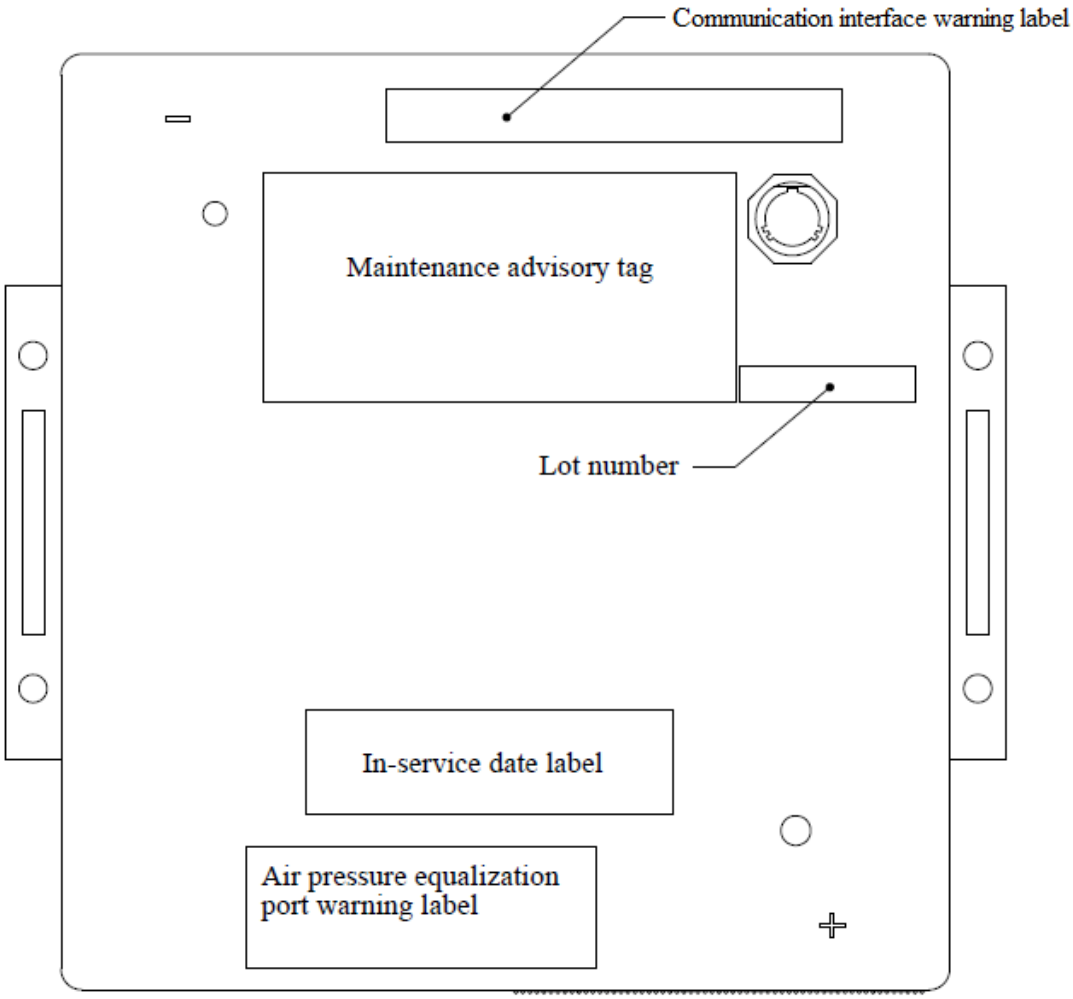


FIGURE 7. Labels required for top of battery.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

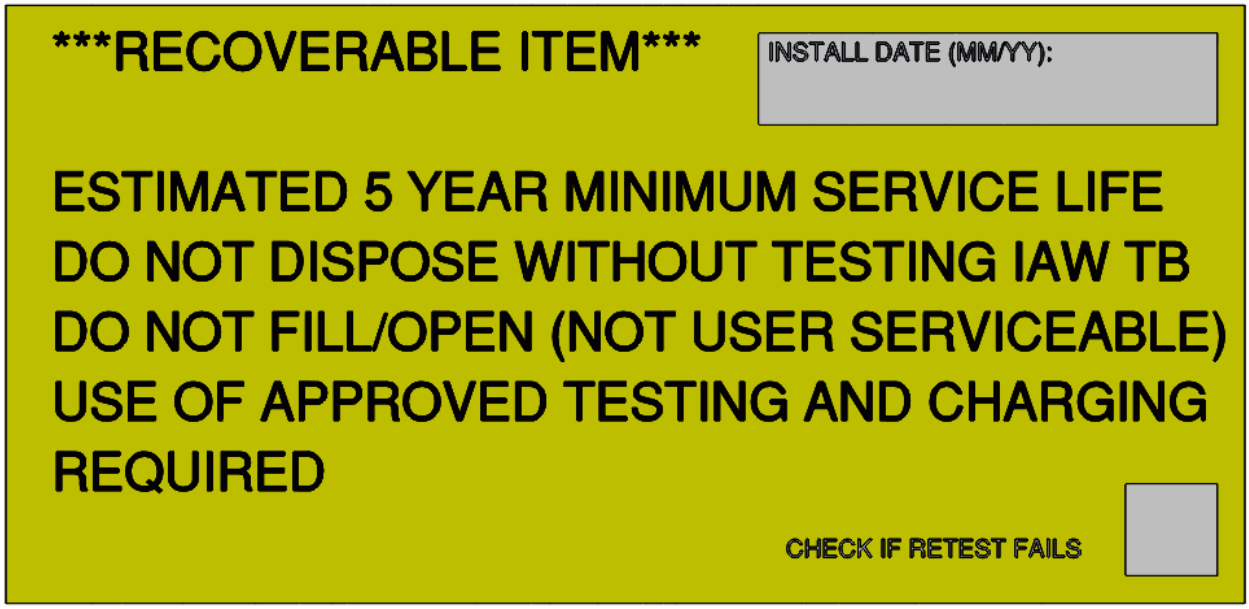

NOTES:
1. Placement of mandatory statements and boxes, within label, is flexible.

FIGURE 8. Maintenance advisory tag.

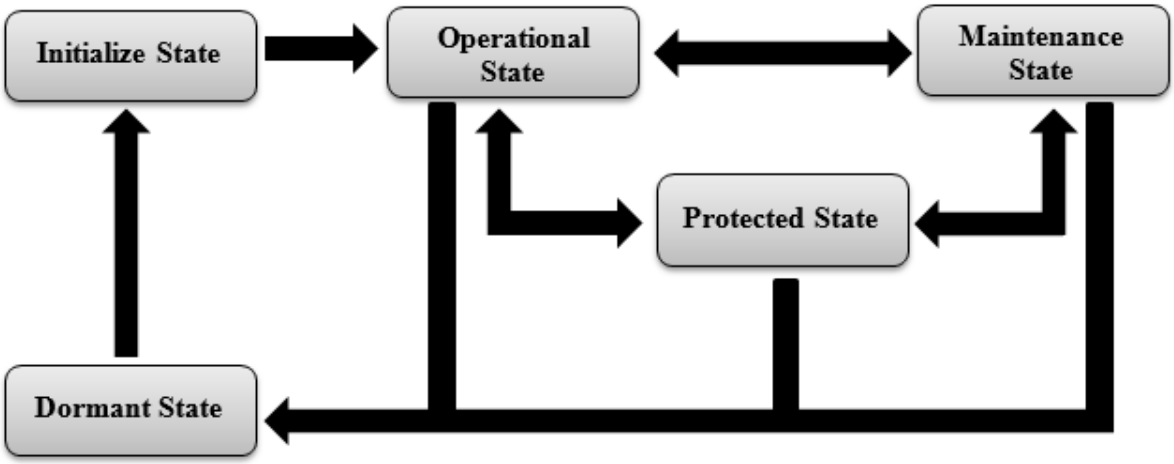


FIGURE 9. Battery state map.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.


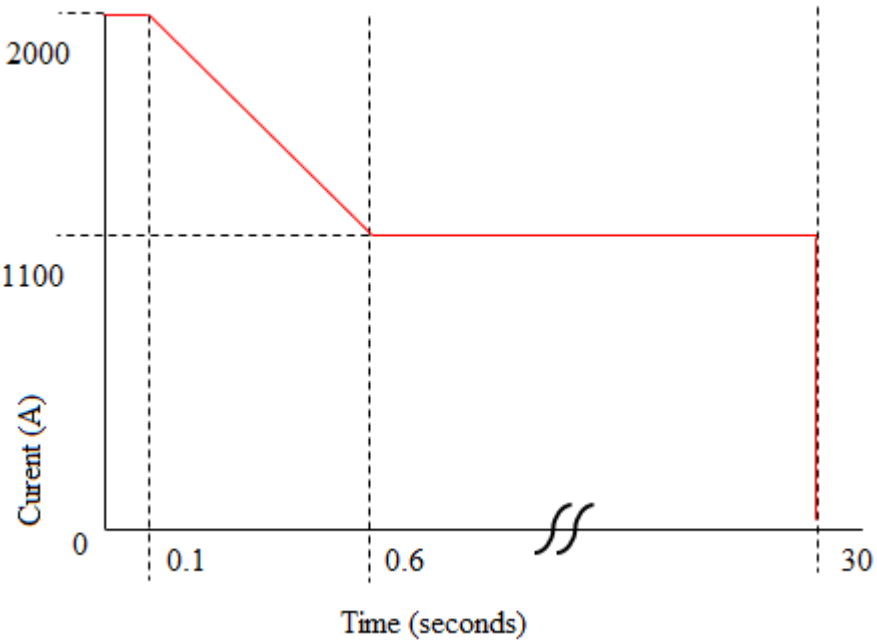


FIGURE 10. Vehicle starting current.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

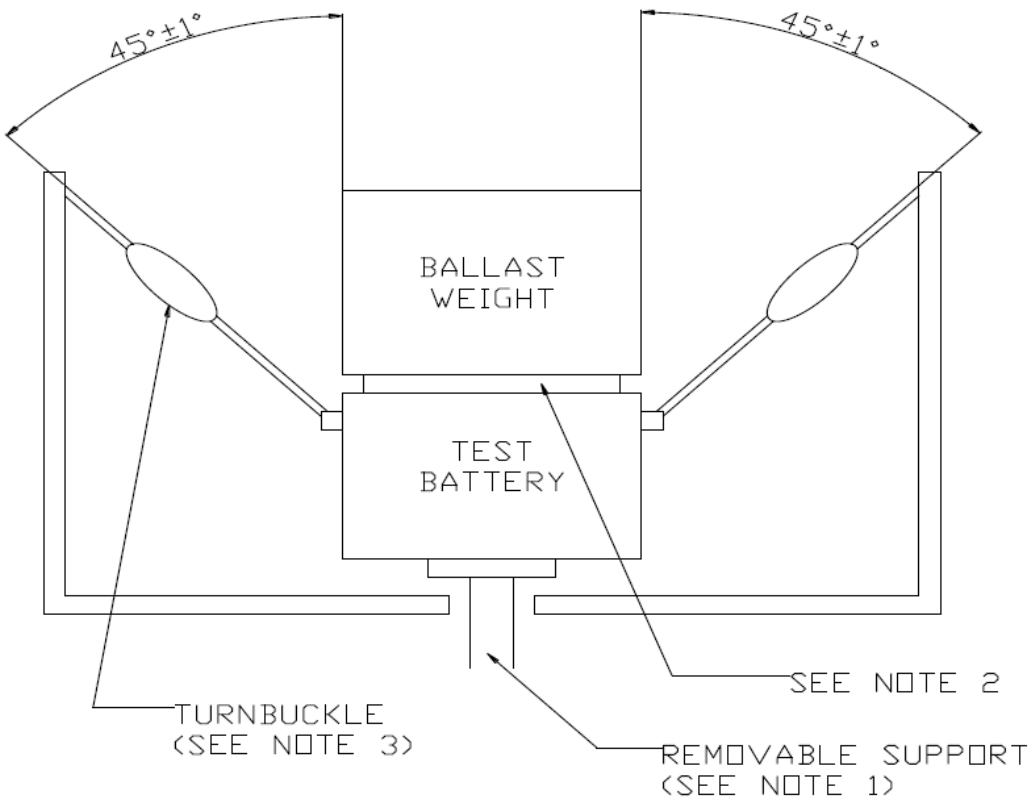

NOTES:

1. Support shall allow gradual and even removal so as to minimize shock and insure even loading of both handles.
2. A lightweight (less than 1 kg) shim may be used between battery and weight to prevent damage to caps, posts or cover.
3. Turnbuckles shall be used to establish 45 ° angles of handles with test weight applied after removal of support. Turn buckles shall include a device to support rope handles over a length of 112 mm during test.

FIGURE 11. Handle test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.



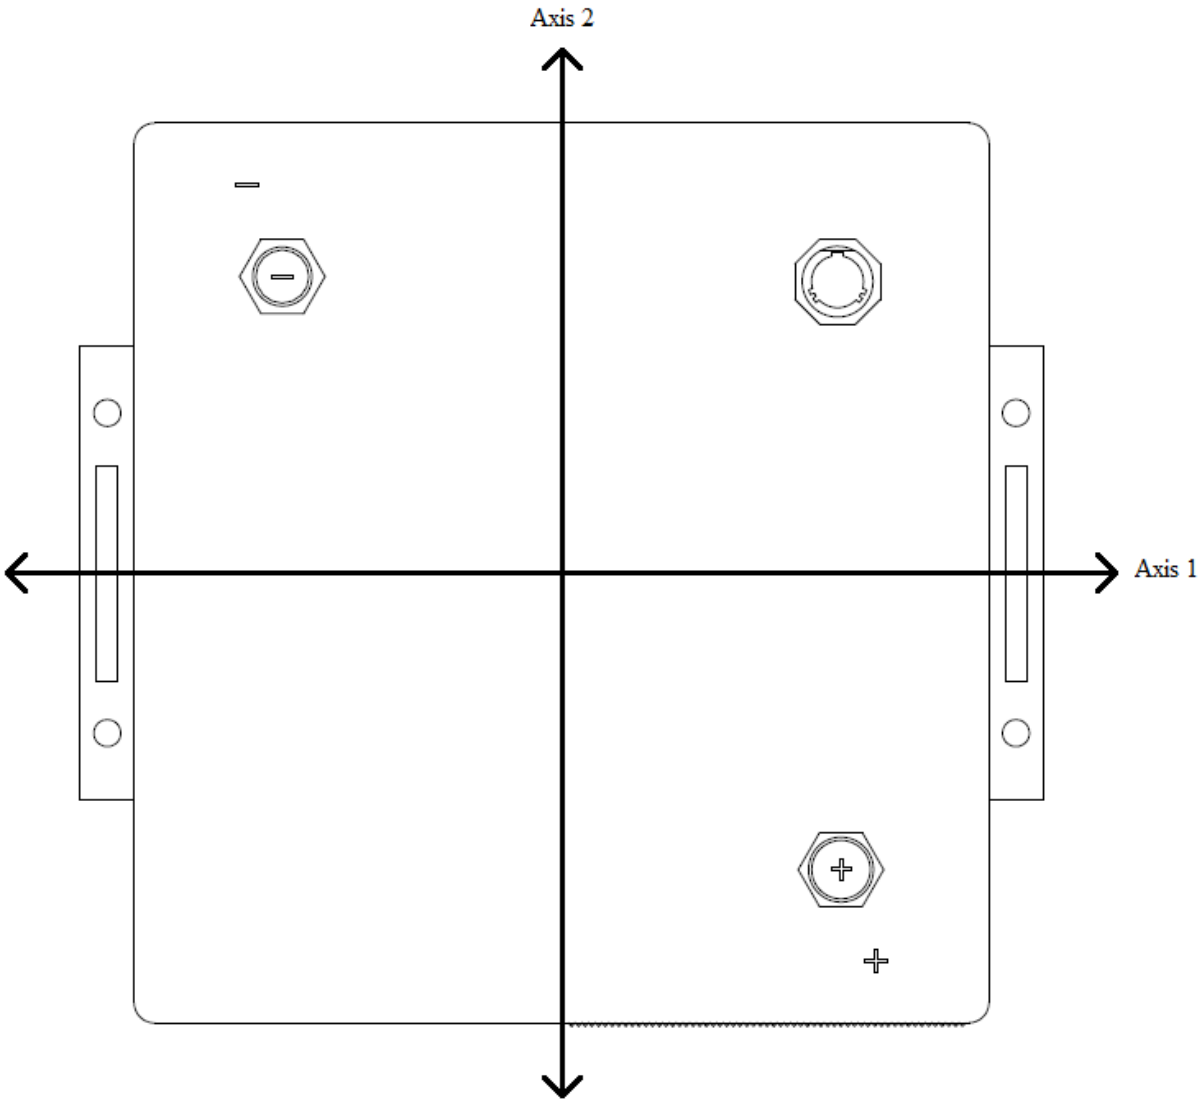


FIGURE 12. Line of impact.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

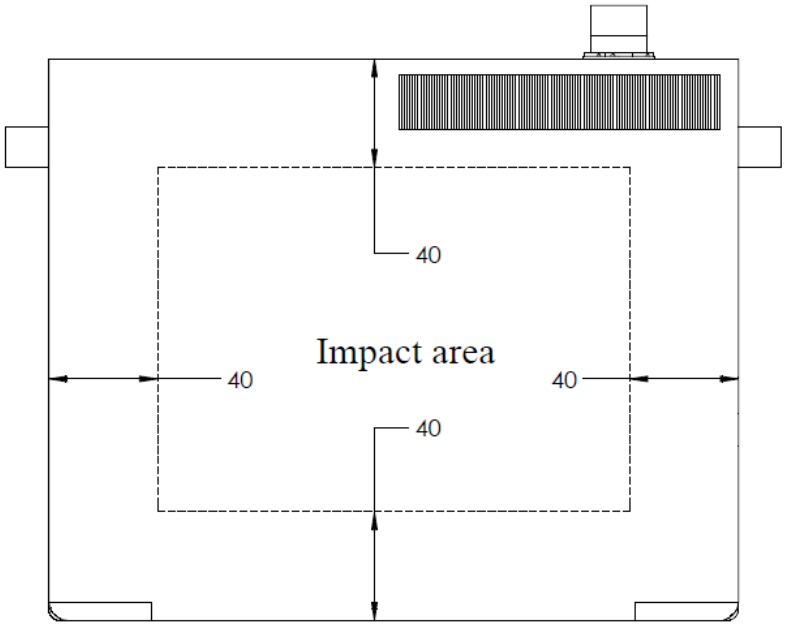

Front view

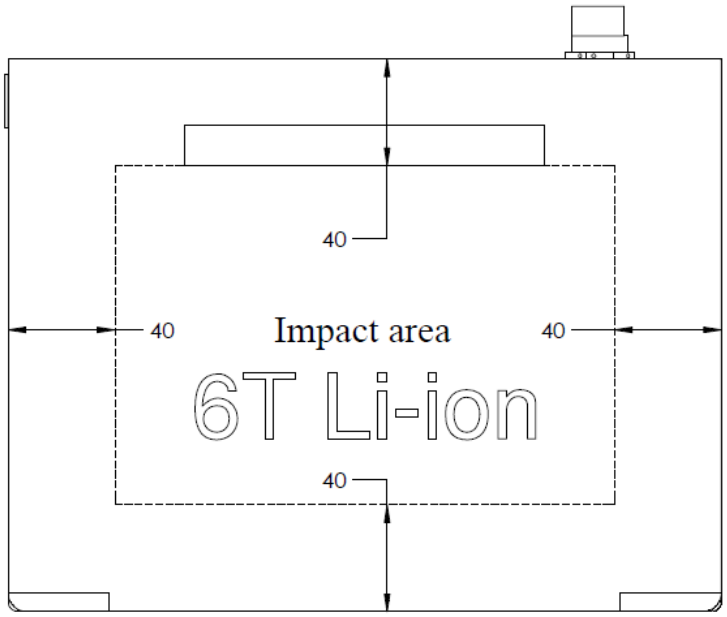

Side view

FIGURE 13. Battery impact areas.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

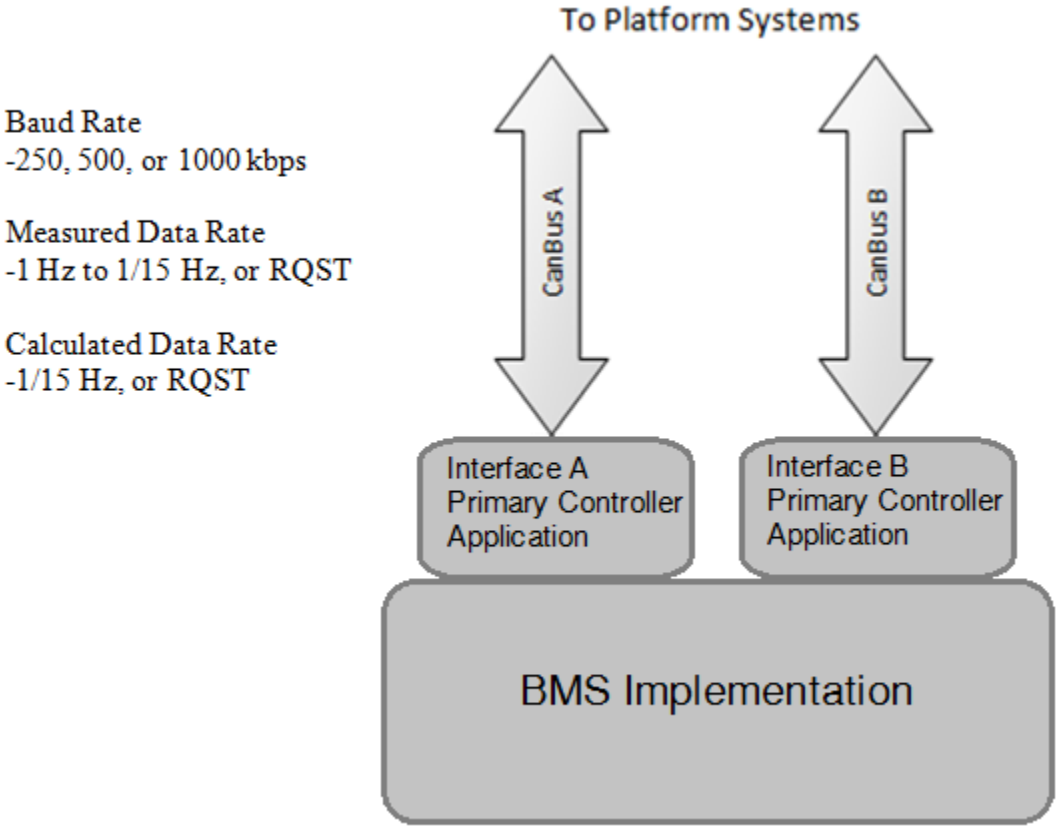


FIGURE 14. BMS SAE J1939 implementation concept.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

Battery Interface Control Document (ICD) and SAE J1939 Messages

A.1 SCOPE

A.1.1 Scope. This appendix is a mandatory part of this specification. This appendix covers the interface and communication requirements of the battery. The information contained herein is intended for compliance. All requirements in this appendix that are not verified in Section 4 shall be vendor certified.

A.2 APPLICABLE DOCUMENTS

A.2.1 General. The documents listed in this section are specified Appendix A of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in Appendix A of this specification, whether or not they are listed.

A.2.2 Government documents. No Government documents exclusive to this appendix.

A.2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents those cited in the solicitation or contract.

SAE INTERNATIONAL

SAE J1939-11	-	Physical Layer, 250 Kbps, Twisted Shielded Pair
SAE J1939-21	-	Data Link Layer
SAE J1939-31	-	Network Layer
SAE J1939-71	-	Vehicle Application Layer
SAE J1939-73	-	Application Layer - Diagnostics

(Copies of these documents are available online at www.sae.org.)

A.3 INTERFACES.

A.3.1 Location. The battery shall have the interfaces depicted in figure 1.

A.3.2 Electrical Interfaces. See 3.3.3.2.

A.3.2.1 Isolation. See 3.3.3.2.1.

A.3.3 Pin definitions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

A.3.3.1 Power. Power (PWR) of the battery communication interface (J1) shall be capable of providing 24 V DC nominal with a maximum continuous current of 250 mA in all battery states (see 3.6.6). Voltage range shall conform to MIL-STD-1275. PWR shall use power (PWR) return of the battery communication interface (J1) as the electrical power return. The battery shall not accept electrical power from an external power source on PWR and PWR return of the battery communication interface (J1).

A.3.3.2 Dormant. Dormant 1 and dormant 2 of the battery communication interface (J1) shall be used to enter or exit the Dormant State (see 3.6.6.1). Current through dormant 1 and dormant 2 shall not exceed 10 mA.

a. For a battery having a SAE J2464 Hazard Severity of 4 or less for all tests except for battery projectile penetration, the battery shall transition out of the Dormant State when dormant 1 is shorted to COM. An equivalent resistance of 100 ohms or less shall be considered "shorted". The battery shall transition into the Dormant State when dormant 1 is floating with respect to COM. An equivalent resistance of 1 megaohm or greater shall be considered "floating". The state of dormant 2 (shorted or floating with respect to COM) shall not be considered in determining action to enter or exit the Dormant State.

b. For a battery having a SAE J2464 Hazard Severity of greater than 4 for any tests except for battery projectile penetration, the battery shall transition out of the Dormant State when dormant 1 and dormant 2 are both shorted to COM. An equivalent resistance of 100 Ohms or less shall be considered "shorted". The battery shall transition into the Dormant State when dormant 1 or dormant 2 are floating with respect to COM. An equivalent resistance of 1 megaohm or greater shall be considered "floating".

A.3.3.3 Master power switch. The battery shall use master power switch in and master power switch return configuration pins to determine when to report CAN messages on a regular interval, and when to enable the automatic heater in the Operational State. The battery shall determine the "On" or "Off" state of the vehicle master power switch using the master power switch in and return contacts. Current through the master power switch in and return shall not exceed 6 mA. The master power switch "On" and "Off" states shall be defined as follows:

a. "On" state shall be identified as a sourcing voltage equivalent to the vehicle bus voltage range defined in MIL-STD-1275.

b. "Off" state shall be identified as an open switch, with floating potential between master power switch in and return.

The master power switch in and return may be connected to battery power terminals or vehicle power bus to provide the source voltage for the master power switch "On" and "Off" signals. Alternatively, the master power switch signals may be provided by connecting master power switch in to PWR, and master power switch return to PWR return of the battery communication interface (J1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

A.3.3.3.1 Virtual master power switch. For instances when a vehicle is unable to provide the necessary master power switch signal to the battery communication interface, the battery shall be capable of receiving the virtual master power switch (VMPS) signal as a substitute to provide the same functionality and control over the battery. The virtual master power switch shall be controlled using CAN messages to update the state of the virtual master power switch as either "On" or "Off". When the battery receives the battery configuration message parameter "Configure VMPS Function" with value of "Enable VMPS Function", the battery shall ignore master power switch signals on the battery communication interface (J1) and use the value of the "Virtual Master Power Switch Command" to provide the same functionality. When the battery receives the battery configuration message parameter "Configure VMPS Function" with value of "Disable VMPS Function", the battery shall only use the master power switch discrete signal to the communication interface. The "Configure VMPS Function" use configuration default according to A.5.4. The state of the virtual master power switch shall be defined as follows:

a. The state of the VMPS shall be "On" when the battery receives the battery configuration message parameter "Virtual Master Power Switch Command" with value "VMPS is on". The battery configuration message shall be sent with this value at a minimum of one time every fifteen seconds.

b. The state of the VMPS shall be "Off" when the battery receives the battery configuration message parameter "Virtual Master Power Switch command" with value "VMPS is off". If a minimum of 16 seconds has elapsed since the battery received the battery configuration message parameter "Virtual Master Power Switch Command" with a value of "VMPS is on", the state of the VMPS shall be "Off".

A.3.3.4 CAN. The battery shall use the appropriate CAN shield, high, and low connections in order to operate on CAN A and CAN B SAE J1939 vehicle networks.

A.3.3.5 Configuration pins 1-2, baud rate. The battery shall use the following configuration pins to determine the CAN communication baud rate, based on the values of configuration pins 1 and 2 in reference to Common (A.3.3.8). When the baud rate has not been previously overwritten in the Maintenance State, the battery shall use the state of the configuration pins on transition from the Initialize State to the Operational State to determine the battery's baud rate.

00_2	1 Mbps
01	500 kbps
10	250 kbps,
11	250 kbps, CAN limited mode*

The bit order shall have configuration pin 2 as the most significant bit, and configuration pin 1 as the least significant bit.

*In CAN limited mode, all CAN bus address arbitration and initialization procedures according to in SAE J1939, and regular interval message reporting for all CAN messages when the master

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

power switch is “On” shall be disabled. The battery shall be capable of receiving request (RQST) and other CAN messages, and respond with the appropriate CAN messages (i.e. communicate with a diagnostic tool connected to the communication port) on both CAN A and CAN B interfaces. This setting is only recommended for vehicles that will not be connecting batteries to a vehicle CAN bus.

A.3.3.6 Configuration pins 3-6, position identity. The battery shall use the following configuration pins to determine the battery position identity, based on the values of configuration pins three (3) through six (6) in reference to Common (A.3.3.8). When the position identity has not been previously overwritten in the Maintenance State, the battery shall use the state of the configuration pins on transition from the Initialize State to the Operational State to determine the battery’s position identity.

$0 – E_{16}$	Positions 0 through 14
F	Position 15 (defined as “Null Position ID”)

The bit order shall have configuration pin 6 as the most significant bit, and configuration pin 3 as the least significant bit.

A.3.3.7 Reset. The reset pin is intended to be used by maintainers, and is not recommended for operation while installed in a vehicle. The battery shall detect when reset has changed state, in all states except the Dormant State, to perform a power cycle of the BMS while maintaining all previous configurations, or power cycle of the BMS while restoring the battery configuration to factory defaults. When using the reset pin to perform a battery reset, the master power switch in and return of the battery communication interface (J1) shall remain in the “On” state. The virtual master power switch shall not be used when using the reset pin to perform a battery reset. The battery shall detect the state of the reset pin, shall count the duration that reset has a value of FALSE to determine action, and perform the action when the state has changed from FALSE (shorted to COM) to TRUE (floating from COM).

a. If reset has been FALSE for less than 3 seconds, the battery shall take no action.

b. If reset has been FALSE for at least 3 seconds, but not more than 15 seconds, the BMS shall power cycle while maintaining all previous configurations.

c. If reset has been FALSE for 15 seconds or greater, the battery shall power cycle while restoring the battery configuration to factory defaults. The battery shall timeout and power cycle while restoring the battery configuration to factory defaults if reset has been FALSE for 30 seconds or more.

A.3.3.8 Common. Dormant, configuration pins and reset shall use the common pin (COM) as a reference node. Configuration pins shorted to COM shall have the value of “0” or “FALSE”, and floating (not shorted) to COM shall have a value of “1”, or “TRUE”. An equivalent resistance of 100 ohms or less shall be considered “shorted”. An equivalent resistance of 1 megaohm or greater shall be considered “floating”.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

A.4 CAN BUS

A.4.1 CAN bus physical characteristics. The CAN bus interface physical layer shall comply with the requirements of SAE J1939-11, except timing requirements for 250 kbps baud rate operation that are incompatible with CAN communication when the battery is configured for 500 kbps or 1 Mbps baud rates. The battery CAN shield (CAN_SHLD) shall be terminated in accordance with the shield termination section of J1939-11. The ground for battery CAN bus interfaces shall be terminated to the J1 CAN_GND contact with a low impedance to allow connection to the applicable external CAN bus network ground for vehicle applications. The battery CAN bus interfaces shall not have significant termination resistance. Termination resistance required for CAN communication shall be provided externally. The battery shall have one CAN bus address common for both the primary and secondary interface. The BMS shall have one bus controller implemented for each of the CAN bus interfaces. See figure 14 for concept diagram of CAN bus implementation.

A.4.2 CAN message response. The battery shall immediately respond to messages (e.g. RQST message) received from CAN A or CAN B on the bus from which the message was received. Regular interval transmission messages and messages triggered by an event shall be transmitted on the primary CAN interface only. The Heartbeat Message shall be configurable for concurrent transmission on both the primary and secondary CAN interfaces, or transmission on the primary CAN interface only. If the master power switch is “Off”, and no communication activity has occurred on the CAN bus for more than 15 minutes, the battery shall be capable of responding to the request or other messages within 5 seconds of start of communication activity on the CAN bus. The battery is not required to process or respond to request or other messages intended for the battery sent before completion of this 5 second period.

A.4.3 Primary CAN interface selection. The battery shall use the “Set Primary CAN Interface” parameter of the battery configuration message to select the primary CAN interface (CAN A or CAN B). See section A.5.4 for configuration default.

A.4.4 Heartbeat CAN interface selection. The heartbeat message shall use the “Heartbeat CAN Interface” parameter of the battery configuration message to select the CAN Interface which the message shall be transmitted. See section A.5.4 for configuration default.

A.4.5 Bit timing. The CAN bus physical bit timings, as specified in ISO 11898-1 and ISO 11898-2, for the BMS systems are as follows:

a. The sample point shall be as close to, but not later than 87.5 percent of the bit time.

b. The synchronization jump width shall be 1-time quanta.

c. The sampling mode shall be single sampling.

d. The synchronization shall be ‘recessive to dominant’ edges only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

A.4.6 BMS J1939 implementation. The BMS shall be compliant to the following SAE J1939 standards:

a. SAE J1939

b. SAE J1939-11

c. SAE J1939-21

d. SAE J1939-31

e. SAE J1939-71

f. SAE J1939-73

g. SAE J1939-81

A.4.7 NAME of controller application. The battery shall have a NAME in accordance with SAE J1939-81. The NAME shall be communicated on the CAN bus when a request Message is received for address claimed, and as required according to SAE J1939. The battery NAME shall be configurable in the Maintenance State using the SAE J1939 NAME management message. The battery NAME shall revert to the original NAME based on defaults when "Restore Defaults" in the battery configuration message has a value of "Restore all settings to Factory defaults", "Clear all parameter overwrites (except PGN Tx Rates), restore defaults", or when the reset pin method (see A.3.3.7 c) is used. The function instance field of the battery NAME, shall be equal to the position identity, unless configured otherwise in the Maintenance State. For example, battery with position identity 0 shall have the function instance field of set to 0.

A.4.8 Preferred source address. The battery, by default, shall use the preferred source address based on the battery position identity according to table III.

a. The arbitrary address capability shall be enabled or disabled using the NAME management message, according to SAE J1939-81, by using the Commanded Arbitrary Address Capable parameter in the Maintenance State. The NAME arbitrary address capable field shall be updated accordingly.

b. The battery shall use the value of the commanded address message as the preferred source address when configured in the Maintenance State and stored in memory. When the battery preferred address has been configured with a commanded address message, arbitrary address capability shall be disabled, and the NAME arbitrary address capable field shall be updated accordingly. Immediately following a valid commanded address message in accordance with SAE J1939, the battery shall change the preferred source address and perform address claim.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

c. The battery preferred source address and arbitrary address capability shall be restored to configuration defaults (see A.5.4) when the battery configuration message "Restore Defaults" parameter has a value of "Restore all settings to Factory defaults" or "Clear all parameter overwrites (except PGN Tx Rates), restore defaults", or when the reset pin method (see A.3.3.7 c) is used. The NAME message shall be updated accordingly.

A.4.9 Arbitrary address capability. When battery address arbitration capability is enabled, the battery shall follow address arbitration procedures according to SAE J1939. When the battery is unable to claim its preferred source address due to address contention, the battery shall not attempt to claim any source address listed in table III. The battery shall first attempt to claim the source address that is one less than the lowest value source address listed in table III. Further attempts shall use a source address with a value of one less than the previous attempt, until attempting to claim address 128. If battery is unable to claim address 128, the battery shall perform Cannot Claim Address procedures according to SAE J1939.

A.5 PROGRAM, CONFIGURATION, AND DATA MEMORY

A.5.1 Hardware and software version. See table A-I and table A-II for hardware and software version format.

TABLE A-I. Hardware version format.

Parameter name	Format	Description
Part Number	123456789012345-00.ab*	Part number of ECU. Position 1-15: alphanumeric part number of ECU per USG inventory system. Position 16-18: identifies dash version (-00, -01, etc). Numeric. Position 19-20: identifies changes to the version that do not impact vehicle version identification (VVID) or do not change the ICD. Reported and displayed as lowercase. Not checked during VVID.
Serial Number	123456789012345*	ECU serial number. Represented by alphanumeric characters.
Location/Name	Abcdefghijk*	Name of ECU.
Type	NA (*)	Reserved. Only '*' delimiter.
Manufacturer	Abcdefghijk*	Name of Manufacturer. Can be descriptive name if name is too long. Alphanumeric.
Classification	TypeX-ClassXsub-classificationX*	MIL-PRF-32565 classification of the battery: type 1 or 2 (numeric); class A or B (uppercase); 55, 75, or 90 sub-classification (numeric). (Ex. 1-A55*)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

TABLE A-II. Software version format.

Parameter name	Format	Description
Number of Software Identification Fields	1-7* (1 byte)	Identifies how many software versions will be reported. Will be a minimum of ECU software version and up to 6 ECU subsystems .
ECU software version	01.23.45.ab.cd*	ECU software version. 01 - numeric characters, indicate major version 23 - numeric characters, indicate intermediate version 45 - numeric characters, indicate minor version ab - non-numeric characters, indicate changes to the version that do not impact the VVID or do not change the ICD. Reported and displayed as lowercase. cd - non-numeric characters, indicate engineering version, blank for software released after qualification. Reported and displayed as lowercase. Note: numeric characters are 0-9; non-numeric characters are a-z.
ECU subsystem 1 software version	01.23.45.ab.cd*	For subsystem if necessary. Follows same format as ECU software version.
ECU subsystem 2 software version	01.23.45.ab.cd*	For subsystem if necessary. Follows same format as ECU software version.
…	…	…
ECU subsystem n software version	01.23.45.ab.cd*	For subsystem if necessary. Follows same format as ECU software version.

A.5.2 Firmware diagnostics. Firmware diagnostic programs shall be stored in non-volatile memory. Programs and data stored in non-volatile memory shall include system level or maintenance software, firmware upgrade procedures, configuration identifier, data download, diagnostic filtering algorithms, DTC status, proprietary PGN and SPN functionality, and data transmission rates.

A.5.3 Firmware update. Firmware update shall be performed over the CAN bus. Firmware update method over CAN bus shall follow the SAE J1939 guidelines for memory access and reflashing (see J1939-73 for more information), and the method shall be destination specific. The method shall be performed using standard J1939 messaging for memory update operations including the Transport Protocol and the following messages as appropriate: Stop Start Broadcast (DM13), Memory Access Request (DM14), Memory Access Response (DM15), Binary Data Transfer (DM16), Boot Load Data (DM17), and Data Security (DM18). The battery shall implement a method to prevent unauthorized access to the firmware update and memory access functions in accordance with J1939-73 security processes for DM14 through DM18. The battery shall not require removal from the vehicle CAN bus to perform firmware update. The firmware update method shall not impair other controller applications on the vehicle CAN bus.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

Firmware transfer and installation to completion shall not exceed 15 minutes. Firmware updates shall be provided as binary files that may be executed using software provided for a field-service Maintenance Support Device (laptop computer).

A.5.3.1 Stop Start Broadcast. Military platforms may use the Stop Start Broadcast (DM13) message to temporarily reduce the amount of data bus utilization for routine communication, in order to increase data bus availability for controller application reprogramming messages. The DM13 message shall be used to reduce battery CAN messages transmitted on the CAN bus when necessary. The battery shall respond to "Current Data Link" and "J1939 Network #1" fields of the DM13 message in accordance with to SAE J1939. As an alternative to SAE J1939 defined usage of the DM13 message, the platform embedded information system may send the DM13 message with "Current Data Link" or "J1939 Network #1" fields set to "Stop Broadcast" to the global address a minimum rate of once every 5 seconds. In this case, the Battery shall resume normal operations when the DM13 message is not received for 6 seconds or more, or when the DM13 message is received with "Current Data Link" or "J1939 Network #1" fields set to "Start Broadcast." When a DM13 message is received on either CAN A or CAN B interfaces, the requested action shall be applied to both CAN A and CAN B interfaces in accordance with SAE J1939. When the DM13 stop broadcast command is active, the battery shall continue to send any messages necessary for safe operation or to support battery regulation on the vehicle, which at a minimum shall include the battery calculations 1, battery regulation information 1 and 2, protected state, and DM1 messages.

A.5.4 Configuration defaults. The battery shall use the following configuration values by default, when using the battery configuration message "Restore Defaults" parameter, or when the reset pin method (see A.3.3.7 c) is used:

a. Preferred Source Address: Based on position identity according to table III

b. NAME: In accordance with SAE J1939, function instance equal to position identity

c. Battery Battle Override: Battery Battle Override disabled

d. Automatic Heater Function: Enable Automatic Heater Function

e. Command Contactor(s): Automatic Contactor(s) Operation

f. Baud Rate: Based on configuration pin values

g. Position Identity: Based on configuration pin values

h. Arbitrary Address Capability: Enabled

i. Primary CAN Interface: CAN A

j. Heartbeat CAN Interface: Primary CAN Interface Only

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

k. Configure VMPS Function: Disable VMPS Function

l. SOC Reserve Limit: 0 percent SOC

m. Standby: Disabled.

n. Application Overcurrent Limit 1: Disabled

o. Application Overcurrent Period 1: NA

p. Application Overcurrent Limit 2: Disabled

q. Application Overcurrent Period 2: NA

A.5.5 Configuration overwrite. The battery shall accept values for baud rate and position identity using the "Overwrite Baud Rate" and "Overwrite Position Identity" parameters of the battery configuration message, which shall be used for configuration in place of the configuration pin values. The function instance field of the SAE J1939 NAME and the preferred source address (see table III) shall be updated accordingly when the position identity parameter is overwritten. Configuration overwrites shall be retained in all battery states, except when the baud rate and position identity are restored to configuration defaults (see A.5.4). The battery shall restore baud rate and position identity to configuration defaults when the following occur:

a. Battery configuration message "Restore Defaults" parameter has a value of "Clear all parameter overwrites (except PGN Tx Rates), restore defaults"

b. Battery configuration message "Restore Defaults" parameters has a value of "Restore all settings to Factory defaults"

c. The reset pin method (see A.3.3.7 c) is used

The configuration overwrite to configuration pins or the restoration of defaults for baud rate and position identity in the Maintenance State shall be implemented to the baud rate, position identity and preferred source address after the battery has completed the next Initialize State after exiting the Maintenance State. This action to initialize the battery shall be accomplished by cycling the dormant pins, performing a hard or soft reset, or using the reset pin method (see A.3.3.7 b).

A.5.6 CAN message transmission rates. Standard messages defined in SAE J1939 shall be transmitted in accordance with SAE J1939 guidelines. All battery SAE J1939 Proprietary B messages and other messages with a regular transmission interval shall have transmission rates configured using the battery configuration message "Configure PGN" and "PGN Tx Rate" parameters. Unless specified otherwise, messages with battery level measurement data shall transmit by default at a rate of once per second, and messages with calculated data shall transmit by default at a rate of once per 15 seconds. Unless specified otherwise, the battery heartbeat message and battery regulation information 1 message shall be the only messages capable of transmission at a rate faster than once per second (see corresponding message definitions for

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

supported rates). Unless specified otherwise, the heartbeat message or state messages shall be communicated on state change by default. No more than one state change shall be transmitted per second. Messages containing other data types or manufacturer specific parameters shall be transmitted on request by default. CAN message transmission rate overwrites shall be retained in all battery states, unless restored to their default CAN message transmission rates. The battery shall restore CAN messages to their default transmission rate when the following occur:

a. Battery configuration message "Configure PGN" parameter has a value equal to a particular message's assigned PGN, and "PGN Tx Rate" has a value of "Reset PGN to its default Tx Rate".

b. Battery configuration message "Restore Defaults" parameter has a value of "Clear all PGN Tx Rate overwrites, restore defaults".

c. Battery configuration message "Restore Defaults" parameters has a value of "Restore all settings to Factory defaults"

d. The reset pin method (see A.3.3.7 c) is used

A.5.7 Application Management Commands and Limits. The battery shall support the following application management commands and limits to support battery integration on vehicle systems and other applications.

A.5.7.1 Transportability Command. The battery shall support the transportability command. This parameter shall be used to maintain the battery at a particular state of charge to support application transportability requirements when operated in a vehicle or system. The battery shall not alter operation of the battery contactor(s), the bus voltage request parameter, or the maximum charge current parameter based on the transportability command. The transportability command shall only be used when the battery is in the Operational State. The battery shall report the present value of the battery configuration message "Transportability Command" parameter in the battery regulation information 2 message "Transportability SOC" parameter. The transportability command parameter must be sent a minimum of once every 15 seconds to maintain reporting the value of the "Transportability Command" parameter in the "Transportability SOC" parameter. The battery shall report the value "NA" in the battery regulation information 2 message "Transportability SOC" parameter when the battery configuration message "Transportability Command" parameter has not been received within a period of 16 seconds, or when the "Transportability Command" parameter has a value of "Disable Transportability Command".

A.5.7.2 SOC Reserve Limit. The battery shall have a configurable SOC reserve limit. This limit shall be used to transition the battery to the Protected State when the battery state-of-charge falls below this limit while the battery is discharging or has no load, in order to limit battery operation below this limit. This limit shall only be used when the battery is in the Operational State. When the only cause for Protected State is that the battery state-of-charge has fallen below the SOC reserve limit, and the battery protection is reset according to methods specified in 3.6.6.5, the battery shall return to the Operational State for a minimum of 5 minutes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

The battery shall not return to the Protected State due to the SOC reserve limit while the battery is charging, unless charging ceases for more than five minutes and the battery state-of-charge is below the SOC reserve limit. This limit shall be temporarily suspended when the battery battle-override command is received as specified in 3.3.6. The limit shall also be temporarily suspended when the battery configuration message "pulse power control" parameter has a value of "pulse power control is on". The pulse power control parameter shall be received at a minimum of once every 15 seconds to suspend battery actions based on the SOC reserve limit. The battery shall restore the SOC reserve limit when the battery configuration message "pulse power control" parameter has not been received within a period of 16 seconds, or when the "pulse power control" parameter has a value of "pulse power control is off". When the battery is in the Protected State with a battery state-of-charge below the SOC reserve limit, the battery shall be capable of entering the Maintenance State. The SOC reserve limit shall be configured in the Maintenance State. When the SOC Reserve Limit is configured to 0 percent, this feature shall be deactivated. See section A.5.4 for configuration default.

A.5.7.3 Application overcurrent limits and application overcurrent periods. The battery shall support configurable application overcurrent limits and periods. These parameters shall be used to allow the vehicle system or platform to limit the amount of discharge current from the battery, in order to reduce damage to components or systems other than the battery or reduce risk of injury to personnel from overcurrent abuse conditions that may not activate primary battery overcurrent protection (3.11.2.1), especially when using multiple batteries connected in parallel in a battery pack. The application overcurrent limits are not intended to be used as primary overcurrent protection, or used in place of other overcurrent protection devices (e.g. fuses) for components or systems susceptible to overcurrent damage. The battery shall transition to the Protected State when the battery detects discharge current magnitude has exceeded the value of an application overcurrent limit for an amount of time greater than the application overcurrent period, in order to limit battery operation when discharge current exceeds a level determined by the intended application. When a fault condition activates both the battery primary battery overcurrent protection (3.11.2.1) and the application overcurrent limit protection, the primary battery overcurrent protection (3.11.2.1) shall have precedence over the application overcurrent limits, and the battery shall respond in accordance with the primary battery overcurrent protection (3.11.2.1) regimen. The battery shall not apply these limits to charge current. The application overcurrent limit 1 and period 1 shall apply only to discharge current when the battery master power switch is "Off". The application overcurrent limit 2 and period 2 shall apply only to discharge current when the master power switch is "On". When the battery master power switch is "Off", initial detection of discharge current for application overcurrent limit 1 may be delayed by a maximum of 2 seconds. The time duration of current excursion shall be monitored and compared against the application overcurrent period after initial detection of the current exceeding the application overcurrent limit. The battery shall enter the Protected State and open battery contactor(s) a maximum of one second after detection that the application overcurrent period 1 or 2 has been exceeded. When the only cause for the battery being in the Protected State is that the battery discharge current magnitude exceeds the application overcurrent limit for an amount of time greater than the application overcurrent period, the battery shall not attempt to remove the fault automatically and shall only return to normal operations when one of reset protection methods specified in 3.6.6.5 is used. These limits shall be temporarily suspended when the battery battle-override command is received as specified in

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

3.3.6. These limits shall also be temporarily suspended when the battery configuration message "pulse power control" parameter has a value of "pulse power control is on". The pulse power control parameter must be sent at a minimum of once every 15 seconds to suspend battery actions based on application overcurrent limits. The battery shall restore the application overcurrent limits and application overcurrent periods when the battery configuration message "pulse power control" parameter has not been received within a period of 16 seconds, or when the "pulse power control" parameter has a value of "pulse power control is off". When the battery is in the Protected State due to operation that exceeds these limits, the battery shall be capable of entering the Maintenance State. The application overcurrent limits and application overcurrent periods shall be configured in the Maintenance State. When the application overcurrent limit is configured to a value of "Disable Application Overcurrent Limit (1 or 2)", both the application overcurrent limit and corresponding application overcurrent period shall be disabled. See section A.5.3 for configuration defaults.

A.5.8 Long term fault data storage . See 3.6.8 for requirement. The battery shall provide a capability to access active and previously active faults, including at a minimum the Diagnostic Trouble Code (DTC) fault and time stamp, or date and time of occurrence, in non-volatile memory over the CAN bus.

A.5.9 Short term fault data storage. See 3.6.9 for requirement. The battery shall detect and report DTCs for faults at a periodic rate and store the DTC in volatile memory or non-volatile memory as required. The battery shall provide a first-in last-out data stack for each DTC Status. No more than one state change per DTC shall be transmitted per second, except for critical or safety DTCs.

A.5.10 BMS CAN J1939 application layer. The battery shall use CAN (J1939) industry standard to include BMS embedded diagnostics with real-time Diagnostic Trouble Code (DTC) reporting.

A.5.11 Diagnostics. The battery shall provide diagnostic capability for fault and failure detection from built-in tests. BIT results shall be provided in messages over the CAN bus, and faults and failures shall be communicated in the form of Diagnostic Trouble Codes (DTCs). Diagnostic capabilities shall follow SAE J1939-73 for Diagnostic Trouble Codes (DTCs) information and management.

A.5.11.1 Diagnostic trouble code lamps. Lamp status for all battery diagnostic trouble codes shall be set to "off" and the flash shall be set to "do not flash" for all lamps.

A.5.11.2 Conversion method. The DTCs shall use conversion method version 4.

A.5.11.3 Diagnostic trouble code severity level. The following guidelines shall be used when determining the severity level of a fault for Failure Mode Indicator (FMI) definition.

a. Least severe level FMI shall be used for a SPN that has deviated outside of a limitation imposed by battery configuration (e.g. SOC reserve limit) or battery control, that may

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

or may not cause the battery to transition to the Protected State. The SPN is not outside of the normal operating region.

b. Moderately severe level FMI shall be used for a SPN that has deviated outside of the normal operating region, and the deviation causes the battery to transition to the Protected State. It may be possible for the fault condition to be resolved if the battery has sufficient relaxation (no load) time, or if minimal action (e.g. reset command) is taken.

c. Most severe level FMI shall be used for a SPN that has deviated outside of the normal operating region, and the deviation causes the battery to transition to the Protected State. The fault condition is unlikely to be resolved with minimal intervention, and the battery may need to be serviced with maintenance activity.

A.5.11.4 SPNs for diagnostics only. The following SPNs defined are used for diagnostics only, and are not associated with a PGN.

SPN	Definition
518144	Cell equalization fault.
518143	Cell (non-specific) voltage fault.

A.5.11.5 DTC fault conditions. The following diagnostic trouble codes and fault conditions shall be used for SPNs defined within this specification, however, the manufacturer may define additional fault conditions as required. The manufacturer is required to define the diagnostic trouble codes and fault conditions for manufacturer specific SPNs. Fault conditions listed as optional shall only be reported if implemented by manufacturer's design.

SPN	FMI	Fault Condition
516143	2	Other subsystem fault.
516146	0	Battery voltage is above maximum operating voltage. Most severe level.
516146	1	Battery voltage is below minimum operating voltage. Most severe level.
516146	2	Battery voltage sensor error.
516146	6	Battery voltage grounded circuit fault.
516146	13	Battery voltage sensor out of calibration. (Optional)
516146	16	Battery voltage is above maximum operating voltage. Moderately severe level.
516146	18	Battery voltage is below minimum operating voltage. Moderately severe level.
516147	0	Battery charge current exceeded operating limit. Most severe level.
516147	1	Battery discharge current exceeded operating limit. Most severe level.
516147	2	Battery current sensor error.
516147	13	Battery current sensor out of calibration. (Optional)
516147	16	Battery charge current exceeded operating limit. Moderately severe level.
516147	17	Battery discharge current exceeded an application overcurrent limit. Least severe level.
516147	18	Battery discharge current exceeded operating limit. Moderately severe level.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

SPN	FMI	Fault Condition
516148	0	Battery temperature is above maximum operating temperature. Most severe level.
516148	1	Battery temperature is below minimum operating temperature. Most severe level.
516148	2	Battery temperature sensor error.
516148	13	Battery temperature sensor out of calibration. (Optional)
516148	16	Battery temperature is above maximum operating temperature. Moderately severe level.
516148	18	Battery temperature is below minimum operating temperature. Moderately severe level.
516150	0	Battery is in the overcharge condition. Most severe level.
516150	1	Battery is in the overdischarge condition. Most severe level.
516150	16	Battery is in the overcharge condition. Moderately severe level.
516150	17	Battery SOC is below the SOC reserve limit. Least severe level.
516150	18	Battery is in the overdischarge condition. Moderately severe level.
516160	2	Battery master power switch subsystem fault. (Optional)
516160	31	Reserved for manufacturer definition. (Optional)
516171	2	Battery heater subsystem fault.
516171	5	Battery heater cannot be activated (stuck open).
516171	6	Battery heater cannot be deactivated (stuck closed).
516171	31	Reserved for manufacturer definition. (Optional)
516173	2	Battery contactor(s) subsystem fault.
516173	5	Battery contactor(s) cannot be activated (stuck open).
516173	6	Battery contactor(s) cannot be deactivated (stuck closed).
516173	31	Reserved for manufacturer definition. (Optional)
516174	2	Battery charge capability fault.
516174	5	Battery is unable to accept charge. Charge path is open.
516174	6	Battery is unable regulate or stop charge. Charge path is closed.
516174	31	Reserved for manufacturer definition. (Optional)
516182	0	Internal pack voltage is above maximum operating voltage. Most severe level.
516182	1	Internal pack voltage is below minimum operating voltage. Most severe level.
516182	2	Internal pack voltage sensor error.
516182	13	Internal pack voltage sensor out of calibration. (Optional)
516182	16	Internal pack voltage is above maximum operating voltage. Moderately severe level.
516182	18	Internal pack voltage is below minimum operating voltage. Moderately severe level.
518143	0	One or more cells is above maximum operating voltage. Most severe level.
518143	1	One or more cells is below minimum operating voltage. Most severe level.
518143	2	Cell (non-specific) voltage sensor error.
518143	16	One or more cells is above maximum operating voltage. Moderately severe level.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

SPN	FMI	Fault Condition
518143	18	One or more cells is below minimum operating voltage. Moderately severe level.
518144	2	Cell equalization subsystem fault. (Optional)
518144	31	Reserved for manufacturer definition. (Optional)

A.6 MESSAGES

A.6.1 Messages. This section specifies the messages that each J1939 controller application interface shall send and receive as part of the SAE J1939 protocol, in addition to the messages which are battery specific.

A.6.2 SAE J1939 messages. The following are messages supported as part of the SAE J1939 Network Management protocol and shall be the minimum, but not limited to, set of messages used by the battery to facilitate integration onto the target platform's SAE J1939 network.

a. NAME Management (NM) message

b. Request (RQST)

c. Address Claimed (AC) (contains NAME of a Controller Application)

d. Acknowledgement Message (ACKM)

e. Commanded Address (CA)

f. Active Diagnostic Trouble Codes (DM1)

g. Stop Start Broadcast (DM13)

h. Memory Access Request (DM14)

i. Memory Access Response (DM15)

j. Binary Data Transfer (DM16)

k. Transport Protocol – Connection Management (TP.CM)

l. Connection Mode Request to Send (TP.CM_RTS)

m. Connection Mode Clear to Send (TP.CM_CTS)

n. Connection Management End of Message Acknowledgment (TP.CM_EndOfMsgACK)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

o. Connection Abort (TP_Conn_Abort)

p. Transport Protocol – Data Transfer (TP.DT)

q. Vehicle Electrical Power #5 (VEP5)

r. ECU Identification Information (ECUID)

s. Software Identification (SOFT)

The support for the following SAE J1939 messages is optional. The battery shall support these messages if the function intended by the message is needed. Proprietary implementation duplicating these functions require justification and approval by the Qualifying Activity.

a. Previously Active Diagnostic Trouble Codes (DM2)

b. Diagnostic Data Clear/Reset of Previously Active DTCs (DM3)

c. Diagnostic Data Clear/Reset For Active DTCs (DM11)

d. Boot Load Data (DM17)

e. Data Security (DM18)

A.6.3 Battery specific messages. The following data (SAE J1939 PDU2 Format – Proprietary B) shall be made available by the battery when in the Operational State:

a. Battery Configuration Message(s)

b. Heartbeat Message

c. Battery Measurement Message(s)

d. Battery Calculations Message(s)

e. Battery Regulation Information Message(s)

f. Battery Power Capability Estimation Message(s)

g. Battery State Messages (s)

h. Battery Built-in Test (PBIT, CBIT) Results Message(s)

i. Cell Voltage Message(s)

j. Battery Equalization Message(s)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

k. Battery Manufacturer Specific Message(s)

A.6.4 BMS parameter group number (PGN) and suspect parameter number (SPN) reservation and prohibition. Proprietary messages defined by the battery manufacturer shall not use a Parameter Group Number (PGN) reserved for Government definition or PGNs that are prohibited in this specification. Suspect Parameter Numbers for manufacturer specific parameters shall not use a Suspect Parameter Number reserved for Government definition.

a. PGN 61184 Proprietary A, Data Page 0, Control Bytes 0 through 63 reserved for USG definition.

b. PGN 61184 Proprietary A, Data Page 0, Control Bytes 64 through 250 reserved for manufacturer definition.

c. PGN 65280 – 65343 Proprietary B, Data Page 0 reserved for USG definition.

d. PGN 65344 – 65535 Proprietary B, Data Page 0 reserved for manufacturer definition.

e. Proprietary B, Data Page 1 shall not be used for messaging on the CAN bus.

f. Proprietary A, Data Page 1 is open for manufacturer definition and use.

g. SPN 516096 – 518144 are reserved for USG definition.

h. SPN 518145 – 524287 are reserved for manufacturer definition.

A.6.5 Proprietary A J1939 PGN Message Definition and Structure. The following message (SAE J1939 PDU1 Format – Proprietary A) shall be used to enable battery battle override, enable/disable the heaters and contactors, enter/exit the Maintenance State, set configurable parameters, or perform other configuration functions within the battery. The first byte of the message shall be the Control byte, with values 0 through 63 reserved for Government definition. The battery shall provide an Acknowledgement message each time a battery configuration message is received. The range of values for parameters used in Proprietary A/A2 messages shall conform to J1939-71 (see sections Parameter Ranges and Assignment of Ranges to New Parameters) when applicable.

NOTE: In the following message(s), bit significance shall be in the following order: bit closest to position (x.1) is least significant, and bit closest to position (x.8) is most significant.

PGN 61184

Description: Battery Configuration
Transmission Repetition Rate: On Request
Data Length: 8,

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

Extended Data Page: 0
Data Page: 0
PDU Format: 239 (0xEF)
PDU Specific: DA
Default Priority: 6
Parameter Group Number: 61184
Data Field:

Control Byte = 0_{10}

Position	Length	Parameter Name (SPN)	Resolution	Offset
1.1-1.8	8 bits	Control Byte		
2.1-2.2	2 bits	Battery Battle Override		
2.3-2.4	2 bits	Automatic Heater Function		
2.5-2.6	2 bits	Command Contactor(s)		
2.7-2.8	2 bits	Primary CAN Interface		
3.1-3.2	2 bits	Reset		
3.3-3.4	2 bits	Maintenance State		
3.5-3.6	2 bits	Virtual Master Power Switch Command		
3.7-3.8	2 bits	Pulse Power Control		

Control Byte = 1

Position	Length	Parameter Name (SPN)	Resolution	Offset
1.1-1.8	8 bits	Control Byte		
2.1-2.2	2 bits	Restore Defaults		
2.3-2.4	2 bits	Heartbeat CAN Interface		
3.1-3.2	2 bits	Overwrite Baud Rate		
3.3-3.6	4 bits	Overwrite Position ID		
3.7-3.8	2 bits	Configure VMPS Function		
4.1-6.8	24 bits	Configure PGN		
7.1-7.5	5 bits	PGN Tx Rate		

Control Byte = 2

Position	Length	Parameter Name (SPN)	Resolution	Offset
1.1-1.8	8 bits	Control Byte		
2.1-2.2	2 bits	Standby		
3.1-3.8	8 bits	Standby Suspend Period	1 minute/bit	0
4.1-4.8	8 bits	Transportability Command	0.5%/bit	0

Control Byte = 3

Position	Length	Parameter Name (SPN)	Resolution	Offset
1.1-1.8	8 bits	Control Byte		
2.1-2.8	8 bits	SOC Reserve Limit	0.5%/bit	0%
3.1-3.8	8 bits	Application Overcurrent Limit 1	5A/bit	0
4.1-4.8	8 bits	Application Overcurrent Period 1	0.25s/bit	0
5.1-5.8	8 bits	Application Overcurrent Limit 2	5A/bit	0
6.1-6.8	8 bits	Application Overcurrent Limit 2	0.25s/bit	0

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

J1939 SPN Message Definitions

SPN (516096) Control Byte
Supporting Information: Control byte associated with the battery configuration message.

SPN (516097) Battery Battle Override*:
00_2 Disable Battle Override
01 Enable Battle Override
10 Reserved
11 NA
*Configuration parameter can be set outside of Maintenance State.

SPN (516098) Automatic Heater Function*:
00_2 Disable Automatic Heater Function
01 Enable Automatic Heater Function
10 Reserved
11 NA
*Configuration parameter can be set outside of Maintenance State.

SPN (516099) Command Contactor(s)*:
00_2 Open Contactor(s)
01 Automatic Contactor Operation
10 Force Close Contactor(s)**
11 NA
*Configuration parameter can be set outside of Maintenance State.
** Ability to force close the contactor (s) shall only be allowable in the Maintenance State. Battery shall provide negative acknowledgement to “Force Close Contactor(s)” if battery is not in the Maintenance State.

SPN (516100) Primary CAN Interface*:
00_2 CAN B Primary Interface
01 CAN A Primary Interface
10 Reserved
11 NA
*Configuration parameter can be set outside of Maintenance State.

SPN (516101) Reset*:
00_2 Hard Reset**
01 Soft Reset***
10 Reset Protection
11 NA
*Configuration parameter can be set outside of Maintenance State.
**Shall include power cycling the battery (BMS) hardware
***Battery Manufacturer to define. Not to include power cycling of the battery (BMS).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

SPN (516102) Maintenance State*:
00_2 Exit Maintenance State
01 Enter Maintenance State
10 Reserved
11 NA
*Configuration parameter can be set outside of Maintenance State.

SPN (516103) Virtual Master Power Switch Command*:
00_2 VMPS is off
01 VMPS is on
10 Reserved
11 NA
*Configuration parameter can be set outside of Maintenance State.

SPN (516113) Pulse Power Control*:
Supporting Information: The pulse power control is a signal sent to the battery to indicate that a high pulse power event, such as a vehicle engine start, is required from the battery.
00_2 Pulse Power Control is off
01 Pulse Power Control is on
10 Reserved
11 NA
*Configuration parameter can be set outside of Maintenance State.

SPN (516104) Restore Defaults:
00_2 Restore all settings to Factory defaults
01 Clear all parameter overwrites (except PGN Tx Rates), restore defaults
10 Clear all PGN Tx Rate overwrites, restore defaults
11 NA

SPN (516105) Heartbeat CAN Interface:
00_2 Primary and Secondary CAN Interface
01 Primary CAN Interface Only
10 Reserved
11 NA

SPN (516107) Overwrite Baud Rate:
00_2 1 Mbps
01 500 Kbps
10 250 Kbps
11 NA

SPN (516108) Overwrite Position ID:
0 –E_{16} Positions 0 through 14
F NA

SPN (516109) Configure VMPS Function

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

00_2	Disable VMPS Function
01	Enable VMPS Function
10	Reserved
11	NA

SPN (516110) Configure PGN:
Supporting Information: See SAE J1939-21 section Parameter Group Number (PGN) for definition.

SPN (516111) PGN Tx Rate*:

00_{16}	On Request only
01-0F	1, 2, 3 … 15 seconds
10	On State Change
11	100 ms*
12	250 ms*
13	500 ms*
14-1D	Reserved
1E	Reset PGN to its default Tx Rate
1F	NA

*100 ms, 250 ms, 500 ms, and On State Change may only be used for messages that support these transmission rates. The battery shall provide negative acknowledgement if the selected rate is not supported for the message provided in the "Configure PGN" value.

SPN (516112) State of Charge (SOC) Reserve Limit
Supporting Information: The State of Charge (SOC) Reserve Limit shall be used to prevent battery from full discharging in the intended application

$00 – C8_{16}$	0% to 100% SOC limit
C9-FE	Reserved
FF	NA

SPN (516114) Standby*:
Supporting Information: Standby is used to alter the state of the contactor when the battery is in the Operational State.

00_2	Disable Standby
01	Enable Standby
10	Reserved
11	NA

*Configuration parameter can be set outside of Maintenance State.

SPN (516115) Standby Suspend Period*
Supporting Information: Standby suspend period is used to set the amount of time before the battery enables standby.

00_{16}	No suspend period
01-FA	1 to 250 minutes
FB-FE	Reserved
FF	NA

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

*Configuration parameter can be set outside of Maintenance State.

SPN (516116) Transportability Command*
Supporting Information: Transportability command is used to alter the regulation messages in the Operational State to support maintaining a particular battery state of charge for transportability purposes.

00 – $C8_{16}$	0-100%
C9 – FA	Reserved
FB	Disable Transportability Command
FC – FE	Reserved
FF	NA

*Configuration parameter can be set outside of Maintenance State.

SPN (516117) Application Overcurrent Limit 1
Supporting Information: The system overcurrent limit shall be used to prevent the battery from discharging in excess of the limit specified in the intended application, similar in operation to a circuit breaker. The application overcurrent limit 1 applies only to discharge current when the battery master power switch is "Off".

00-04_{16}	Reserved
05 – DC_{16}	25 to 1100 Amperes
DD – FA	Reserved
FB	Disable System Overcurrent Limit 1
FC-FE	Reserved
FF	NA

SPN (516118) Application Overcurrent Period 1

Supporting Information: The system over current period shall be used to set the amount of time the discharge current exceeds the system overcurrent limit 1 before transitioning to the Protected State.

00_{16}	Reserved
00 – FA	0.25 – 60 seconds
FB – FE	Reserved
FF	NA

SPN (516119) Application Overcurrent Limit 2
Supporting Information: The system overcurrent limit shall be used to prevent the battery from discharging above a limit specified in the intended application, similar in operation to a circuit breaker. The application overcurrent limit 2 applies only to discharge current when the battery master power switch is "On".

00-04_{16}	Reserved
05 – DC_{16}	25 to 1100 Amperes

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

DD – FA	Reserved
FB	Disable System Overcurrent Limit 2
FC-FE	Reserved
FF	NA

SPN (516120) Application Overcurrent Period 2

Supporting Information: The system over current period shall be used to set the amount of time the discharge current exceeds the application overcurrent limit 2 before transitioning to the Protected State.

00_{16}	Reserved
00-FA	0.25 – 60 seconds
FB-FE	Reserved
FF	NA

A.6.6 Proprietary B J1939 PGN message definition and structure. The battery shall provide the following Proprietary B, Data Page 0 messages as specified. The range of values for parameters used in Proprietary B PGNs shall conform to J1939-71 (see sections Parameter Ranges and Assignment of Ranges to New Parameters) when applicable.

NOTE: In the following messages, bit significance shall be in the following order: bit closest to position (x.1) is least significant, and bit closest to position (x.8) is most significant.

PGN 65280
Description: Heartbeat
Transmission Repetition Rate: 100 ms , 250 ms, 500 ms, 1000 ms to 15000 ms, On State Change, On Request (On State Change by default)
Data Length: 8
Extended Data Page: 0
Data Page: 0
PDU Format: 255 (0xFF)
PDU Specific: 00 (0x00)
Default Priority: 3
Parameter Group Number: 65280
Data Field:

Position	Length	Parameter Name (SPN)
2.1-2.2	2 bits	Primary CAN Interface
2.3-2.4	2 bits	Heartbeat CAN Interface
3.1-3.2	2 bits	Battery Status
3.3-3.4	2 bits	CAN A Status
3.5-3.6	2 bits	CAN B Status

J1939 SPN Message Definitions
SPN (516140) Primary CAN Interface:

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

00_2	CAN B Primary Interface
01	CAN A Primary Interface
10	Error
11	NA

SPN (516141) Heartbeat CAN Interface:

00_2	Primary and Secondary CAN Interface
01	Primary CAN Interface Only
10	Error
11	NA

SPN (516143) Battery Status

00_2	Battery has normal function
01	Battery has a fault
10	Error
11	NA

SPN (516144) CAN A Status

00_2	CAN A is not operational
01	CAN A is operational
10	Error
11	NA

SPN (516145) CAN B Status

00_2	CAN B is not operational
01	CAN B is operational
10	Error
11	NA

PGN 65281
Description: Battery Measurements 1
Transmission Repetition Rate: 1000 ms to 15000 ms, On Request (1000 ms by default)
Data Length: 8
Extended Data Page: 0
Data Page: 0
PDU Format: 255 (0xFF)
PDU Specific: 01 (0x01)
Default Priority: 5
Parameter Group Number: 65281
Data Field:

Position	Length	Parameter Name (SPN)	Resolution	Offset
1.1-2.8	16 bit	Internal Pack Voltage	0.05V/bit	0
3.1-3.8	8 bit	Battery Internal Temperature (C)	1°C/bit	-55 °C
4.1-5.1	9 bit	Battery Internal Temperature (F)	1°F/bit	-67 °F

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

J1939 SPN Message Definitions

SPN (516182) Internal Pack Voltage
Supporting Information: The voltage as measured across the battery's internal cell assembly.

SPN (516148) Internal Battery Temperature (C)
Supporting Information: The internal temperature of the battery, referenced in Celsius.

SPN (516149) Internal Battery Temperature (F)
Supporting Information: The internal temperature of the battery, referenced in Fahrenheit.

PGN 65282
Description: Battery Calculations 1
Transmission Repetition Rate: 15000 ms, On Request (15000 ms by default)
Data Length: 8
Extended Data Page: 0
Data Page: 0
PDU Format: 255 (0xFF)
PDU Specific: 2 (0x02)
Default Priority: 5
Parameter Group Number: 65282
Data Field:

Position	Length	Parameter Name (SPN)	Resolution	Offset
2.1-2.8	8 bit	Battery State of Charge	0.5%/bit	0%
3.1-3.8	8 bit	Battery State of Health	0.5%/bit	0%
4.1-4.8	8 bit	Battery Capacity Estimation	1 Ah/bit	0
5.1-6.2	10 bit	Time Remaining	0.1 hour	0 hour

J1939 SPN Message Definitions

SPN (516150) Battery State of Charge
Supporting Information: The battery's estimated state of charge reported as a percentage.

SPN (516151) Battery State of Health
Supporting Information: The battery's estimated state of health reported as a percentage.

SPN (516152) Battery Capacity Estimation
Supporting Information: The battery's estimated full charge capacity reported in amp hours (Ah).

SPN (516153) Time Remaining
Supporting Information: The amount of time, reported in hours, the battery has at its present state of charge before it reaches the SOC reserve limit under present discharge conditions.

PGN 65283
Description: Battery Regulation Information 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

Transmission Repetition Rate: 100 ms (optional), 250 ms (optional), 500 ms, 1000 ms to 15000 ms, On Request (1000 ms by default)
Data Length: 8
Extended Data Page: 0
Data Page: 0
PDU Format: 255 (0xFF)
PDU Specific: 3 (0x03)
Default Priority: 4
Parameter Group Number: 65283
Data Field:

Position	Length	Parameter Name (SPN)	Resolution	Offset
1.1-2.8	16 bit	Battery Voltage	0.05V/bit	0V
3.1-4.8	16 bit	Open Circuit Voltage	0.05V/bit	0V
5.1-6.8	16 bit	Battery Current	0.05A/bit	-1600A
7.1-8.8	16 bit	Maximum Charge Current	0.05A/bit	0A

J1939 SPN Message Definitions

SPN (516146) Battery Voltage
Supporting Information: The voltage as measured across the battery's external power terminals.

SPN (516155) Open Circuit Voltage
Supporting Information: The estimated open circuit voltage based on the present condition of the battery.

SPN (516147) Battery Current
Supporting Information: The net battery charge current (positive) to or discharge current (negative) from the battery power terminals.

SPN (516184) Maximum Charge Current
Supporting Information: The maximum net battery current that the battery may accept during charge based on the present condition of the battery while maintaining functionality in the Operational State.

PGN 65284
Description: Battery Regulation Information 2
Transmission Repetition Rate: 1000 ms to 15000 ms, On Request (1000 ms by default)
Data Length: 8
Extended Data Page: 0
Data Page: 0
PDU Format: 255 (0xFF)
PDU Specific: 4 (0x04)
Default Priority: 5
Parameter Group Number: 65284
Data Field:

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

Position	Length	Parameter Name (SPN)	Resolution	Offset
1.1-1.2	2 bits	Contactor(s) State	4 states/2 bits	0
1.3-1.4	2 bits	Charge Capability State	4 states/2 bits	0
2.1-3.8	16 bit	Bus Voltage Request	0.05V/bit	0V
4.1-4.8	8 bit	Transportability SOC	0.5%/bit	0%

J1939 SPN Message Definitions

SPN (516173) Contactor(s) State
Supporting Information: State of the battery contactor(s)

00_2 Contactor(s) is open
01 Contactor(s) is closed
10 Error
11 NA

SPN (516174) Charge Capability State
Supporting Information: State of battery's capability to charge

00_2 Battery is unable to accept charge
01 Battery is able to accept charge
10 Error
11 NA

SPN (516154) Bus Voltage Request
Supporting Information: The vehicle bus voltage that would provide optimal battery charge based on the present condition of the battery.

SPN (516185) Transportability SOC
Supporting Information: The battery state of charge value commanded by the Transportability Command.

PGN 65285
Description: Battery Power Capability Estimation 1
Transmission Repetition Rate: 1000 ms to 15000 ms, On Request (15000 ms by default)
Data Length: 8
Extended Data Page: 0
Data Page: 0
PDU Format: 255 (0xFF)
PDU Specific: 5 (0x05)
Default Priority: 5
Parameter Group Number: 65285
Data Field:

Position	Length	Parameter Name (SPN)	Resolution	Offset

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

2.1-3.8	16 bits	Power Capability Estimation (10s)	1 Watt/bit	0
4.1-5.8	16 bits	Power Capability Estimation (30s)	1 Watt/bit	0

J1939 SPN Message Definitions

SPN (516156) Power Capability Estimation (10s)

Supporting Information: An estimation of the maximum discharge power in Watts that the battery can sustain for a minimum of 10 seconds at its present condition while maintaining a voltage greater than the battery's terminal cutoff voltage specified in 4.4.6.1 d.

SPN (516157) Power Capability Estimation (30s)

Supporting Information: An estimation of the maximum discharge power in Watts that the battery can sustain for a minimum of 30 seconds at its present condition while maintaining a voltage greater than the battery's terminal cutoff voltage specified in 4.4.6.1 d.

PGN 65286
Description: Configuration State 1
Transmission Repetition Rate: 1000 ms to 15000 ms, On State Change, On Request (On State Change by default)
Data Length: 8
Extended Data Page: 0
Data Page: 0
PDU Format: 255 (0xFF)
PDU Specific: 6 (0x06)
Default Priority: 6
Parameter Group Number: 65286
Data Field:

Position	Length	Parameter Name (SPN)	Resolution	Offset
1.1-1.2	2 bits	Dormant 1 State	4 states/2 bits	0
1.3-1.4	2 bits	Dormant 2 State	4 states/2 bits	0
1.5-1.6	2 bits	Master Power Switch State	4 states/2 bits	0
1.7-1.8	2 bits	Configuration Pin 1 State	4 states/2 bits	0
2.1-2.2	2 bits	Configuration Pin 2 State	4 states/2 bits	0
2.3-2.4	2 bits	Configuration Pin 3 State	4 states/2 bits	0
2.5-2.6	2 bits	Configuration Pin 4 State	4 states/2 bits	0
2.7-2.8	2 bits	Configuration Pin 5 State	4 states/2 bits	0
3.1-3.2	2 bits	Configuration Pin 6 State	4 states/2 bits	0
3.3-3.4	2 bits	Virtual Master Power Switch State	4 states/2 bits	0
4.1-4.2	2 bits	Battery Battle-override State	4 states/2 bits	0
4.3-4.4	2 bits	Maintenance State	4 states/2 bits	0
4.5-4.6	2 bits	Automatic Heater Function State	4 states/2 bits	0
4.7-4.8	2 bits	Battery Heater(s) State	4 states/2 bits	0
5.1-5.2	2 bits	Contactor(s) Control State	4 states/2 bits	0

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

5.3-5.4	2 bits	Standby State	4 states/2 bits	0
6.1-6.2	2 bits	Baud Rate Overwrite State	4 states/2 bits	0
6.3-6.4	2 bits	Position Identity Overwrite State	4 states/2 bits	0
6.5-6.6	2 bits	Configure VMPS Function State	4 states/2 bits	0
6.7-6.8	2 bits	Pulse Power Control State	4 states/2 bits	0

J1939 SPN Message Definitions

SPN (516158) Dormant 1 State
Supporting Information: The value of dormant 1 on the communication interface as sensed by the battery.

00_2 Dormant 1 is off
01 Dormant 1 is on
10 Error
11 NA

SPN (516159) Dormant 2 State
Supporting Information: The value of dormant 2 on the communication interface as sensed by the battery.

00_2 Dormant 2 is off
01 Dormant 2 is on
10 Error
11 NA

SPN (516160) Master Power Switch State
Supporting Information: The value of Master Power Switch In on the communication interface as sensed by the battery.

00_2 Master Power Switch In is off
01 Master Power Switch In is on
10 Error
11 NA

SPN (516161) Configuration Pin 1 State
Supporting Information: The value of configuration pin 1 on the communication interface as sensed by the battery.

00_2 Configuration Pin 1 is false
01 Configuration Pin 1 is true
10 Error
11 NA

SPN (516162) Configuration Pin 2 State

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

Supporting Information: The value of configuration pin 2 on the communication interface as sensed by the battery.

00_2 Configuration Pin 2 is false
01 Configuration Pin 2 is true
10 Error
11 NA

SPN (516163) Configuration Pin 3 State
Supporting Information: The value of configuration pin 3 on the communication interface as sensed by the battery.

00_2 Configuration Pin 3 is false
01 Configuration Pin 3 is true
10 Error
11 NA

SPN (516164) Configuration Pin 4 State
Supporting Information: The value of configuration pin 4 on the communication interface as sensed by the battery.

00_2 Configuration Pin 4 is false
01 Configuration Pin 4 is true
10 Error
11 NA

SPN (516165) Configuration Pin 5 State
Supporting Information: The value of configuration pin 5 on the communication interface as sensed by the battery.

00_2 Configuration Pin 5 is false
01 Configuration Pin 5 is true
10 Error
11 NA

SPN (516166) Configuration Pin 6 State
Supporting Information: The value of configuration pin 6 on the communication interface as sensed by the battery.

00_2 Configuration Pin 6 is false
01 Configuration Pin 6 is true
10 Error
11 NA

SPN (516167) Virtual Master Power Switch State
Supporting Information: The present value of the virtual master power switch state

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

00_2 Virtual Master Power Switch is off
01 Virtual Master Power Switch is on
10 Error
11 NA

SPN (516168) Battery Battle-override State
Supporting Information: State of battery battle override mode

00_2 Battery Battle-override Disabled
01 Battery Battle-override Enabled
10 Error
11 NA

SPN (516169) Maintenance State
Supporting Information: State of the battery Maintenance State

00_2 Battery is not in the Maintenance State
01 Battery is in the Maintenance State
10 Error
11 NA

SPN (516170) Automatic Heater Function State
Supporting Information: State of the automatic heater function

00_2 Automatic Heater Function is disabled
01 Automatic Heater Function is enabled
10 Error
11 NA

SPN (516171) Battery Heater(s) State
Supporting Information: State of the battery heater(s)

00_2 Battery heater is off
01 Battery heater is on
10 Error
11 NA

SPN (516172) Contactor(s) Control State
Supporting Information: State of the battery contactor(s) control

00_2 Contactor(s) control is not automatic (state forced by command)
01 Contactor(s) control is automatic
10 Error
11 NA

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

SPN (516186) Standby State
Supporting Information: State of battery standby.

00_2 Battery standby is disabled
01 Battery standby is enabled
10 Battery standby is suspended by the Standby Suspend Period
11 NA

SPN (516175) Baud Rate Overwrite State
Supporting Information: State of the baud rate overwrite

00_2 Baud Rate has not been overwritten
01 Baud Rate has been overwritten
10 Battery initialization is required to implement the baud rate change
11 NA

SPN (516176) Position Identity Overwrite State
Supporting Information: State of the position identity overwrite

00_2 Position identity has not been overwritten
01 Position identity has been overwritten
10 Battery initialization is required to implement the position identity change
11 NA

SPN (516177) Configure VMPS Function
Supporting Information: State of the configure VMPS function

00_2 VMPS Function Disabled
01 VMPS Function Enabled
10 Error
11 NA

SPN (516183) Pulse Power Control State:
Supporting Information: State of the battery pulse power control.

00_2 Pulse Power Control is off
01 Pulse Power Control is on
10 Error
11 NA

PGN 65287
Description: Protected State 1
Transmission Repetition Rate: 1000 ms, only when Protected State Warning = 000, 001, 010, or 011. Otherwise, On Request.
Data Length: 8
Extended Data Page: 0

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

Data Page: 0
PDU Format: 255 (0xFF)
PDU Specific: 7 (0x07)
Default Priority: 3
Parameter Group Number: 65287
Data Field:

Position	Length	Parameter Name (SPN)	Resolution	Offset
1.1-1.3	3 bits	Protected State Warning	8 states/3 bits	0
2.1-2.8	8 bits	Failed Exit Attempts Count	1 count/bit	0
3.1-4.8	16 bits	Protected State Timeout	1 second/bit	0
5.1-5.2	2 bits	Load Indicator	4 states/2 bits	

J1939 SPN Message Definitions

SPN (516179) Protected State Warning
Supporting Information: Warnings the battery shall provide when it is approaching a limit that may transition the battery to the Protected State, and when the battery is in the Protected State.

000_2	Battery is in the Protected State
001	Warning 1. Battery could transition to the Protected State within 1-2 seconds
010	Warning 2. Battery could transition to the Protected State within 3-10 seconds
011	Warning 3. Battery could transition to the Protected State within 11-30 seconds
100	No warnings. Normal operation
101	Reserved
110	Error
111	NA

SPN (516180) Failed Exit Attempts Count
Supporting Information: A count of the number of attempts that have been made by the battery or by command that have failed to transition the battery out of the Protected State.

$0\text{-}FA_{16}$	Count of the number of failed attempts
FB	Count exceeded maximum
FC	Reserved
FD	Reserved
FE	Error
FF	NA

SPN (516181) Protected State Timeout
Supporting Information: The amount of time before the battery automatically attempts to exit the Protected State.

$0\text{-}FAFF_{16}$	Time in seconds before the attempt to exit the Protected State
FB00	Battery requires reset protection method to exit Protected State

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

FB01	No timeout for fault
FB02-FDFF	Reserved
FExx	Error
FFxx	NA

SPN (516191) Load Indicator
Supporting Information: Indication of requested adjustments to the load on the battery power terminals that may allow the battery to transition out of the Protected State.

00_2	Provide or adjust charging potential on battery to exit Protected State.
01	Remove load or short circuit from battery to exit Protected State.
10	No load indicator for fault.
11	NA

PGN 65288
Description: Application Management States 1
Transmission Repetition Rate: 1000 ms to 15000 ms, On State Change, On Request (On State Change by default)
Data Length: 8
Extended Data Page: 0
Data Page: 0
PDU Format: 255 (0xFF)
PDU Specific: 8 (0x08)
Default Priority: 6
Parameter Group Number: 65289
Data Field:

Position	Length	Parameter Name (SPN)	Resolution	Offset
2.1-2.8	8 bits	SOC Reserve Limit Value	0.5%/bit	0
3.1-3.8	8 bits	Application Overcurrent Limit 1 Value	5A/bit	0
4.1-4.8	8 bits	Application Overcurrent Period 1 Value	0.25s/bit	0
5.1-5.8	8 bits	Application Overcurrent Limit 2 Value	5A/bit	0
6.1-6.8	8 bits	Application Overcurrent Period 2 Value	0.25s/bit	0

J1939 SPN Message Definitions

SPN (516178) SOC Reserve Limit Value
Supporting Information: Configured value for the SOC Reserve Limit

$00 – C8_{16}$	0% to 100% SOC limit
C9 – FD	Reserved
FE	Error
FF	NA

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

SPN (516187) Application Overcurrent Limit 1 Value
Supporting Information: Configured value for the Application Overcurrent Limit 1

$00\text{-}04_{16}$	Reserved
05 – DC	25 to 1100 Amperes
DD-FA	Reserved
FB	Application Overcurrent Limit 1 is disabled
FC-FD	Reserved
FE	Error
FF	NA

SPN (516188) Application Overcurrent Period 1 Value
Supporting Information: Configured value for the Application Overcurrent Period 1

00	Reserved
$01\text{–}\ F0_{16}$	0.25 to 60 seconds
F1-FA	Reserved
FB	Application Overcurrent Period 1 is disabled
FC-FD	Reserved
FE	Error
FF	NA

SPN (516189) Application Overcurrent Limit 2 Value
Supporting Information: Configured value for the Application Overcurrent Limit 2

$00\text{-}04_{16}$	Reserved
05 – DC	25 to 1100 Amperes
DD – FA	Reserved
FB	Application Overcurrent Limit 2 is disabled
FC – FD	Reserved
FE	Error
FF	NA

SPN (516190) Application Overcurrent Period 2 Value
Supporting Information: Configured value for the Application Overcurrent Period 2

00	Reserved
$01 – F0_{16}$	0.25 to 60 seconds
F1 – FA	Reserved
FB	Application Overcurrent Period 2 is disabled
FC – FD	Reserved
FE	Error
FF	NA

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.

Custodians:
Army – AT
Air Force – 11
DLA – CC

Preparing activity:
Army – AT
(Project 6140-2022-002)

Review activities:
Army – AV, CR, MI

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:05Z
Check the source to verify that this is the current version before use.