MILITARY STANDARD

SWITCHES AND ASSOCIATED HARDWARE, SELECTION AND USE OF

TO ALL HOLDERS OF MIL-STD-1132A:

1. THE FOLLOWING SECTION OF MIL-STD-1132A HAS BEEN REVISED AND SUPERSEDES THE SECTION LISTED:

SECTION	DATE	SUPERSEDED SECTION	DATE
112A	29 AUGUST 1988	112	23 March 1976

2. RETAIN THIS NOTICE AND INSERT BEFORE THE TABLE OF CONTENTS.

3. Holders of MIL-STD-1132A will verify that page changes and additions indicated above have been entered. This notice page will be retained as a check sheet. This issuance, together with appended pages, is a separate publication. Each notice is to be retained by stocking points until the Military Standard is completely revised or canceled.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Air Force - 99
DLA - ES

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5930-1345)

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil - Downloaded: 2026-02-26T07:47Z
Check the source to verify that this is the current version before use.

SECTION 112A

SWITCHES, TOGGLE
(Applicable specifications: MIL-S-3950, MIL-S-8834, and MIL-S-8805)

Figure	Detail document	Number of poles	Terminals	Seal	Highest 28 V dc resistive rating (amperes)	Lever lock	Other features
112-1	MS24523	1	Screw	Environmental	20		
112-2	MS24524	2	"	"	20		
"	MS27407	2*	"	"	20		
"	MS24525	4	"	"	20		
"	MS27406	4*	"	"	20		
112-3	MS24658	1	"	"	20	X	
112-4	MS24659	2	"	"	20	X	
"	MS27408	2*	"	"	20	X	
"	MS24660	4	"	"	20	X	
"	MS27409	4*	"	"	20	X	
112-5	MS27722	1	CTS	"	20		
"	MS27784	1	"	"	7.5		
112-6	MS27723	2*	"	"	20		
"	MS27724	4*	"	"	20		
112-7	MS27785	2*	"	"	7.5		
"	MS27786	4*	"	"	7.5		
112-8	MS27782	2*	"	"	20	X	
"	MS27783	4*	"	"	20	X	
112-9	MS27788	2*	"	"	7.5	X	
"	MS27789	4*	"	"	7.5	X	
112-10	MS27781	1	"	"	20	X	
"	MS27787	1	"	"	7.5	X	
112-11	MS27734	1	Solder lug	"	20		
112-12	MS27735	2*	"	"	20		
	MS27736	4*	"	"	20		
112-13	MS27737	1	"	"	20	X	
112-14	MS27738	2*	"	"	20	X	
"	MS27739	4*	"	"	20	X	
112-15	MS14001	1	"	"	25		Positive break
"	MS14002	2	"	"	25		"
"	MS14003	4	"	"	25		"
112-16	MS21026	1	"	Toggle	5	X	
"	MS21027	2*	"	"	5	X	
112-17	MS21346	1	CTS	"	5		
"	MS21347	2*	"	"	5		
112-18	MS21346	1	"	"	5	X	
"	MS21347	2*	"	"	5	X	Positive break
112-19	MS21351	1	Solder lug	"	5		Low level
"	MS21353	2*	"	"	5		
112-20	MS21354	1	"	"	5		
"	MS21355	2*	"	"	5		
112-21	MS21356	1	"	"	5		
"	MS21357	2*	"	"	5		
112-22	MS24612	1	Screw	Environmental	25	X	Positive break
"	MS24613	2	"	"	25	X	"
"	MS24614	4	"	"	25	X	"
112-23	MS24655	1	Solder lug	Toggle	5		
"	MS24656	2*	"	"	5		Positive break
112-24	MS24655	1	CTS	"	5		Low level
"	MS24656	2*	"	"	5		

This section supersedes
section 112 dated 23 March 1976

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:41Z
Check the source to verify that this is the current version before use.

SECTION 112A


SWITCHES, TOGGLE
(Applicable specifications: MIL-S-3950, MIL-S-8834, and MIL-S-8805)

Figure	Detail document	Number of poles	Terminals	Seal	Highest 28 V dc resistive rating (amperes)	Lever lock	Other features
112-25	MS25306	1	Screw	Environmental	25		Positive break
"	MS25307	2	"	"	25		"
"	MS25308	4	"	"	25		"
112-26	MS90310	1	Solder lug	Toggle	5		
"	MS90311	2	"	"	5		
112-27	MS21433	1	PC	"	5		Positive break
112-28	MS21434	2*	"	"	5		Low level
112-29	MS21436	1	Solder lug	"	5	X	
"	MS21437	2*	"	"	5	X	
112-30	MIL-S-8805/26	2*,3*,4*	"	Unsealed	5		Snap action
112-31	MIL-S-8805/92	2*,3*,4*	"	"	5	X	Snap action
112-32	MIL-S-8805/93	2*,4*, 6*,8*	"	"	7		Snap action
112-33	MIL-S-8805/98	4*,6*,8*	"	Panel	7	X	Snap action

* Special three position "on" circuits are available.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Dash number	Current capacity (amperes)					
	28 V dc			115 V ac, 60 and 400 Hz		
	Load			Load		
	Lamp	Resistive	Inductive	Lamp	Resistive	Inductive
-21, -22, and -23	5	20	15	3	15	10
-26, -27, -29, -30, and -31	4	15	10	2	15	7

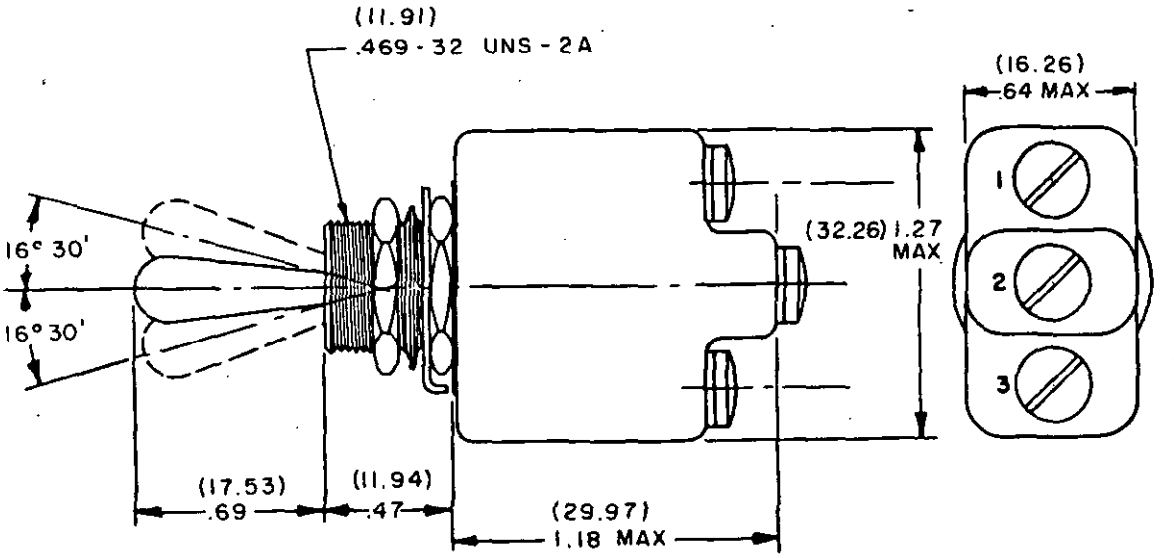


Dash number	Circuit with toggle lever in		
	Opposite keyway side	Center	Keyway side
-21	ON	OFF	ON
-22	ON	NONE	OFF
-23	ON	NONE	ON
-26	ON	NONE	MOM ON
-27	MOM ON	OFF	MOM ON
-29	ON	NONE	MOM OFF
-30	OFF	NONE	MOM ON
-31	ON	OFF	MON ON

Part number: Consists of "MS24523" followed by the dash number as shown in the tabulation.

FIGURE 112-1. MS24523 toggle switches, environmentally sealed (MIL-S-3950).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:41Z
Check the source to verify that this is the current version before use.

Dash number	Current capacity (amperes)							
	28 V dc					115 V ac, 60 and 400 Hz		
	Load					Load		
	Lamp		Resistive	Inductive		Lamp	Resistive	Inductive
	2 Pole	4 Pole		2 Pole	4 Pole			
-1, -21, -22, and -23	7	5	20	15	12	4	15	15
-2, -3, -26, -27, -29, -30, and -31	5	4	18	10	10	2	11	8

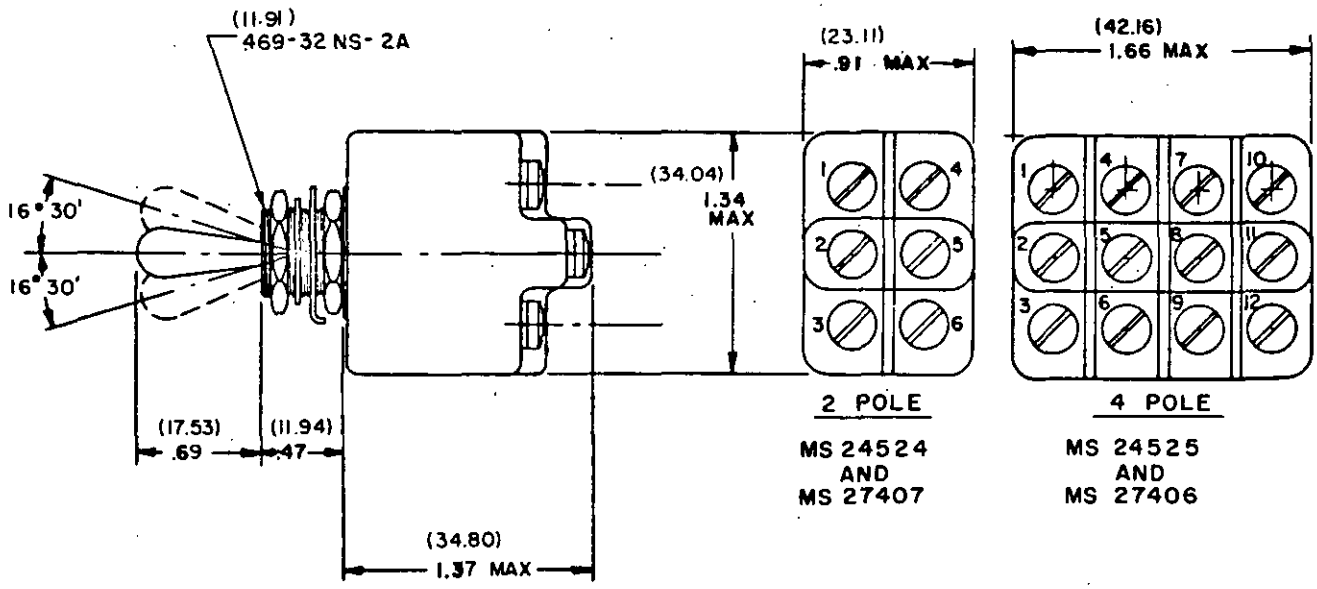

1/ Dash number	Circuit with toggle lever in			1/ Dash number	Circuit with toggle lever in		
	Opposite keyway side	Center	Keyway side		Opposite keyway side	Center	Keyway side
-1	ON	ON	ON	-26	ON	NONE	MOM ON
-2	ON	ON	MOM ON	-27	MOM ON	OFF	MOM ON
-3	MOM ON	ON	MOM ON	-29	ON	NONE	MOM OFF
-21	ON	OFF	ON	-30	OFF	NONE	MOM ON
-22	ON	NONE	OFF	-31	ON	OFF	MOM ON
-23	ON	NONE	ON				


1/ -1, -2, and -3 applicable to MS27406 and MS27407; -21 through -31 applicable to MS24524 and MS24525.

Part number: Consists of the applicable MS number followed by the dash number as shown in the tabulation.

FIGURE 112-2. MS24524, MS24525, MS27406, and MS27407 toggle switches, environmentally sealed (MIL-S-3950).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Dash number	Current capacity (amperes)					
	28 V dc Load			115 V ac, 60 and 400 Hz Load		
	Lamp	Resistive	Inductive	Lamp	Resistive	Inductive
-21, -22, and -23	5	20	15	3	15	10
-26, -27, -28, -29, -30, -31, and -32	4	15	10	2	15	7

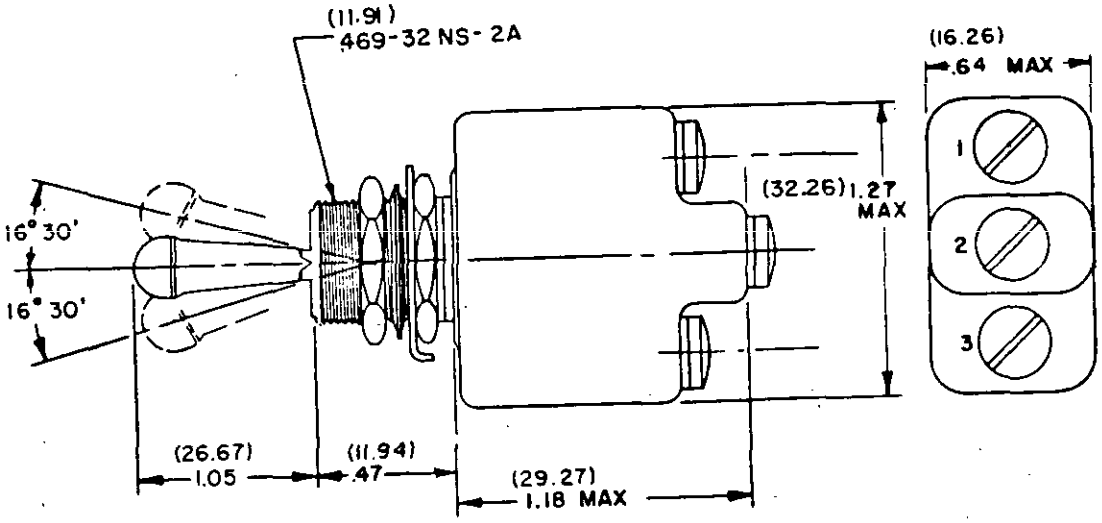

LOCKING COMBINATIONS
(KEYING SIDE)

A LOCKED IN THREE POSITIONS	B LOCKED IN CENTER AND DOWN POSITION (KEYING SIDE)	D LOCKED OUT OF CENTER POSITION	E LOCKED IN CENTER POSITION	F LOCKED IN UP POSITION (OPPOSITE KEYING)	G LOCKED IN DOWN POSITION (KEYING SIDE)	H LOCKED OUT OF CENTER AND DOWN POSITION (KEYING SIDE)
J LOCKED OUT OF CENTER AND UP POSITION (OPPOSITE KEYING)	K LOCKED IN CENTER AND UP POSITION (OPPOSITE KEYING)	L LOCKED OUT OF DOWN POSITION (KEYING SIDE)	M LOCKED OUT OF AND INTO UP POSITION (OPPOSITE KEYING)	N LOCKED OUT OF UP POSITION (OPPOSITE KEYING)	P LOCKED OUT OF AND INTO DOWN POSITION (KEYING SIDE)	FIGURES A THRU P DO NOT REPRESENT DETAILS OF CONSTRUCTION. THEY SCHEMATICALLY ILLUSTRATE LOCKING CONFIGURATIONS & MOM POSITIONS


Dash number	Available locking combinations	Circuit with toggle lever in			Dash number	Available locking combinations	Circuit with toggle lever in		
		Opposite keyway side	Center	Keyway side			Opposite keyway side	Center	Keyway side
-21	All	ON	OFF	ON	-28	E	NONE	OFF	MOM ON
-22	D,F,G	ON	NONE	OFF	-29	F	ON	NONE	MOM OFF
-23	D,F,G	ON	NONE	ON	-30	F	OFF	NONE	MOM ON
-26	F	ON	NONE	MOM ON	-31	E,F,K,L,M,N	ON	OFF	MOM ON
-27	E,L,N	MOM ON	OFF	MOM ON	-32	E	MOM ON	ON	NONE

Part number: Consists of "MS24658" followed by the dash number and locking combination letter from the tabulation. Example: MS24658-21A.


FIGURE 112-3. MS24658 toggle switches, environmentally sealed, lever lock (MIL-S-3950).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:41Z
Check the source to verify that this is the current version before use.

Dash number	Current capacity (amperes)							
	28 V dc Load					115 V ac, 60 and 400 Hz Load		
	Lamp		Resistive	Inductive		Lamp	Resistive	Inductive
	2 Pole	4 Pole		2 Pole	4 Pole			
-1, -21, -22, and -23	7	5	20	15	12	4	15	15
-2, -3, -26, -27, -28, -29, -30, -31, and -32	5	4	18	10	10	2	11	8

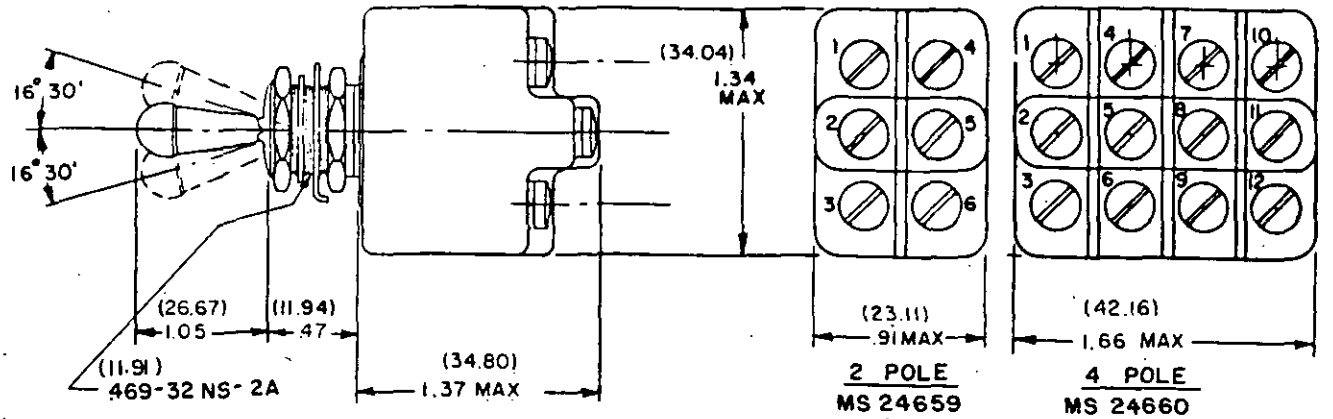

LOCKING COMBINATIONS (KEYING SIDE)

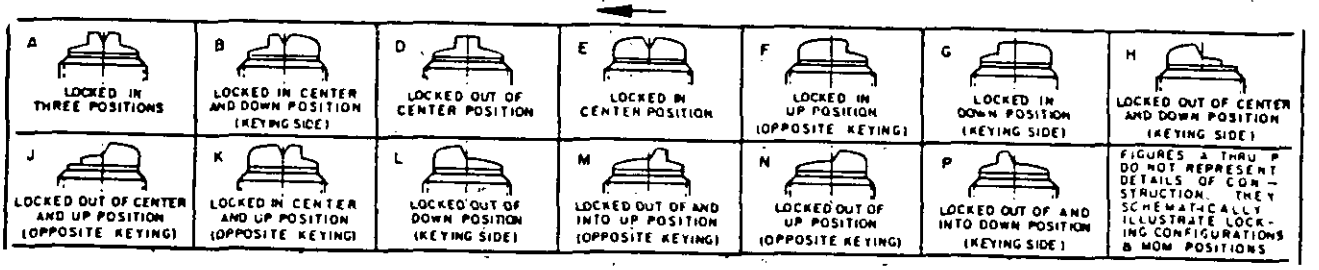

1/Dash number	Available locking combination	Circuit with toggle lever in			1/Dash number	Available locking combination	Circuit with toggle lever in		
		Opposite keyway side	Center	Keyway side			Opposite keyway side	Center	Keyway side
-1	All	ON	ON	ON	-27	E,L,N	MOM ON	OFF	MOM ON
-2	E,F,K,L,M,N	ON	ON	MOM ON	-28	E	NONE	OFF	MOM ON
-3	E,L,N	MOM ON	ON	MOM ON	-29	F	ON	NONE	MOM OFF
-21	All	ON	OFF	ON	-30	F	OFF	NONE	MOM ON
-22	D,F,G	ON	NONE	OFF	-31	E,F,K,L,M,N	ON	OFF	MOM ON
-23	D,F,G	ON	NONE	ON	-32	E	MOM ON	ON	NONE
-26	F	ON	NONE	MOM ON					


1/ -1, -2, and -3 applicable to MS27408 and MS27409; -21 through -32 applicable to MS24659 and MS24660.

Part number: Consists of applicable MS number followed by the dash number and locking combination letter as shown in the tabulation. Example: MS24659-1A.

FIGURE 112-4. MS24659, MS24660, MS27408, and MS27409 toggle switches, environmentally sealed, lever lock (MIL-S-3950).

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:41Z
Check the source to verify that this is the current version before use.

Dash number	Current capacity (amperes)									
	28 V dc					115 V ac, 60 and 400 Hz				
	Lamp	Resistive		Inductive		Lamp	Resistive		Inductive	
		MS27722	MS27784	MS27722	MS27784		MS27722	MS27784	MS27722	MS27784
-21, -22, and -23	5	20	7.5	15	7.5	3	15	7.5	10	7.5
-26, -27, -28, -29, -30, -31, and -32	4	15	7.5	10	7.5	2	15	7.5	7	7

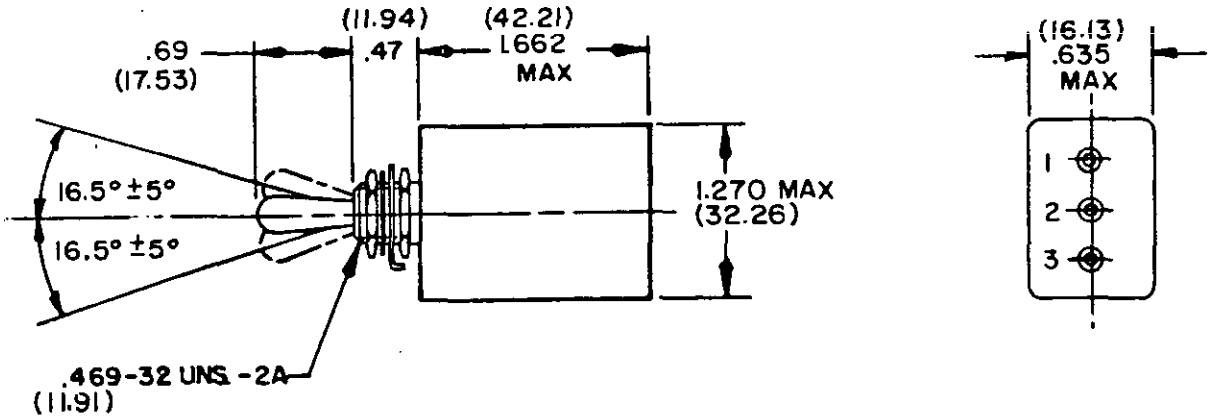


Dash number	Circuit with toggle lever in		
	Keyway side	Center	Opposite keyway side
-21	ON	OFF	ON
-22	OFF	NONE	ON
-23	ON	NONE	ON
-26	MOM ON	NONE	ON
-27	MOM ON	OFF	MOM ON
-28	MOM ON	OFF	NONE
-29	MOM OFF	NONE	ON
-30	MOM ON	NONE	OFF
-31	MOM ON	OFF	ON
-32	NONE	ON	MOM ON

Part number: Consists of applicable MS number followed by the dash number as shown in the tabulation.

FIGURE 112-5. MS27722 and MS27784 toggle switches, environmentally sealed, integrated wire terminals (MIL-S-3950).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:41Z
Check the source to verify that this is the current version before use.

Dash number	Current capacity (amperes)							
	28 V dc					115 V ac, 60 and 400 Hz		
	Load					Load		
	Lamp		Resistive	Inductive		Lamp	Resistive	Inductive
	2 Pole	4 Pole		2 Pole	4 Pole			
-1, -21, -22, and -23	7	5	20	15	12	4	15	15
-2, -3, -26, -27, -29, -30, and -31	5	4	18	10	10	2	11	8

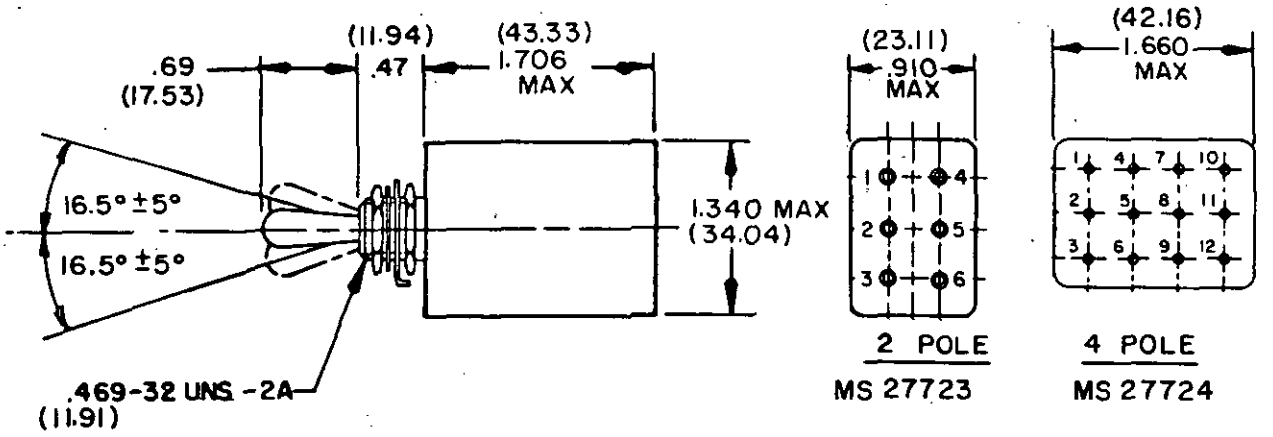


Dash number	Circuit with toggle lever in		
	Opposite keyway side	Center	Keyway side
-1	ON	ON	ON
-2	MOM ON	ON	ON
-3	MOM ON	ON	MOM ON
-21	ON	OFF	ON
-22	OFF	NONE	ON
-23	ON	NONE	ON
-26	MOM ON	NONE	ON
-27	MOM ON	OFF	MOM ON
-28	MOM ON	OFF	NONE
-29	MOM OFF	NONE	ON
-30	MOM ON	NONE	OFF
-31	MOM ON	OFF	ON
-32	NONE	ON	MOM ON

Part number: Consists of the applicable MS number followed by the dash number as shown in the tabulation.

FIGURE 112-6. MS27723 and MS27724 toggle switches, environmentally sealed, integrated wire terminals (MIL-S-3950).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:41Z
Check the source to verify that this is the currentversion before use.

Dash number	Current capacity (amperes)						
	28 V dc				115 V ac, 60 and 400 Hz		
	Load				Load		
	Lamp		Resistive	Inductive	Lamp	Resistive	Inductive
	2 Pole	4 Pole					
-1, -21, -22, and -23	7	5	7.5	7.5	4	7.5	7.5
-2, -3, -26, -27, -28, -29, -30, -31, and -32	5	4	7.5	7.5	2	7.5	7.5

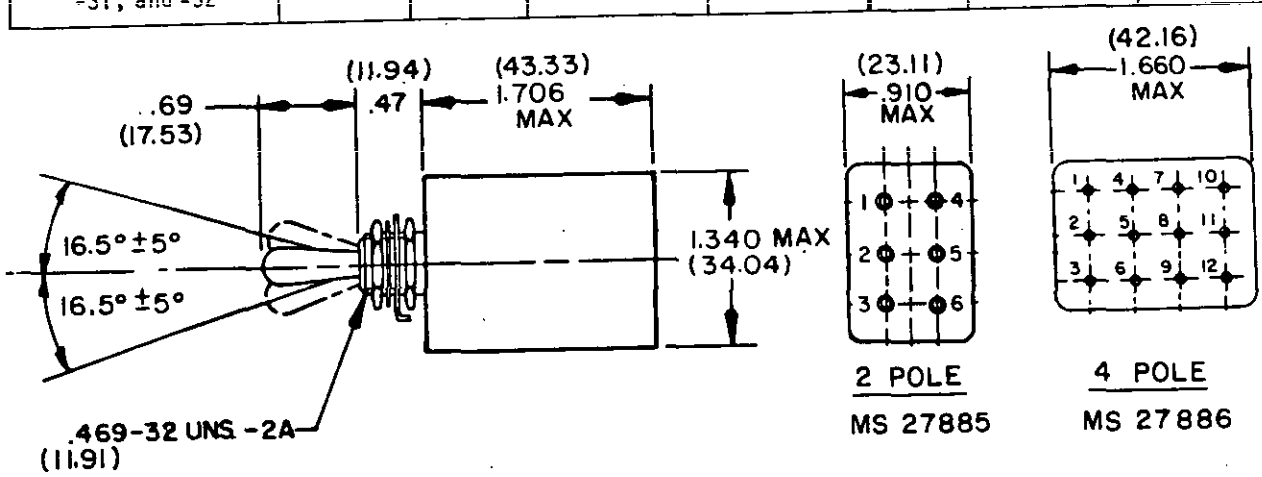


Dash number	Circuit with toggle lever in		
	Keying side	Center	Opposite keying side
-1	ON	ON	ON
-2	MOM ON	ON	ON
-3	MOM ON	ON	MOM ON
-21	ON	OFF	ON
-22	OFF	NONE	ON
-23	ON	NONE	ON
-26	MOM ON	NONE	ON
-27	MOM ON	OFF	MOM ON
-28	MOM ON	OFF	NONE
-29	MOM OFF	NONE	ON
-30	MOM ON	NONE	OFF
-31	MOM ON	OFF	ON
-32	NONE	ON	MOM ON

Part number: Consists of the applicable MS number followed by the dash number as shown in the tabulation.


FIGURE 112-7. MS27785 and MS27786 toggle switches, environmentally sealed, integrated wire terminals (MIL-S-3950).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:41Z
Check the source to verify that this is the current version before use.

Dash number	Current capacity (amperes)							
	28 V dc					115 V ac, 60 and 400 Hz		
	Load					Load		
	Lamp		Resistive	Inductive		Lamp	Resistive	Inductive
	2 Pole	4 Pole		2 Pole	4 Pole			
-1, -21, -22, and -23	7	5	20	15	12	4	15	15
-2, -3, -26, -27, -28, -29, -30, -31, and -32	5	4	18	10	10	2	11	8

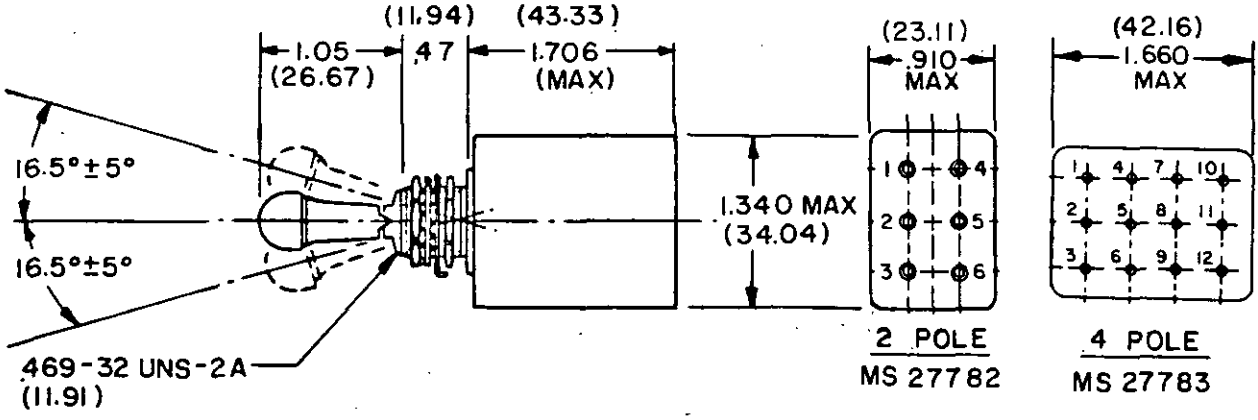

LOCKING COMBINATIONS
(KEYING SIDE)

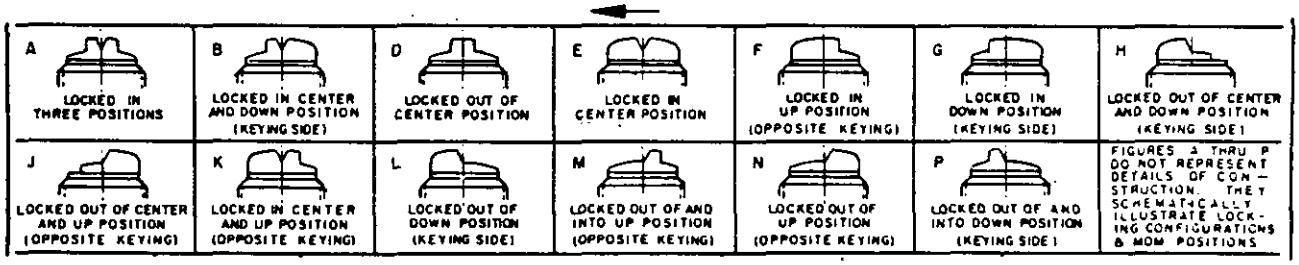


Dash number	Available locking combinations	Circuit with toggle lever in		
		Keying side	Center	Opposite keying side
-1	All	ON	ON	ON
-2	E,F,K,L,M,N	MOM ON	ON	ON
-3	E,L,N	MOM ON	ON	MOM ON
-21	All	ON	OFF	ON
-22	D,F,G	OFF	NONE	ON
-23	D,F,G	ON	NONE	ON
-26	F	MOM ON	NONE	ON
-27	E,L,N	MOM ON	OFF	MOM ON
-28	E	MOM ON	OFF	NONE
-29	F	MOM OFF	NONE	ON
-30	F	MOM ON	NONE	OFF
-31	E,F,K,L,M,N	MOM ON	OFF	ON
-32	E	NONE	ON	MOM ON

Part number: Consists of applicable MS number followed by the dash number and locking combination letter as shown in the tabulation. Example: MS27783-1A.

FIGURE 112-8. MS27782 and MS27783 toggle switches, environmentally sealed, lever-lock, integrated wire terminals (MIL-S-3950).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:41Z
Check the source to verify that this is the current version before use.

Dash number	Current capacity (amperes)						
	28 V dc				115 V ac, 60 and 400 Hz		
	Load				Load		
	Lamp		Resistive	Inductive	Lamp	Resistive	Inductive
	2 Pole	4 Pole					
-1, -21, -22, and -23	7	5	7.5	7.5	4	7.5	7.5
-2, -3, -26, -27, -28, -29, -30, -31, and -32	5	4	7.5	7.5	2	7.5	7.5

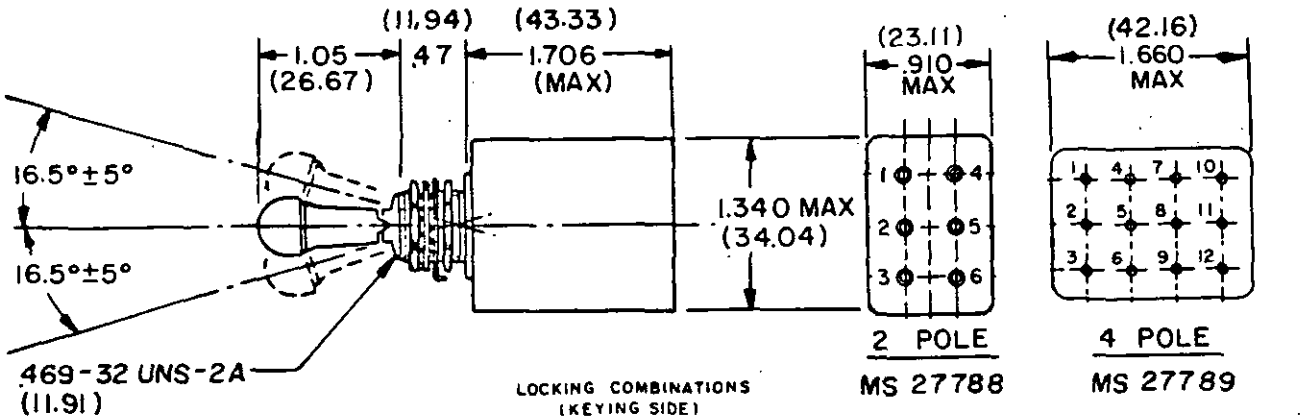


Dash number	Available locking combinations	Circuit with toggle lever in		
		Keying side	Center	Opposite keying side
-1	All	ON	ON	ON
-2	E,F,K,L,M,N	MOM ON	ON	ON
-3	E,L,N	MOM ON	ON	MOM ON
-21	All	ON	OFF	ON
-22	D,F,G	OFF	NONE	ON
-23	D,F,G	ON	NONE	ON
-26	F	MOM ON	NONE	ON
-27	E,L,N	MOM ON	OFF	MOM ON
-28	E	MOM ON	OFF	NONE
-29	F	MOM OFF	NONE	ON
-30	F	MOM ON	NONE	OFF
-31	E,F,K,L,M,N	MOM ON	OFF	ON
-32	E	NONE	ON	MOM ON

Part number: Consists of applicable MS number followed by the dash number and locking combination letter as shown in the tabulation. Example: MS27788-1A.

FIGURE 112-9. MS27788 and MS27789 toggle switches, environmentally sealed, lever-lock, integrated wire terminals.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Dash number	Current capacity (amperes)									
	28 V dc Load					115 V ac, 60 and 400 Hz Load				
	Lamp	Resistive		Inductive		Lamp	Resistive		Inductive	
		MS27781	MS27787	MS27781	MS27787		MS27781	MS27787	MS27781	MS27787
-21, -22, and -23	5	20	7.5	15	7.5	3	15	7.5	10	7.5
-26, -27, -28, -29, -30, -31, and -32	4	15	7.5	10	7.5	2	15	7.5	7	7

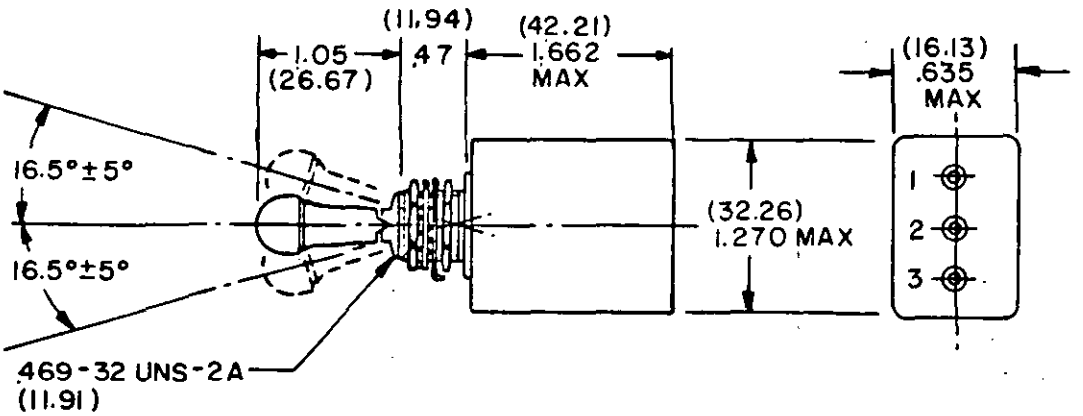

LOCKING COMBINATIONS
(KEYING SIDE)

A LOCKED IN THREE POSITIONS	B LOCKED IN CENTER AND DOWN POSITION (KEYING SIDE)	D LOCKED OUT OF CENTER POSITION	E LOCKED IN CENTER POSITION	F LOCKED IN UP POSITION (OPPOSITE KEYING)	G LOCKED IN DOWN POSITION (KEYING SIDE)	H LOCKED OUT OF CENTER AND DOWN POSITION (KEYING SIDE)
J LOCKED OUT OF CENTER AND UP POSITION (OPPOSITE KEYING)	K LOCKED IN CENTER AND UP POSITION (OPPOSITE KEYING)	L LOCKED OUT OF DOWN POSITION (KEYING SIDE)	M LOCKED OUT OF AND INTO UP POSITION (OPPOSITE KEYING)	N LOCKED OUT OF UP POSITION (OPPOSITE KEYING)	P LOCKED OUT OF AND INTO DOWN POSITION (KEYING SIDE)	FIGURES A THRU P DO NOT REPRESENT DETAILS OF CONSTRUCTION. THEY SCHEMATICALLY ILLUSTRATE LOCKING CONFIGURATIONS & MOM POSITIONS


Dash number	Available locking combinations	Circuit with toggle lever in		
		Keying side	Center	Opposite keying side
-21	All	ON	OFF	ON
-22	D,F,G	OFF	NONE	ON
-23	D,F,G	ON	NONE	ON
-26	F	MOM ON	NONE	ON
-27	E,L,N	MOM ON	OFF	MOM ON
-28	E	MOM ON	OFF	NONE
-29	F	MOM OFF	NONE	ON
-30	F	MOM ON	NONE	OFF
-31	E,F,K,L,M,N	MOM ON	OFF	ON
-32	E	NONE	ON	MOM ON

Part number: Consists of applicable MS number followed by the dash number and locking combination letter as shown in the tabulation. Example: MS27781-21A.

FIGURE 112-10. MS27781 and MS27787 toggle switches, environmentally sealed, lever-lock, integrated wire terminals (MIL-S-3950).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Dash number	Current capacity (amperes)					
	28 V dc Load			115 V ac, 60 and 400 Hz Load		
	Lamp	Resistive	Inductive	Lamp	Resistive	Inductive
-21, -22, and -23	5	20	15	3	15	10
-26, -27, -28, -29, -30, -31, and -32	4	15	10	2	15	7

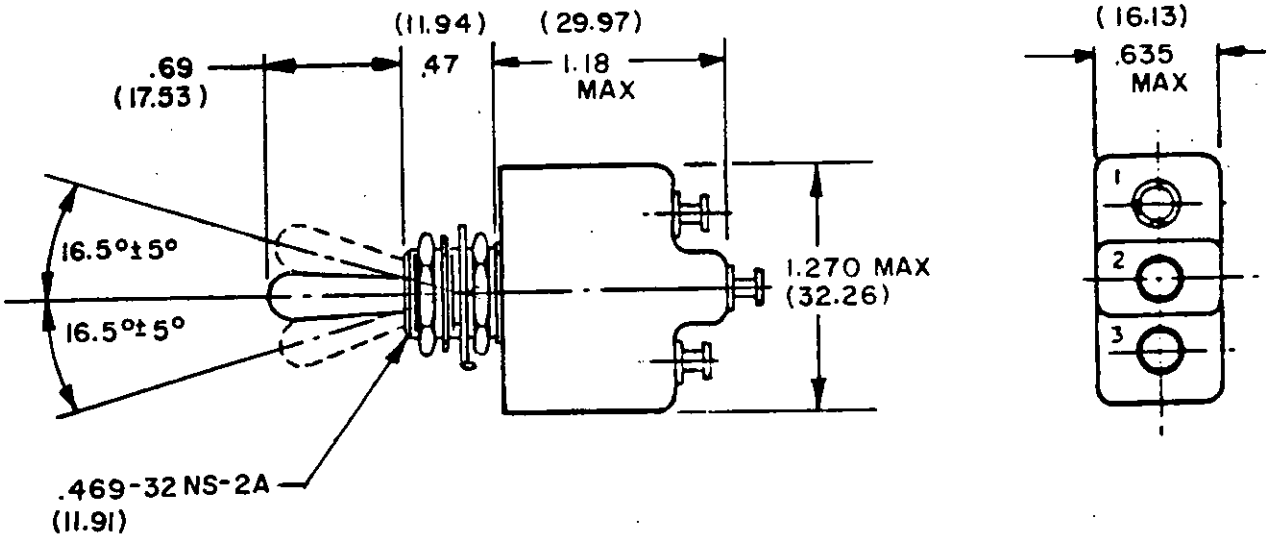


Dash number	Circuit with toggle lever in		
	Keyway side	Center	Opposite keyway side
-21	ON	OFF	ON
-22	OFF	NONE	ON
-23	ON	NONE	ON
-26	MOM ON	NONE	ON
-27	MOM ON	OFF	MOM ON
-28	MOM ON	OFF	NONE
-29	MOM OFF	NONE	ON
-30	MOM ON	NONE	OFF
-31	MOM ON	OFF	ON
-32	NONE	ON	MOM ON

Part number: Consists of "MS27734" followed by the dash number as shown in the tabulation.

FIGURE 112-11. MS27734 toggle switches, environmentally sealed, solder terminals (MIL-S-3950).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Dash number	Current capacity (amperes)							
	28 V dc Load					115 V ac, 60 and 400 Hz Load		
	Lamp		Resistive	Inductive		Lamp	Resistive	Inductive
	2 Pole	4 Pole		2 Pole	4 Pole			
-1, -21, -22, and -23	7	5	20	15	12	4	15	15
-2, -3, -26, -27, -28, -29, -30, -31, and -32	5	4	18	10	10	2	11	8

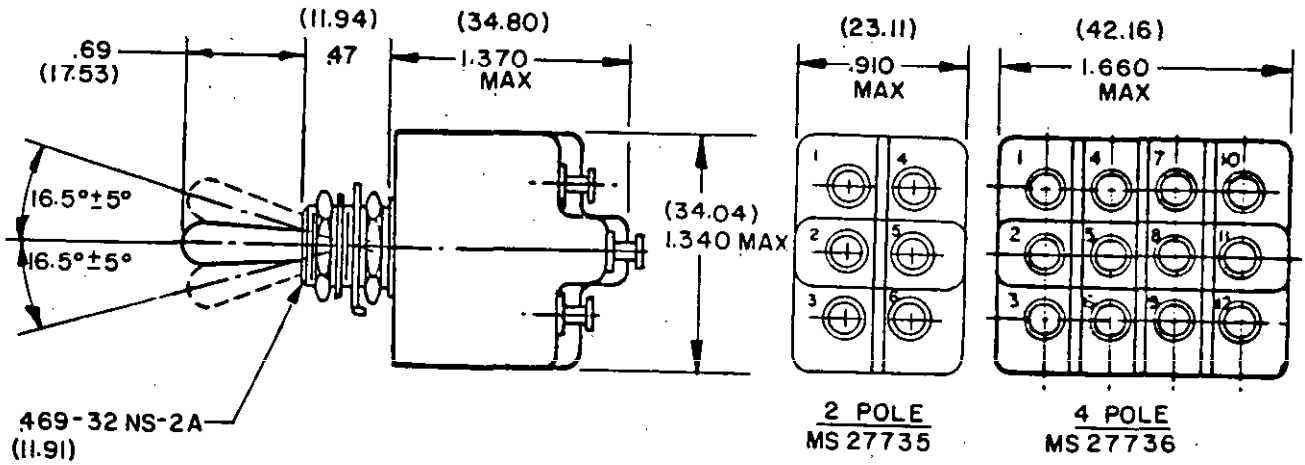


Dash number	Circuit with toggle lever in		
	Keyway side	Center	Opposite keyway side
-1	ON	ON	ON
-2	MOM ON	ON	ON
-3	MOM ON	ON	MOM ON
-21	ON	OFF	ON
-22	OFF	NONE	ON
-23	ON	NONE	ON
-26	MOM ON	NONE	ON
-27	MOM ON	OFF	MOM ON
-28	MOM ON	OFF	NONE
-29	MOM OFF	NONE	ON
-30	MOM ON	NONE	OFF
-31	MOM ON	OFF	ON
-32	NONE	ON	MOM ON

Part number: Consists of the applicable MS number followed by the dash number as shown in the tabulation.


FIGURE 112-12. MS27735 and MS27736 toggle switches, environmentally sealed, solder terminals (MIL-S-3950).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Dash number	Current capacity (amperes)					
	28 V dc Load			115 V ac, 60 and 400 Hz Load		
	Lamp	Resistive	Inductive	Lamp	Resistive	Inductive
-21, -22, and -23	5	20	15	3	15	10
-26, -27, -28, -29, -30, -31, and -32	4	15	10	2	15	7

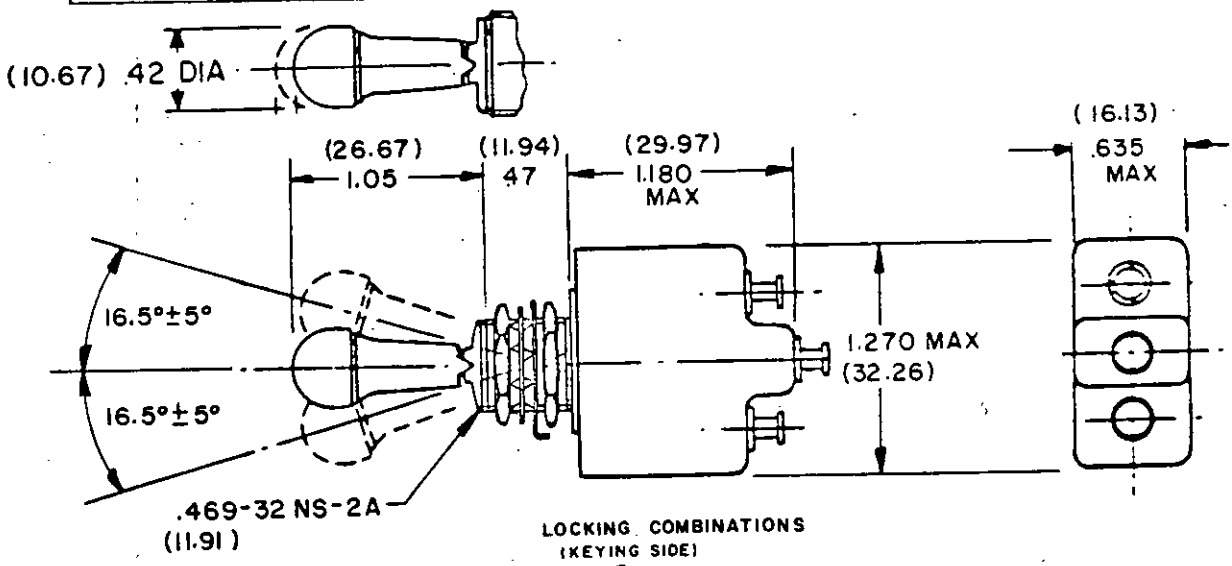

LOCKING COMBINATIONS (KEYING SIDE)

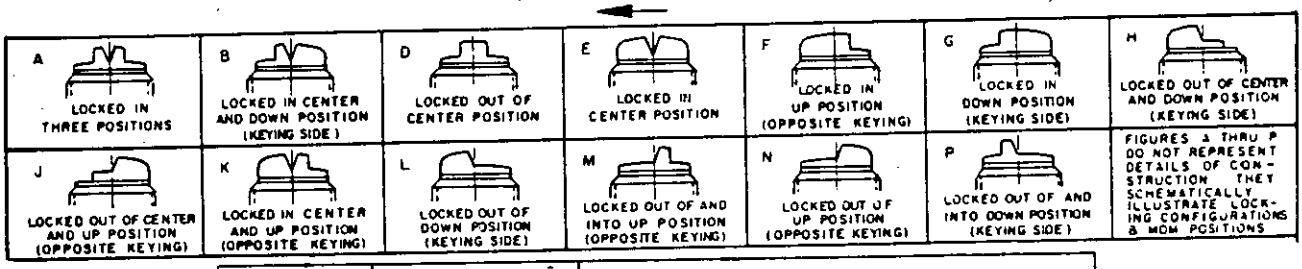


Dash number	Available locking combinations	Circuit with toggle lever in		
		Keying side	Center	Opposite keying side
-21	All	ON	OFF	ON
-22	D,F,G	OFF	NONE	ON
-23	D,F,G	ON	NONE	ON
-26	F	MOM ON	NONE	ON
-27	E,L,N	MOM ON	OFF	MOM ON
-28	E	MOM ON	OFF	NONE
-29	F	MOM OFF	NONE	ON
-30	F	MOM ON	NONE	OFF
-31	E,F,K,L,M,N	MOM ON	OFF	ON
-32	E	NONE	ON	MOM ON

Part number: Consist of "MS27737" followed by the dash number and locking combination letter as shown in the tabulation. Example: MS27737-21A.


FIGURE 112-13. MS27737 toggle switches, environmentally sealed, lever-lock, solder terminals (MIL-S-3950).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Dash number	Current capacity (amperes)							
	28 V dc					115 V ac, 60 and 400 Hz		
	Load					Load		
	Lamp		Resistive	Inductive		Lamp	Resistive	Inductive
	2 Pole	4 Pole		2 Pole	4 Pole			
-1, -21, -22, and -23	7	5	20	15	12	4	15	15
-2, -3, -26, -27, -28, -29, -30, -31, and -32	5	4	18	10	10	2	11	8

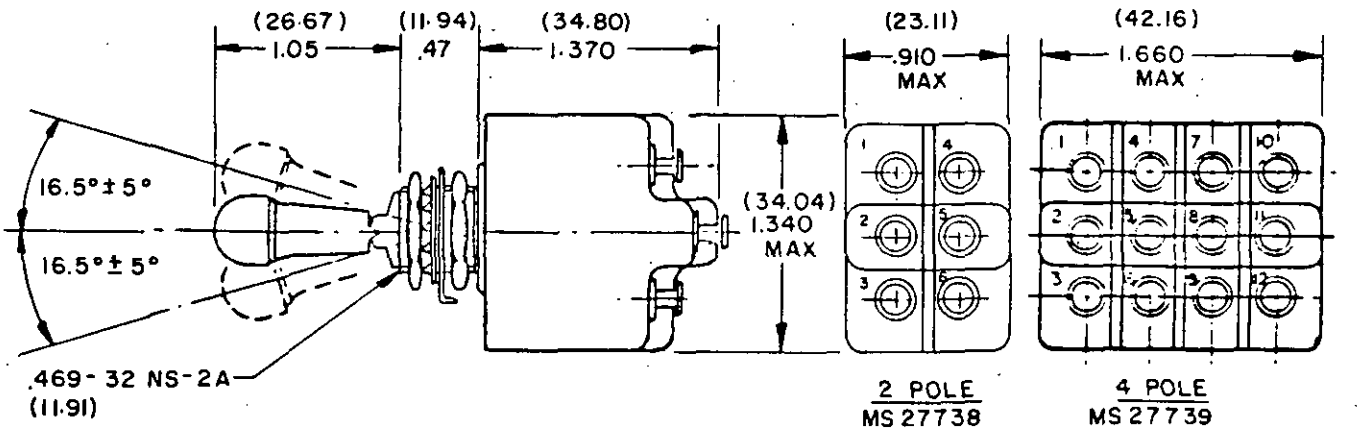

LOCKING COMBINATIONS
(KEYING SIDE)

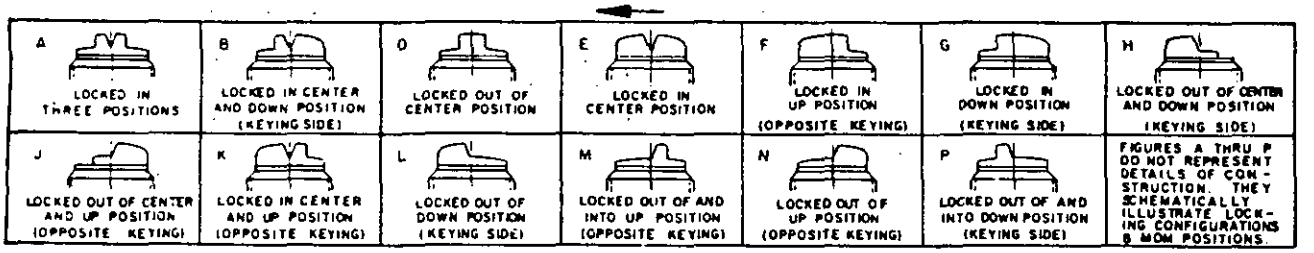


Dash number	Available locking combinations	Circuit with toggle lever in			Dash number	Available locking combinations	Circuit with toggle lever in		
		Keying side	Center	Opposite keying side			Keying side	Center	Opposite keying side
-1	All	ON	ON	ON	-27	E,L,N	MOM ON	OFF	MOM ON
-2	E,F,K,L,M,N	MOM ON	ON	ON	-28	E	MOM ON	OFF	NONE
-3	E,L,N	MOM ON	ON	MOM ON	-29	F	MOM OFF	NONE	ON
-21	All	ON	OFF	ON	-30	F	MOM ON	NONE	OFF
-22	D,F,G	OFF	NONE	ON	-31	E,F,K,L,M,N	MOM ON	OFF	ON
-23	D,F,G	ON	NONE	ON	-32	E	NONE	ON	MOM ON
-26	F	MOM ON	NONE	ON					

Part number: Consists of applicable MS number followed by the dash number and locking combination letter as shown in the tabulation. Example: MS27738-1A.

FIGURE 112-14. MS27738 and MS27739 toggle switches, environmentally sealed, lever-lock, solder terminals (MIL-S-3950).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:41Z
Check the source to verify that this is the current version before use.

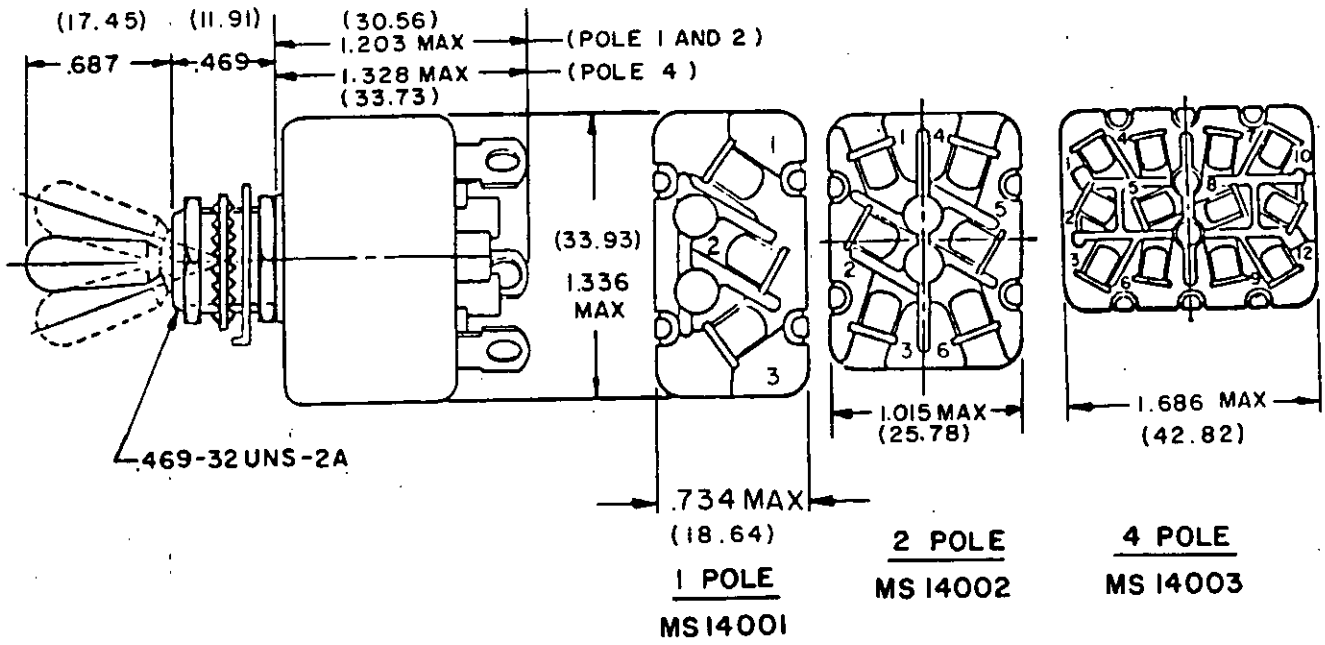


Dash number	Circuit with toggle lever in			Current capacity (amperes) 1/					
				28 V dc and 115 V ac, 400 Hz load			115 V ac, 60 Hz load		
	Opposite keyway side	Center	Keyway side	Lamp	Resistive	Inductive	Lamp	Resistive	Inductive
-212	ON	OFF	ON	7	25	15	7	20	15
-222	ON	NONE	OFF						
-232	ON	NONE	ON						
-242	ON	OFF	NONE						
-262	ON	NONE	MOM-ON						
-272	MOM-ON	OFF	MOM-ON						
-282	NONE	OFF	MOM-ON						
-292	ON	NONE	MOM-OFF						
-302	OFF	NONE	MOM-ON						
-312	ON	OFF	MOM-ON						

1/ See applicable MS sheet for 250 V ac/dc, 125 V dc and low level application information.











Part number: Consists of the applicable MS number followed by the dash number as shown in the tabulation.

FIGURE 112-15. MS14001, MS14002, and MS14003 toggle switches, positive break, environmentally sealed, solder lug, .469 mounting bushing (MIL-S-8834).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

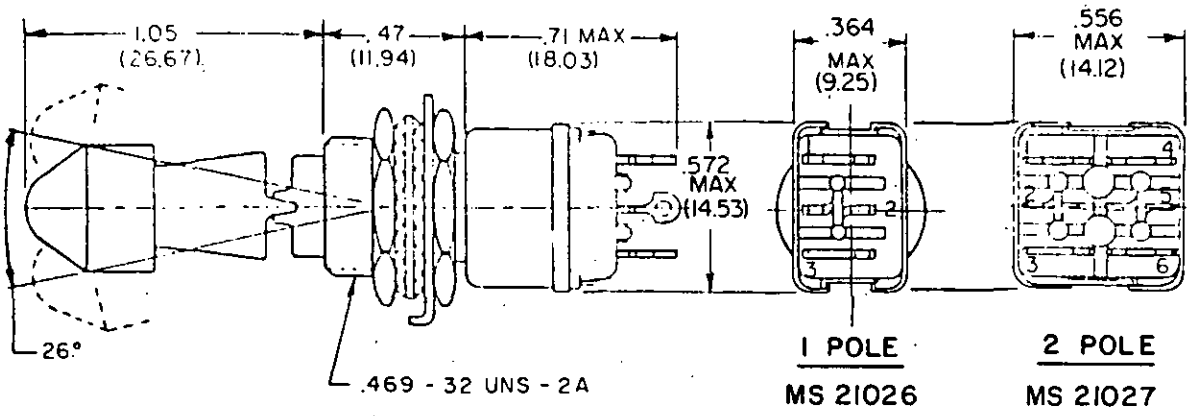

KEYWAY SIDE ⟶

A  LOCKED IN THREE POSITIONS	B  LOCKED IN CENTER POSITION	C  LOCKED IN KEYWAY SIDE	E  LOCKED OUT OF CENTER POSITION
F  LOCKED IN CTR POS MOM. EITHER SIDE	G  LOCKED OUT OF KEYWAY SIDE, MOM. KEYWAY SIDE	H  LOCKED OUT OF SIDE OPP KEYWAY, MOM. EITHER SIDE	J  LOCKED OUT OF & INTO SIDE OPP KEYWAY
K  LOCKED IN CTR POS, MOM. KEYWAY SIDE	L  LOCKED OUT OF SIDE OPP KEYWAY, MOM. KEYWAY SIDE	D  LOCKED OUT OF SIDE OPPOSITE KEYWAY	


MS dash number 1/		Locking comb.	Circuit with toggle lever in			Current capacity (in amperes)						Life low current level switching 5 mV
						Resistive load			Inductive load			
						28 V dc	115 V ac		28 V dc	115 V ac		
MS21027	MS21025		Opposite keyway side	Center position	Keyway side		60 Hz	400 Hz		60 Hz	400 Hz	
-711	-211	A,B,D	ON	OFF	ON	5	2	3	1	1	2	25 uA
-721	-221	C,E	ON	NONE	OFF							
-731	-231	C,E	ON	NONE	ON							
-741	-241	J,B	ON	OFF	NONE							
-771	-271	F,H	MOM-ON	OFF	MOM-ON							
-781	-281	K	NONE	OFF	MOM-ON							
-811	-311	G,K,L	ON	OFF	MOM-ON							
-821		K	NONE	ON	MOM-ON							
-831		A,B,C,D	ON	ON	ON							
-841		F,H	MOM-ON	ON	MOM-ON							
-851		G,K,L	ON	ON	MOM-ON							

1/ Seven hundred and 800 series have toggle water seal (15 foot head) (applicable to MS21027 only). Two hundred and 300 series have toggle water seal (0.5 inch head) (applicable to MS21026).

Part number: Consists of the applicable MS number followed by the locking combination letter and the three-digit number as shown in the tabulation. Example: MS21027C721.

FIGURE 112-16. MS21026 and MS21027 toggle switches, positive break, lever lock, miniature, toggle sealed, solder lug, .469 mounting bushing (MIL-S-8834).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

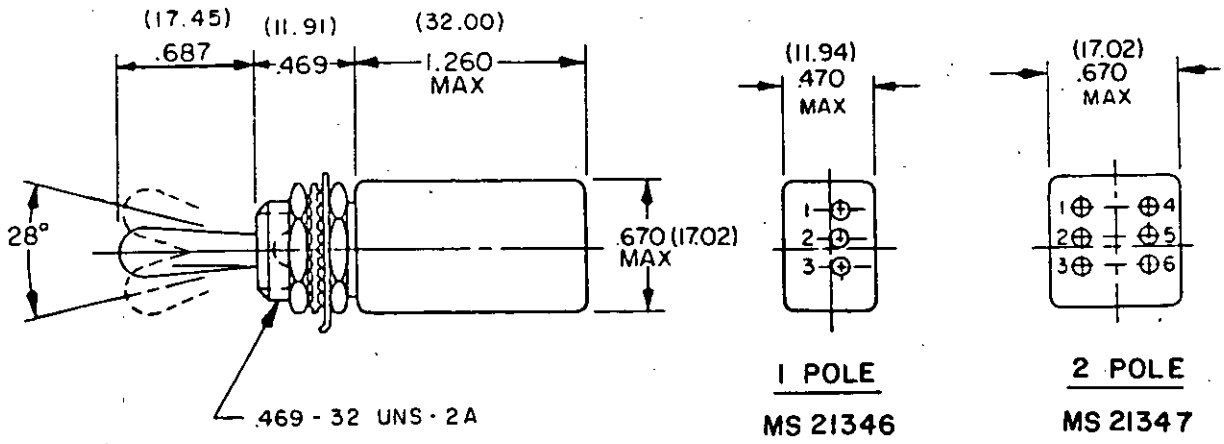


MS dash number 1/		Circuit with toggle lever in			Current capacity (in amperes)						Life low current level switching 5 mV
					Resistive load			Inductive load			
						115 V ac			115 V ac		
MS21347	MS21346	Opposite keyway side	Center position	Keyway side	28 V dc	60 Hz	400 Hz	28 V dc	60 Hz	400 Hz	
-711	-211	ON	OFF	ON							
-721	-221	ON	NONE	OFF							
-731	-231	ON	NONE	ON							
-741	-241	ON	OFF	NONE	5	2	3	1	1	2	25 µA
-771	-271	MOM-ON	OFF	MOM-ON							
-781	-281	NONE	OFF	MOM-ON							
-811	-311	ON	OFF	MOM-ON							
-821	-321	NONE	ON	MOM-ON							
-831		ON	ON	ON							
-841		MOM-ON	ON	MOM-ON							
-851		ON	ON	MOM-ON							


1/ Seven hundred and 800 series have toggle water seal (15 foot head) (applicable to MS21347 only). Two hundred and 300 series have toggle water seal (0.5 inch head) (applicable to MS21346).

Part number: Consists of the applicable MS number followed by the dash number as shown in the tabulation.

FIGURE 112-17. MS21346 and MS21347 toggle switches, positive break, miniature, toggle sealed, integrated wire terminals, .469 mounting bushing (MIL-S-8834).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

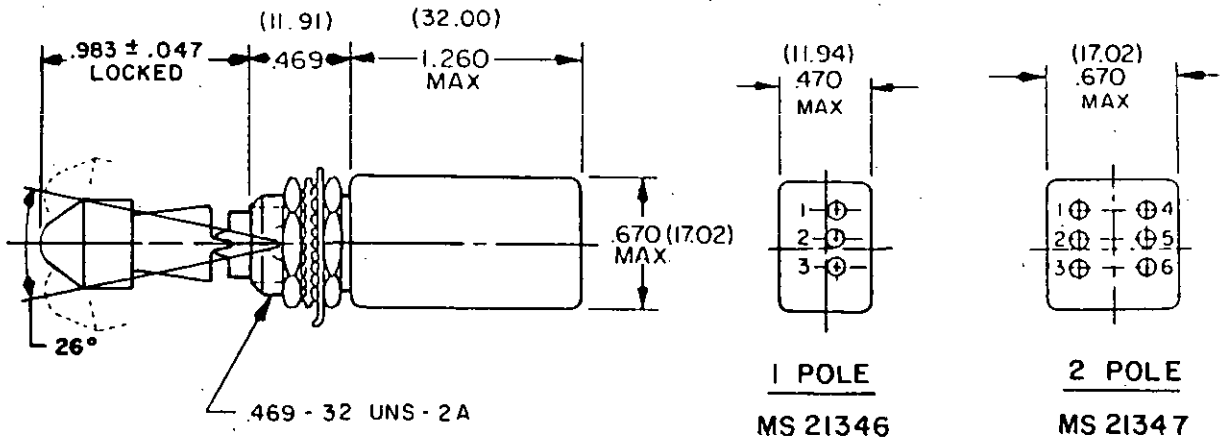

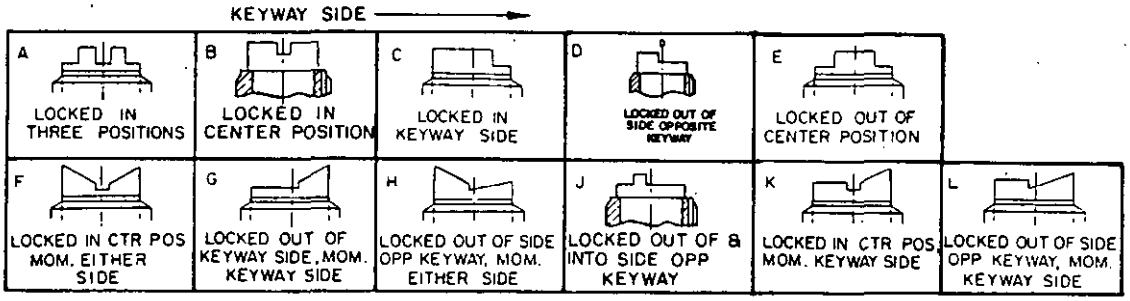


MS dash number 1/		Locking comb.	Circuit with toggle lever in			Current capacity (in amperes)						Life low current level switching 5 mV
						Resistive load			Inductive load			
							115 V ac			115 V ac		
MS21347	MS21346		Opposite keyway side	Center position	Keyway side	28 V dc	60 Hz	400 Hz	28 V dc	60 Hz	400 Hz	
-711	-211	A,B,D	ON	OFF	ON							
-721	-221	C,E	ON	NONE	OFF							
-731	-231	C,E	ON	NONE	ON							
-741	-241	J,B	ON	OFF	NONE	5	2	3	1	1	2	25 µA
-771	-271	F,H	MOM-ON	OFF	MOM-ON							
-781	-281	K	NONE	OFF	MOM-ON							
-811	-311	G,K,L	ON	OFF	MOM-ON							
-821	-321	K	NONE	ON	MOM-ON							
-831		A,B,C	ON	ON	ON							
-841		F,H	MOM-ON	ON	MOM-ON							
-851		G,K,L	ON	ON	MOM-ON							

1/ Seven hundred and 800 series have toggle water seal (15 foot head) (applicable to MS21347 only). Two hundred and 300 series have toggle water seal (0.5 inch head) (applicable to MS21346).

Part number: Consists of the applicable MS number followed by the locking combination letter and the dash number as shown in the tabulation. Example: MS21346D211.

FIGURE 112-18. MS21346 and MS21347 toggle switches, positive break, miniature, toggle sealed, integrated wire terminals, .469 mounting bushing (MIL-S-8834).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

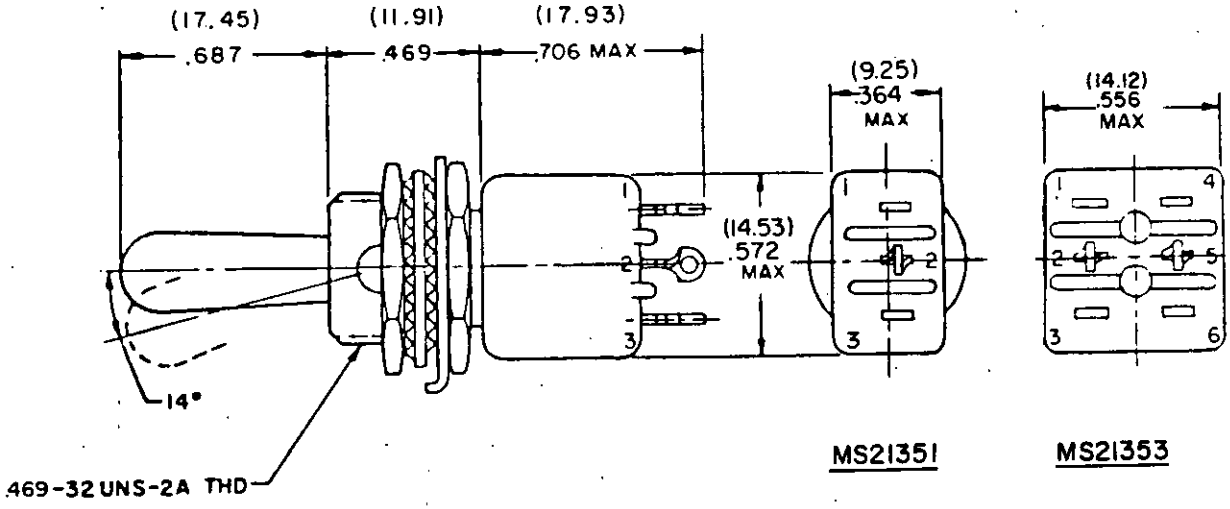


Dash number 1/		Circuit with toggle lever in			Current capacity (amperes)						Life low current level switching 5 mV
					Resistive load			Inductive load			
					28 V dc	115 V ac		28 V dc	115 V ac		
MS21353	MS21351	Opposite keyway side	Center	Keyway side		60 Hz	400 Hz		60 Hz	400 Hz	(μA)
-821	-321	NONE	ON	MOM-ON	5	2	3	1	1	2	25
-831		ON	ON	ON							
-841		MOM-ON	ON	MOM-ON							
-851		ON	ON	MOM-ON							

1/ Eight hundred series have toggle water seal (15 foot head) (applicable to MS21353 only). Three hundred series have toggle water seal (0.5 inch head) (applicable to MS21351).

Part number: Consists of the applicable MS number followed by the dash number as shown in the tabulation.

FIGURE 112-19. MS21351 and MS21353 toggle switches, positive break, special circuit, miniature, toggle sealed, solder lug, single pole (MIL-S-8834).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

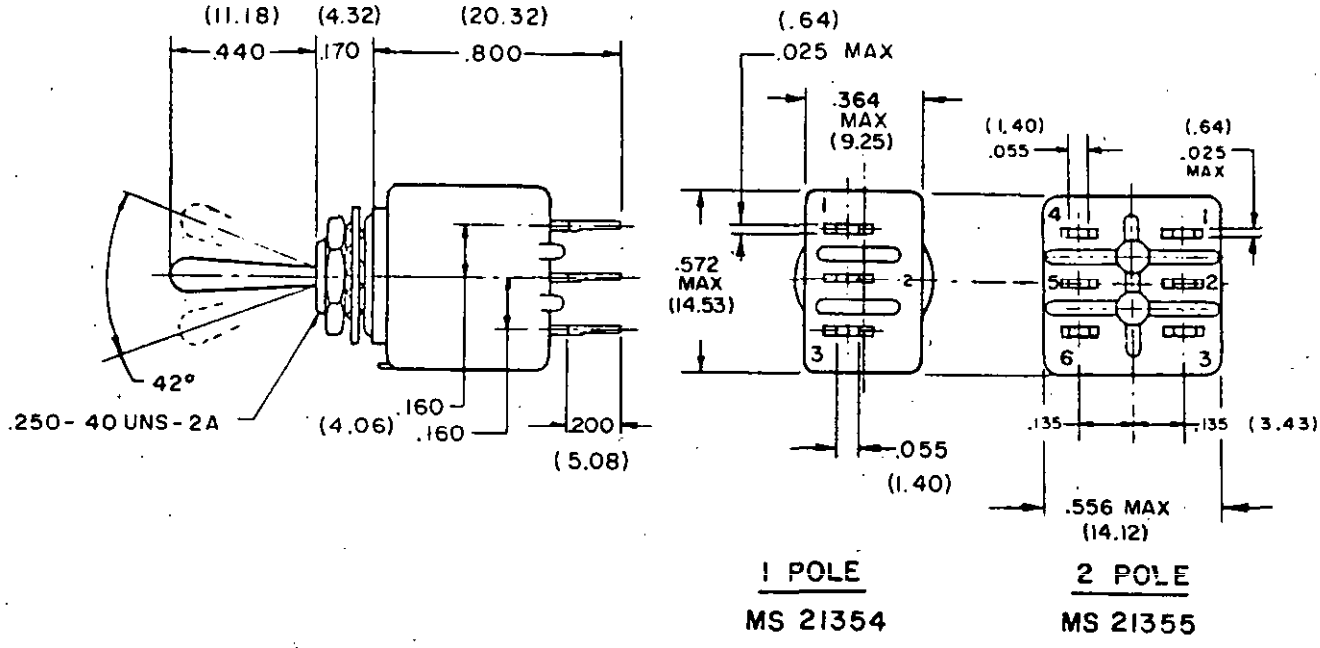


Dash number		Circuit with toggle lever in			Current capacity (amperes)						Life low current level switching 5 mV
					Resistive load			Inductive load			
					28 V dc	115 V ac		28 V dc	115 V ac		
MS21354	MS21355	Opposite locking tab side	Center	Locking tab side		60 Hz	400 Hz		60 Hz	400 Hz	
											(μA)
-211	-211	ON	OFF	ON							
-221	-221	ON	NONE	OFF							
-231	-231	ON	NONE	ON							
-241	-241	ON	OFF	NONE	5	2	3	1	1	2	25
-271	-271	MOM-ON	OFF	MOM-ON							
-281	-281	NONE	OFF	MOM-ON							
-311	-311	ON	OFF	MOM-ON							
-321	-321	NONE	ON	MOM-ON							
	-331	ON	ON	ON							
	-341	MOM-ON	ON	MOM-ON							
	-351	ON	ON	MOM-ON							

Part number: Consists of the applicable MS number followed by the dash number as shown in the tabulation.

FIGURE 112-20. MS21354 and MS21355 toggle switches, positive break, miniature, toggle sealed, printed circuit board terminals, .250 mounting bushing (MIL-S-8834).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

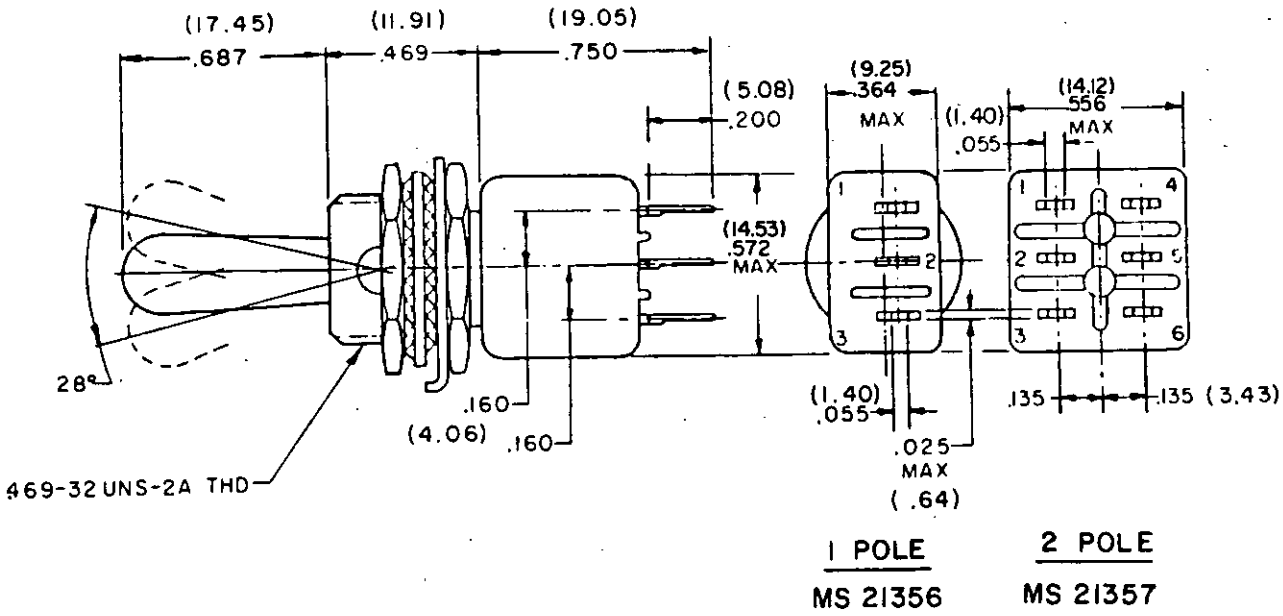


Dash number 1/		Circuit with toggle lever in			Current capacity (amperes)						Life low current level switching 5 mV
					Resistive load			Inductive load			
					28 V dc	115 V ac		28 V dc	115 V ac		
MS21357	MS21356	Opposite keyway side	Center	Keyway side		60 Hz	400 Hz		60 Hz	400 Hz	
											(μA)
-711	-211	ON	OFF	ON							
-721	-221	ON	NONE	OFF							
-731	-231	ON	NONE	ON							
-741	-241	ON	OFF	NONE	5	2	3	1	1	2	25
-771	-271	MOM-ON	OFF	MOM-ON							
-781	-281	NONE	OFF	MOM-ON							
-811	-311	ON	OFF	MOM-ON							
-821	-321	NONE	ON	MOM-ON							
-831		ON	ON	ON							
-841		MOM-ON	ON	MOM-ON							
-851		ON	ON	MOM-ON							

1/ Seven hundred and 800 series have toggle water seal (15 foot head) (applicable to MS21357 only). Two hundred and 300 series have toggle water seal (0.5 inch head) (applicable to MS21356).

Part number: Consists of the applicable MS number followed by the dash number as shown in the tabulation.

FIGURE 112-21. MS21356 and MS21357 toggle switches, positive break, miniature, toggle sealed, printed circuit board terminals, .469 mounting bushing (MIL-S-8834).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

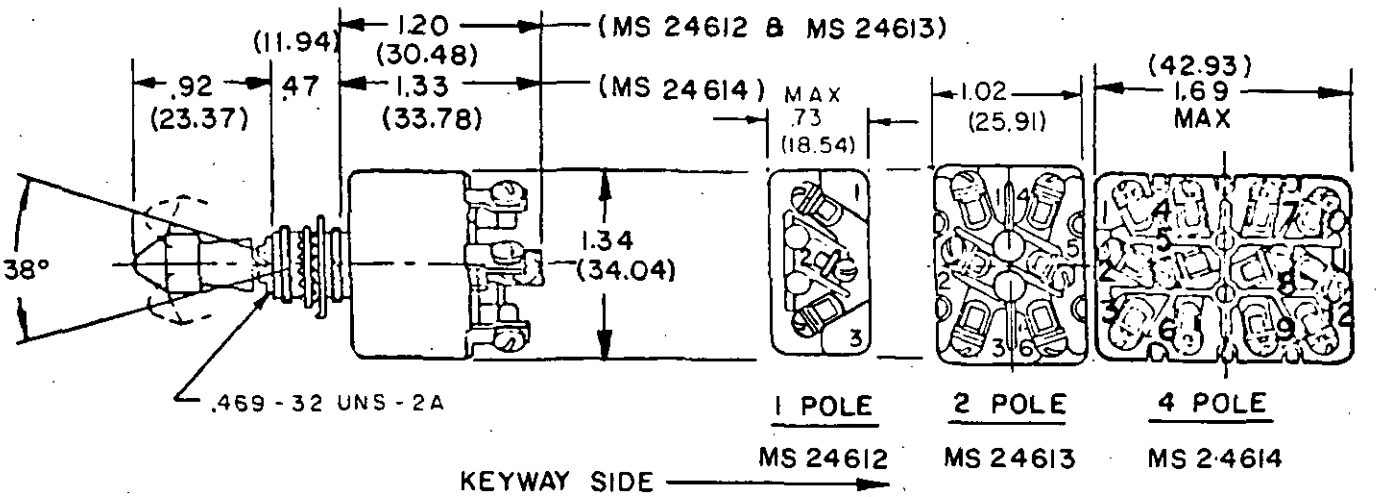

KEYWAY SIDE →

A LOCKED IN THREE POSITIONS	B LOCKED IN CENTER POSITION	C LOCKED IN KEYWAY SIDE	E LOCKED OUT OF CENTER POSITION
F LOCKED IN CTR POS MOM. EITHER SIDE	G LOCKED OUT OF KEYWAY SIDE, MOM. KEYWAY SIDE	H LOCKED OUT OF SIDE OPP KEYWAY, MOM. EITHER SIDE	J LOCKED OUT OF & INTO SIDE OPP KEYWAY
K LOCKED IN CTR POS, MOM. KEYWAY SIDE	L LOCKED OUT OF SIDE OPP KEYWAY, MOM. KEYWAY SIDE	M LOCKED OUT OF SIDE OPP KEYWAY, MOM. KEYWAY SIDE	N LOCKED OUT OF & INTO SIDE OPP KEYWAY, MOM KWY SIDE


Dash number	Available locking combinations	1/ Circuit with toggle lever in			Current capacity (amperes) 1/					
		Opposite keyway side	Center	Keyway side	28 V dc and 115 V ac, 400 Hz Load			115 V ac, 60 Hz Load		
					Lamp	Resistive	Inductive	Lamp	Resistive	Inductive
212	A,B,C,D,E	ON	OFF	ON	7	25	15	7	20	15
222	C,E	ON	NONE	OFF						
232	C,E	ON	NONE	ON						
242	J,B	ON	OFF	NONE						
262	L	ON	NONE	MOM-ON						
272	F,H	MOM-ON	OFF	MOM-ON						
282	K	NONE	OFF	MOM-ON						
292	L	ON	NONE	MOM-OFF						
302	L	OFF	NONE	MOM-ON						
312	G,K,M,N	ON	OFF	MOM-ON						

1/ See applicable MS sheet for 250 V ac/dc, 125 V dc and low level application information.

Part number: Consists of the applicable MS number followed by the locking combination letter and the three-digit number as shown in the tabulation. Example: MS24612A212.

FIGURE 112-22. MS24612, MS24613, and MS24614 toggle switches, positive break, lever lock, environmentally sealed, screw terminals, .469 mounting bushing (MIL-S-8834).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:41Z
Check the source to verify that this is the current version before use.

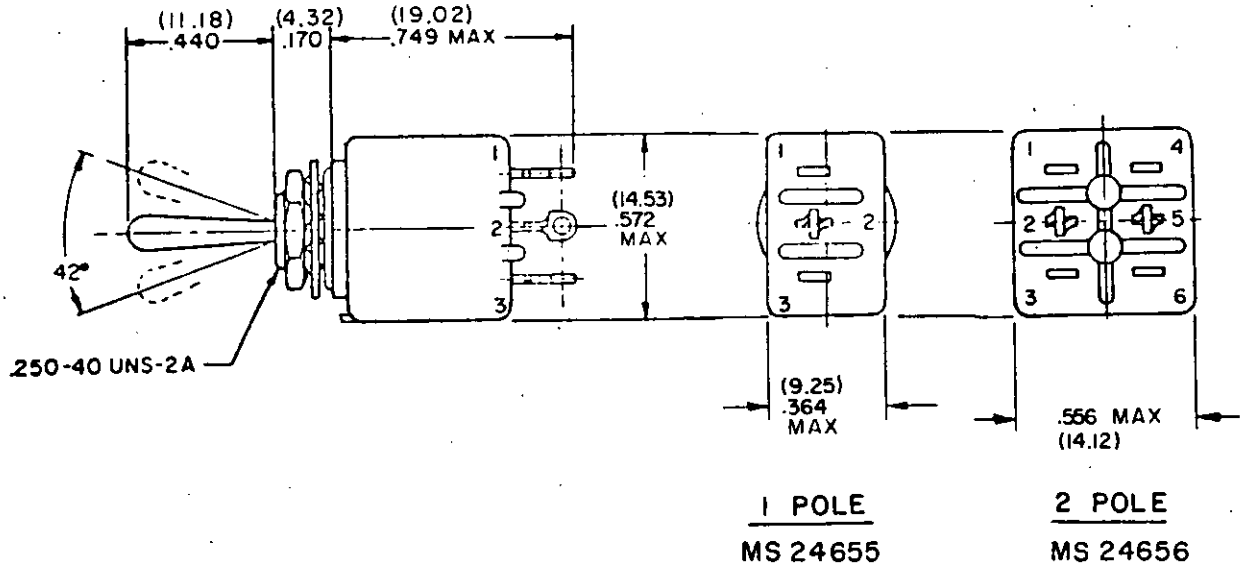


Dash number		Circuit with toggle lever in			Current capacity (amperes)						Life low current level switching 5 mV
					Resistive load			Inductive load			
					28 V dc	115 V ac		28 V dc	115 V ac		
MS21355	MS21356	Opposite locking tab side	Center	Locking tab side		60 Hz	400 Hz		60 Hz	400 Hz	
											(μA)
-211	-211	ON	OFF	ON							
-221	-221	ON	NONE	OFF							
-231	-231	ON	NONE	ON							
-241	-241	ON	OFF	NONE	5	2	3	1	1	2	25
-271	-271	MOM-ON	OFF	MOM-ON							
-281	-281	NONE	OFF	MOM-ON							
-311	-311	ON	OFF	MOM-ON							
-321	-321	NONE	ON	MOM-ON							
	-331	ON	ON	ON							
	-341	MOM-ON	ON	MOM-ON							
	-351	ON	ON	MOM-ON							

Part number: Consists of the applicable MS number followed by the dash number as shown in the tabulation.

FIGURE 112-23. MS24655 and MS24656 toggle switches, positive break, miniature, toggle sealed, solder lug, .250 mounting bushing (MIL-S-8834).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

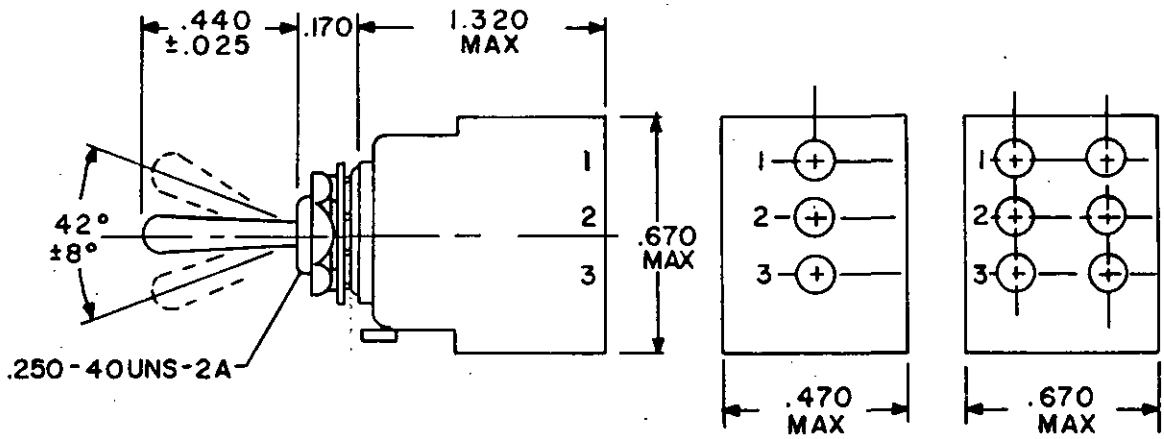



Dash number		1/ Circuit with toggle lever in			Current capacity (amperes)						Life low current level switching 5 mV
					Resistive load			Inductive load			
MS21355	MS21356	Opposite locking tab side	Center	Locking tab side	28 V dc	115 V ac 60 Hz	115 V ac 400 Hz	28 V dc	115 V ac 60 Hz	115 V ac 400 Hz	(μA)
-211W	-211W	ON	OFF	ON	-						
-221W	-221W	ON	NONE	OFF		1					
-231W	-231W	ON	NONE	ON							
-241W	-241W	ON	OFF	NONE	5	2	3	1	1	2	25
-271W	-271W	MOM-ON	OFF	MOM-ON							
-281W	-281W	NONE	OFF	MOM-ON							
-311W	-311W	ON	OFF	MOM-ON							
-321W	-321W	NONE	ON	MOM-ON							
	-331W	ON	ON	ON							
	-341W	MOM-ON	ON	MOM-ON							
	-351W	ON	ON	MOM-ON							

Part number: Consists of the applicable MS number followed by the dash number as shown in the tabulation.

FIGURE 112-24. MS24655 and MS24656 toggle switches, positive break, miniature, toggle sealed, integrated wire terminals, .250 mounting bushing (MIL-S-8834).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:41Z
Check the source to verify that this is the current version before use.

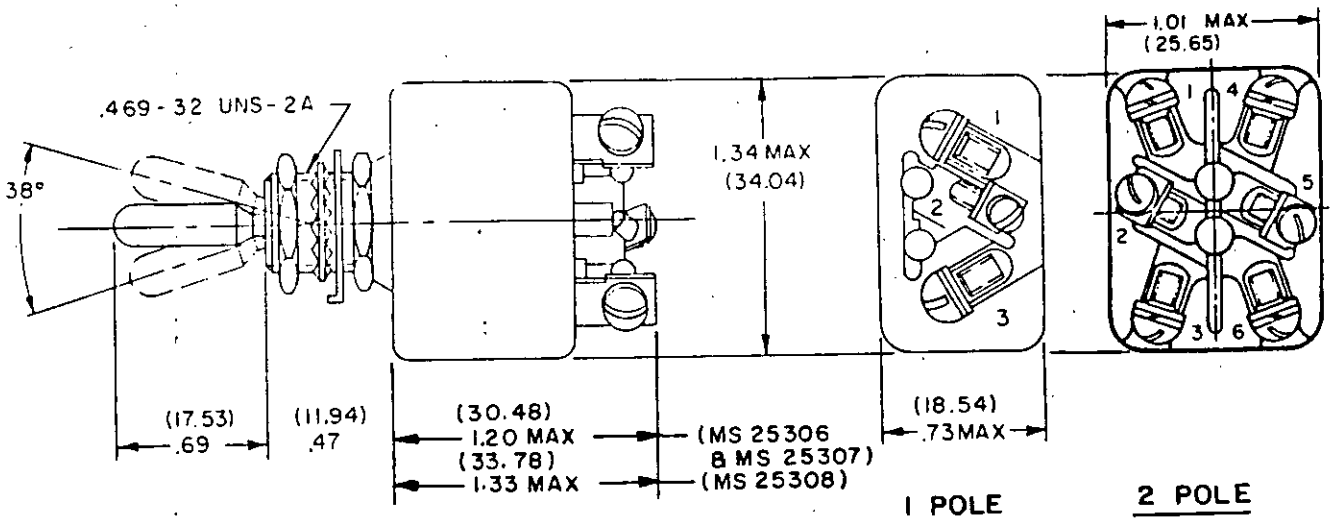

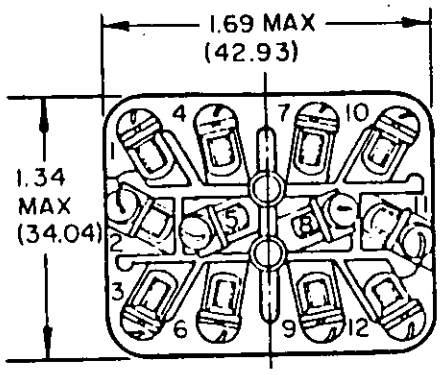


Dash number	Circuit with toggle lever in			Current capacity (amperes) 1/					
				28 V dc and 115 V ac, 400 Hz			115 V ac, 60 Hz		
				Load			Load		
	Opposite keyway side	Center	Keyway side	Lamp	Resistive	Inductive	Lamp	Resistive	Inductive
-212	ON	OFF	ON	7	25	15	7	20	15
-222	ON	NONE	OFF						
-232	ON	NONE	ON						
-242	ON	OFF	NONE						
-262	ON	NONE	MOM-ON						
-272	MOM-ON	OFF	MOM-ON						
-282	NONE	OFF	MOM-ON						
-292	ON	NONE	MOM-OFF						
-302	OFF	NONE	MOM-ON						
-312	ON	OFF	MOM-ON						

1/ See applicable MS sheet for 250 V ac/dc, 125 V dc and low level application information.

Part number: Consists of the applicable MS number followed by the dash number as shown in the tabulation.

FIGURE 112-25. MS25306, MS25307, and MS25308 toggle switches, positive break, environmentally sealed, screw terminals, .469 mounting bushing (MIL-S-8834).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

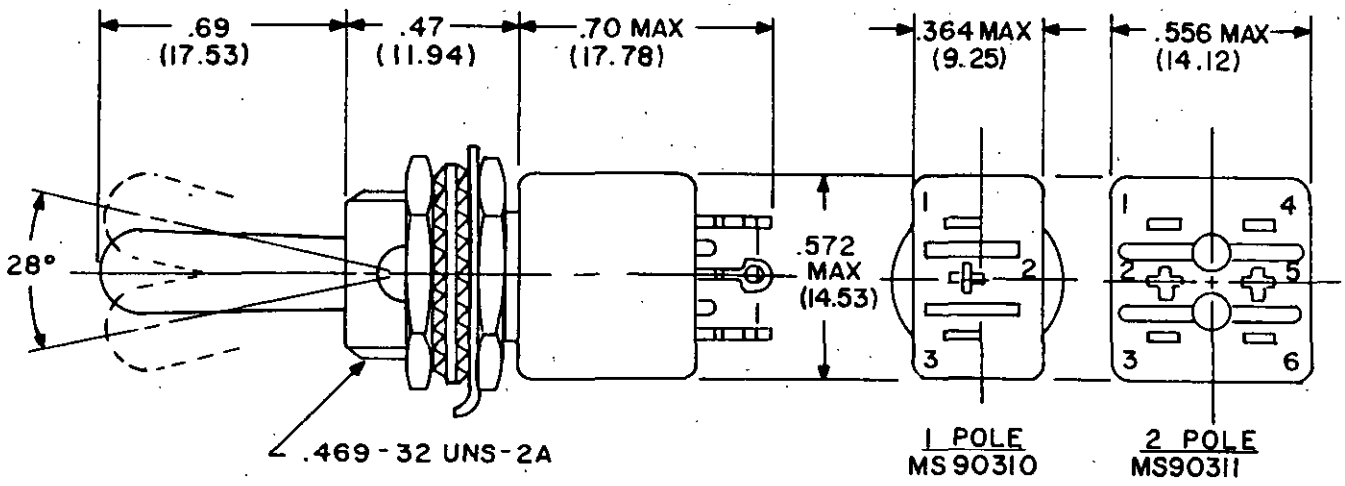


Dash number 1/		Circuit with toggle lever in			Current capacity (amperes)						Life low current level switching 5 mV
					Resistive load			Inductive load			
					28 V dc	115 V ac		28 V dc	115 V ac		
MS90311	MS90310	Opposite keyway side	Center	Keyway side		60 Hz	400 Hz		60 Hz	400 Hz	
											(μA)
-711	-211	ON	OFF	ON							
-721	-221	ON	NONE	OFF							
-731	-231	ON	NONE	ON							
-741	-241	ON	OFF	NONE	5	2	3	1	1	2	25
-771	-271	MOM-ON	OFF	MOM-ON							
-781	-281	NONE	OFF	MOM-ON							
-811	-311	ON	OFF	MOM-ON							

1/ Seven hundred and 800 series have toggle water seal (15 foot head) (applicable to MS90311 only). Two hundred and 300 series have toggle water seal (0.5 inch head) (applicable to MS90310).

Part number: Consists of the applicaple MS number followed by the dash number as shown in the tabulation.

FIGURE 112-26. MS90310 and MS90311 toggle switches, miniature, toggle sealed, solder lug, .469 mounting bushing (MIL-S-8834).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:41Z
Check the source to verify that this is the current version before use.

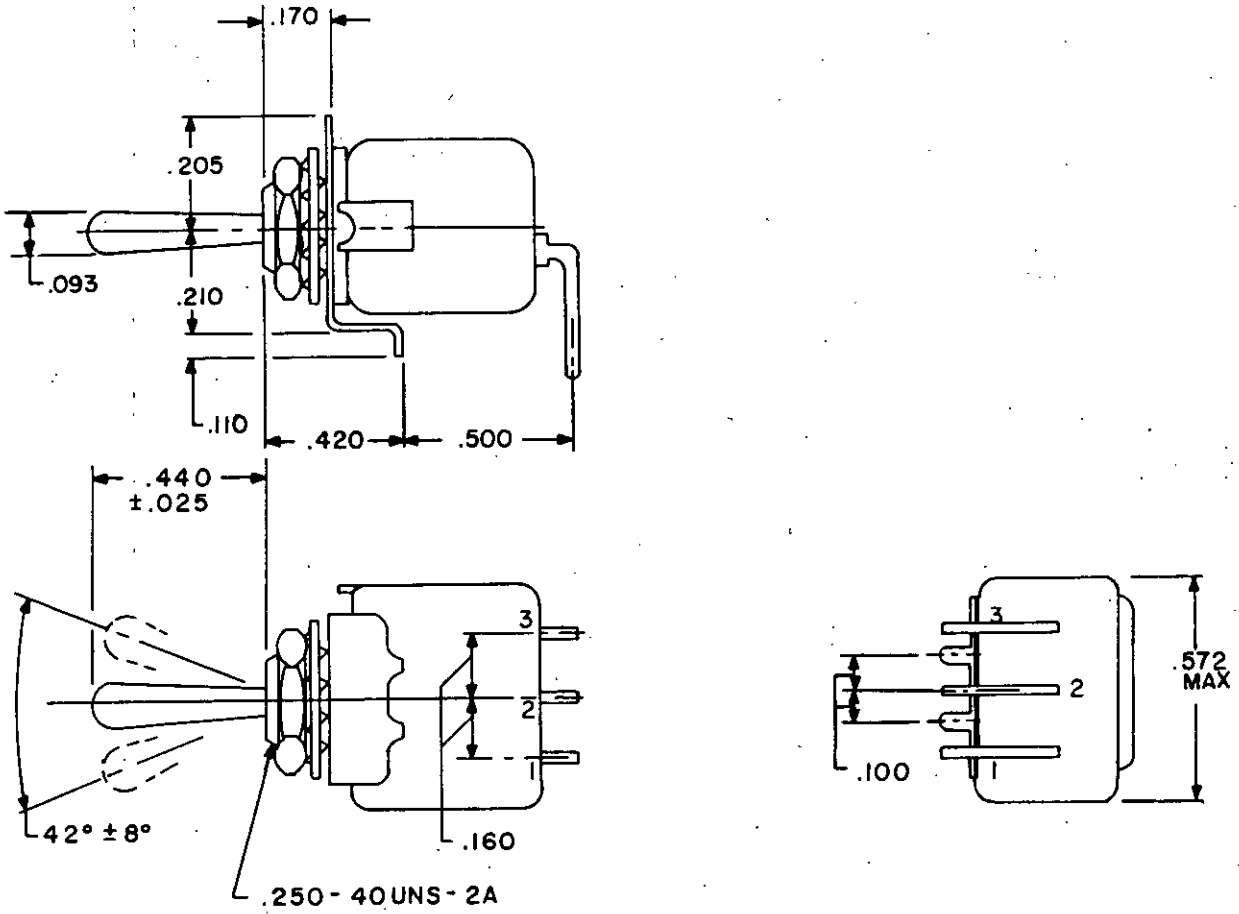


MS dash no.	Circuit made between terminals as indicated with toggle lever in these positions (a)			Current capacity in amperes						Life, low current level switching 5 mV
				Resistive load			Inductive load			
	Opposite locking tab side (d)	Center position	Locking tab side (d)	28 volts dc	115 volts 60 hertz ac	115 volts 400 hertz ac	28 volts dc	115 volts 60 hertz ac	115 volts 400 hertz ac	
-211	ON 2-3	OFF	ON 1-2	5	2	3	1	1	2	25 microamperes
-221		NONE	OFF							
-231			ON 1-2							
-241		OFF	NONE							
-271	MOM-ON 2-3		MOM-ON 1-2							
-281	NONE									
-311	ON 2-3									
-321	NONE	ON 2-3	MOM-ON 1-2							

Part number: Consists of "MS21433" followed by the dash number as shown in the tabulation.

FIGURE 112-27. Switches, toggle, positive break, miniature, toggle sealed, printed circuit board terminals, right angle mount, (MS21433).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

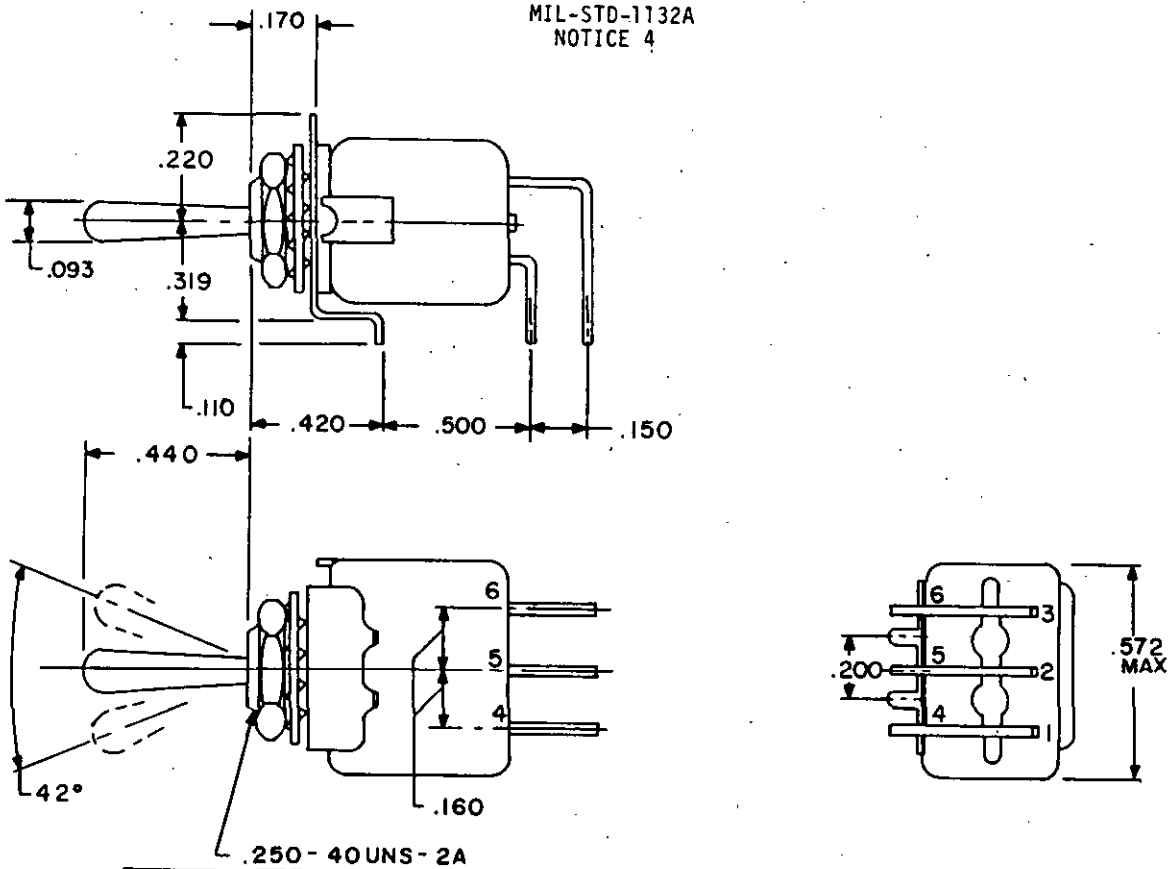


MS dash no.	Circuit made between terminals as indicated with toggle lever in these positions (a)			Current capacity in amperes						Life, low current level switching 5 mV
				Resistive load			Inductive load			
	Opposite locking tab side (d)	Center position	Locking tab side (d)	28 volts dc	115 volts 60 hertz ac	115 volts 400 hertz ac	28 volts dc	115 volts 60 hertz ac	115 volts 400 hertz ac	
-211	ON 2-3, 5-6	OFF	ON 1-2, 4-5	5	2	3	1	1	2	25 microamperes
-221		NONE	OFF							
-231			ON 1-2, 4-5							
-241		OFF	NONE							
-271	MOM-ON 2-3, 5-6		MOM-ON 1-2, 4-5							
-281	NONE									
-311	ON 2-3, 5-6									
-331	ON 2-3, 5-6	ON 2-3, 4-5	ON 1-2, 4-5							
-341	MOM-ON 2-3, 5-6	ON 2-3, 4-5	MOM-ON 1-2, 4-5							
-321	NONE	ON 2-3, 5-6	MOM-ON 1-2, 4-5							
-351	ON 2-3, 5-6	ON 2-3, 4-5	MOM-ON 1-2, 4-5							


Part number: Consists of "MS21434" followed by the dash number as shown in the tabulation.

FIGURE 112-28. Switches, toggle, positive break, miniature, toggle sealed, printed circuit board terminals, right angle mount (MS21434).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

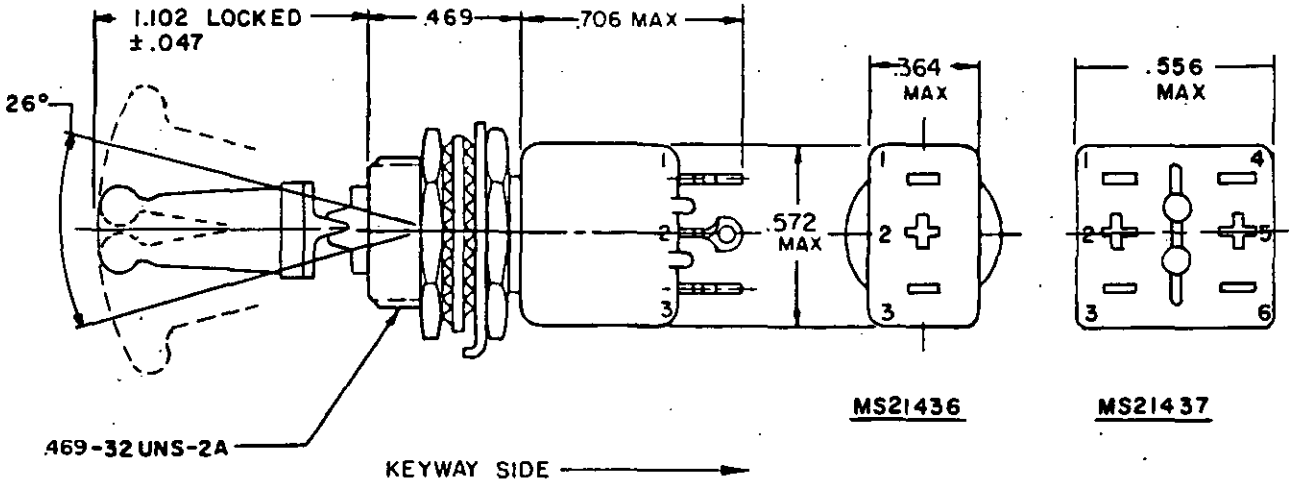

KEYWAY SIDE →

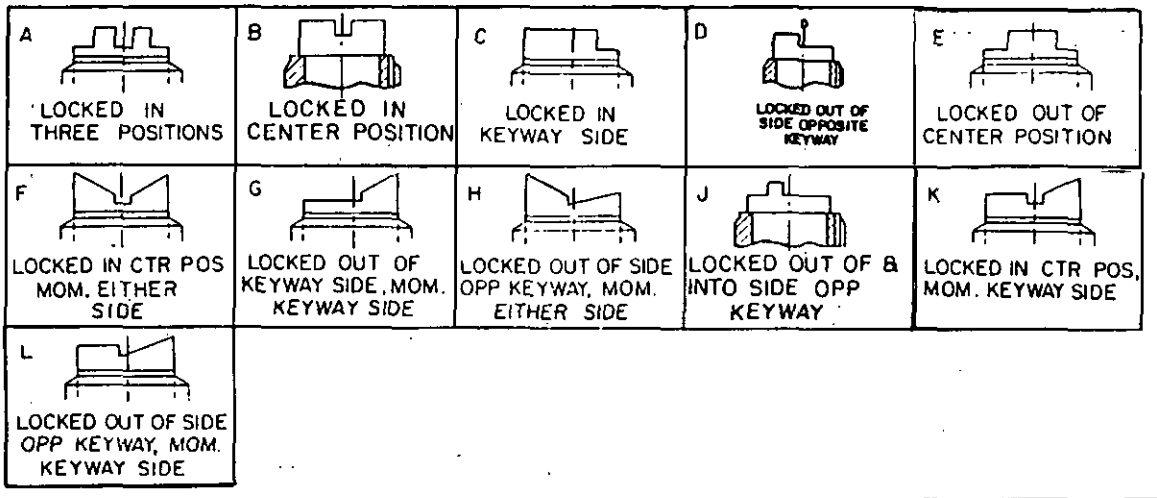

MS dash number 1/		Locking comb.	Circuit with toggle lever in these positions:			Current capacity (in amperes)						Life low current level switching 5 mV
						Resistive load			Inductive load			
							115 V ac			115 V ac		
MS21436	MS21437		Opposite keyway side	Center position	Keyway side	28 V dc	60 Hz	400 Hz	28 V dc	60 Hz	400 Hz	
211	711	A,B,D	ON	OFF	ON							
221	721	C,E	ON	NONE	OFF							
231	731	C,E	ON	NONE	ON							
241	741	J,B	ON	OFF	NONE	5	2	3	1	1	2	25 µA
271	771	F,H	MOM-ON	OFF	MOM-ON							
281	781	K	NONE	OFF	MOM-ON							
311	811	G,K,L	ON	OFF	MOM-ON							
	821	K	NONE	ON	MOM-ON							
	831	A,B,C,D	ON	ON	ON							
	841	F,H	MOM-ON	ON	MOM-ON							
	851	G,K,L	ON	ON	MOM-ON							

1/ Seven hundred and 800 series have toggle water seal (15 foot head) (applicable to MS21437 only). Two hundred and 300 series have toggle water seal (0.5 inch head) (applicable to MS21436).

Part number: Consists of the applicable MS number followed by the locking combination letter and the three-digit number as shown in the tabulation. Example: MS21437A711.

FIGURE 112-29. Switch, toggle, positive break, lever lock, miniature, toggle sealed, solder lug, .469 mounting bushing (MS21436 and MS21437).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Load	Electrical ratings		
	Sea level		50,000 feet
	28 V dc	115 V ac, 60 Hz	28 V dc
	Amperes	Amperes	Amperes
Resistive - - -	5	5	5
Inductive - - -	3	5	2.5
Lamp - - - - -	2.4	1.5	2.4


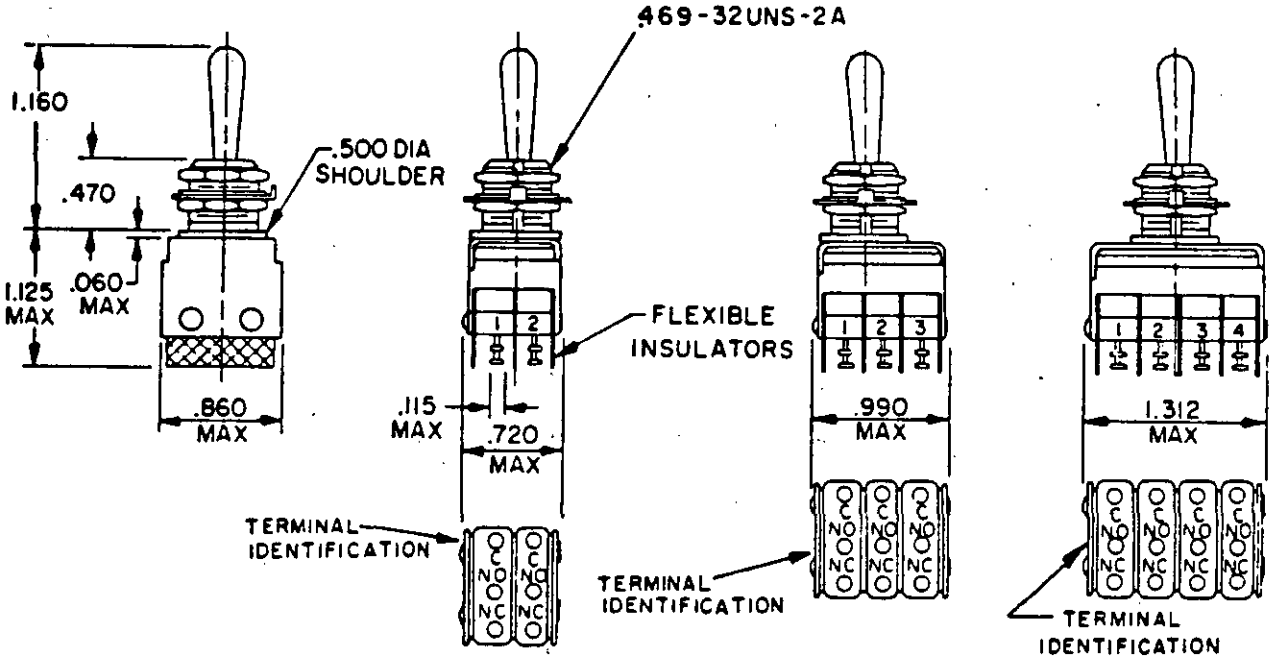


FIGURE A FIGURE B FIGURE C

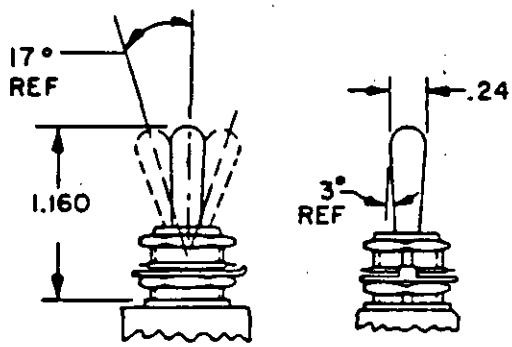

STANDARD LEVER

FIGURE 112-30. Switch assemblies, sensitive, toggle lever (with integral leaf), 5 amperes, unsealed (MIL-S-8805/26).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:41Z
Check the source to verify that this is the current version before use.

TABLE I. Part numbers and characteristics.

Dash number	Figure	Lever	Circuit configuration (see table II)	Switch action		
				Opposite keyway	Center	Keyway
-001	A	Standard	1	Main	None	Main
-002	C	Standard	4	Main	None	Main
-005	A	Standard	2	Mom	Main	Mom
-007	A	Standard	2	Main	Main	Main
-009	A	Standard	2	Mom	Main	Main
-011	B	Standard	3	Mom	Main	Mom
-013	B	Standard	3	Main	Main	Main

TABLE II. Circuit configuration.

Circuit configuration	Switch pole number	Circuit closed with toggle lever in		
		Opposite keyway side	Center	Keyway side
1	1	C-NC	None	C-NO
	2	C-NC	None	C-NO
2	1	C-NO	C-NC	C-NC
	2	C-NC	C-NC	C-NO
3	1	C-NO	C-NC	C-NC
	2	C-NC	C-NC	C-NO
	3	C-NO	C-NC	C-NC
4	1	C-NC	None	C-NO
	2	C-NC	None	C-NO
	3	C-NC	None	C-NO
	4	C-NC	None	C-NO

Operating characteristics:
Coincidence of operating and releasing points: All poles transfer within 10° of lever travel.

Part number: Consists of "M8805/26" followed by the dash number shown in table I.

FIGURE 112-30 Switch assemblies, sensitive, toggle lever (with integral leaf), 5 amperes, unsealed (MIL-S-8805/26) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Load	Electrical ratings		
	Sea level		50,000 feet
	28 V dc	115 V ac, 60 Hz	28 V dc
	Amperes	Amperes	Amperes
Resistive - - -	5	5	5
Inductive - - -	3	5	2.5
Lamp- - - - - -	2.4	1.5	2.4

Inches	mm
.115	2.92
.469	11.91
.720	18.29
.860	21.84
.990	25.15
1.125	28.58
1.312	33.32
1.65	41.91

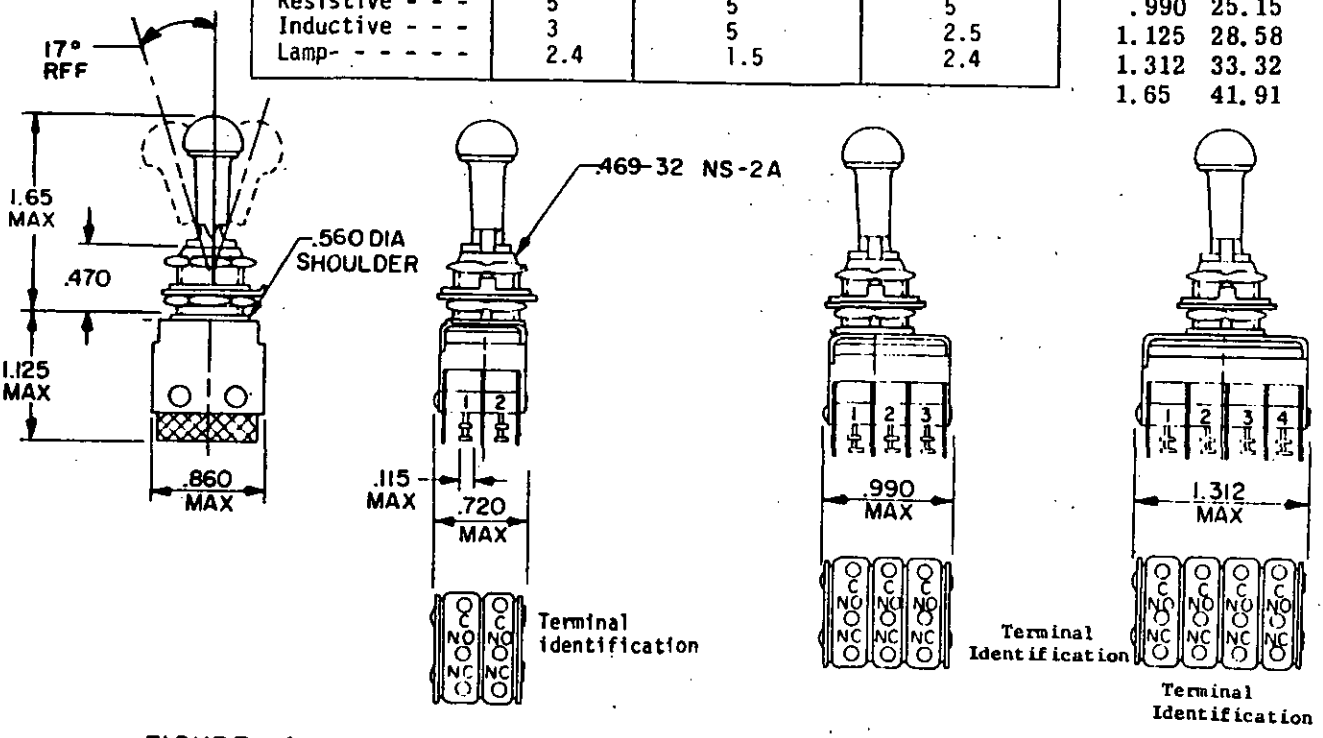


FIGURE A

KEYING SIDE →

FIGURE B

FIGURE C

"A" LOCKED IN THREE POSITIONS	"B" LOCKED IN CENTER AND EXTREME POSITION KEYWAY SIDE	"D" LOCKED OUT OF CENTER POSITION	"E" LOCKED IN CENTER POSITION
"F" LOCKED IN EXTREME POSITION OPPOSITE KEYWAY	"G" LOCKED IN EXTREME POSITION KEYWAY SIDE	"J" LOCKED OUT OF CENTER AND EXTREME POSITION OPPOSITE KEYWAY	"K" LOCKED IN CENTER AND EXTREME POSITION OPPOSITE KEYWAY
"L" LOCKED OUT OF EXTREME POSITION KEYWAY SIDE	"M" LOCKED OUT OF AND INTO EXTREME POSITION OPPOSITE KEYWAY	"N" LOCKED OUT OF EXTREME POSITION OPPOSITE KEYWAY	"P" LOCKED OUT OF AND INTO EXTREME POSITION KEYWAY SIDE

FIGURE 112-31. Switch assemblies, sensitive, lever lock, 5 amperes, unsealed (MIL-S-8805/92).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

TABLE I. Part numbers and characteristics.

Dash number	Figure	Locking combination	Circuit configuration (see table II)	Switch action		
				Opposite keyway	Center	Keyway
-001	A	D	1	Main	None	Main
-002	C	D	4	Main	None	Main
-003	C	F	4	Main	None	Main
-004	C	G	4	Main	None	Main
-005	A	E	2	Mom	Main	Mom
-006	A	A	2	Main	Main	Main
-007	A	D	2	Main	Main	Main
-008	A	E	2	Main	Main	Main
-009	A	F	2	Main	Main	Main
-010	A	G	2	Main	Main	Main
-011	A	J	2	Main	Main	Main
-012	A	K	2	Main	Main	Main
-013	A	L	2	Main	Main	Main
-014	A	M	2	Main	Main	Main
-015	A	N	2	Main	Main	Main
-016	A	B	2	Mom	Main	Main
-017	A	E	2	Mom	Main	Main
-018	A	P	2	Mom	Main	Main
-019	B	A	3	Main	Main	Main

TABLE II. Circuit configuration.

Circuit configuration	Switch pole number	Circuit closed with toggle lever in		
		Opposite keyway side	Center	Keyway side
1	1	C-NC	None	C-NO
	2	C-NC	None	C-NO
2	1	C-NO	C-NC	C-NC
	2	C-NC	C-NC	C-NO
3	1	C-NO	C-NC	C-NC
	2	C-NC	C-NC	C-NO
	3	C-NO	C-NC	C-NC
4	1	C-NC	None	C-NO
	2	C-NC	None	C-NO
	3	C-NC	None	C-NO
	4	C-NC	None	C-NO

Operating characteristics:
Coincidence of operating and releasing points: All poles transfer within 10°of lever travel.
Locking arrangement: Positive locking is accomplished and prevents motion of the toggle lever until the locking mechanism is manually released.
Locking mechanism release: The force required to release the locking mechanism is 3 to 5 pounds.

Part number: Consists of "M8805/92" followed by the dash number shown in table I.


FIGURE 112-31. Switch assemblies, sensitive, lever lock, 5 amperes, unsealed (MIL-S-8805/92) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.


Load	Electrical ratings (amperes)		
	Sea level		50,000 feet
	28 V dc	115 V ac, 60 Hz	28 V dc
Resistive - - - -	7.0	7.0	4.0
Inductive - - - -	4.0	7.0	2.5
Lamp- - - - - - -	2.5	2.0	2.5


Inches	mm
.13	3.30
.240	6.10
.50	12.70
.670	17.02
.720	18.29
.930	23.62
1.15	29.21
1.16	29.46
1.17	29.72
1.30	33.02

SIDE VIEW FOR TYPE I

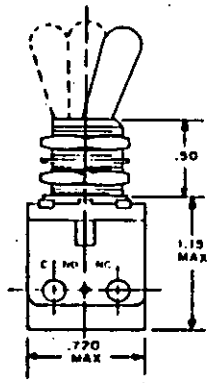

SIDE VIEW FOR TYPES II THROUGH IV

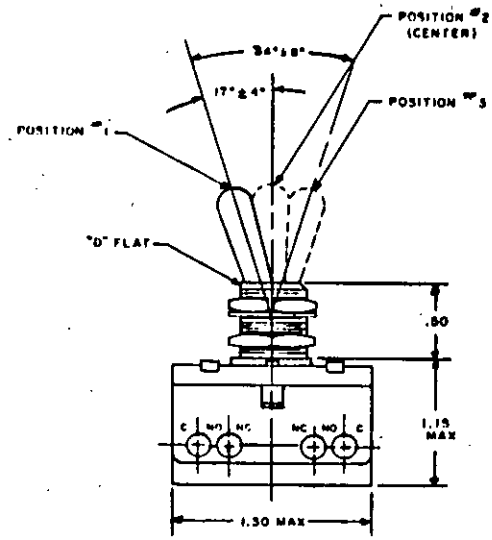

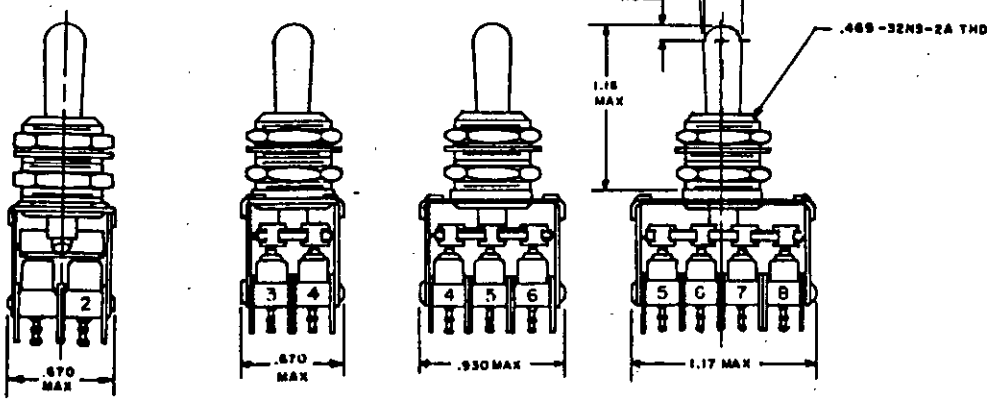

TYPE I TYPE II TYPE III TYPE IV

Part number M8805/93-				Operation
Type I 2PDT	Type II 4PDT	Type III 6PDT	Type IV 8PDT	
001	008	015	022	Maint-maint-maint
002	009	016	023	Mom-maint-maint
003	010	017	024	Maint-maint-mom
004	011	018	025	Mom-maint-mom
005	012	019	026	Maint-none-maint
006	013	020	027	Mom-none-maint
007	014	021	028	Maint-none-mom

FIGURE 112-32. Switch assemblies, sensitive, lever, unsealed, 7 amperes (MIL-S-8805/93).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

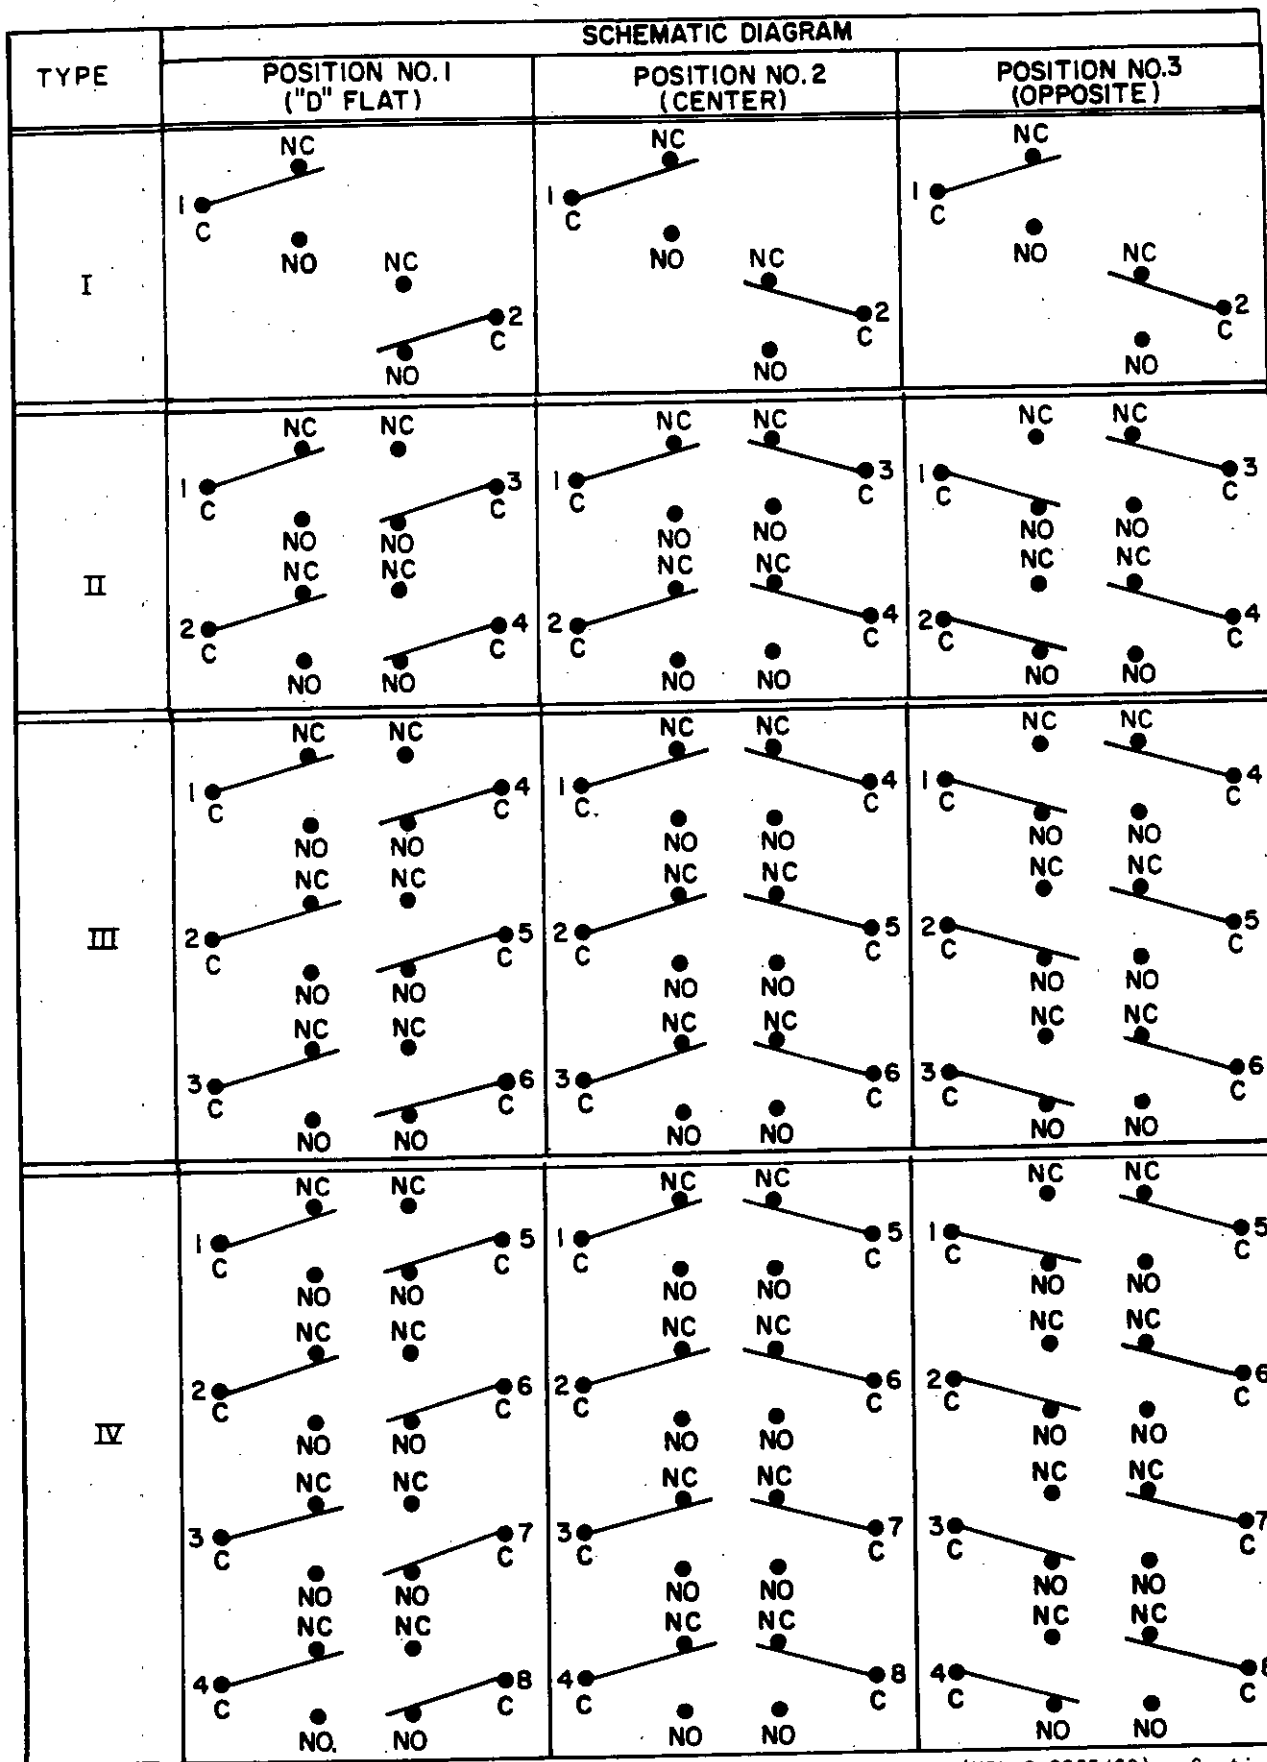


FIGURE 112-32. Switch assemblies, sensitive, lever, unsealed, 7 amperes (MIL-S-8805/93) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Load	Sea level		50,000 feet
	28 V dc	115 V ac, 60 Hz	28 V dc
Resistive	Amperes 7	Amperes 7	Amperes 4
Inductive	4	7	2.5


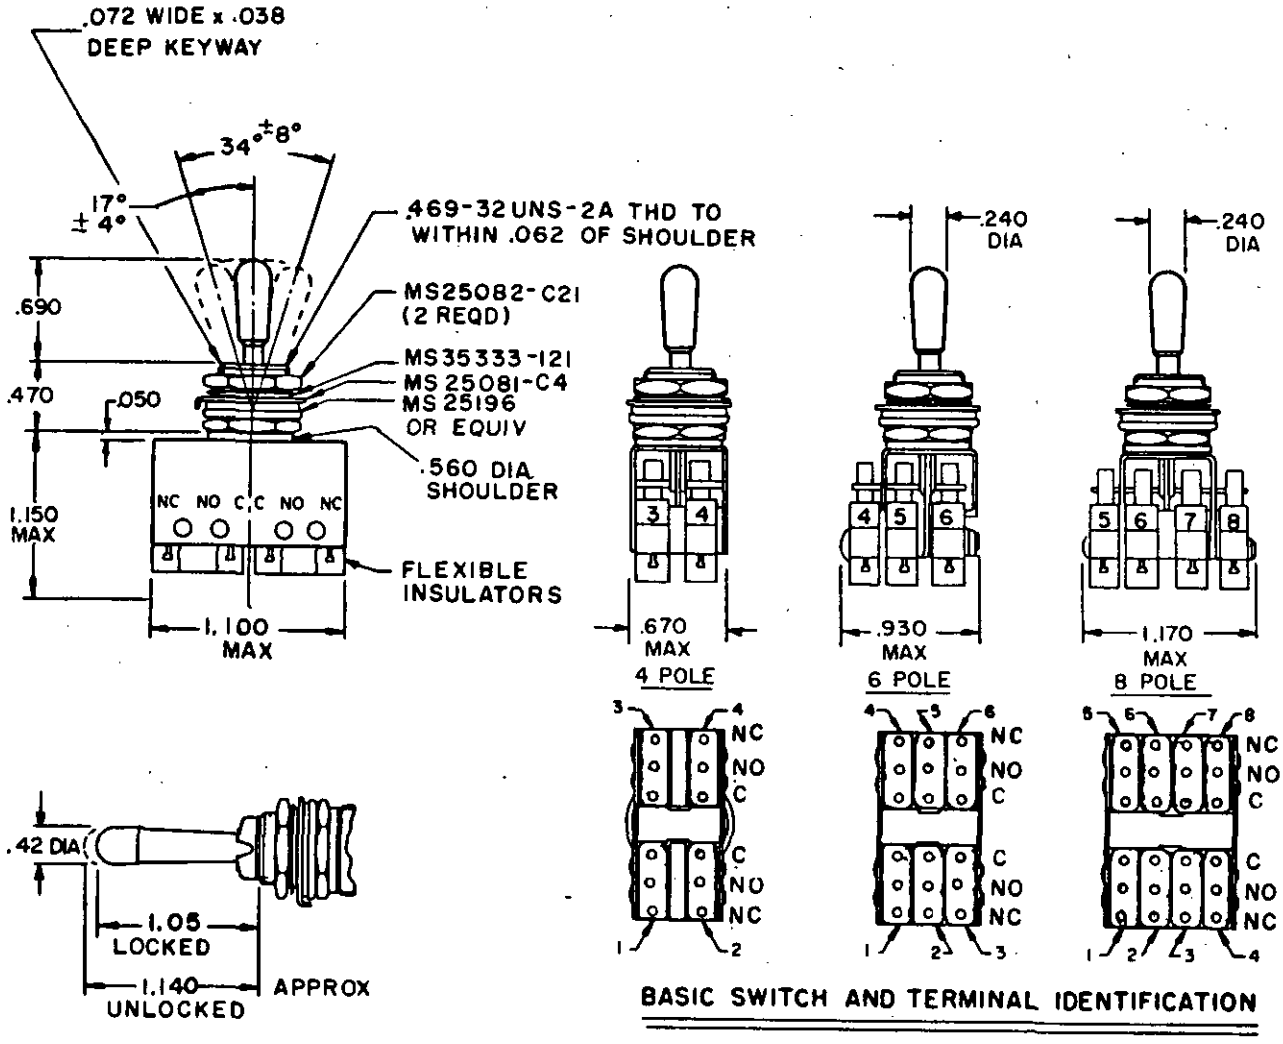


FIGURE 112-33. Switch assembly, sensitive, toggle, 7 amperes, panel seal, random vibration (MIL-S-8805/98).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

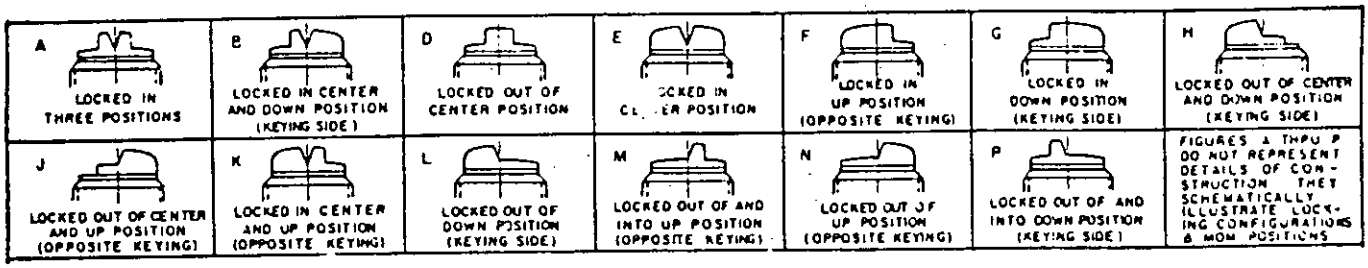

Part number: M8805/98 - (dash number from table I).

TABLE I. Dash number and characteristics.

Dash number	No. of poles	Lever-action and circuitry (table II)	Locking combination
-001	4 pole	1	None
-002			A
-003			B
-004			D
-005			E
-006			F
-007			G
-008			H
-009			J
-010			K
-011			L
-012			M
-013			N
-014			P
-015		3	None
-016			D
-017			F
-018			G
-019		5	None
-020			E
-021			F
-022			K
-023			L
-024			M
-025			N
-026		7	None
-027			E
-028			L
-029			N
-032	6 pole	1	None
-033			A
-034			B
-035			D
-036			E
-037			F
-038			G
-039			H
-040			J
-041			K
-042			L
-043			M
-044			N
-045			P

FIGURE 112-33. Switch assembly, sensitive, toggle, 7 amperes, random vibration panel seal (MIL-S-8805/98) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

TABLE I. Dash number and characteristics - Continued.

Dash number	No. of poles	Lever action and circuitry (table II)	Locking combination
-046	6 pole	3	None
-047			D
-048			F
-049			G
-050		5	None
-051			E
-052			F
-053			K
-054			L
-055			M
-056			N
-057		7	None
-058			E
-059			L
-060			N
-063	8 pole	1	None
-064			A
-065			B
-066			D
-067			E
-068			F
-069			G
-070			H
-071			J
-072			K
-073			L
-074			M
-075			N
-076			P
-077		3	None
-078			D
-079			F
-080			G
-081		5	None
-082			E
-083			F
-084			K
-085			L
-086			M
-087			N
-088		7	None
-089			E
-090			L
-091			N

FIGURE 112-33. Switch assembly, sensitive, toggle, 7 amperes, random vibration panel seal (MIL-S-8805/98) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

TABLE II. Lever action and circuitry.

Type number	Basic switch numbers			With toggle lever in position					
				Keying side		Center		Opposite keying side	
	For 4 pole	For 6 pole	For 8 pole	Toggle action	Circuit closed	Toggle action	Circuit closed	Toggle action	Circuit closed
1	1-2	1-2-3	1-2-3-4	Maintain	C-NC	Maintain	C-NC	Maintain	C-NO
	3-4	4-5-6	5-6-7-8		C-NO		C-NC		C-NC
3	1-2	1-2-3	1-2-3-4	Maintain	C-NC	(None)		Maintain	C-NO
	3-4	4-5-6	5-6-7-8		C-NO				C-NC
5	1-2	1-2-3	1-2-3-4	Momentary	C-NC	Maintain	C-NC	Maintain	C-NO
	3-4	4-5-6	5-6-7-8		C-NO		C-NC		C-NC
7	1-2	1-2-3	1-2-3-4	Momentary	C-NC	Maintain	C-NC	Momentary	C-NO
	3-4	4-5-6	5-6-7-8		C-NO		C-NC		C-NC

FIGURE 112-33. Switch assembly, sensitive, toggle, 7 amperes, random vibration panel seal (MIL-S-8805/98) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.