MIL-C-17587B(SH)
AMENDMENT 1
1 July 1986

MILITARY SPECIFICATION

CIRCUIT BREAKERS, LOW VOLTAGE, ELECTRIC POWER, AIR,
OPEN FRAME, REMOVABLE CONSTRUCTION

This amendment forms a part of MIL-C-17587B(SH), dated 18 April 1983, and is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 1

1.2: Add new types: "ACB-2603R", "ACB-5001R".

1.2: Delete "ACB-2000HRC" and substitute "ACB-2000LRC".

PAGE 2

1.2.1; subparagraph H: Add at end "and the a.c. short time withstand current equal to the interrupting rating.

1.2.1: Add new subparagraph:

"L - This suffix indicates that the circuit breaker has a rated a.c. short-circuit greater than 50,000 A and a rated a.c. short-time withstand current of 50,000 A or less."

AMSC N/A FSC 5925
DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:20Z
Check the source to verify that this is the current version before use.

Table I: Delete and substitute:

TABLE I. General ratings of circuit breaker types and attachments.

CIRCUIT BREAKER TYPE:	ACB-	900R	901R	902R	1600HR	2000R	2000LRC	2002HR	2601R	2603R	4000HR (3200HR)	4001R	5001R	6400HR
Rated continuous current (See 6.5.15)	(amperes)	900	900	900	1,600	2,000	2,000	2,000	2,600	2,600	4,000 (3,200)	4,000	5,000	6,400
Rated maximum voltage[1/] and frequency	a.c. (volts) 60 hertz	500	---	500	500	500	500	500	---	---	500	---	---	500
	d.c. (volts)		355				---		355	355		355	355	---
Max interrupting rating rated symmetrical short-circuit current (amperes)	a.c. (see 6.5.14) 60 hertz	42,000	---	50,000	85,000	50,000	85,000	100,000	---	---	85,000	---	---	100,000
	d.c. (see 6.5.16)	---	50,000	---	---	---	---	---	75,000	150,000	---	150,000	150,000	---
Rated short-time current[2/] (amperes) (see 6.5.17)		25,000	25,000	25,000	85,000	50,000	50,000	100,000	50,000	50,000	85,000	150,000	150,000	100,000
Rated short-time current duration (seconds)		0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.75	0.5	0.75	0.75
Operating mechanism[3/]	Manual	YES	YES	YES	---	YES	---	---	---	---	---	---	---	---
	Electric	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES
Dimensions	Figure no.	1	2	3	4	4	4	5	4	4	7	8	7	9
Number of poles		3	2	3	3	3	3	3	2	2	3	2	2	3
Number of overcurrent coils or solid-state sensors		2/3	2	2	2/3	2/3	2/3	2/3	2	2	2	2	2	3
Overcurrent coils and sensors	Table	IV	IV	IV,V,VI	IV	IV	IV	IV	IV	IV	IV	IV	IV	IV
Time-current characteristics	Figure no.	10	10	[4/]10	10	10	13, 10	13	10	10	13, 10	14	14	13
	Time band no.	1,2,3	2	1,2,3,4	1,2,3	1,2,3	1,2,3	1,2,3,4	3	3	2,3,4	1,2,3,4	1,2,3,4	1,2,3,4

Source: https://assist.dla.mil - Downloaded: 2026-10-18T10:20Z
Check the source to verify that this is the current version before use.

TABLE I. General ratings of circuit breaker types and attachments. - Continued

CIRCUIT BREAKER TYPE:	ACB-	900R	901R	902R	1600HR	2000R	2000LRC	2002HR	2601R	2603R	4000HR (3200HR)	4001R	5001R	6400HR
ATTACHMENTS														
Electric closing mechanism (see 3.4.2.2.3.2)		OPTION	OPTION	OPTION	STD	OPTION	STD	STD	STD	STD	STD	STD	STD	STD
Auxiliary switches (see 3.4.2.9)	Number of contacts	8	6	10	8	8	8	12	8	8	8	12	8	12
Lockout device (see 3.4.2.14)		Optional for all circuit breaker types												
Mechanical position indicator (see 3.4.2.2.4)		Required for all circuit breaker types												
Secondary disconnecting devices (see 3.4.2.7)		Required for all circuit breaker types, unless otherwise specified (see 6.2.1)												
Cell switch (see 3.4.2.10)		Optional for all circuit breaker types												
Indicator light (see 3.4.2.8)		Provisions for mounting required for all circuit breaker types; Furnished only when specified (see 6.2.1)												
Hold-closed mechanism (see 3.4.2.11)		Opt	Opt	Not Reqd	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Not Reqd	Opt	Not Reqd
Undervoltage trip device (see 3.4.2.12)		Optional for all circuit breaker types (see 6.2.1)												
Shunt trip device (see 3.4.2.13)		Required for electrically operated circuit breakers (see 3.4.2.2.3.2)												
Operations counter (see 3.4.2.15)		Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt

(See footnotes at top of next page)

Source: https://assist.dla.mil - Downloaded: 2026-10-18T10:20Z
Check the source to verify that this is the current version before use.

PAGE 9

3.4.2.1.2, line 1: Delete "Alinement"...."alinement" and substitute "Alignment"...."alignment".

PAGE 10

3.4.2.1.4, line 1: Delete "When specified" and substitute "Unless otherwise specified,."

3.4.2.2.3.2, line 12: Delete "0.1 second" and substitute "0.25 second".

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:20Z
Check the source to verify that this is the current version before use.

Table IV: Delete and substitute:

TABLE IV. General ratings and pickup current settings for overcurrent coils and sensors.

Type	Coil or sensor rating 1/	Long time delay setting 5/			Short time delay setting 6/						Maximum instantaneous trip 2/
	Amperes	Amperes			Amperes						Amperes
ACB-900R	320	500	640	840	---	640	840	960	1280	1600	16000
	400	640	840	960	720	800	960	1280	1800	2100	20000
	480	720	960	1280	---	960	1280	1600	2100	2800	20000
	560	840	1120	1400	---	1120	1400	1800	2400	3200	20000
	640	960	1280	1600	---	1280	1600	2100	2800	3600	20000
	800	1280	1600	2100	1200	1600	2100	2400	3200	4000	35000
	900	1320	1800	2340	---	1800	2500	2700	3600	4800	35000
ACB-901R	400	---	---	---	---	800	---	---	---	---	2400
	480	---	---	---	---	960	---	---	---	---	2400
	640	960	---	---	---	1280	---	---	---	---	3200
	900	1320	---	---	---	---	---	2100	---	5400	10000
	3/ 1200	---	---	---	---	---	---	---	---	6000	10000
ACB-902R 4/	100	160	200	250	---	200	250	320	400	500	2000
	160	250	320	400	240	320	400	500	720	840	2300
	250	400	500	640	570	500	640	840	1120	1400	5000
	320	500	640	840	---	640	840	960	1280	1600	6400
	400	640	840	960	---	800	960	1280	1800	2100	8000
	480	720	960	1280	720	960	1280	1600	2100	2800	9600
	560	840	1120	1400	---	1120	1400	1800	2400	3200	11200
	640	960	1280	1600	---	1280	1600	2100	2800	3600	12800
	800	1280	1600	2100	1200	1600	2100	2400	3200	4000	16000
	900	1320	1800	2340	---	1800	2500	2700	3600	4800	18000
ACB-2000R	320	500	640	840	---	640	840	960	1280	1600	16000
	400	640	840	960	---	800	960	1280	1800	2100	20000

See footnotes at end of table.

Source: https://assist.dla.mil-5 Downloaded: 2026-10-18T10:20Z
Check the source to verify that this is the current version before use.

TABLE IV. General ratings and pickup current settings for overcurrent coils and sensors. - Continued

Type	Coil or sensor rating[1/]	Long time delay setting[5/]			Short time delay setting[6/]						Maximum instantaneous trip[2/]
	Amperes	Amperes			Amperes						Amperes
ACB-2000R	480	720	960	1120	---	960	1280	1600	2100	2800	24000
	560	840	1120	1280	---	1120	1400	1800	2400	3200	28000
	640	960	1280	1600	---	1280	1600	2100	2800	3600	32000
	800	1280	1600	2100	1200	1600	2100	2400	3200	4000	36000
	1000	1600	2100	2400	---	2100	2400	3200	4000	4800	40000
	1200	1800	2400	2800	1800	2400	2800	3600	4800	6000	40000
	1400	2100	2800	3600	---	2800	3200	3600	4800	6000	40000
	1600	2400	3200	4000	2400	3200	4000	4800	6000	8000	40000
	2000	3000	4000	5000	---	---	4000	6000	8000	10000	40000
ACB-1600HR ACB-2000LRC	800	1280	1600	2100	1200	1600	2100	2400	3200	4000	64000
	1000	1600	2100	2400	---	2100	2400	3200	4000	4800	68000
	1200	1800	2400	2800	1800	2400	2800	3600	4800	6000	68000
	1400	2100	2800	3600	---	2800	3200	3600	4800	6000	68000
	1600	2400	3200	4000	2400	3200	4000	4800	6000	8000	68000
ACB-2000LRC	2000	3000	4000	5000	---	---	4000	6000	8000	10000	68000
ACB-2002HR	300	450	600	750	600	750	900	1200	1500	---	6000
	500	750	1000	1250	1000	1250	1500	2000	2500	---	10000
	800	1200	1600	2000	1600	2000	2400	3200	4000	---	16000
	1200	1800	2400	3000	2400	3000	3600	4800	6000	---	24000
	1600	2400	3200	4000	3200	4000	4800	6400	8000	---	32000
	2000	3000	4000	5000	4000	5000	6000	8000	10000	---	40000
ACB-2601R ACB-2603R	1600	---	---	---	---	3200	---	---	---	---	8000
	2600	---	---	---	4000	---	---	---	---	---	14000
	2600	---	---	---	---	---	---	---	10000	12000	22000

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:20Z
Check the source to verify that this is the current version before use.

TABLE IV. General ratings and pickup current settings for overcurrent coils and sensors. - Continued

Type	Coil or sensor rating 1/	Long time delay setting 5/			Short time delay setting 6/						Maximum instantaneous trip 2/
	Amperes	Amperes			Amperes						Amperes
ACB-3200HR	2000	3200	4000	4800	---	4000	4800	6000	8000	---	68000
	2400	3600	4800	6000	---	4800	6000	8000	---	---	68000
	2800	4200	5600	6600	---	5600	7000	8400	---	---	68000
	3200	4800	6400	8000	---	6400	8000	9600	---	---	68000
ACB-4000HR	4000	6000	8000	10000	---	8000	10000	12000	---	---	68000
ACB-4001R	400	600	800	1000	800	1000	1200	1600	2000	---	4000
	800	1200	1600	2000	1600	2000	2400	3200	4000	---	8000
	1200	1800	2400	3000	2400	3000	3600	4800	6000	---	12000
ACB-5001R	2000	3000	4000	5000	4000	5000	6000	8000	10000	---	20000
	4000	6000	8000	10000	8000	10000	12000	16000	20000	---	40000
	5000	6500	10000	12500	10000	15000	20000	25000	---	---	50000
ACB-6400HR	4800	7200	9600	12000	9600	12000	14400	19200	24000	---	72000
	5800	8700	11600	14500	11600	14500	17400	23200	29000	---	80000
	6400	9600	12800	16000	12800	16000	19200	25600	32000	---	80000

1/ Continuous current rating.
2/ The instantaneous trip device shall be set at the place of manufacture from five times the coil or sensor rating to the maximum pickup setting specified for mechanical coils and 20 times sensor rating for solid state sensors with a default at maximum listed rating.
3/ Coil rating is special and in excess of the circuit breaker's rated continuous current. When specified, the temperature rise requirements (see 3.3.8) may exceed each limit of table II by 10°C.
4/ See tables V and VI for pickup current settings of overcurrent coils for circuit breaker type ACB-902R when general purpose motor or special purpose motor application is specified (see 3.4.2.6.2 and 6.2.1).
5/ The long time settings for solid state devices shall be set at 1-1/2, 2 and 2-1/2 times sensor rating.
6/ The short time settings for solid state devices shall be set at 2, 2.5, 3, 4 and 5 times sensor rating.

Source: https://assist.dla.mil - Downloaded: 2026-10-18T10:20Z
Check the source to verify that this is the current version before use.

PAGE 17

3.4.2.6.5, line 4: Delete: "from five times the trip coil or sensor rating" and "maximum".

PAGE 18

3.4.2.6.6.2, last sentence: Delete and substitute "The device shall have a provision through a test socket for secondary injection testing to check the overload calibrations. Means shall be provided to recalibrate the devices."

PAGE 19

3.4.2.10: Delete "By-pass" and substitute "Cell".

PAGE 20

Add as new paragraph:

"3.4.2.15 Operations counter. When specified (see 6.2.1), the circuit breakers shall be equipped with a mechanical device which indicates the number of close - open operations. The device may be operated on either the close or open portion of the cycle. The read-out shall be readably visible from the front of the breaker, but is not required to be mounted on the escutcheon plate. The device shall not be resettable."

PAGE 22

4.2: Add: "(c) Comparison inspection (see 4.4.2)."

PAGE 24

Sample note 1, line 3: Delete "maximum time" and substitute "minimum time".

Sample note 2: Delete "minimum time" and substitute "maximum time."

Sample note 4, line 3: Delete "minimum time" and substitute "maximum time".

Sample note 5, line 1: Delete "A.c." and substitute "D.c." and delete "3" and substitute "2".

Sample note 6, line 3: Delete "at maximum time" and substitute "at special maximum time".

Source: https://assist.dla.mil - Downloaded: 2026-10-18T10:20Z
Check the source to verify that this is the current version before use.

Table XII: Delete and substitute:

TABLE XII. Qualification inspection of attachments.

Inspection	Requirement paragraph	Lock-out mecha-nism	Electric closing mecha-nism	Mechan-ical position indicator	Secondary discon-necting device	Indi-cator light	Auxil-iary switches	Hold-closed mecha-nism	Under-voltage trip device	Shunt trip device	Opera-tions counter
General examination	3.3.3	4.6.1	4.6.1	4.6.1	4.6.1	4.6.1	4.6.1	4.6.1	4.6.1	4.6.1	4.6.1
Endurance	3.3.4	---	4.6.7	4.6.7	---	---	4.6.7	---	4.6.20	4.6.21	4.6.7
Inclined operation	3.3.5	4.6.3	4.6.3	---	4.6.3	4.6.3	4.6.3	4.6.3	4.6.3	4.6.3	4.6.3
Temperature rise	3.3.8	4.6.6	4.6.6	---	4.6.6	4.6.6	4.6.6	---	4.6.6	4.6.6	---
Shock	3.3.9	4.6.7	4.6.7	4.6.7	4.6.7	4.6.7	4.6.7	4.6.7	4.6.7	4.6.7	4.6.7
Vibration	3.3.10	4.6.8	4.6.8	4.6.8	4.6.8	4.6.8	4.6.8	4.6.8	4.6.8	4.6.8	4.6.8
Dielectric with-standing voltage	3.3.11	4.6.9	4.6.9	---	4.6.9	4.6.9	4.6.9	4.6.9	4.6.9	4.6.9	---
Insulation resistance	3.3.12	4.6.10	4.6.10	---	4.6.10	4.6.10	4.6.10	4.6.10	4.6.10	4.6.10	---
Operation	1/	4.6.14	4.6.15	---	4.6.16	4.6.17	4.6.18	4.6.19	4.6.20	4.6.21	4.6.23
Interrupting per-formance	3.4.2.9	---	---	---	---	---	4.6.18	---	---	---	---
Voltage range	2/	---	4.6.15	---	---	---	4.6.18	---	4.6.20	4.6.21	---
Closing time	3.4.2.2.3.2	---	4.6.15	---	---	---	---	---	---	---	---

Source: https://assist.dla.mil Downloaded: 2026-10-18T10:20Z
Check the source to verify that this is the current version before use.

PAGE 28

Add new paragraph:

"4.4.2 Comparison inspection. At intervals of not more than 3 years during which circuit breakers of a type have been acquired under this specification, the manufacturer shall provide sample circuit breakers with all attachments specified in table XII and conduct complete qualification tests specified in table XI. Circuit breakers of a type which have not been supplied within the specified 3-year period shall be tested as a part of the subsequent order for production line units. Failure of a sample to meet the requirements of this specification shall be cause for removal from the Qualified Products List."

PAGE 29

Table XIV, category 116: Delete "By-pass" and substitute "Cell".

Table XIV, continued: Add under major defects:

Categories	Defects	Applicable paragraph
Major		
121	Operations counter not as specified	3.4.2.15

PAGE 30

Table XV, column 5: Delete column heading "Maximum a.c. power factor (lagging) or d.c. time constant (X/R)" and substitute "Maximum a.c. power factor (lagging) X/R or d.c. time constant".

PAGE 31

4.6.4, line 3: Delete "Temperature rise" and substitute "The temperature rise."

PAGE 32

4.6.5.4: Delete and substitute:

"4.6.5.4 Interrupting current d.c. test circuit. In d.c. test circuits, the test shall be performed on the two poles connected in series. The test circuit shall be so adjusted that the requirements of table XVI are met."

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:20Z
Check the source to verify that this is the current version before use.

Add new table:

"TABLE XVI. Requirements for d.c. interrupting test.

Short circuit current (amperes)	Time constant L/R (milliseconds)	Maximum initial current rise E/L (at 240 V) (amperes per microsecond)
50,000	16.0	3.1
75,000	15.6	3.3
150,000	12.5	12.5

"

PAGE 33

Delete table XVI and substitute:

"TABLE XVII. Sizes of cables and bus bars for making temperature rise test.

Circuit breaker type	Continuous current rating (amperes)	Cable quantity per terminal	Cable size 1/	Bus bar quantity per phase	Bus bar size (inches) 2/
ACB-900R	900	3	300 MCM	1	2.5 x 1/4
ACB-901R	900	3	300 MCM	1	2.5 x 1/4
ACB-902R	900	3/ 3	300 MCM	2	1.5 x 1/4
ACB-1600HR	1600	4	400 MCM	2	3.0 x 1/4
ACB-2000LRC	2000	5	400 MCM	2	4.0 x 1/4
ACB-2000R	2000	5	400 MCM	2	4.0 x 1/4
ACB-2002HR	2000	5	400 MCM	2	4.0 x 1/4
ACB-2601R	2600	3/ 7	400 MCM	3	3.0 x 1/4
ACB-2603R	2600	3/ 7	400 MCM	3	3.0 x 1/4
ACB-3200HR	3200	8	400 MCM	2	6.0 x 1/4
ACB-4000HR	4000	3/ 10	400 MCM	4	6.0 x 1/4
ACB-4001R	4000	3/ 10	400 MCM	4	6.0 x 1/4
ACB-5001R	5000	3/ 12	400 MCM	2 pr or 5	6.0 x 1/4
ACB-6400HR	6400	3/ 16	400 MCM	4	8.0 x 1/4

"

PAGE 34

4.6.7, line 5: Delete "carrying their rated continuous current," and substitute "carrying half their rated continuous current or less,".

4.6.8, lines 8 and 9: Delete "carry their rated continuous current." and substitute "be energized with their rated voltage.".

PAGE 37

Add: "4.6.23 Operations counter. The operations counter shall be monitored during all operational tests to ensure that it is registering a precise count of operations."

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:20Z
Check the source to verify that this is the current version before use.

PAGE 40

6.2.1(f): Delete.

6.2.1, between items (t) and (u): Add "(t.1) Operations counter (see 3.4.2.15)."

PAGE 42

6.5.1: Delete "By-pass switch. A By-pass" and substitute "Cell switch. A cell".

PAGE 44

6.5.23: Add "Three sensors may be required to derive enough energy to actuate the tripper."

6.5.24: Add "Multiple sensors may be required to derive enough energy to actuate the tripper."

PAGE 45

6.6, line 9, column 2: Delete the word "Deleted" and substitute "ACB 1600HR".

6.6, lines 15 and 16: Delete last sentence and substitute: "In order for these types to be used as direct replacement, a wiring change must be made."

Preparing activity:
Navy - SH
(Project 5925-N098)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:20Z
Check the source to verify that this is the current version before use.

Figure 1: Delete and substitute:


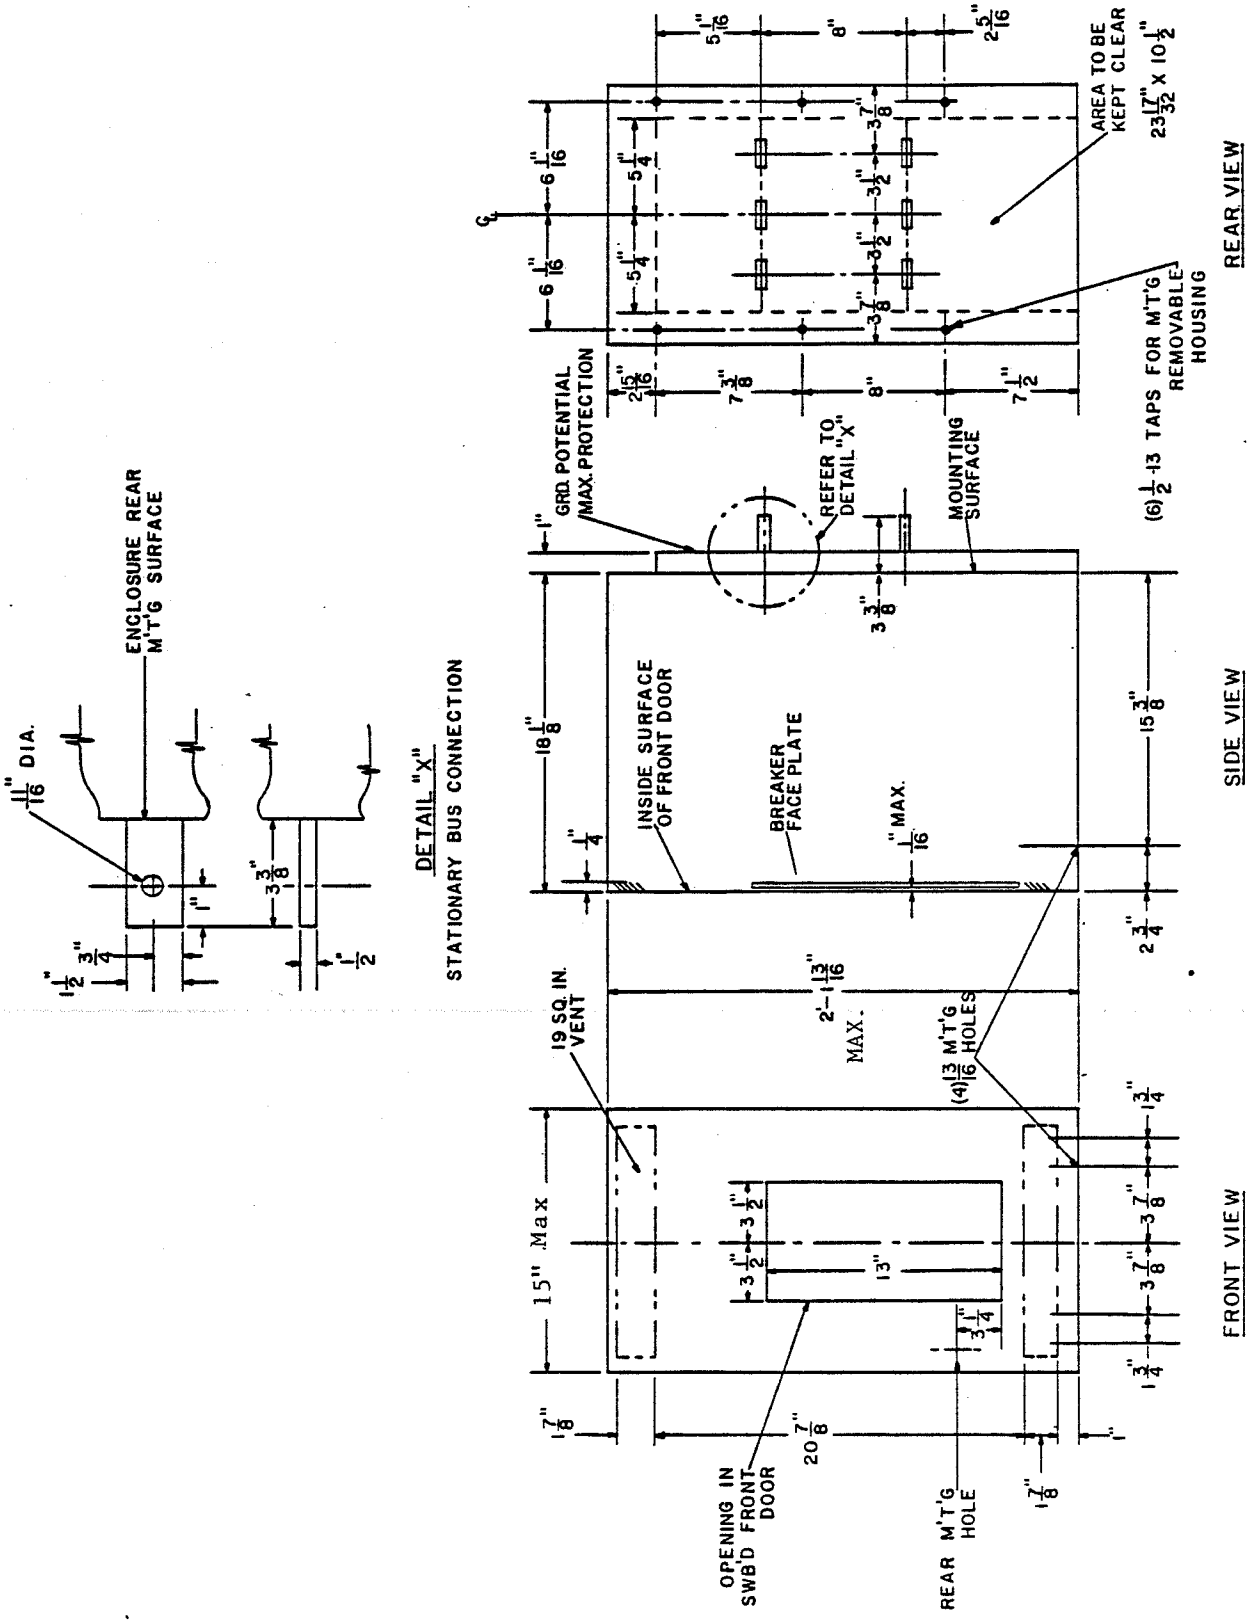


FIGURE 1. Outline and mounting dimensions for circuit breaker type ACB-900R.

SH 7361

Source: https://assist.dla.mil - Downloaded: 2026-10-18T10:20Z
Check the source to verify that this is the current version before use.

Figure 2: Delete and substitute:

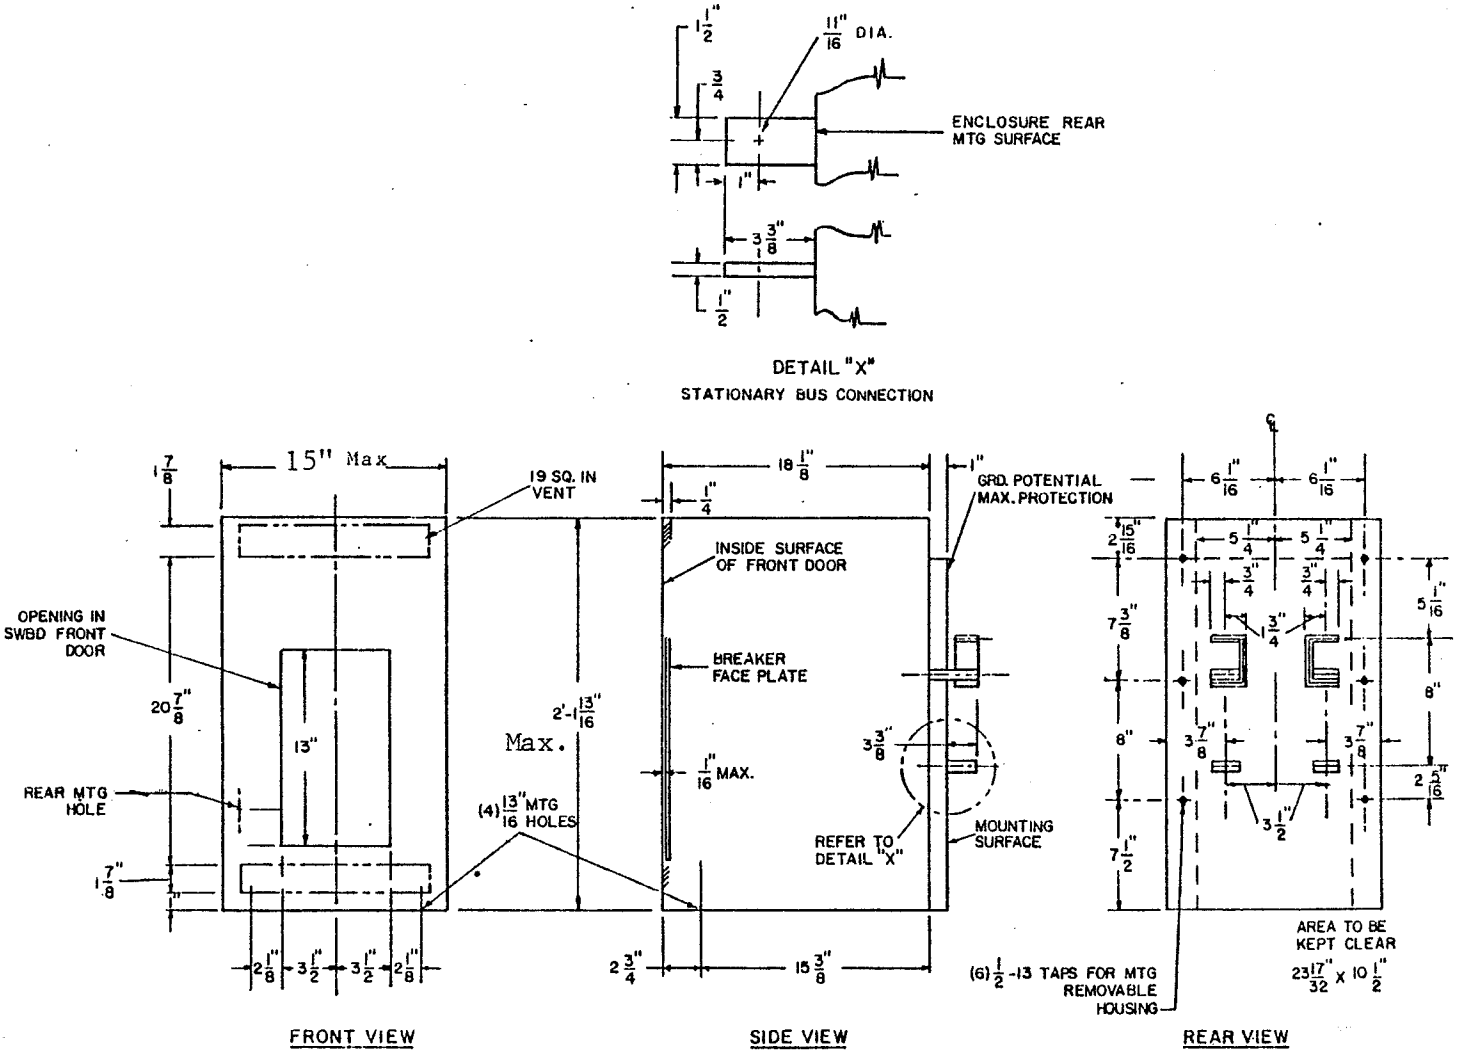

SH 12118

FIGURE 2. Outline and mounting dimensions for circuit breaker type ACB-901R.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:20Z
Check the source to verify that this is the current version before use.

Figure 4: Delete and substitute:

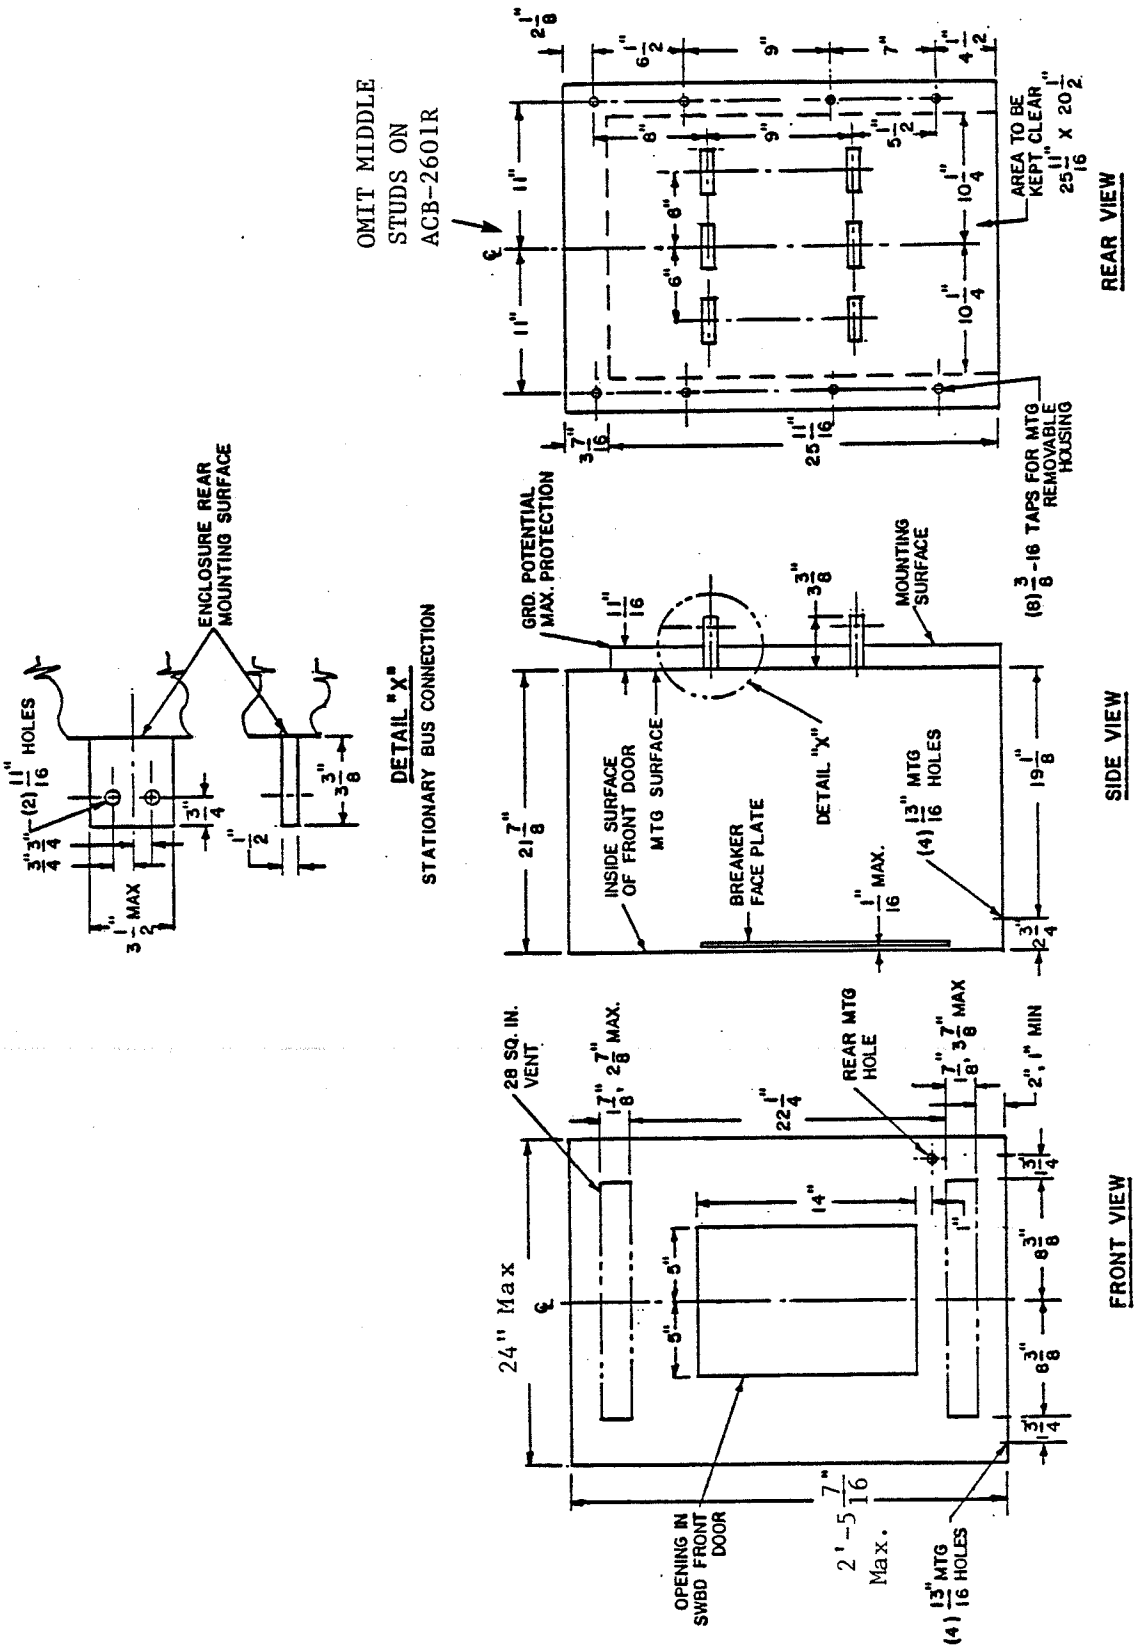


FIGURE 4. Outline and mounting dimensions for circuit breaker types ACB-1600HR, ACB-2000R, 2000LR, and 2601R.

SH 12120

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:20Z
Check the source to verify that this is the current version before use.

Figure 5: Delete and substitute:

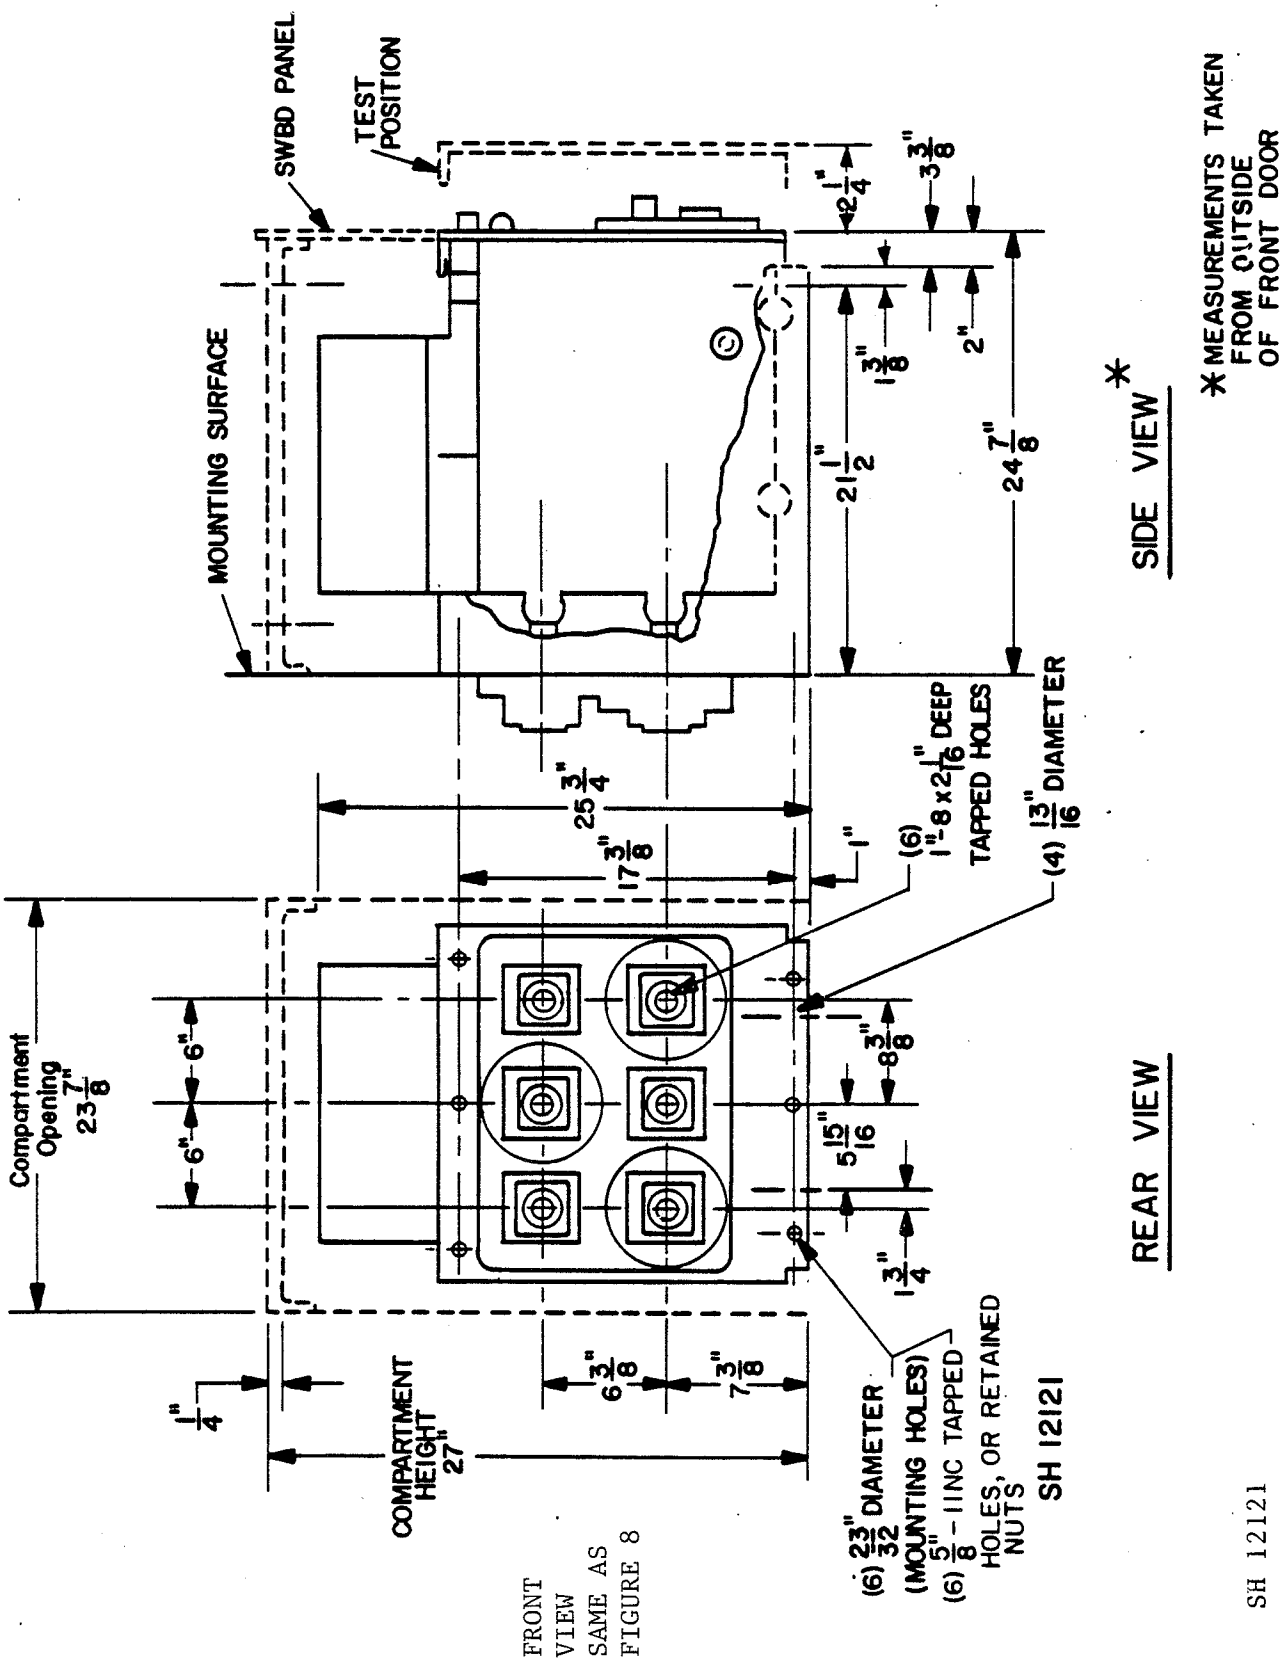


FIGURE 5. Outline and mounting dimensions for circuit breaker type ACB-2002HR.

SH 12121

Source: https://assist.dla.mil - Downloaded: 2026-10-18T10:20Z
Check the source to verify that this is the current version before use.

Figure 6: Delete.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:20Z
Check the source to verify that this is the current version before use.

Figure 7: Delete and substitute:


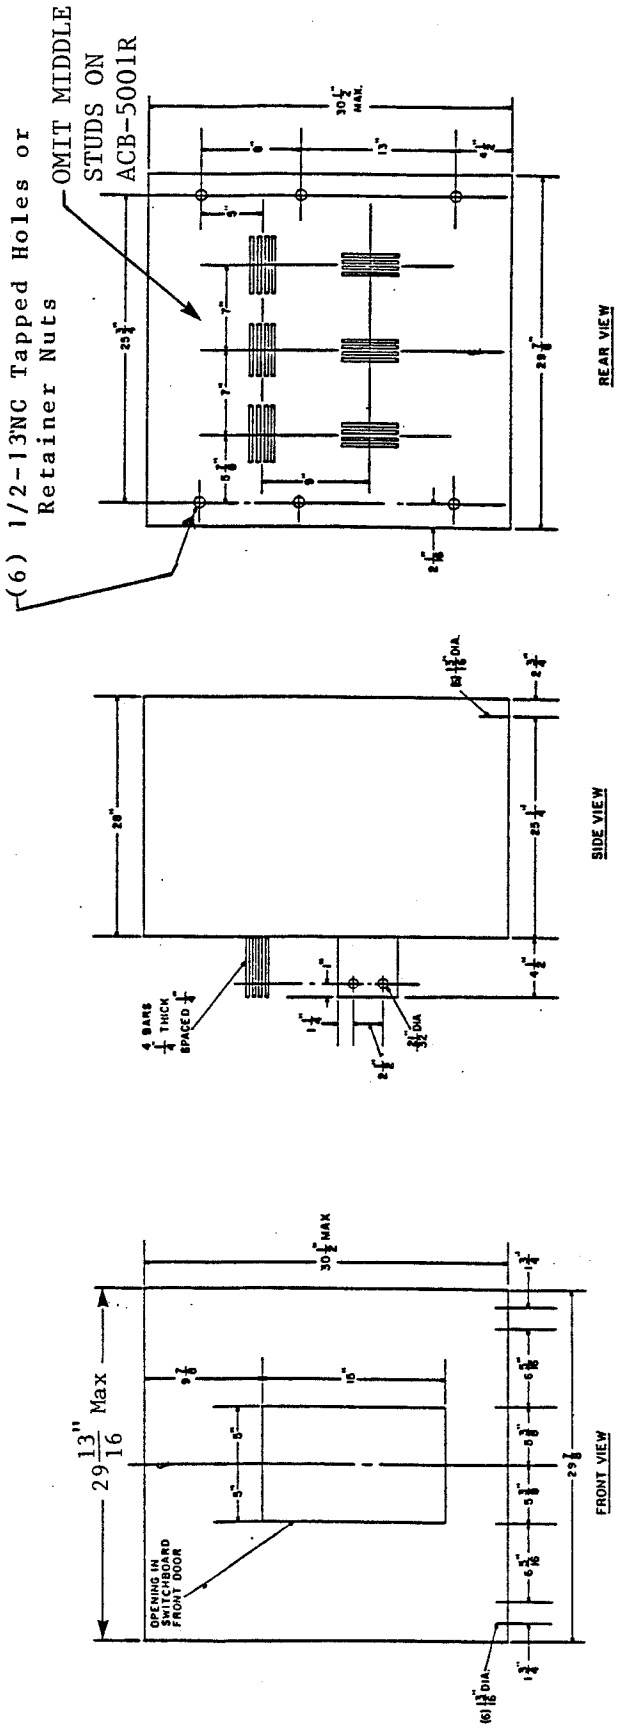


FIGURE 7. Outline and mounting dimensions for circuit breaker types ACB-3200HR, ACB-4000HR and ACB-5001R.

SH 12122

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:20Z
Check the source to verify that this is the current version before use.

Figure 8: Delete and substitute:

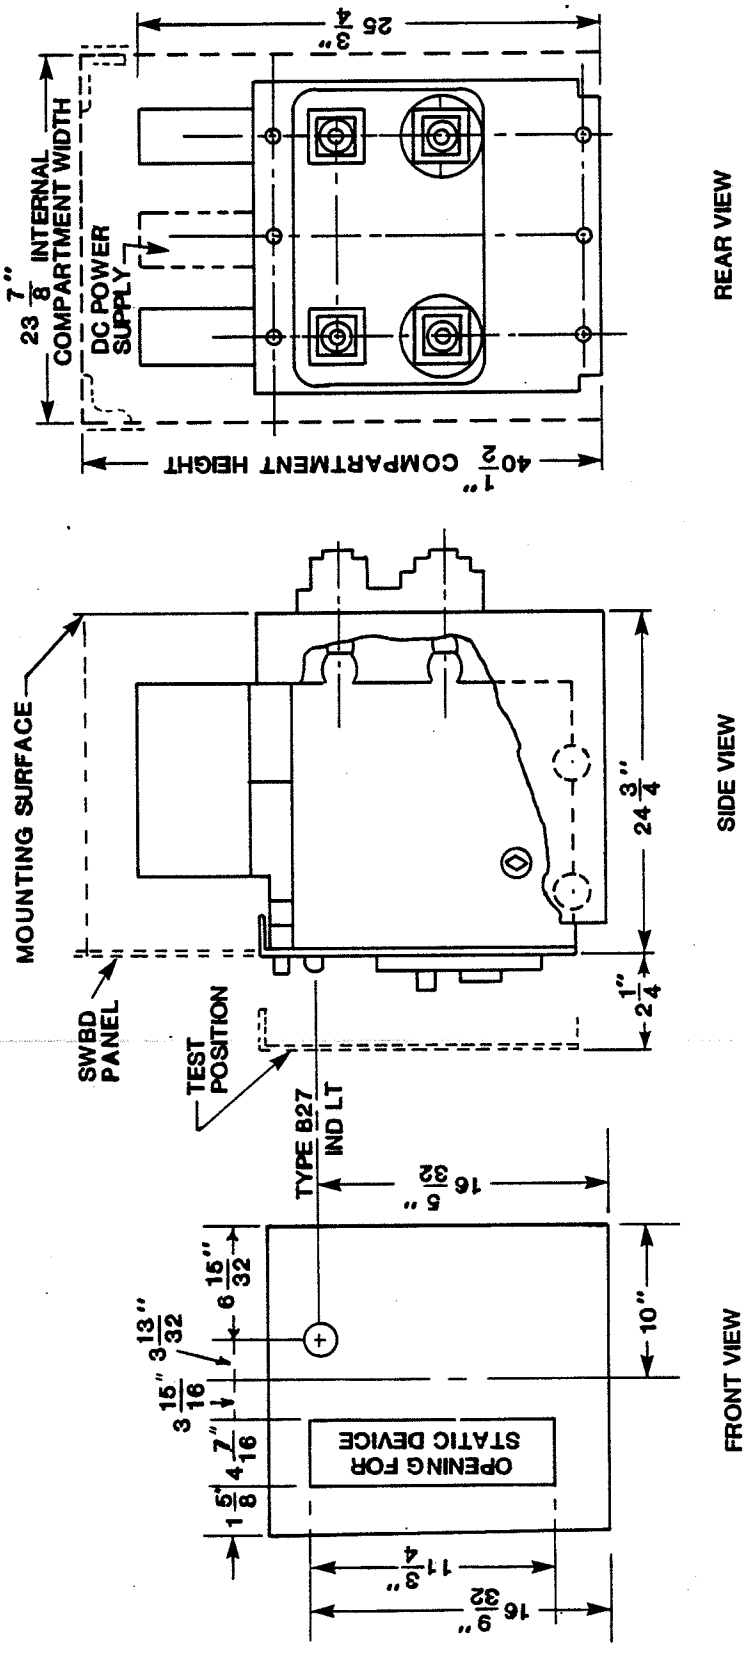


DIMENSIONS SAME AS FIGURE 5

FIGURE 8. Outline and mounting dimensions for circuit breaker type ACB-4001R.

SH 12123

Source: https://assist.dla.mil - Downloaded: 2026-10-18T10:20Z
Check the source to verify that this is the current version before use.

Figure 13: Delete and substitute:

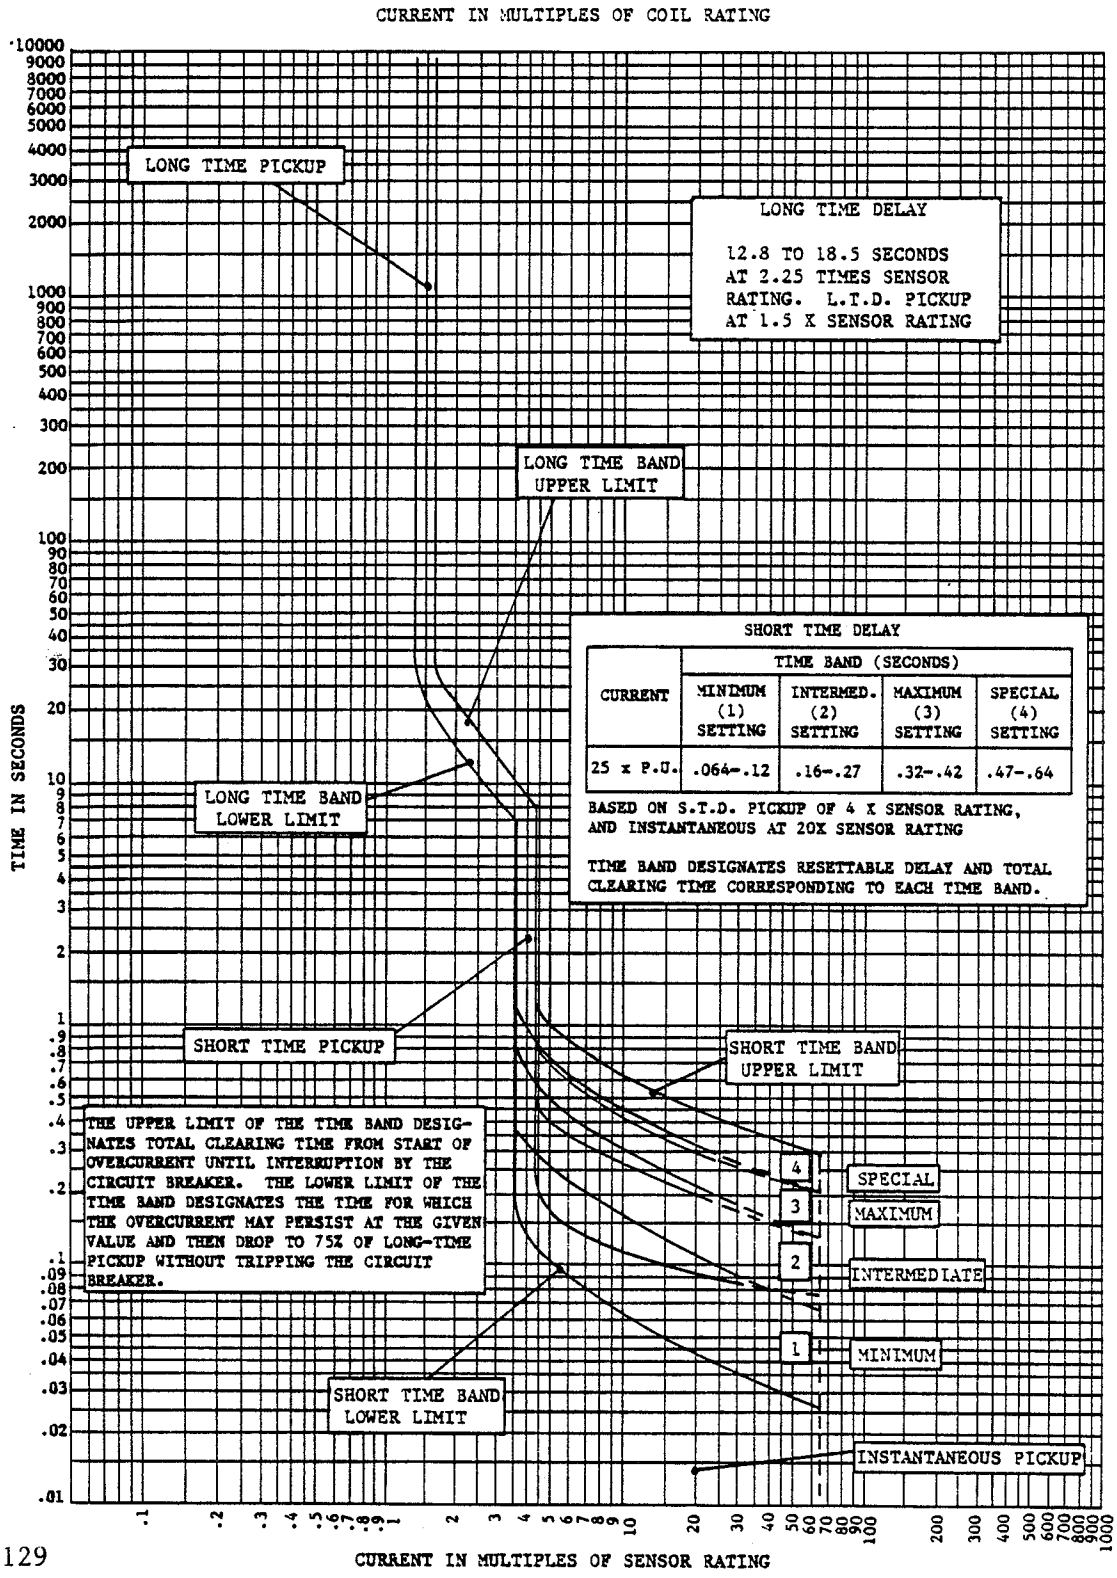

SH 12129

FIGURE 13. Time-current characteristics curve for circuit breaker types ACB-2000LR, ACB-2002HR and ACB-6400HR.

Source: https://assist.dla.mil - Downloaded: 2026-10-18T10:20Z
Check the source to verify that this is the current version before use.