MILITARY SPECIFICATION SHEET

CIRCUIT CARD ASSEMBLY, 9290623
(OPERATOR CONTROL PANEL INTERFACE)

This specification is approved for use by the US Army Armament, Munitions and Chemical Command and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the circuit card assembly described herein shall consist of this document and the latest issue of specification MIL-C-63371(AR).

Electrical Requirements

1. The tolerance for inputs to Pins 45, 49 and 50 specified in the following tests are: V_1 shall be V_1 to $0.95V_1$ and V_2 shall be V_2 to $1.05V_2$. All other input and output levels shall be consistent with IC operating levels and power supply regulation and shall not exceed plus or minus 1.0% of the indicated nominal values.

2. All frequencies and pulse widths shall be within plus or minus 10% of the values indicated herein.

FSC: 1095

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

BOARD POWER

NOTE: Maintain the following throughout all tests.

Pin No.	Voltage
2	14
37	14
35	0
70	0
1	0
36	0
54	14 (except Test 1I)
4(B)	5

MCS SELF TEST, TIME LONG

NOTE: Connect a 130 ohm, 6 watt resistor between pin no. 69 and 28 volts.

Test 1A

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	Voltage
67	14	69	28(B)

Test 1B

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	Voltage
67	0	69	0

Test 1C

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	Voltage
44	0	41	24
57	14		
43	0		
66	0		
40	0		

(B) denotes change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

Test 1D

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	Voltage
44	0	41	0
57	0		
43	0		
66	0		
40	0		

Test 1E

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	Voltage
44	0	41	24
57	14		
43	0		
66	0		
40	0		

Test 1F

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	Voltage
44	0	41	0
57	14		
43	0		
66	0		
40	14		

Test 1G

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	Voltage
44	0	41	0
57	14		
43	14		
66	0		
40	0		

Source: https://assist.dla.mil -- Downloaded: 20261O-23T02:43Z
Check the source to verify that this is the current version before use.

Test 1H

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	Voltage
44	0	41	0
57	14		
43	0		
66	14		
40	0		
65	0		
62	14		

Test 1I

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	Voltage
44	0	41	0
66	0		
57	14		
40	0		
43	0		
54	0		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

DISPENSE MODE 2

Test 2A

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	Voltage
64	0	61	0
62	14		
65	0		

Test 2B

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	Voltage
62	14	61	14
65	0		
64	14		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

LAUNCHER READY LIGHT

NOTE: Connect a 175 ohm, 2 watt resistor between pin no. 68 and 24 volts.

Test 3A

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	Voltage
65	0	68	0
62	14		
65	0	68	24
62	0		
65	14	68	24
62	14		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

LAUNCHER WHEEL SOLENOID

NOTE: Connect a 12 ohm, 60 watt resistor in parallel with a 160 ohm, 2 watt resistor between pin no. 38 and 24 volts. (B)

Test 4A

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	Voltage
57	0	38	24
65	14		
64	14		
62	0		

Test 4B

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	Voltage
57	14	38	0
65	0		
64	14		
62	14		

Test 4C

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	Voltage
57	14	38	0
65	0		
64	0		
62	0		

Test 4D

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	Voltage
57	0	38	24
65	0		
64	0		
62	0		

(B) denotes change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

Test 4E

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	Voltage
57	14	38	0
65	0		
64	0		
62	0		

Test 4F

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	Voltage
57	14	38	24
65	0		
64	14		
62	0		

Test 4G

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	Voltage
57	14	38	0
65	0		
64	0		
62	0		

Test 4H

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	Voltage
57	14	38	24
65	14		
64	0		
62	0		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

Test 4I

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	Voltage
62	14	68	24
65	14		

Test 4J

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	Voltage
62	14	68	0
65	0		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

DISPENSE MODE TEST

Test 5A (90° Full)

INPUT Pin No.	Voltage (V_1, V_2)
60	0
58	14
59	14
46	0 (B)
47	0 (B)
48	0
50	Fig. 2 (0, 7.9) (B)

OUTPUT Pin No.	Voltage (V_1, V_2)
51	Fig. 2 (3.89, 8.25) (B)
63	0 (B)
39	24 (B)

Test 5B (50° Left)

INPUT Pin No.	Voltage (V_1, V_2)
60	14
58	0
59	14
46	0 (B)
47	0 (B)
48	0
50	Fig. 2 (-4.54, 3.84) (B)

OUTPUT Pin No.	Voltage (V_1, V_2)
51	Fig. 2 (5.94, 10.13) (B
63	Fig. 1
39	Fig. 1

(B) denotes change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

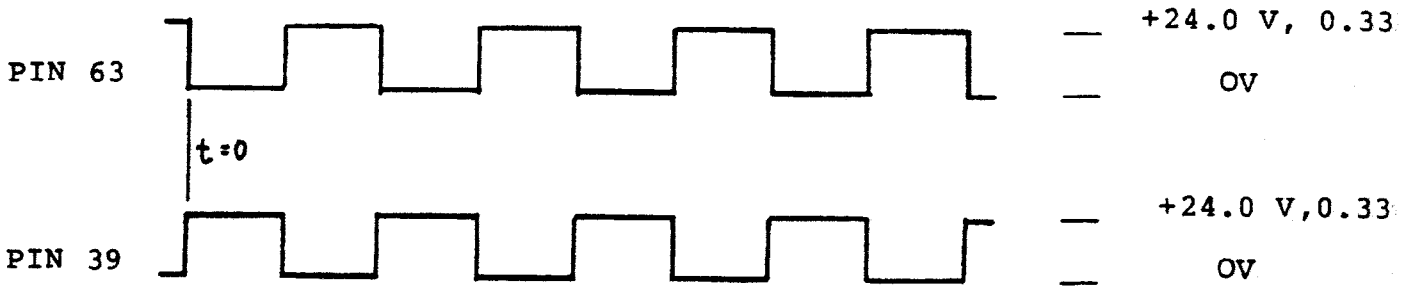


FIGURE 1. LAUNCHER CLOCKWISE/COUNTER CLOCKWISE SOLENOID SIGNALS

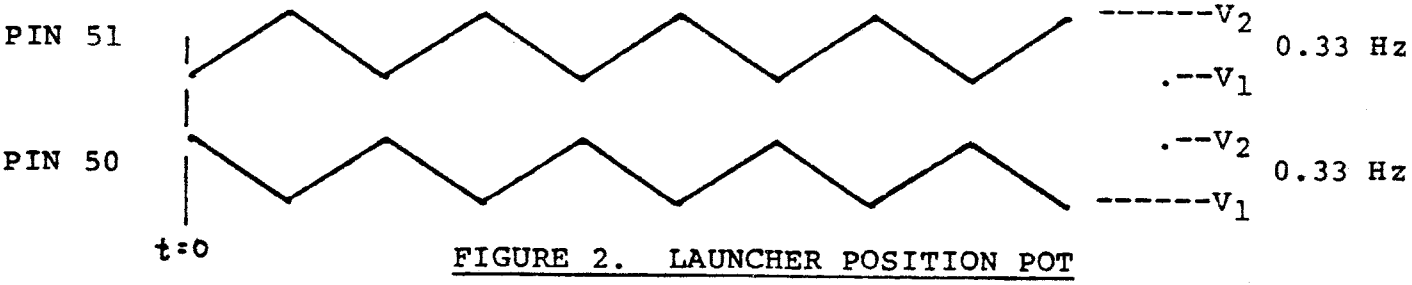


FIGURE 2. LAUNCHER POSITION POT

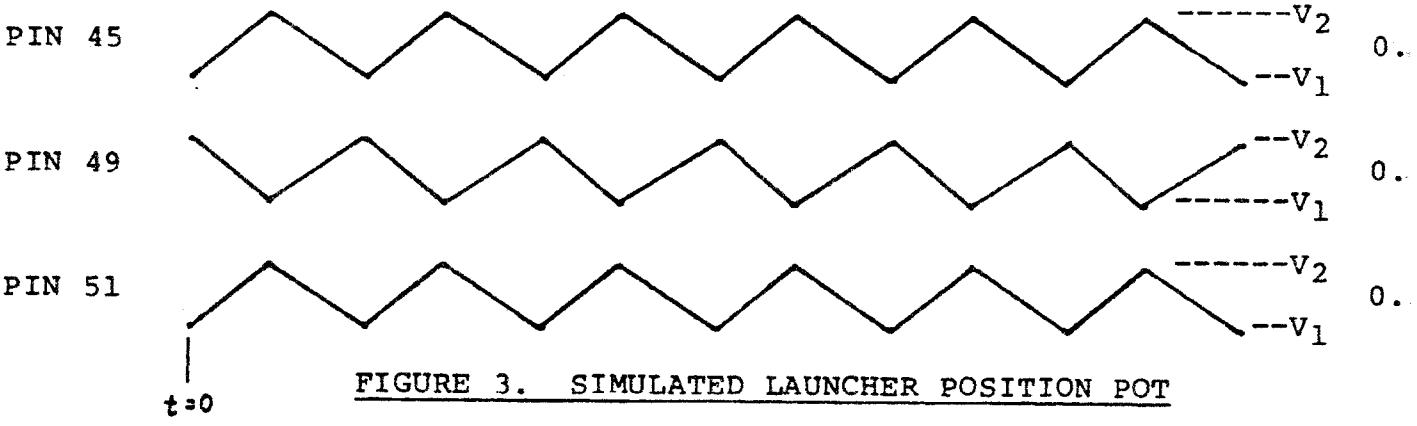


FIGURE 3. SIMULATED LAUNCHER POSITION POT

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

BITE MODE TEST

Test 5C (50º Right)

INPUT Pin No.	Voltage (V_1, V_2)	OUTPUT Pin No.	Voltage (V_1, V_2)
60	0	51	Fig. 2 (3.89, 8.05) (
58	0	63	Fig. 1
59	14	39	Fig. 1
46	0 (B)		
47	0 (B)		
48	0		
50	Fig. 2 (-.378, 7.94) (B)		

Test 5D (40º Left)

INPUT Pin No.	Voltage (V_1, V_2)	OUTPUT Pin No.	Voltage (V_1, V_2)
60	14	51	Fig. 2 (6.68, 10.
58	14	63	Fig. 1
59	0	39	Fig. 1
46	0 (B)		
47	0 (B)		
48	0		
50	Fig. 2 (-4.54, 2.36) (B)		

Test 5E (40º Right)

INPUT Pin No.	Voltage (V_1, V_2)	OUTPUT Pin No.	Voltage (V_1, V_2)
60	0	51	Fig. 2 (3.89, 7.34) (
58	14	63	Fig. 1
59	0	39	Fig. 1
46	0 (B)		
47	0 (B)		
48	0		
50	Fig. 2 (1.04, 7.94) (B)		

(B) denotes change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

Test 5F

INPUT Pin No.	Voltage
60	0
58	0
59	0
46	0
47	0
48	0
50	0

OUTPUT Pin No.	Voltage
63	0
39	24

Test 5G

INPUT Pin No.	Voltage
60	14
58	0
59	0
46	0
47	0
48	0
50	0

OUTPUT Pin No.	Voltage
63	24
39	0

Test 5I

INPUT Pin No.	Voltage
60	14
58	14
59	14
46	0
47	0
48	0
50	0
63	24(B)

OUTPUT Pin No.	Voltage
63	0
39	24

Test 6A (90° Full)

INPUT Pin No.	Voltage (V_1, V_2)
60	0
58	14
59	14
46	0
47	0
48	14
49	Fig. 3 (5.12, 8.68) (B)
45	Fig. 3 (4.74, 8.16) (B)

OUTPUT Pin No.	Voltage (V_1, V_2)
51	Fig. 3 (3.89, 10.13)
63	Fig. 1
39	Fig. 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

(B) denotes ch

Test 6B (50° Left)

INPUT		OUTPUT	
Pin No.	Voltage (V_1, V_2)	Pin No.	Voltage (V_1, V_2)
60	14	51	Fig. 3 (5.94, 10.1
58	0	63	Fig. 1
59	14	39	Fig. 1
46	0		
47	0		
48	14		
49	Fig. 3 (5.09, 7.44) (B)		
45	Fig. 3 (6.04, 8.25) (B)		

Test 6C (50° Right)

INPUT		OUTPUT	
Pin No.	Voltage (V_1, V_2)	Pin No.	Voltage (V_1, V_2)
60	0	51	Fig. 3 (3.89, 8.05
58	0	63	Fig. 1
59	14	39	Fig. 1
46	0		
47	0		
48	14		
49	Fig. 3 (6.15, 8.51) (B)		
45	Fig. 3 (4.99, 7.20) (B)		

Test 6D (40° Left)

INPUT		OUTPUT	
Pin No.	Voltage (V_1, V_2)	Pin No.	Voltage (V_1, V_2)
60	14	51	Fig. 3 (6.68, 10.1
58	14	63	Fig. 1
59	0	39	Fig. 1
46	0		
47	0		
48	14		
49	Fig. 3 (5.03, 6.88) (B)		
45	Fig. 3 (6.53, 8.29) (B)		

(B) denotes change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

Test 6E (40° Right)

INPUT Pin No.	Voltage (V_1, V_2)
60	0
58	14
59	0
46	0
47	0
48	14
49	Fig. 3 (6.60, 8.46) (B)
45	Fig. 3 (5.03, 6.79) (B)

OUTPUT Pin No.	Voltage (V_1, V_2)
51	Fig. 3 (3.89, 7.34) (B
63	Fig. 1
39	Fig. 1

Test 6F

INPUT Pin No.	Voltage
60	0
58	0
59	0
46	0
47	0
48	14
45	0
49	0

OUTPUT Pin No.	Voltage
63	0
39	24

Test 6G

INPUT Pin No.	Voltage
60	14
58	0
59	0
46	0
47	0
48	14
45	0
49	0

OUTPUT Pin No.	Voltage
63	24
39	0

(B) denotes change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

Test 6H

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	Voltage
60	14	63	24 (B)
58	14	39	24
59	14		
46	0		
47	0		
48	14		
45	0		
49	0		

(B) denotes change

Custodian:
Army-AR

Preparing Activity:
Army-AR

(Project 1095-A140/4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-63371/4B (AR)	

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.