MILITARY SPECIFICATION

HEADSET-MICROPHONE, LIGHTWEIGHT, SUPRA-AURAL,
GENERAL SPECIFICATION FOR

This amendment forms a part of MIL-H-83535, dated 1 September 1989, and is approved for use by the Department of Air Force and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 19

3.5.1, delete and substitute:


"3.5.1 Transmit output level. With the exception of test condition 3, when tested as specified in 4.8.2, the 1,000 Hz output level shall be -22.5 ±4 dBV. While under test condition 3, the 1,000 Hz output shall be within 6 dB of the level measured in test condition 4. When tested with an electrically similar headset connected in parallel, the 1,000 Hz output level shall be within 6.5 dB of the value measured as a single headset."

3.5.2, delete in its entirety.

PAGE 20

FIGURE 14, delete and substitute.

"

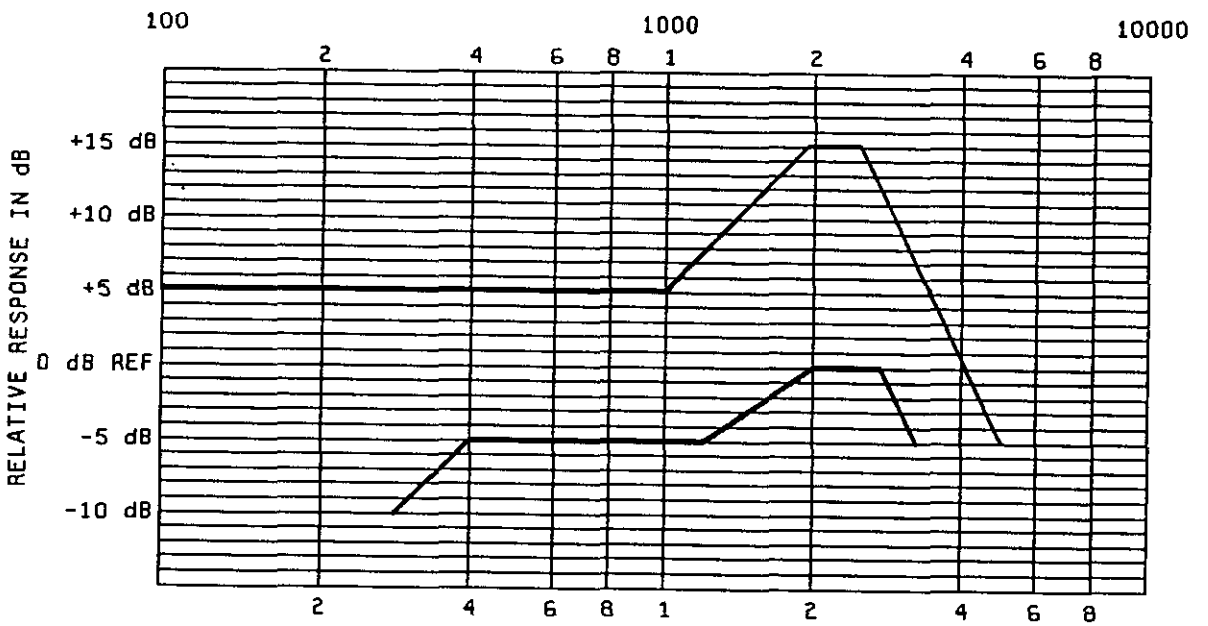

NOTE: The response curve is typical and may 'float' within the envelope.
FIGURE 14. Transmit response envelope. "

DISTRIBUTION STATEMENT A. Approved for public release: distribution unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-23T08:43Z
Check the source to verify that this is the current version before use.

PAGE 21

3.6.2, delete in its entirety.

3.6.7, delete and substitute.

"3.6.7 Receiver linearity. When a headset with volume control is specified (see 3.1), the receiver output shall remain within the envelope limits of figure 18 when tested as specified in 4.8.17."

3.6.8, delete and substitute.

"3.6.8 Common mode rejection. When a headset with volume control is specified (see 3.1), the receiver output shall be at least 40 dB below the level of paragraph 3.6.4 when tested as specified in 4.8.18."

3.6.10, delete and substitute.

"3.6.10 Transition times. When a headset with volume control is specified (see 3.1), the transition time requirements of paragraphs 3.6.10.1 through 3.6.10.4 shall apply."

PAGE 28

TABLE II, Group I, Transmit loudness level: Delete.

TABLE II, Group I, Receiver loudness level: Delete.

PAGE 30

TABLE III, Transmit loudness level: Delete.

TABLE III, Receiver loudness level: Delete.

PAGE 31

4.6.2.1.1, delete and substitute:

"4.6.2.1.1 Sampling plan. Four sample units shall be selected from each 6-months production or each 2,500 units, whichever occurs first after date of notification of qualification."

PAGE 34

4.7.3, delete in its entirety.

Source: https://assist.dla.mil -- Downloaded: 202610-23T08:43Z
Check the source to verify that this is the currentversion before use.

4.7.8, delete and substitute:

"4.7.8 DC resistance (see 3.5.7). The dc resistance in ohms shall be determined as V_h (in volts)/I_h (in amperes) (see figure 19)."


4.7.12, delete in its entirety.

4.7.21, delete and substitute:

"4.7.21 Input impedance. Receiver impedance shall be determined to be the average of measurements taken at 500 Hz, 1,000 Hz, and 2,000 Hz. Each measurement shall be taken using the constant current method described in figure 21."

$$I = \frac{10V}{100K\Omega} = 100uA$$

$$Z = \frac{V_1}{100uA} = 10^4\ V_1$$

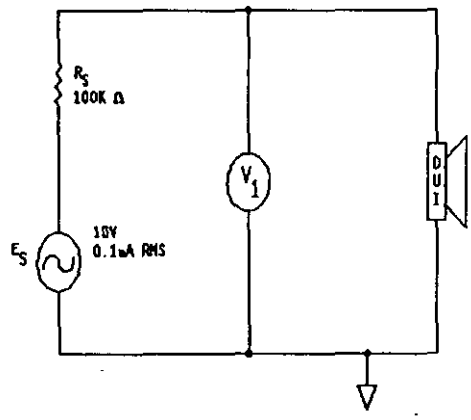

NOTES:

1. Constant current generator may be made with oscillator in series with 100 ohm resistor. Other values of E_s may be used (3.0 V_{RMS} min.). Then

$$Z = \frac{V_1}{E_S} \times 100K\Omega$$

2. Do not use ammeter to set current. Use floating voltmeter (true RMS) across R_S to avoid ground loops
3. Example calculation: V_1 is 30mV for 300 ohms Z and V_1 is 600 ohms Z.
4. All tolerances are ±1%.

FIGURE 22. Input impedance test circuitry."

4.7.26.1.b(3), delete: "Pressure range 8.7 to 14.7 psia"

4.7.26.3, delete and substitute:

"4.7.26.3 Vibration (see 3.11.3). The headset shall be exposed to 0.5g peak (displacement less than .03 inch) sinusoidal vibration along each of three orthogonal axes. Frequency shall be swept logarithmically at 0.1 octave per minute from 5 to 100 Hz and 0.25 octave per minute from 100 to 500 Hz for a total of approximately 1 hour in each axis."

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:43Z
Check the source to verify that this is the current version before use.

4.7.27, delete and substitute:

"4.7.27 Cable flexing (see 3.12). The cable shall be run through 50,000 flex cycles over a 1/4-inch radius, 60° to each side of vertical at a rate of 85 flex cycles per minute with a load of 12 ±1/4 ounces attached to the lower end of the cable. One cycle equals two complete 120° arcs of travel. Failure of the cable shall be considered as a 25 percent increase in the initial resistance of the test sample in which the four or six conductors are connected in series."

CONCLUDING MATERIAL

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5965-F219)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:43Z
Check the source to verify that this is the current version before use.