



Command Name : BL_GET_VER

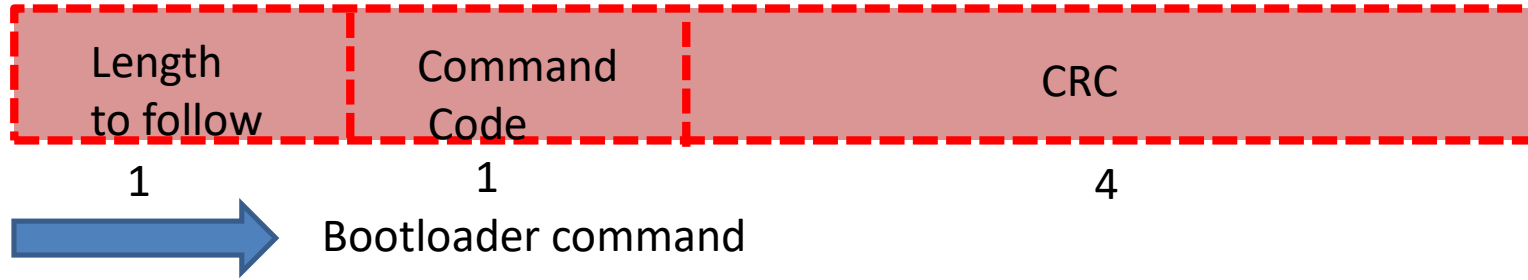


Total Bytes of the packet = 6

"Length to follow" field will contain the value : 5

Command Code : 0x51

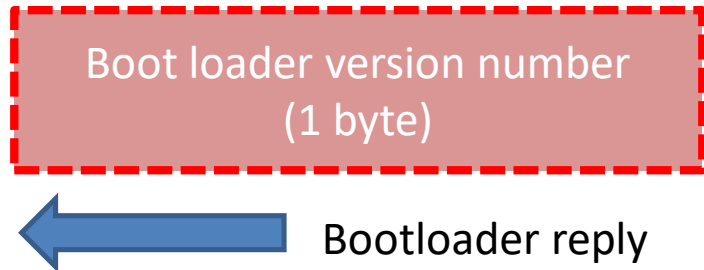


Command Name : BL_GET_HELP

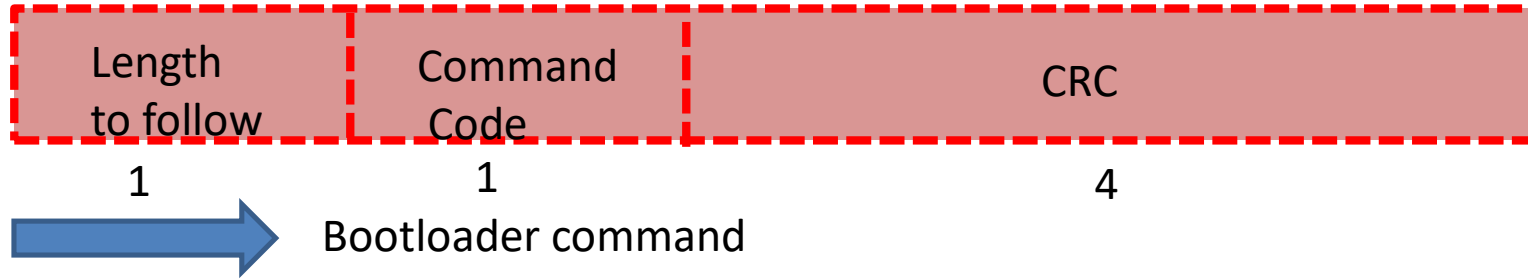


Total Bytes of the packet = 6

"Length to follow" field will contain the value : 5

Command Code : 0x52

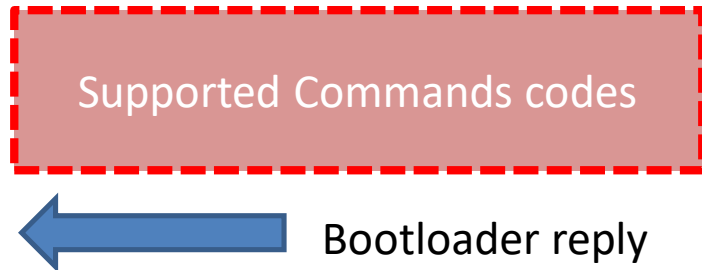


Command Name : BL_GET_CID

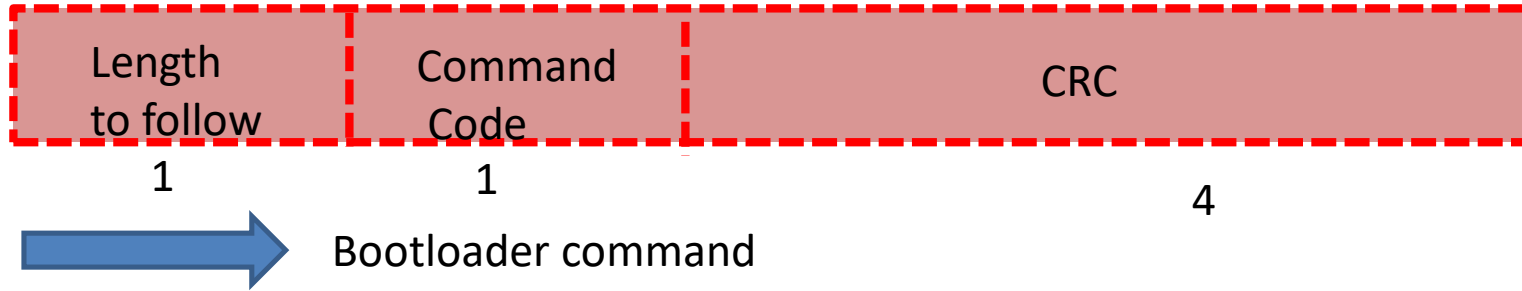


Total Bytes of the packet = 6

“Length to follow ” field will contain the value : 5

Command Code : 0x53

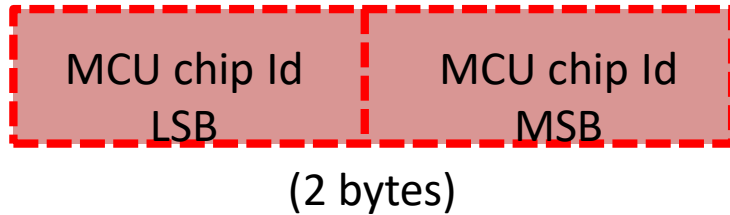

Command Name : BL_GET_RDP_STATUS

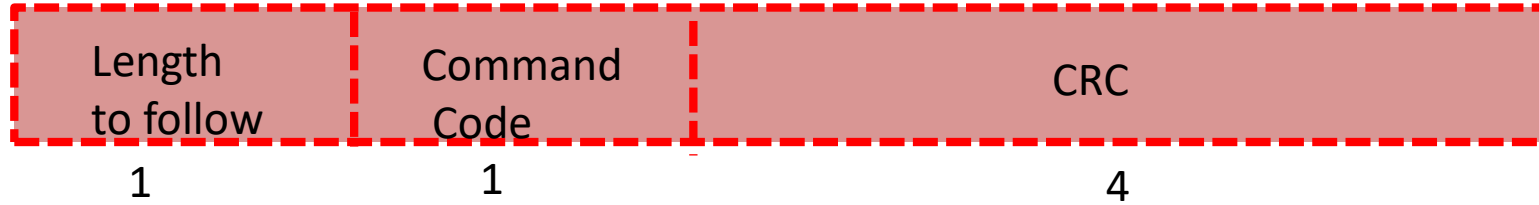

 Bootloader command

Total Bytes of the packet = 6

“Length to follow ” field will contain the value : 5


Command Code : 0x54



(1 bytes)

 Bootloader reply

Command Name : BL_GO_TO_ADDR

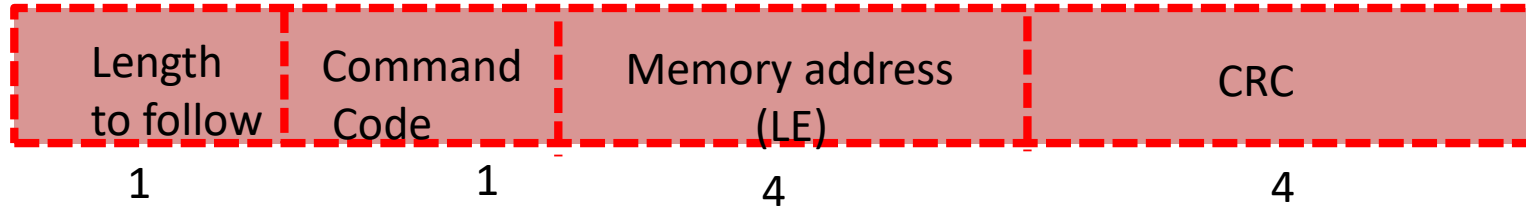

Bootloader command

Total Bytes of the packet = 10

“Length to follow ” field will contain the value : 9

Command Code : 0x55

Base Memory Addr. :

4 Byte base address to jump




(1 byte)



Bootloader reply

Command Name : BL_FLASH_ERASE

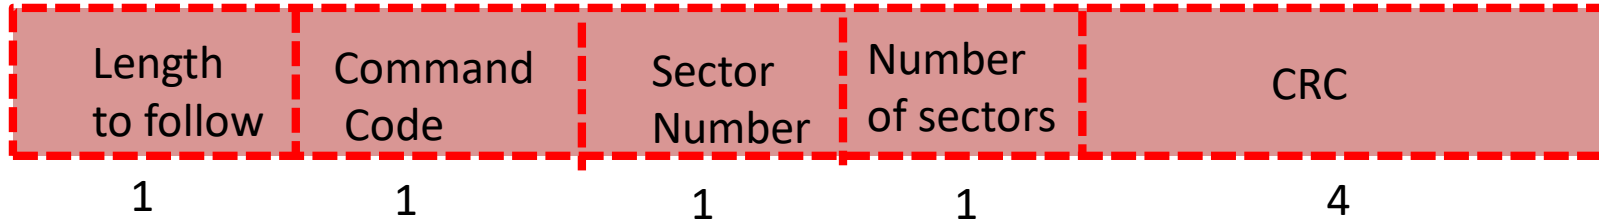

Bootloader command

Total Bytes of the packet = 8

“Length to follow ” field will contain the value : 7

Command Code : 0x56

Sector number : 0 , 1 , 2 , 3 , 4 , 5 , 6 , 7

Number of sectors : 0 to 7




(1 byte)



Bootloader reply

Command Name : BL_MEM_WRITE

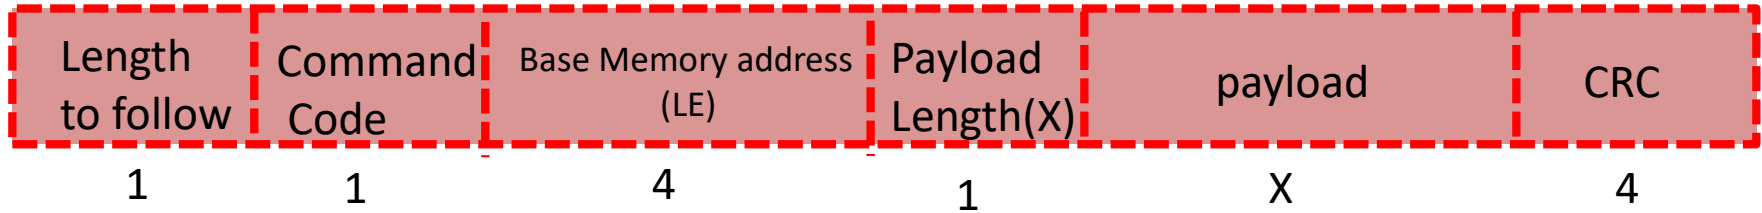

Bootloader command

Total Bytes of the packet = $11+X$

“Length to follow ” field will contain the value : $10+X$

Command Code : 0x57

Base Memory Addr. :

4 Byte base address

Payload len: No. of bytes to write

Payload : bytes to write



(1 byte)



Bootloader reply