NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.


MIL-PRF-22885/93B
27 February 1985
SUPERSEDING
MIL-S-22885/93A(EC)
30 November 1981

PERFORMANCE SPECIFICATION SHEET

SWITCH, PUSHBUTTON, ILLUMINATED, ROCKER, PADDLE, LOGIC LOAD TO 3 AMPERES, UNSEALED

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switches described herein shall consist of this specification and the latest issue of MIL-S-22885.

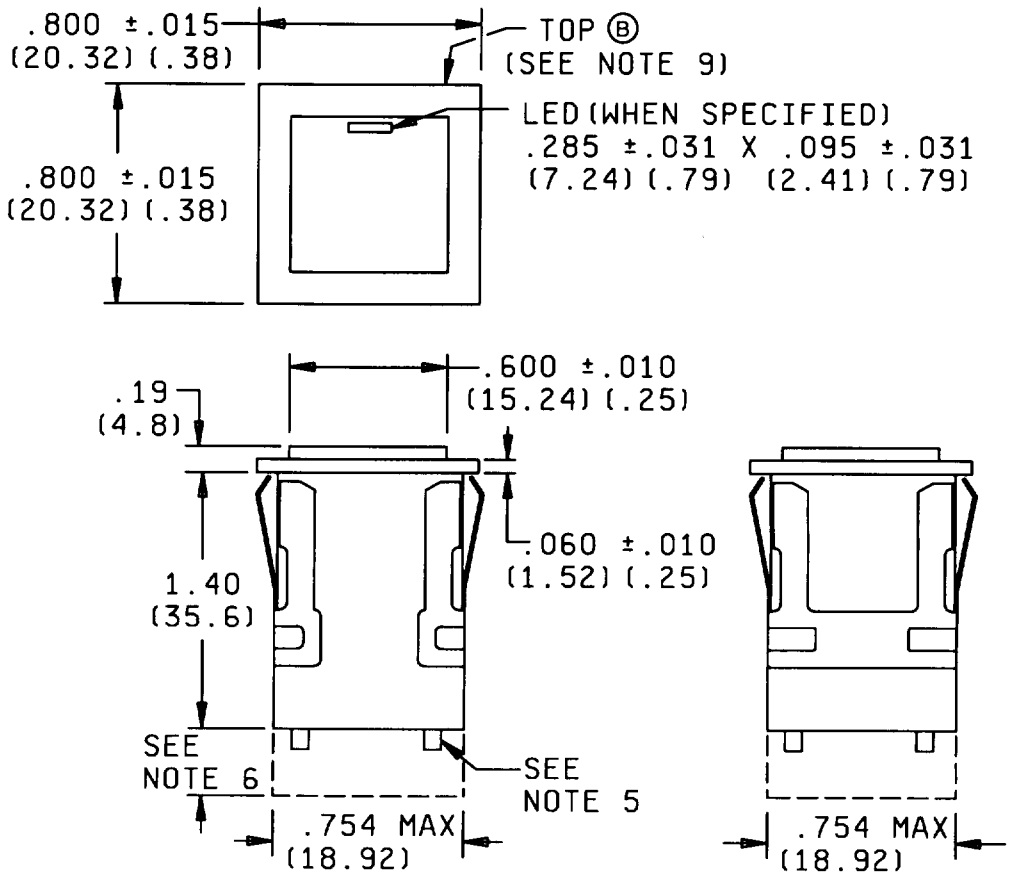


PUSHBUTTON-SQUARE
(SWITCH AND INDICATOR)

FIGURE 1. Configurations and dimensions

Ⓑ denotes changes

FSC 5930


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:31Z
Check the source to verify that this is the current version before use.

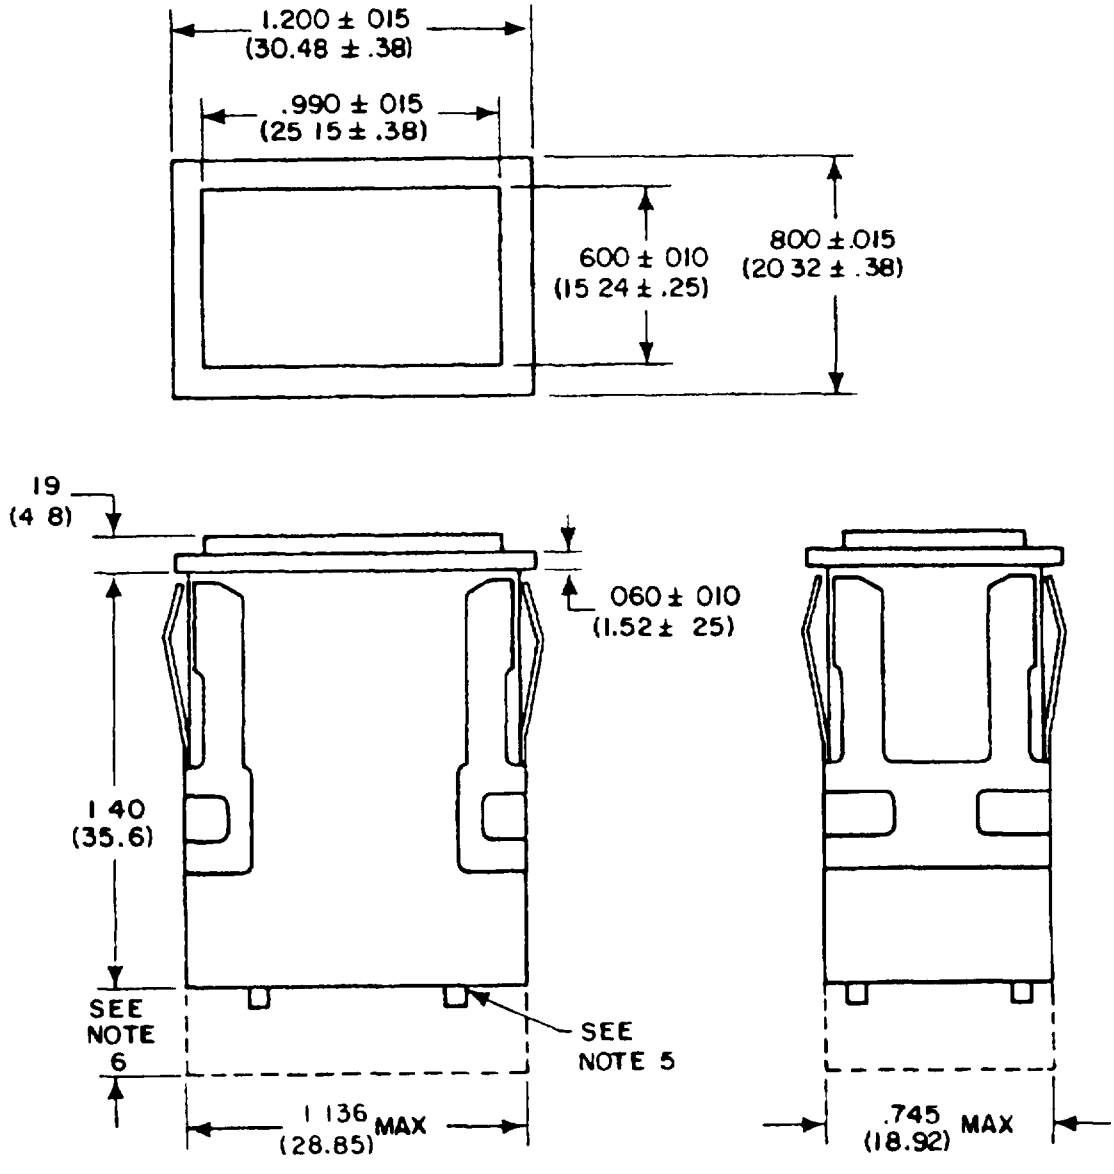

PUSHBUTTON-RECTANGULAR
(Switch and indicator)

FIGURE 1. Configurations and dimensions - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:31Z
Check the source to verify that this is the current version before use.

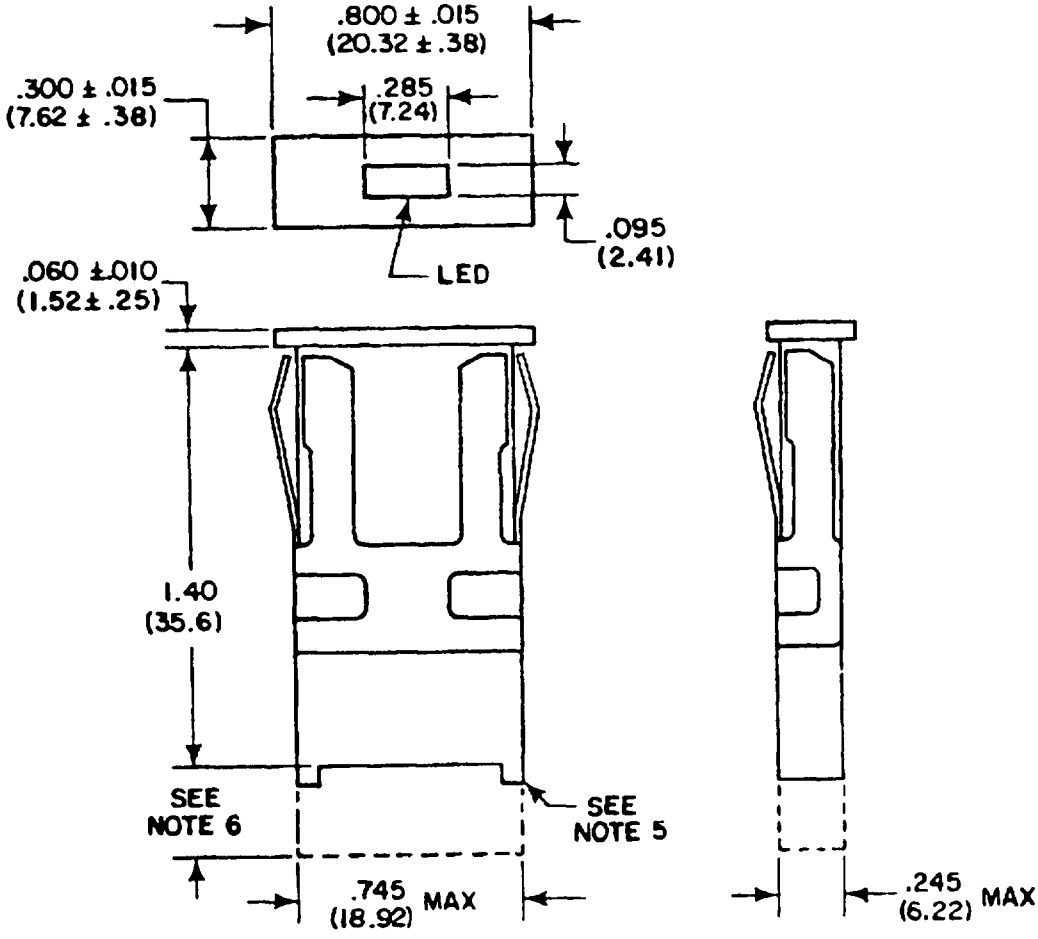

MINIATURE INDICATOR

FIGURE 1. Configurations and dimensions - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:31Z
Check the source to verify that this is the current version before use.

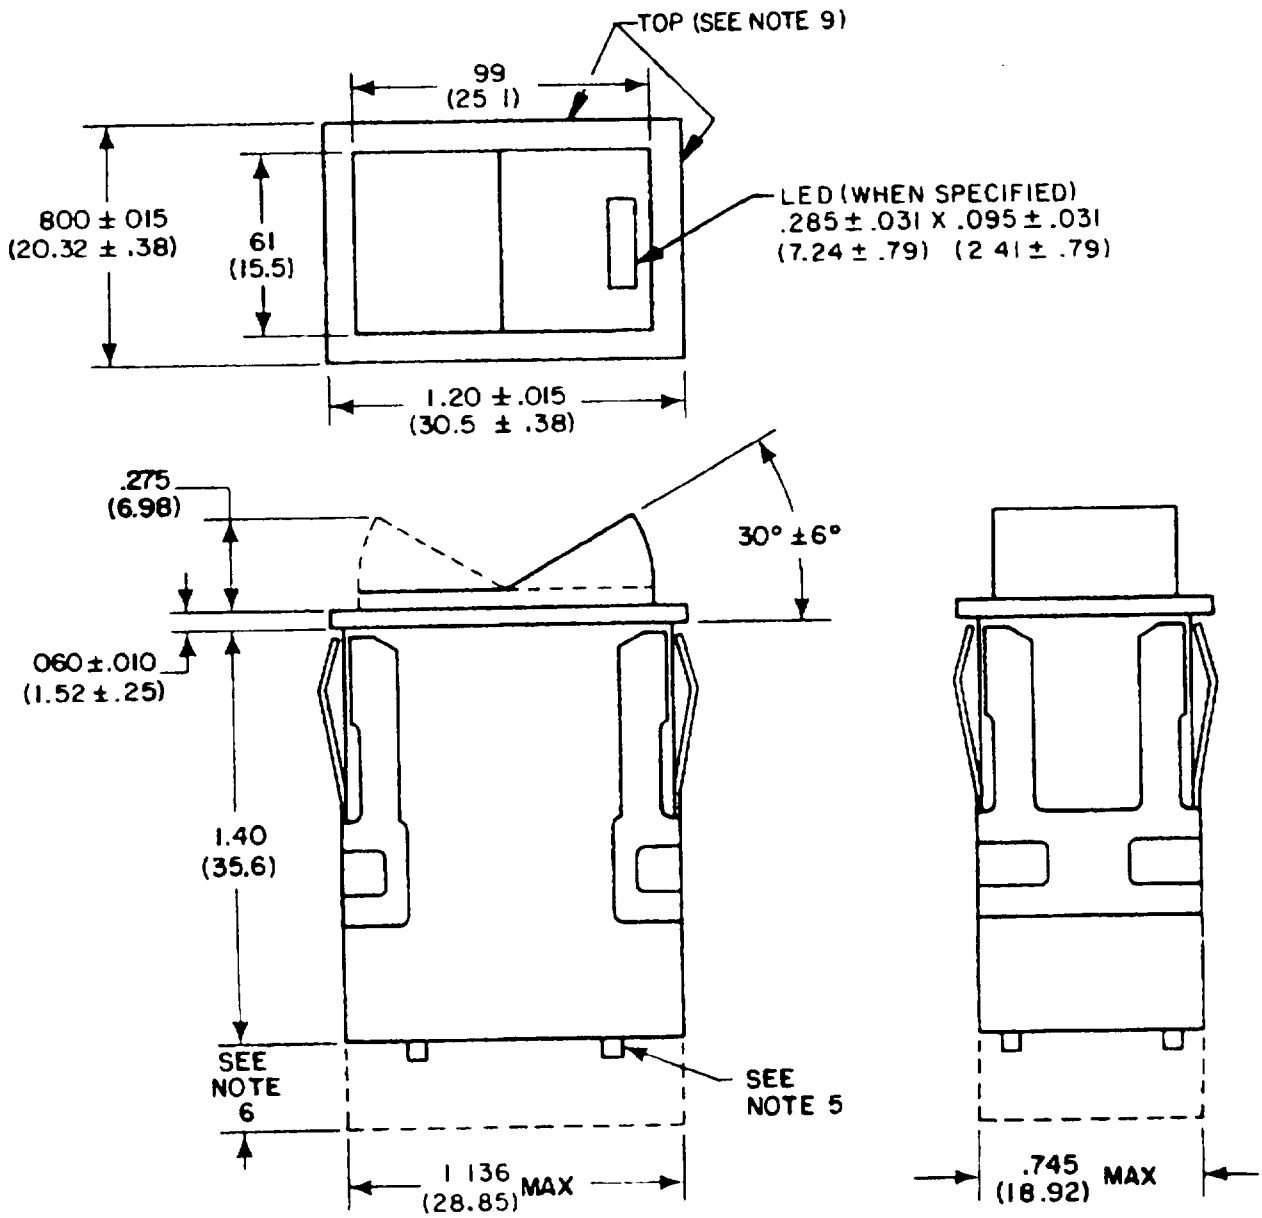

ROCKER
(Switch only)

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil - Downloaded: 2026-10-19T14:31Z
Check the source to verify that this is the current version before use.

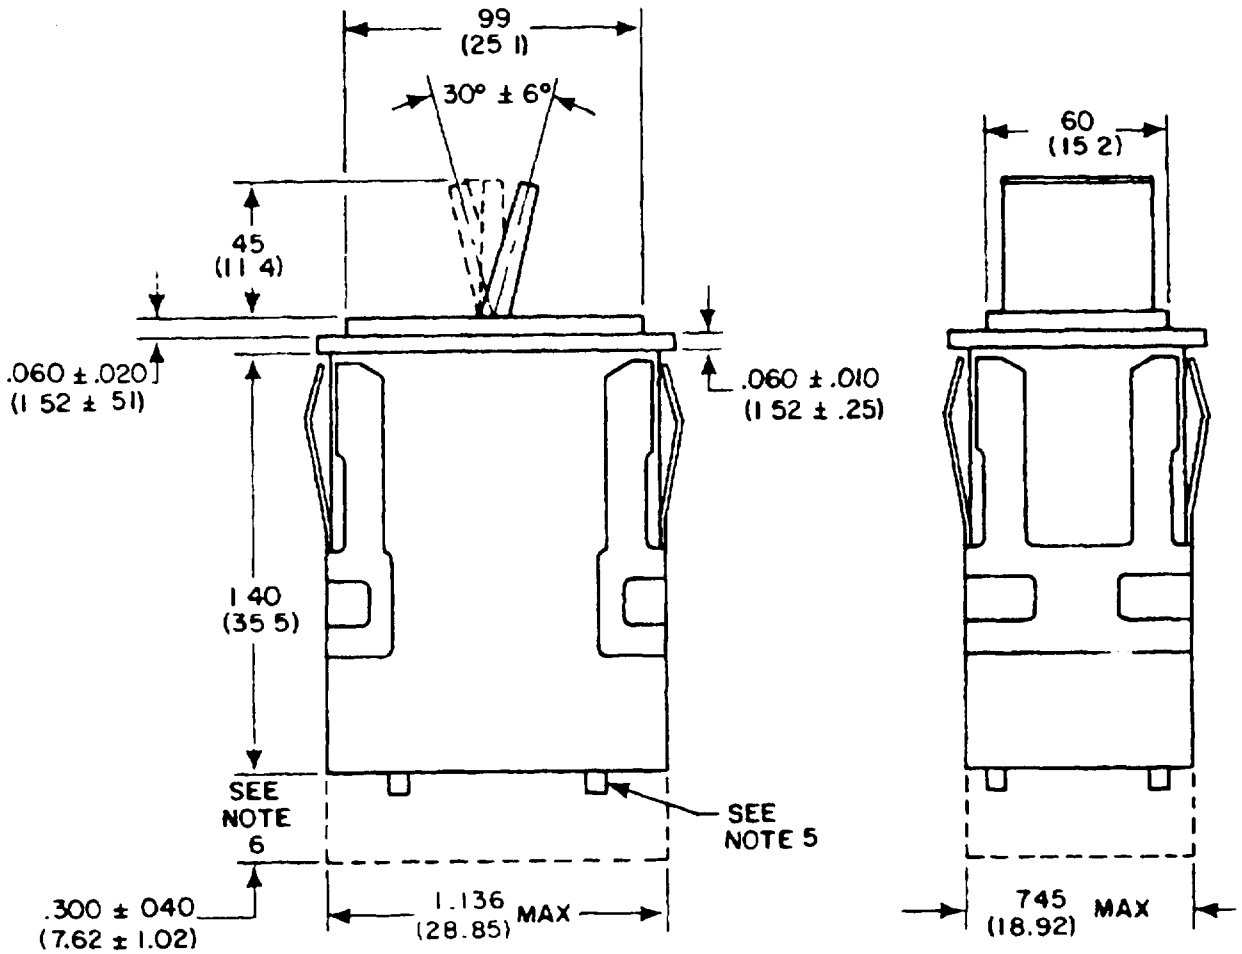


PADDLE
(Switch only)

NOTES
1. Dimensions are in inches.
2. Tolerances are ±.031 (±0.79 mm) unless otherwise specified.
3. Switches shall mount on .060-.187 (1.52-4.75 mm) panel thickness.
4. The design configuration is optional within envelope dimensions shown.
5. .059 ±.015 (1.50 ±.38 mm) high x .065 ±.021 (1.65 ±.53 mm) diameter standoffs are provided.
6. See figures 2 thru 8 for terminal size and location.
7. Metric equivalents are given for general information only.
8. Metric equivalents are in parentheses.
(B) 9. Top side(s) of switch is shown to insure proper legend orientation (see figures 3 thru 8). See application information.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:31Z
Check the source to verify that this is the current version before use.

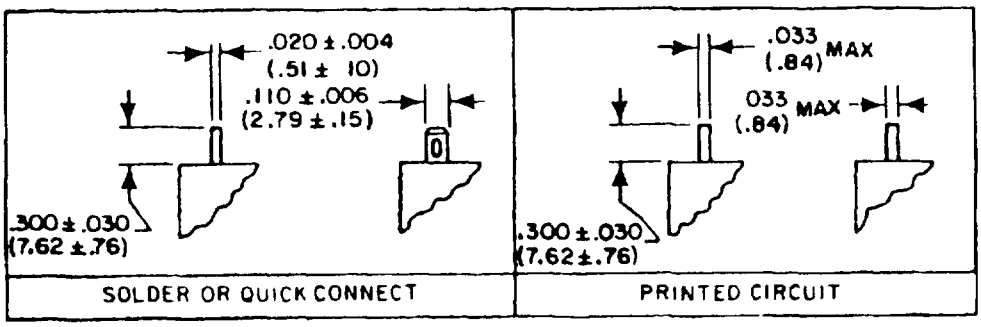


Solder or quick connect - Solder hole will accept two #22 AWG standard conductor (per NEMA publication DC-2 1976)


Printed circuit - See Figure 10 for printed circuit board mounting information.

FIGURE 2. Terminal types.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:31Z
Check the source to verify that this is the current version before use.




SQUARE
1 pole configuration




SQUARE
2 pole configuration




SQUARE
4 pole configuration



RECTANGULAR
1 pole configuration



RECTANGULAR
2 pole configuration




RECTANGULAR
4 pole configuration

Illuminated devices shown-for nonilluminated devices, lamp terminals are not provided.


NOTES
1. Top side of switch is shown to insure proper legend orientation. See application information.
2. Switch terminals shall be located relative to top side(s) of switch as shown. Orientation of switch terminals is optional.
3. Location and orientation of lamp (or LED) terminals optional.
4. Terminal identification marking shall be as shown. Terminal identification may be marked on adjacent side of housing.
(B) 5. Minimum spacing between terminals, and minimum distance from terminal edge to edge of housing is .045 inch.

(B) FIGURE 3. Terminal location-push buttons - solder or quick connect terminals.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:31Z
Check the source to verify that this is the current version before use.

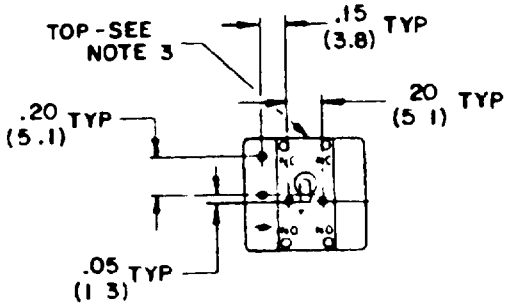


SQUARE
1 pole configuration
.033 max P.C. termination

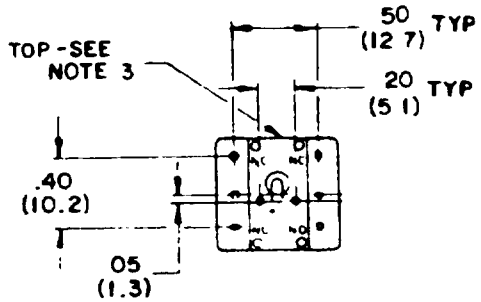

SQUARE
2 pole configuration
.033 max P.C. termination

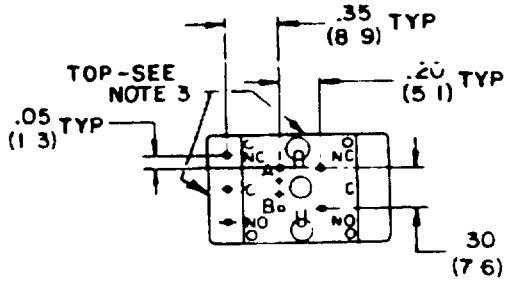

RECTANGULAR
1 pole configuration
.033 max P.C. termination

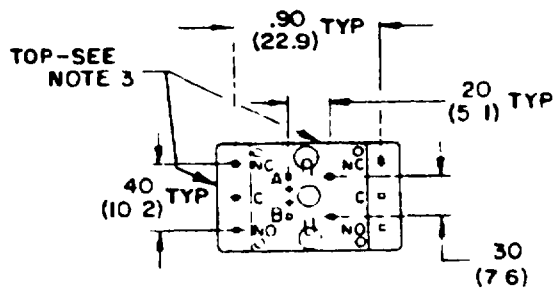


RECTANGULAR
2 pole configuration
.033 max P.C. termination


Illuminated devices shown-for nonilluminated devices, lamp terminals are not provided.

FIGURE 4. Terminal location-push button - printed circuit terminals.

Source: https://assist.dla.mil - Downloaded: 2026Ø10-19T14:31Z
Check the source to verify that this is the current version before use.

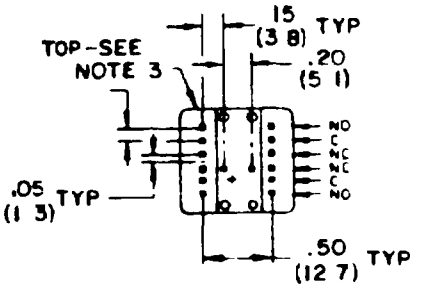

SQUARE
4 pole configuration
.033 max P.C. termination

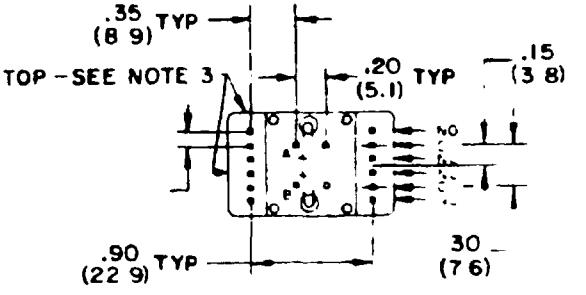


RECTANGULAR
4 pole configuration
.033 max P.C. termination

Illuminated devices shown-for nonilluminated devices, lamp terminals are not provided.


NOTES:
1. Dimensions are in inches.
2. Tolerances are ±.015 (±0.38 mm) unless otherwise specified.
(B) 3. Top side of switch is shown to insure proper legend orientation. See application information.
4. Metric equivalents are given for general information only.
5. Metric equivalents are in parentheses.

FIGURE 4. Terminal location-push button - printed circuit terminals - Continued.


Source: https://assist.dla.mil -- Downloaded: 202640-19T14:31Z
Check the source to verify that this is the currenversion before use.



1 pole, .020 x .110 termination




2 pole, .020 x .110 termination




4 pole, .020 x .110 termination


(B) Solder or quick connect terminals.

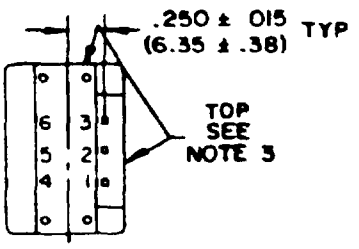

1 pole, .033 max P.C. termination

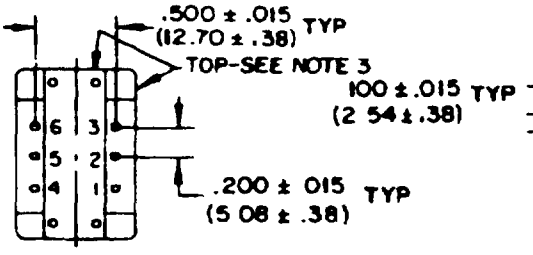

2 pole, .033 max P.C. termination



4 pole, .033 max P.C. termination


Printed circuit terminals.

NOTES
1. Dimensions are in inches.
2. Tolerances are ±.031 (±0.79 mm) unless otherwise specified.
(B) 3. Top side of switch is shown to insure proper legend orientation. See application information.
4. Metric equivalents are given for general information only.
5. Metric equivalents are in parentheses.
(B) 6. Solder/quick connect terminals shall be located relative to top sides of switch as shown, and terminal orientation is optional.
(B) 7. Solder terminals Minimum spacing between terminals, and minimum distance to edge of housing is .045 inch.


FIGURE 5. Terminal locations-rockers and paddles - nonilluminated.

Source: https://assist.dla.mil -- Downloaded: 202610-19T14:31Z
Check the source to verify that this is the current version before use.

(B) Solder or quick connect terminals.




1 pole, .020 x .110 termination




2 pole, .020 x .110 termination

Printed circuit terminal

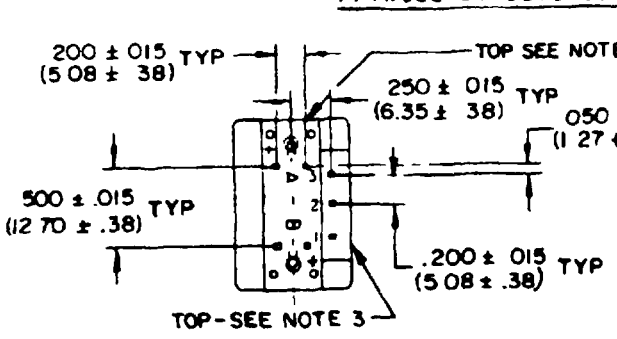

1 pole, .033 max P.C. termination

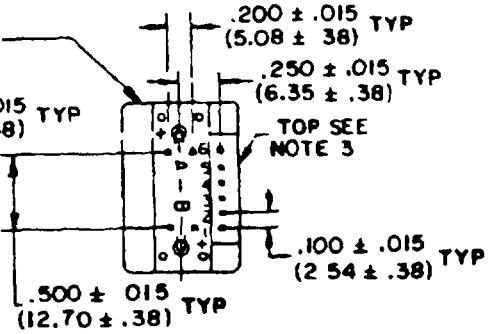


2 pole, .033 max P.C. termination


NOTES
1. Dimensions are in inches.
2. Tolerances are ±.031 (±0.79 mm) unless otherwise specified.
(B) 3. Top side of switch is shown to insure proper legend orientation. See application information.
4. Metric equivalents are given for general information only.
5. Metric equivalents are in parentheses.
(B) 6. Solder/quick connect terminals: Switch terminals shall be located relative to top sides of switch as shown. Orientation of switch terminals is optional.
(B) Location and orientation of lamp terminals is optional.
7. Solder terminals: Minimum spacing between terminals, and minimum distance to edge of housing is .045 inch.

FIGURE 6. Terminal locations-rockers and paddles - illuminated.


Source: https://assist.dla.mil -- Downloaded: 202610-19T14:31Z
Check the source to verify that this is the current version before use.




Square configuration
1 LED circuit
EITHER TERMINAL
ARRANGEMENT ACCEPTABLE




Miniature indicator configuration
1 LED circuit




Square configuration
1 incandescent lamp circuit
either terminal arrangement acceptable.

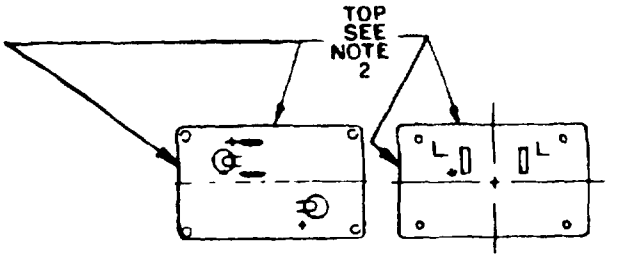

Rectangular configuration
1 incandescent lamp circuit
either terminal arrangement acceptable.



Square configuration
2 incandescent lamp circuits

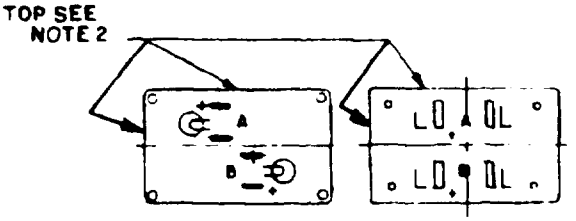


Rectangular configuration
2 incandescent lamp circuit
either terminal arrangement acceptable.


NOTES.
1. Positive terminal identification (+) marked on side of housing.
2. Top side of switch is shown to insure proper legend orientation. See application information.
(B) 3 Minimum spacing between terminals, and minimum distance from terminal edge to edge of housing is .045 inch

(B) FIGURE 7. Terminal locations - indicators - solder or quick connect terminals


Source: https://assist.dla.mil -- Downloaded: 202610-19T14:31Z
Check the source to verify that this is the current version before use.




Square configuration
1 LED circuit

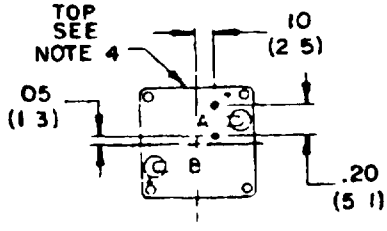


Square configuration
1 incandescent lamp circuit

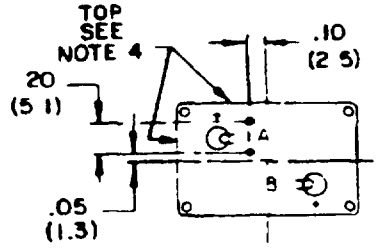


Rectangular configuration
1 incandescent lamp circuit

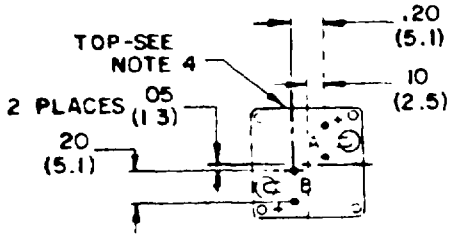

Square configuration
2 incandescent lamp circuits

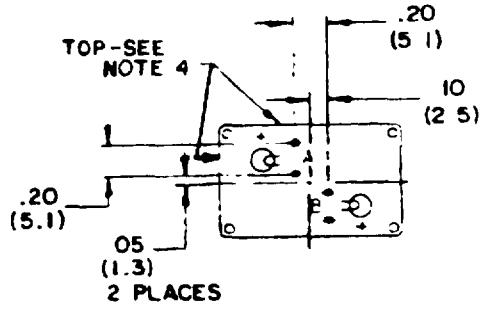

Rectangular configuration
2 incandescent lamp circuits

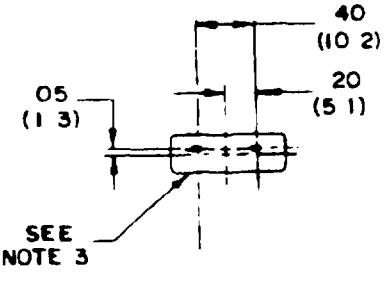


Miniature indicator configuration
1 LED circuit


NOTES
1. Dimensions are in inches.
2. Tolerances are ±.015 (±0.38 mm) unless otherwise specified.
3. Positive terminal identification (+) marked on side of housing.
(B) 4. Top side of switch is shown to insure proper legend orientation. See application information.
5. Metric equivalents are given for general information only.
6. Metric equivalents are in parentheses.

FIGURE 8. Terminal locations - indicators - printed circuit terminals.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:31Z
Check the source to verify that this is the current version before use.

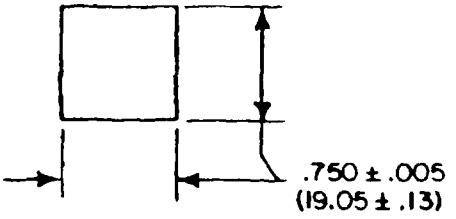

Square configuration

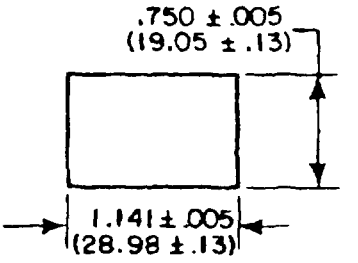

Rectangular configuration

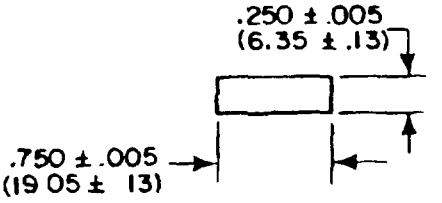

Miniature indicator configuration

Strip Mounting (see notes 4 and 5)


Square units	Rectangular units
(.8) (No. of units) — .045 (20,3) (No of units)— 1,14	(1.20) (No. of units) —.045 (30,5) (No. of units) — 1,14

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Metric equivalents are in parentheses.
4. See application information for strip mounting information.
5. Miniature indicator not suitable for strip mounting.

FIGURE 9. Panel cutouts

Source: https://assist.dla.mil -- Downloaded: 202640-19T14:31Z
Check the source to verify that this is the currenversion before use.


Basic dimensions for strip mounting are .800 (20.32 mm) for square units. .800 (20.32 mm) and 1.200 (30.48 mm) for the rectangular units

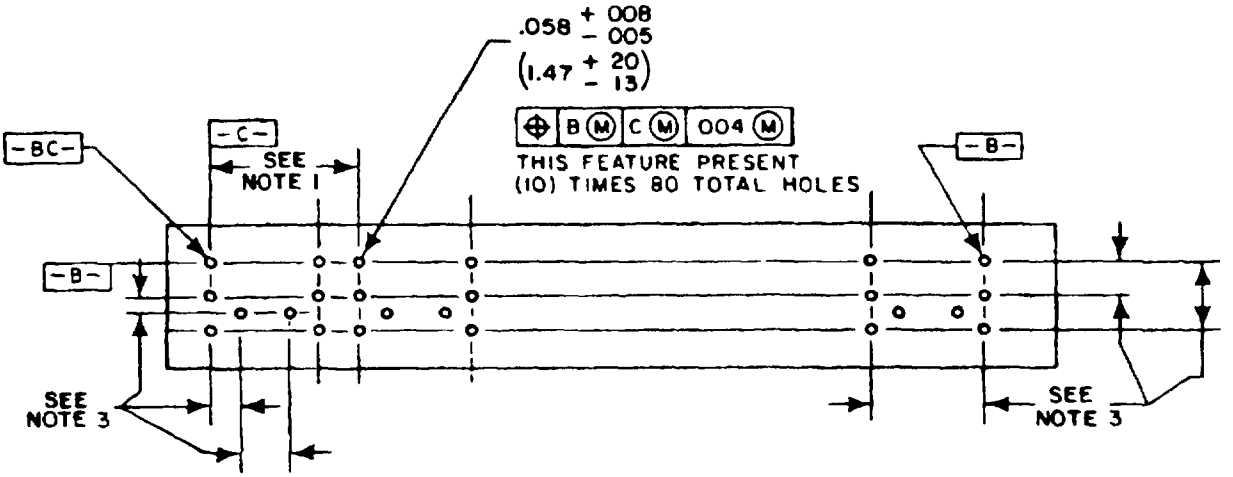

NOTES:
1. Dimension for square .800 (20.32 mm) typ.
   Dimension for rectangular - 1.200 (30.48 mm) typ. (horizontal)
   .800 (20.32 mm) typ. (vertical.)
2. Component side shown.
3. Basic dimensions for each component hole pattern spacing are the nominal dimensions as shown on figures 4, 5, 6, and 8 for printed circuit terminals.
4. Dimensions are in inches.
5. Metric equivalents are given for general information only.
6. Metric equivalents are in parentheses

FIGURE 10. Printed circuit board dimensions for strip mount.

Source: https://assist.dla.mil -- Downloaded: 202610-19T14:31Z
Check the source to verify that this is the current version before use.

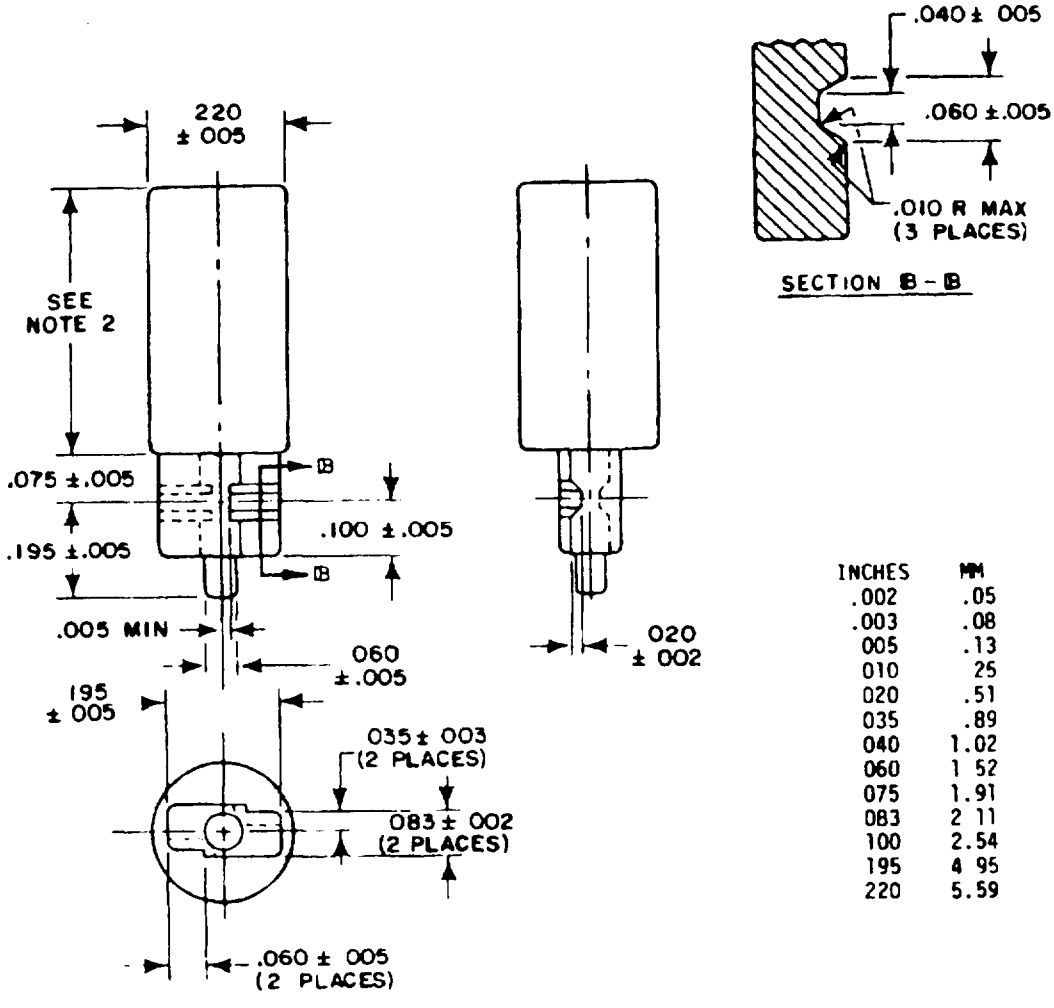

INCHES	MM
.002	.05
.003	.08
005	.13
010	25
020	.51
035	.89
040	1.02
060	1 52
075	1.91
083	2 11
100	2.54
195	4 95
220	5.59

NOTES
1. All radii .030 ± 015 (76 ± 38 mm) unless otherwise specified.
2. This dimension shall be adjusted to provide a total weight of 5 $^{+1}_{-0}$ gram.
3. May be of multi-piece construction
4. May be suitably plated to resist corrosion
5. Dimensions are in inches
6. Metric equivalents are given for general information only.

FIGURE 11. T1 3/4 wedge base lamp retention plug.

Source: https://assist.dla.mil -- Downloaded: 202610-19T14:31Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration. See figures 1 through 11.

Complete switch shall consist of:

Switch housing - The switch housing shall include mounting clips.

Actuation and display - Unassembled, when furnished.

Pushbutton actuation:

Transmitted color - (One translucent colored button is furnished when specified).
Projected color - (One white translucent cap and a transparent color insert is furnished when specified).
Hidden color - (One black appearing cap and a translucent color insert is furnished when specified).
Nonilluminated - (One translucent colored button is furnished when specified).
LED - (The rectangular LED is furnished as an integral part of the switch which extends through a window in the translucent colored button to extend flush with the top of the button surface).

Indicators Square and rectangular indicators are furnished with the same display features as detailed for the illuminated pushbuttons. Miniature indicators are furnished with LED illumination only.

Rocker actuation: Same features as detailed for the pushbutton actuation except the rocker operator can be provided as one piece full rocker or two piece rocker for contrasting color selection.

Paddle actuation Same features as detailed for the pushbutton actuation except paddle cover is provided as a two piece cover.

(B) Lamps Not furnished. Illuminated switches will accept T-1 3/4 subminiature wedge base incandescent lamps (Industry Lamp No. 73 (14 volt), No. 85 (28 volt), and No. 86 (6.3 volt)).

Enclosure design 1 (unsealed).

Temperature characteristic 0°C to +55°C.

Vibration grade 2 (10-500 Hz)

Materials.

LED circuitry Ferrous materials may be used for current carrying parts. The dissimilar metals and compatible couples requirements are not applicable.

Polycarbonate May be used as material for light displays and actuators only providing it meets UL 94V-2 or better.

Printed circuit terminals. Printed circuit terminals shall be treated to facilitate soldering.

Weight See table I.

TABLE I. Weight.

Configuration type	Weight
	Max grams
Square pushbutton	21
Square indicator	20
Rectangular pushbutton	33
Rectangular indicator	25
Miniature indicator	8
Rocker	30
Paddle	33

Source: https://assist.dla.mil -- Downloaded: 202610-19T14:31Z
Check the source to verify that this is the current version before use.

Lamp contacts Contacts for incandescent lamps shall be designed to accept T-1 3/4 wedge base lamps.

LED Shall not be damaged by the application of reverse polarity voltage.

LENS: The lens design shall permit application of hot stamp legends.

Electrical ratings and endurance See table II. The overload, short circuit, and electrical endurance requirements of MIL-S-22885 are not applicable to 10 mA switches. For 10 mA rating, switches shall be tested as follows

The open circuit voltage shall be 5 V dc maximum. The load current shall be 10 mA maximum.

Contact load - Each set of normally open and normally closed contacts shall be connected to individual loads.

Operate cycles - 50,000 at a rate not to exceed 60 cycles per minute with "ON" and "OFF" times approximately equal.

Operating temperatures

Twenty-five percent of the test cycles at the minimum temperature specified

Twenty-five percent of the test cycles at room ambient temperature.

Fifty percent of the cycles at the maximum temperature specified.

During each closure, the contact potential shall be monitored for a minimum of .010 second. The contact voltage drop of any individual switch circuit shall be 50 mV or less during each contact closure.

Lamps shall be energized during test.

TABLE II. Electrical rating/life and initial contact resistance.

Rating	Cycles	Initial contact resistance
3 amperes, 120 V ac (75% Power factor) 2 amperes, 28 V dc (Resistive)	25,000	.100 ohm max
10 mA, 5 V dc (Resistive)	50,000	.050 ohm max

Intermediate current Not applicable

Overload Inductive load ac electrical endurance samples shall be subjected to a resistive overload test at 150 percent of the inductive rating.

Operating characteristics· See table III.

TABLE III. Operating characteristics. 1/

Configuration type	Characteristics	Value
Pushbuttons	Total actuator travel	.180 in min
Rocker	Total actuator travel	30° ±6°
Paddle	Total actuator travel	30° ±6°

1/ Operating characteristics are not applicable to indicators.

Contact resistance (switch)

Initial See table II.

After electrical endurance Not applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:31Z
Check the source to verify that this is the current version before use.

Contact resistance (lamp): Not applicable to LED. Lamp circuit resistance test plug in accordance with figure 12.

Terminal strength Direction of pull to be parallel to the long axis of the terminal only.

Strength of actuating means:

Rocker actuation - The static load shall be gradually applied to the rocker surface when that surface is parallel to the mounting surface.

Paddle actuation: With the paddle in the extreme position, a static load of 15 pounds shall be gradually applied perpendicular to the paddle axis and parallel to the direction of paddle travel.

Thermal shock Temperature extremes shall be -40°C to +65°C.


Shock (specified pulse) MIL-STD-202, method 213, test condition A (50 G's).

Field of view For paddle configuration, obstruction of view by paddle shall not be cause for failure.

Color and luminance: See tables IV and V.

Group A inspection See table VI.

Qualification inspection See table VII.

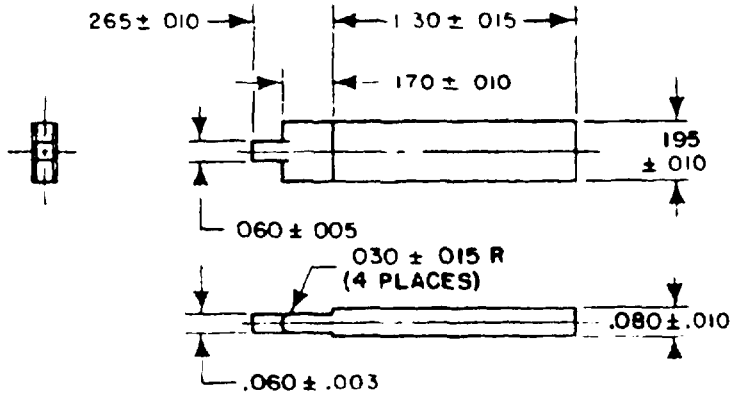

INCHES	MM
.003	.08
.005	.13
.010	.25
.015	.38
.030	.76
.060	1.52
.080	2.03
.170	4.32
.195	4.95
.265	6.73
1.30	33.0

NOTES
1. Dimensions are in inches.
2. Material shall be 1/2 hard brass
3. May be suitably plated to resist corrosion.
4. Metric equivalents are given for general information only.

FIGURE 12. T1 3/4 wedge base lamp circuit resistance test plug.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:31Z
Check the source to verify that this is the current version before use.

TABLE IV. Illuminated chromaticity limits incandescent. 1/2/

Color	Chromaticity coordinates					
	Projected color		Transmitted color		Hidden color	
	"X"	"Y"	"X"	"Y"	"X"	"Y"
Blue	.275	.525	.325	.475	.275	.475
	.275	.450	.250	.475	.225	.475
	.200	.425	.250	.400	.200	.400
	.200	.525	.325	.400	.275	.350
Green	.415	.495	.290	.610	.275	.650
	.375	.450	.255	.525	.195	.595
	.300	.525	.180	.610	.325	.500
	.355	.585	.180	.695	.375	.550
Red	.695	.285	.695	.285	.695	.285
	.710	.290	.710	.290	.710	.290
	.655	.320	.655	.320	.655	.320
	.660	.340	.660	.340	.660	.340
White	.550	.395	.475	.435	.570 (B)	395
	.530	.435	.475	.395	.530	.435
	.460	.435	.530	.435	460	435
	.460	.385	.545	.395	.460	.395
Yellow	.580	.400	.580	.400	.580	.400
	.590	.410	.590	.410	.590	.410
	.515	.450	.515	.450	.515	450
	.525	.475	.525	.475	.525	.475

1/ Measured at 2100° Kelvin using 1 rectangular pushbutton indicator housing plus 2 lens of each color.

2/ Illuminated chromaticity limits shall be established by the spectroradiometric method of incandescent lamps.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:31Z
Check the source to verify that this is the current version before use.

TABLE V. Brightness - incandescent switches, push-buttons, indicators, rockers, and paddles.

Brightness foot lambert minimum average												
Color	Pushbuttons											
	Square 1/						Rectangular 2/					
	Projected		Transmitted		Hidden		Projected		Transmitted		Hidden	
Blue	21		18		3		32		15		2	
Green	32		16		3		60		26		4	
Red	36		28		6		68		51		11	
White	90		91		16		146		159		41	
Yellow	92		114		19		142		193		49	
Indicators												
Color	Project		Transmitted		Hidden		Projected		Transmitted		Hidden	
	1/	2/	1/	2/	1/	2/	1/	2/	1/	2/	1/	2/
Blue	24	30	18	39	3	6	16	20	9	18	2	3
Green	36	67	21	46	3	6	24	44	12	31	2	5
Red	38	78	38	65	8	15	25	51	22	55	5	12
White	115	250	141	274	24	48	75	165	56	174	16	42
Yellow	105	249	161	309	26	51	69	164	79	208	17	50
Rockers and paddles 3/												
Color	Rocker						Paddle					
	Projected		Transmitted		Hidden		Projected		Transmitted		Hidden	
Blue	25		14		4		25		14		4	
Green	40		19		4		40		19		4	
Red	42		38		9		42		38		9	
White	108		109		19		108		109		19	
Yellow	120		136		22		120		136		22	

1/ Tested with one lamp using one housing plus two lens of each color.

2/ Tested with two lamps using one housing plus two lens of each color.

3/ Tested with one housing plus two lens of each color.

Source: https://assist.dla.mil -- Downloaded: 202610-19T14:31Z
Check the source to verify that this is the current version before use.

TABLE VI. Group A inspection.

Inspection	AQL percent defective	
	Major	Minor
Visual and mechanical inspection	1.0 1/	4.0
Operating characteristics	1.0	---
Dielectric withstanding voltage	.65	---
Contact resistance (switch)	.65	---

1/ At the option of the contractor, in-process inspection may be used to meet the materials and design and construction requirements provided they meet the acceptable quality level and all of the contractor's in-process control data on these tests are made available to the Government upon request.

TABLE VII. Qualification (group submission).

Inspection	Samples 4/	Ext. of approval
Group I Visual and mechanical 1/ Solderability 2/ Resistance to solder heat 2/ Contact resistance Operating characteristics	All	All
Group II Terminal strength 2/ Strength of actuation means 3/ Lamp retention Thermal shock Vibration Shock (specified pulse) Moisture resistance Dielectric withstanding voltage Operating characteristics	M22885/93-HAB06EW (4 samples) M22885/93-CEA01DW (4 samples) M22885/93-RAA83KWW (4 samples) M22885/93-PEA11JWW (4 samples)	
Group III Salt spray (corrosion)	M22885/93-HAB06EW (2 samples) M22885/93-PEA11JWW (2 samples) M22885/93-TEA11PWW (2 samples)	
Group IV Short circuit Dielectric withstanding voltage Operating characteristics	M22885/93-HAB06EW (2 samples)	
Group VI Overload Electrical endurance Contact resistance Dielectric withstanding voltage Operating characteristics	M22885/93-HAB06EW (4 samples) M22885/93-HAB13EW (2 samples) M22885/93-RAA83KWW (2 samples)	
Group VIII Color Luminance Field of view	Chromaticity and brightness samples to be tested are as determined by the applicable tables of this specification sheet. Two samples of each configuration are tested for field of view.	

1/ Two samples of each configuration type for physical dimensions.


2/ Two samples of each terminal type

3/ Two samples of each actuator type.

Ⓑ 4/ Samples shall have Industry Lamp No. 85 installed for those tests requiring the lamps to be energized.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:31Z
Check the source to verify that this is the current version before use.

Part number for indicators and pushbutton switches.

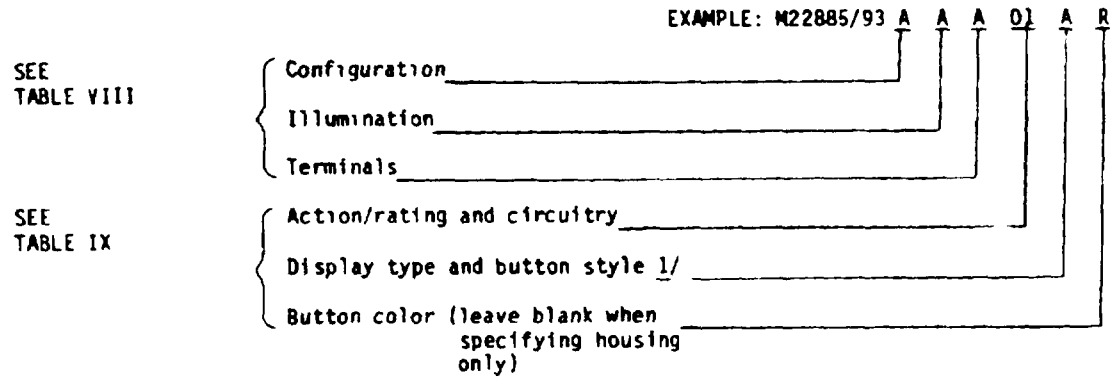

(B) 1/ For acquisition of government spares, code letters H or J shall be used.

TABLE VIII. Configuration, illumination, and terminal codes for indicators and pushbutton switches.

Configuration	Illumination	Terminal
A - Square, switch, nonilluminated	A - Nonilluminated or incandescent (no lamp installed)	A - Solder or quick connect
B - Square, switch, 1 lamp circuit	B - * V Red LED	B - Printed circuit
C - Square, switch, 1 LED	C - 5.0 V Red LED	
D - Square, indicator, 1 lamp circuit	D - 10.0 V Red LED	
E - Square, indicator, 2 lamp circuits	E - 15.0 V Red LED	
F - Square, indicator, 1 LED	F - * V Yellow LED	
G - Rectangular, switch, nonilluminated	G - 5.0 V Yellow LED	
H - Rectangular, switch, 2 lamp circuits	H - 10.0 V Yellow LED	
J - Rectangular, indicator, 1 lamp circuit	J - 15.0 V Yellow LED	
K - Rectangular, indicator, 2 lamp circuits	K - * V Green LED	
L - Miniature indicator, 1 LED	L - 5.0 V Green LED	
	M - 10.0 V Green LED	
	N - 15.0 V Green LED	

* Refer to application information for nonresistor

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:31Z
Check the source to verify that this is the current version before use.

TABLE IX. Action/rating and circuitry, display and button style for indicators and pushbutton switches.

Action/rating and circuitry	Display type, button style 1/ 2/	Button color
01 - Momentary, 1 Pole, 3 A, 120 V ac Ind - 2 A, 28 V dc, Res.	A - Transmitted Color - Square	R - Red
02 - Momentary, 2 Pole 3 A, 120 V ac Ind - 2 A, 28 V dc, Res.	B - Projected Color - Square	Y - Yellow
03 - Momentary, 4 Pole 3 A, 120 V ac Ind - 2 A, 28 V dc, Res.	C - Hidden Color - Square	G - Green
04 - Alternate, 1 Pole, 3 A, 120 V ac Ind - 2 A, 28 V dc, Res.	D LED Window - Square	B - Blue
05 - Alternate, 2 Pole, 3 A, 120 V ac Ind - 2 A, 28 V dc, Res.	E - Transmitted Color Rectangular	W - White
06 - Alternate, 4 Pole, 3 A, 120 V ac Ind - 2 A, 28 V dc, Res.	F - Projected Color - Rectangular	A - Miniature indicator No button
07 - Momentary, 1 Pole 10 mA, 5 V dc Res.	G - Hidden Color-Rectangular	K - Black 3/
08 - Momentary, 2 Pole 10 mA, 5 V dc Res.	H - Miniature Indicator (No button required)	L - Gray 3/
09 - Momentary, 4 Pole, 10 mA, 5 V dc, Res.	J - Housing only. No button, caps, or color inserts supplied. Acquire separately from source listed on QPL	
11 - Alternate, 1 Pole, 10 mA, 5 V dc Res.		
12 - Alternate, 2 Pole 10 mA, 5 V dc Res.		
13 - Alternate, 4 Pole 10 mA, 5 V dc Res.		
14 - No Action, Indicator Only No Switching Mechanism		


(B) 1/ For nonilluminated switches, use code A, E, or J as required. For LED illuminated switches, use code D or J as required.

2/ Button styles are shown as viewed from the front of the panel.

3/ For nonilluminated and LED configuration types only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:31Z
Check the source to verify that this is the current version before use.

Part Number for rocker and paddle switches

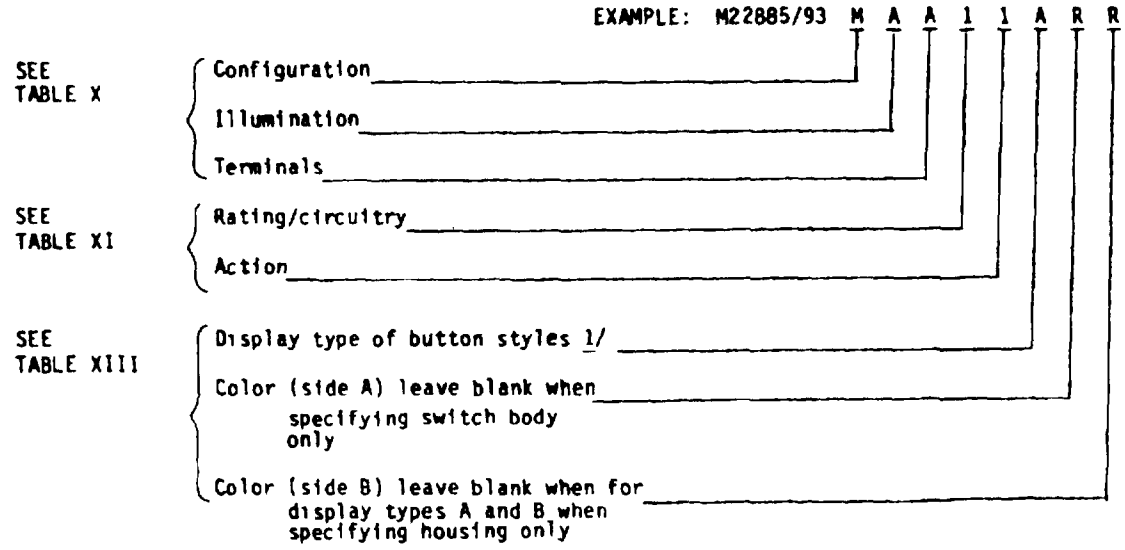

(8) 1/ For acquisition of government spares, code letter R shall be used.


TABLE X. Configuration, illumination, and terminal codes for rocker and paddle switches.

Configuration	Illumination	Terminals
M - Rocker, nonilluminated	A - Nonilluminated or incandescent (no lamp installed)	A - Solder or quick-connect
N - Rocker, 2 lamp circuits	B - * V Red LED	B - Printed circuit
P - Rocker, 1 LED (Side A)	C - 5.0 V Red LED	
R - Paddle, nonilluminated	D - 10.0 V Red LED	
S - Paddle, 2 lamp circuits	E - 15.0 V Red LED	
T - Paddle, 1 LED (Side A)	F - * V Yellow LED	
	G - 5.0 V Yellow LED	
	H - 10.0 V Yellow LED	
	J - 15.0 V Yellow LED	
	K - * V Green LED	
	L - 5.0 V Green LED	
	M - 10.0 V Green LED	
	N - 15.0 V Green LED	

* Refer to application information for nonresistor.








Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:31Z
Check the source to verify that this is the current version before use.

TABLE XI. Rating/circuitry and action for rocker and paddle switches.

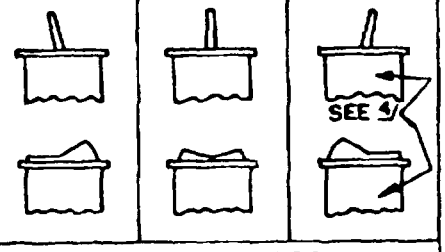Rating/circuitry	ACTION CODE			
1/ - 3 A, 120 V ac Ind. - 2 A, 28 V dc res.				
1 1 Pole (Code D Circuitry - See table XII)				
2/ - 3 A, 120 V ac Ind. - 2 A, 28 V dc res.				
2 2 Pole (Code E Circuitry - See table XII)				
1/ 3/ 3 A, 120 V ac Ind. - 2 A, 28 V dc res.				
3 2 Pole (Code F Circuitry - See table XII)				
2/ - 3 A, 120 V ac Ind. - 2 A, 28 V dc res.				
4 4 Pole (Code G Circuitry - See table XII)				
1/ - 10 mA, 5 V dc Res.				
5 1 Pole (Code D Circuitry - See table XII)				
2/ - 10 mA, 5 V dc Res.				
6 2 Pole (Code E Circuitry - See table XII)				
1/ 3/ - 10 mA, 5 V dc Res.				
7 2 Pole (Code F Circuitry - See table XII)				
2/ - 10 mA, 5 V dc Res.				
8 4 Pole (Code G Circuitry - See table XII)				
		2 - POSITION		
	1	MAIN	(NONE)	MAIN.
	2	MOM.	(NONE)	MAIN.
	3	MAIN.	(NONE)	MOM.
		3 - POSITION		
	4	MAIN.	MAIN.	MAIN.
	5	MOM.	MAIN.	MOM
	6	MAIN.	MAIN.	MOM
	7	MOM.	MAIN.	MAIN.

1/ LED versions available only in these circuitries
2/ Nonilluminated switches only.
3/ For use with three position switches only.
(B) 4/ Actions are shown with the switch positioned such that the top side located on figures 5 and 6 is on this side of the switch See application information.

TABLE XII. Paddle and rocker circuitry

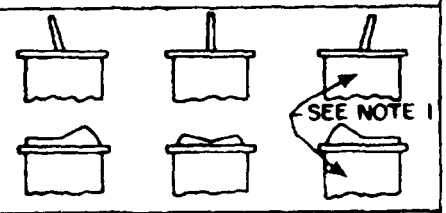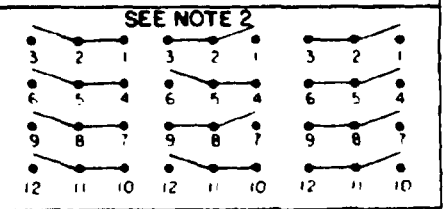Paddle and Rocker Circuitries		
Code	2 Position	3 Position
		
D See note 4		
E See note 3		
F See note 4	For use with 3 position unit only	
G See note 3		

NOTES
(B) 1 Circuitries are shown with the switch positioned such that the top side located on figures 5 and 6 is on this side of the switch.
2. Refer to application information for how to wire for ON-ON-ON circuitry.
3 For nonilluminated switches only.
4. LED version available only in these circuitries.

Source: https://assist.dla.mil Downloaded: 2026-10-19T14:31Z
Check the source to verify that this is the current version before use.


TABLE XIII. Button style/display type and color for rocker and paddle switches.

Button style/display type 1/ 3/	Color	
	Side A	Side B
A - Nonilluminated/1 pc. rocker (one color selection only)	R - Red Y - Yellow G - Green B - Blue W - White K - Black 2/ L - Gray 2/	R - Red Y - Yellow G - Green B - Blue W - White K - Black 2/ L - Gray 2/
B - Transmitted color/1 pc. rocker (one color selection only)		
C - Projected color/1 pc. rocker		
D - Hidden color/1 pc. rocker		
E - Nonilluminated/2 pc. rocker		
F - Transmitted color/2 pc. rocker		
G - Projected color/2 pc. rocker		
H - Hidden color/2 pc. rocker		
J - 1 LED window/2 pc. rocker		
K - Nonilluminated/2 pc. paddle cover		
L - Transmitted color/2 pc. paddle cover		
M - Projected color/2 pc. paddle cover		
N - Hidden color/2 pc. paddle cover		
P - 1 LED window/2 pc. paddle cover		
R - Housing only. No rocker, covers, or color inserts supplied. Acquire separately from source listed on QPL.		

Ⓑ 1/ Button styles are shown below as viewed from front of the panel. Top sides of switch are shown to insure proper legend orientation (see figures 5 and 6) See application information.

2/ For nonilluminated and LED configurations only.

Ⓑ 3/ For nonilluminated switches, use code A, E, K, or R as required
For LED illuminated switches, use code J, P, or R as required

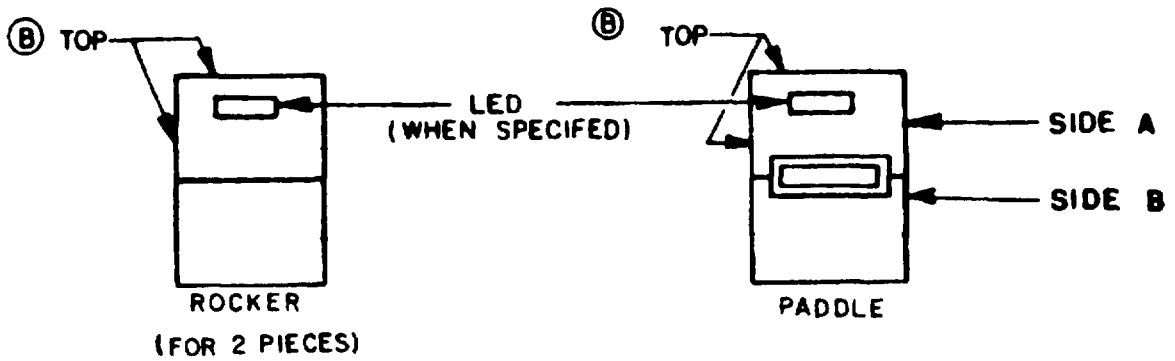

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:31Z
Check the source to verify that this is the current version before use.


APPLICATION INFORMATION

LED APPLICATION INFORMATION

Internal resistors control the LED current to a nominal 20 mA on 5 and 15 V dc devices

For those devices without internal current limiting resistors, suitable external control of the LED current must be provided. It is recommended that a minimum of 5 V dc open circuit voltage with an appropriate series resistance be used to drive LED devices. This minimizes the effect of temperature (current variation) on forward voltage of the LED.

The example illustrates a simple dc drive circuit and the equation used to determine the value of the series resistance



$$R_s = \frac{E - V_f}{I_f}$$

WHERE: R_s = Series resistance
E = Supply voltage
V_f = Forward voltage of LED
I_f = Circuit current

For example: For E = 5 V

V_f = 2.4 V $\quad R_s = \frac{5.0 - 2.4}{.020} = 130\Omega$

I_f = .020 A

If a diode is added in series for reverse polarity protection then

$$R_s = \frac{E - V_f - V_{PD}}{I_f}$$ WHERE: V_{PD} = Forward voltage of protection diode

For the 5 Vdc example above the required resistance is then:

$$R_s = \frac{5 - 2.4 - 0.7}{.020} = 95\Omega$$


TYPICAL LED CHARACTERISTICS

Color	Forward voltage @ 020 mA, V	Intensity @20 mA, mcd	Dominant Wavelength, nm
Red	2.4	1.5	626
Yellow	2 4	1.4	585
Green	2 4	1.2	570

The reverse breakdown voltage of the LED is 5 volts min

How to wire for ON-ON-ON circuitry

Schematic shows wiring for code F circuitry when specified with a 3-position switch
Numbers in parentheses indicate additional circuitry available when code G is specified.

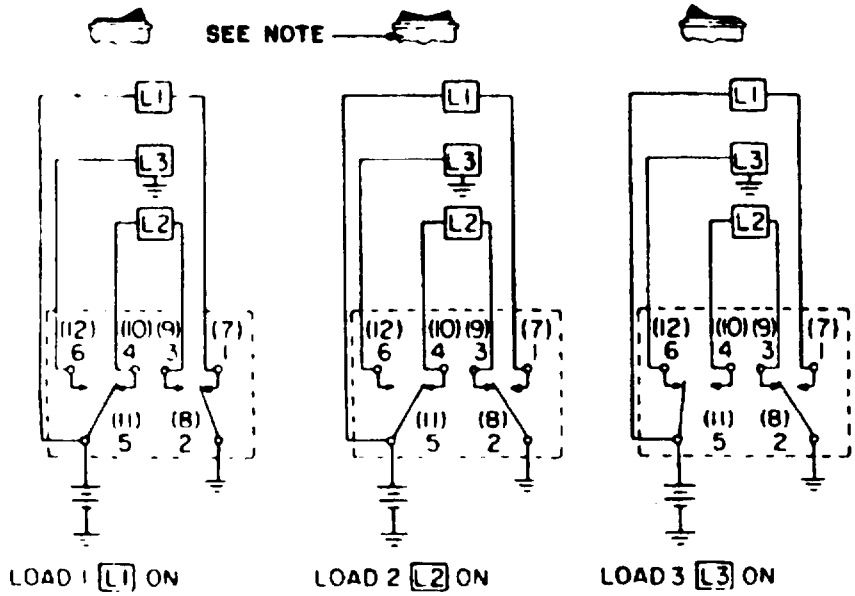

(B) NOTE: Top side of switch as located on figures 5 and 6

Source: https://assist.dla.mil -- Downloaded: 202610-19T14:31Z
Check the source to verify that this is the current version before use.

APPLICATION INFORMATION - Continued

RECOMMENDED STRIP-MOUNTING ORIENTATION·

Ⓑ SQUARE. Square housings have "panel holding" mounting clips located on the top side and on the opposite side. These clips should be compressed against the edges of the mounting slot when strip mounting. The clips on the other two sides may have a lower profile to allow units to be horizontally strip-mounted with bezels touching. (No more than three square housings can be mounted in a vertical strip with the bezel touching.)

RECTANGULAR. "Panel holding" mounting clips are on the long sides. Only horizontal strip mounting with the long sides adjacent the panel edges is recommended. (No more than three units can be strip-mounted with the long bezel sides touching.)

ROCKERS AND PADDLES. "Panel holding" mounting clips are located on the short sides. This permits horizontal strip mounting with the long sides of the bezel touching. (No more than three rocker or paddle switches can be strip-mounted with the short sides of the bezel touching.)

Custodians·
Army - ER
Navy - EC
Air Force - 85

Review activities
Army - MI
Air Force - 11, 99
DLA - ES

User activities:
Navy - OS
Air Force - 13

Agent
DLA - ES

Preparing activity·
Navy - EC

(Project 5930-1264-2)

Source: https://assist.dla.mil -- Downloaded: 202610-19T14:31Z
Check the source to verify that this is the current version before use.