INCH-POUND

MIL-DTL-17361/4B(SH)
19 September 2006

SUPERSEDING
MIL-C-17361/4A(SH)
13 March 1995

DETAIL SPECIFICATION SHEET

CIRCUIT BREAKERS, AIR, ELECTRIC, INSULATED HOUSING (SHIPBOARD USE) TYPES AQB-A101, AQB-A102, AQB-A103, AQB-A103 RMS, NQB-A101, NQB-A102, NQB-A103, AND NQB-A103 RMS

This specification is approved for use by the Naval Sea Systems Command and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-17361.

LIST OF TABLES

TABLE I. Requirements. 3
TABLE II. Continuous current ratings and settings. 4
TABLE III. Adjustable instantaneous trip settings amperes/maximum time (all 3 poles). 5
TABLE IV. Adjustable short-time delay pickup (STDPU) settings in amperes. 6
TABLE V. Adjustable STD in seconds. 8
TABLE VI. Tripping characteristics – long-time delay (LTD) (all 3 poles). 9
TABLE VII. Interruption performance test requirements for circuit breaker combined with fuse unit /1. 10
TABLE VIII. Endurance and temperature rise test requirements. 11
TABLE IX. Rubber handle boot. 11

LIST OF FIGURES

FIGURE 1. Circuit breaker types AQB-A101, AQB-A102, NQB-A101, and NQB-A102 outline dimensions. 12
FIGURE 2. Circuit breaker types AQB-A103 and NQB-A103 outline dimensions. 13
FIGURE 3. Single mounted circuit breaker types AQB-A101, AQB-A102, AQB-A103, NQB-A101, NQB-A102, and NQB-A103 mounting base dimensions. 14
FIGURE 4. Circuit breaker types AQB-A101 and AQB-A102 with fuse unit outline and mounting dimensions (typical for AQB-A103 with fuse unit). 15
FIGURE 5. Circuit breaker types AQB-A101, AQB-A102, NQB-A101, and NQB-A102 mounting base dimensions (typical for AQB-A103 and NQB-A103). 16
FIGURE 6. Double mounted circuit breaker types AQB-A101 and AQB-A102 with fuse units outline and mounting base dimensions (typical for AQB-A103 with fuse unit). 17
FIGURE 7. Double mounted circuit breaker types AQB-A101, AQB-A102, and AQB-A103 mounting base drill plan dimensions. 18
FIGURE 8. Stud assembly for circuit breaker types AQB-A101, AQB-A102, AQB-A103, NQB-A101, NQB-A102, and NQB-A103 rear connected mounting bases. 19
FIGURE 9. Circuit breaker types AQB-A101, AQB-A102, AQB-A103, NQB-A101, NQB-A102, and NQB-A103 front sheet cutout dimensions. 20
FIGURE 10. Circuit breaker types AQB-A101, AQB-A102, and AQB-A103 fuse unit outline dimensions. 21
FIGURE 11. Fuse unit for circuit breaker types AQB-A101 and AQB-A102. 22
FIGURE 12. Fuse unit cover for circuit breaker types AQB-A101, AQB-A102 and AQB-A103 with fuse unit outline dimensions. 23
FIGURE 13. Circuit breaker types AQB-A101, AQB-A102, AQB-A103, NQB-A101, NQB-A102, and NQB-A103 handle boot and handle locking device outline dimensions. 24
FIGURE 14. Circuit breaker type AQB-A102 time-current response. 25

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:01Z
Check the source to verify that this is the current version before use.

FIGURE 15. AQB-A103 long delay and short delay response. 26
FIGURE 16. AQB-A103 25-amp frame instantaneous response. 27
FIGURE 17. AQB-A103 100-amp frame instantaneous response. 28
FIGURE 18 AQB-A103RMS long delay and short delay (I^2T) response. 29
FIGURE 19 AQB-A103RMS long delay and short delay (flat) response. 30
FIGURE 20 AQB-A103RMS instantaneous response. 31

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:01Z
Check the source to verify that this is the current version before use.

TABLE I. Requirements.

Maximum rated continuous current	100 amperes
Voltage and frequency With fuse unit Without fuse unit Note: Type AQB-A102 has no DC application.	 500 VAC, 60 Hz 500 VAC, 400 Hz 250 VDC 500 VAC, 60 Hz 500 VAC, 400 Hz 250 VDC
Interrupting rating With fuse unit Without fuse unit AQB-A101	 100,000 amperes, 60 Hz 15,000 amperes, 60 Hz 7,500 amperes, 400 Hz 10,000 amperes, 250 VDC
Peak let-through current With fuse unit: F101A F101B Without fuse unit	 20, 000 amperes 35,000 amperes Not applicable
Trip unit	Non-interchangeable
Current limiting fuses	Fuse unit (see Figures 3 and 5) F101A, 15–25 amp, 5,000–15,000 amp rms (symmetrical) F101B, 50–100 amp, 10,000–15,000 amp rms (symmetrical)
Type of connections	Back (removable mtg.)
Electric operator	Not available
Undervoltage trip or shunt trip	Shunt trip only
Auxiliary switch	Two (a) contacts and two (b) contacts (voids provision of shunt trip for AQB-A101, AQB-A102, and AQB-A103). One (a) contact and one (b) contact (voids provision of shunt trip for AQB-A101). One (a) contact and one (b) contact (allows provision of shunt trip for AQB-A102 and AQB-A103).
Handle lock	Group 2 (Figure 1 of MIL-DTL-17361)
Additional identification	Frame - ampere rating
Additional mounting requirements	Each circuit breaker shall have two threaded metal inserts molded in the cover for insertion of the supporting screws. Stud terminals or lug terminals connected to the circuit breaker shall not turn to reduce the electrical clearances. Stud terminals or lug terminals shall be supplied with mounting bases.
Handle boot	See Figure 13 and Table VIII.

NOTE: NQB circuit breakers shall consist of an AQB type without trip unit and a modification kit of metallic parts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:01Z
Check the source to verify that this is the current version before use.

TABLE II. Continuous current ratings and settings.

AQB-A101 type trip units only															
Element rating /1															
15	15H	15G	25	25H	25G	50	50H	50G	50GH	75	75H	75G	100	100H	100GH	100G
AQB-A102 type “E and E1” trip units only															
Continuous current setting /2															
15			25			50			75			100			
AQB-A102 type “E2” trip units only															
Continuous current dial settings /2															
15		20		25		40		50		60		80		100	
AQB-A103 trip units only															
Continuous current dial settings /3															
10		12.5		15		20		25		40		50		60	80	100
AQB-A103 RMS trip units only															
Continuous current dial settings /3															
10		12.5		15		18.75		20		25		40		50	60	75	80	100

NOTES:

/1 Identification marking of trip units:

Numerals indicate continuous current rating of the specific trip unit.
Letter “E” denotes the capability for high set instantaneous and for short-time delay (STD).
Letter “G” denotes special calibration for use as generator or transformer protection.
Letter “H” denotes calibration for 400-Hz applications.

/2 “E” type units have a interchangeable rating plug and “E1” and “E2” type units have an adjustable continuous current dial.

/3 The AQB-A103 and AQB-A103RMS has two frame sizes covering continuous current ratings from 10-25 A and 40-100 A respectively.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:01Z
Check the source to verify that this is the current version before use.

TABLE III. Adjustable instantaneous trip settings amperes/maximum time (all 3 poles).

AQB-A101 trip units only /1													
Element rating	**LO /2**		**2**		**3**		**4**		**HI /2**		**Seconds /3**		
	AC	**DC**	**AC**	**DC**	**AC**	**DC**	**AC**	**DC**	**AC**	**DC**	**60 Hz AC**	**400 Hz AC**	**DC**
15	90	90	115	115	140	140	165	165	195	195	0.017	0.021	0.021
15H	90	---	115	---	140	---	165	---	195	---			
15G	150	---	190	---	225	---	265	---	300	---			
25	150	150	190	190	235	235	280	280	325	325			
25H	150	---	190	---	235	---	280	---	325	---			
25G	250	---	315	---	375	---	440	---	500	---			
50	300	300	380	380	470	470	560	560	650	650			
50H	300	---	380	---	470	---	560	---	650	---			
50G	500	---	675	---	750	---	875	---	1000	---			
50GH	300	---	380	---	470	---	560	---	650	---			
75	450	450	580	580	710	710	840	840	975	975			
75H	450	---	580	---	710	---	840	---	975	---			
75G	750	---	940	---	1125	---	1300	---	1500	---			
100	600	600	775	775	950	950	1125	1125	1300	1300			
100H	600	---	775	---	950	---	1125	---	1300	---			
100GH	600	---	775	---	950	---	1125	---	1300	---			
100G	1000	---	1250	---	1500	---	1750	---	2000	---			

AQB-A102 type “E” trip units only /1										
Element rating	**LO /3**	**2**	**3**	**4**	**5**	**6**	**7**	**8**	**Seconds /3**	
									60 Hz AC	**400 Hz AC /4**
15E	90	115	140	195	225	300	450	600	0.017	0.021
25E	150	190	235	325	375	500	750	1000		
50E	300	380	470	650	750	1000	1500	2000		
75E	450	580	710	975	1125	1500	2250	3000		
100E	600	775	950	1300	1500	2000	3000	4000		

AQB-A102 type “E1” and “E2” only /1												
Element rating	**Setting, multiples of frame rating**										**Seconds /3**	
	3X	**4X**	**6X**	**8X**	**10X**	**12X**	**15X**	**20X**	**30X**	**40X**	**60 Hz AC**	**400 Hz AC /4**
100	300	400	600	800	1000	1200	1500	2000	3000	4000	0.017	0.021

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:01Z
Check the source to verify that this is the current version before use.

TABLE III. Adjustable instantaneous trip settings amperes/maximum time (all 3 poles) - Continued.

AQB-A103 and AQB-A103RMS trip units only /1									
Frame rating (amps)	Setting, multiples of frame rating								Seconds (max.) /3
	6X	8X	10X	12X	15X	20X	30X	40X	
25	150	200	250	300	375	500	750	1000	0.021
100	400	800	1000	1200	1500	2000	3000	4000	0.021

NOTES:

/1 The tolerance for each calibrated ampere setting shall not exceed ±15%.

/2 The LO and HI settings only are calibrated. Others are approximate.

/3 Time shall be measured at three times pickup current of instantaneous setting. For qualification tests only, not for routine calibration.

/4 Time shall be less than 0.10 seconds at six times coil rating.

TABLE IV. Adjustable short-time delay pickup (STDPU) settings in amperes.

AQB-A102 type "E" trip units only								
Element rating	1		2		3		4	Seconds
15	45		75		105		150	1.5
25	75		125		175		250	
50	150		250		350		500	
75	225		375		525		750	
100	300		500		700		1000	
AQB-A102 type "E1" trip units only								
CCS dial setting	2X	3X	4X	6X	8X	10X	15X	Seconds
15	30	45	60	90	120	150	225	1.5
25	50	75	100	150	200	250	375	
50	100	150	200	300	400	500	750	
75	150	225	300	450	600	750	1125	
100	200	300	400	600	800	1000	1500	
AQB-A102 type "E2" trip units only								
CCS dial setting	2X	3X	4X	6X	8X	10X	15X	Seconds
15	30	45	60	90	120	150	225	1.5
20	40	60	80	120	160	200	300	
25	50	75	100	150	200	250	375	
40	80	120	160	240	320	400	600	
50	100	150	200	300	400	500	750	
60	120	180	240	360	480	600	900	
80	160	240	320	480	640	800	1200	
100	200	300	400	600	800	1000	1500	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:01Z
Check the source to verify that this is the current version before use.

TABLE IV. Adjustable short-time delay pickup (STDPU) settings in amperes (STD) - Continued.

AQB-A103 trip units only						
Frame rating (amps)	**Element setting (amps)**	**Setting, multiples of element rating**				
		3X	**5X**	**7X**	**10X**	**13X**
25	10	30	50	70	100	130
	12.5	37	62	87	125	162
	15	45	75	105	150	195
	20	60	100	140	200	260
	25	75	125	175	250	325
100	40	120	200	280	400	520
	50	150	250	350	500	650
	60	180	300	420	600	780
	80	240	400	560	800	1040
	100	300	500	700	1000	1300

AQB-A103 RMS trip units only									
Frame rating (amps)	**Element setting (amps)**	**Setting, multiples of element rating**							
		2X	**3X**	**5X**	**7X**	**9X**	**10X**	**13X**	**14X**
25	10	20	30	50	70	90	100	130	140
	12.5	25	37	62	87	112.5	125	162	175
	15	30	45	75	105	135	150	195	210
	18.75	37.5	56.25	93.75	131.25	168.75	187.5	243.75	262.5
	20	40	60	100	140	180	200	260	280
	25	50	75	125	175	225	250	325	350
100	40	80	120	200	280	360	400	520	560
	50	100	150	250	350	450	500	650	700
	60	120	180	300	420	540	600	780	840
	75	150	225	375	525	975	750	975	1050
	80	160	240	400	560	720	800	1040	1120
	100	200	300	500	700	900	1000	1300	1400

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:01Z
Check the source to verify that this is the current version before use.

TABLE V. Adjustable STD in seconds.

AQB-A102 type "E1" and "E2" trip units only								
Frame and element rating	**STD setting /1**							
All ratings	**1**		**2**		**3**			
	0.025–0.055 /2		0.065–0.095		0.105–0.135			
AQB-A103 trip units only								
Frame and element rating	**STD setting /1**							
All ratings	**MIN**	**1**	**2**	**3**	**MAX**			
	0.05 /3	2.0	4.0	8.0	16			
AQB-A103 RMS trip units only								
Frame and element rating	**STD setting /1**							
All ratings	**MIN**	**.100**	**.200**	**.300**	**1 /4**	**2 /4**	**3 /4**	**MAX /4**
	0.05 sec, max /3	0.058 – 0.083	0.158 – 0.183	0.258 – 0.283	2.0	4.0	8.0	16

NOTES:

/1 Time delay measured at 4X element rating with STDPU set at 3X setting; time delay is accurate ±10% of value.

/2 Time delay with 2X STDPU setting shall be 0.020–0.060 seconds.

/3 On MIN setting, STD defaults to an "instantaneous" trip setting, permitting circuit breaker to emulate an AQB-A101 (no STD). Verify maximum time delay with current of 2X pickup setting.

/4 STD measured at 4 x CCS; tolerance on time is ±20%.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:01Z
Check the source to verify that this is the current version before use.

TABLE VI. Tripping characteristics – long-time delay (LTD) (all 3 poles).

AQB-A101 trip units only		
Current as multiple of trip element rating	**Tripping time 60-Hz AC trip element DC trip element**	**Tripping time 400-Hz AC trip element**
1.35	----	Not less than 1 hour
1.50	Not less than 1 hour	----
2.25	Less than 1 hour	Less than 1 hour
6.00	Between 20 and 32 seconds	Between 35 to 45 seconds
	Trip unit with “G” marking /1	
1.50	Not less than 20 minutes	Not less than 20 minutes
2.00	Between 5 and 15 minutes	Between 5 and 15 minutes
3.00	Between 60 and 120 seconds	Between 60 and 120 seconds

AQB-A102 type “E” trip units only	
Current as multiple of CCS	**Tripping time 60 Hz and 400 Hz AC**
1.35	----
1.50	Not less than 1 hour
2.25	Less than 1 hour
6.00	Between 20 and 32 seconds
	Trip unit with “G” marking /1
1.50	Not less than 20 minutes
2.00	Between 5 and 15 minutes
3.00	Between 60 and 120 seconds

AQB-A102 type “E1” trip units only	
Current in multiples of CCS	**Tripping time 60 Hz and 400 Hz AC**
1.35	Not less than 1 hour
1.65	Less than 1 hour
4.0	Between 35 and 55 seconds
6.0	Between 20 and 32 seconds

AQB-A103 and AQB-A103 RMS trip units only	
Current in multiples of CCS	**Tripping time 60 Hz and 400 Hz AC**
1.50	Not less than 1 hour
2.25	Less than 1 hour
6.0	Between 20 and 32 seconds

NOTE:

/1 Letter “G” denotes special calibration for use as generator or transformer protection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:01Z
Check the source to verify that this is the current version before use.

TABLE VII. Interruption performance test requirements for circuit breaker combined with fuse unit /1.

Circuit sample	Element amperes	Fuse unit type	Interrupting amperes	Power factor lagging	Unit operation	See note
1A	100	AQB-F101B	100,000	0.15–0.20	O-CO-CO	/2
1A(1)	100	AQB-F101B	10,000	0.45–0.50	O-CO-CO	/3 /4
1A(1)			15,000	0.25–0.30	O-CO-CO	/2 /3
1A(1)			25,000	0.15–0.20	O-CO-CO	/2 /3
1A(1)			50,000	0.15–0.20	O-CO-CO	/2 /3
1B	15	AQB-F101A	100,000	0.15–0.20	O-CO-CO	/2 /3
1B(1)	25	AQB-F101A	5,000	0.45–0.50	O-CO-CO	/3 /4
1B(1)			15,000	0.25–0.30	O-CO-CO	/2 /3
1B(1)			25,000	0.15–0.20	O-CO-CO	/2 /3
1B(1)			50,000	0.15–0.20	O-CO-CO	/2 /3
1B(2)	50	AQB-F101B	100,000	0.15–0.20	O-CO-CO	/2 /3

NOTES:

/1 Oscillograms shall be taken on all interrupting tests.

/2 Circuit breaker shall open and at least one fuse blow.

/3 New circuit breakers may be used for tests above the standard circuit breaker rating.

/4 Circuit breaker shall open on instantaneous trip and fuses shall not blow.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:01Z
Check the source to verify that this is the current version before use.

TABLE VIII. Endurance and temperature rise test requirements.

Electrical endurance test	The rate of operation shall be 6 operations per minute for a total of 6000 close-open operations.			
Temperature rise tests	Size of cable and bus bars for temperature rise tests			
	Copper rating (amperes)	Cable size		Copper bus size (inch)
		AC	DC	AC and DC
	100	AWG 3	AWG 3	3/4 X 1/8

TABLE IX. Rubber handle boot.

Properties	
Color	Clear transparent
Specific gravity at 77 °F	1.15±0.02
Chemical classification	A-A-59588
Shore A hardness	50±5
Minimum tensile strength (lb/in^2)	1100
Minimum elongation (%)	450
Minimum tear strength (lb/in^2)	150
Minimum bayshore resiliency (%)	40
Fatigue life at 125% strength (flexes)	800,000
Test requirements	
Color	/1
Shore A hardness	ASTM D2240
Tensile strength	ASTM D412
Elongation	ASTM D412
Tear strength	ASTM D624
Bayshore resiliency	ASTM D412
Fatigue life	ASTM D412

NOTE:

/1 A 0.075-inch slab of the rubber shall be placed in direct contact with a piece of newsprint. The rubber shall not interfere with the ability to read the newsprint.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:01Z
Check the source to verify that this is the current version before use.

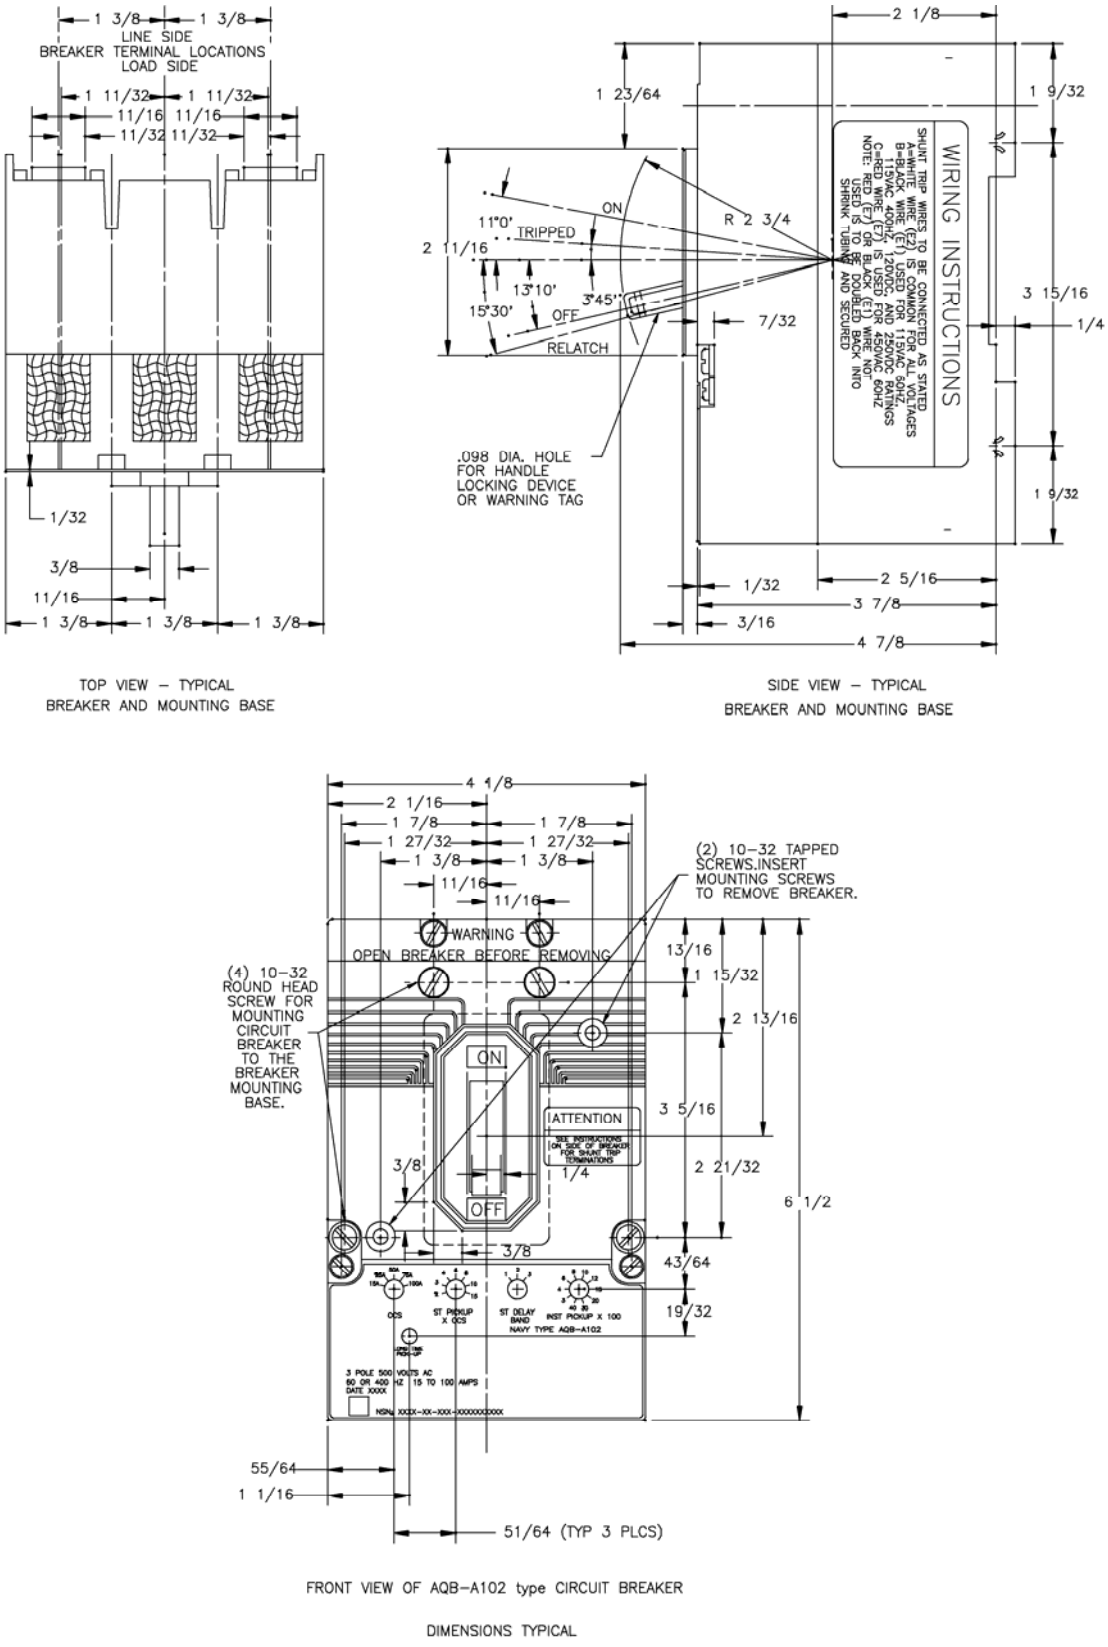


FIGURE 1. Circuit breaker types AQB-A101, AQB-A102, NQB-A101, and NQB-A102 outline dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:01Z
Check the source to verify that this is the current version before use.

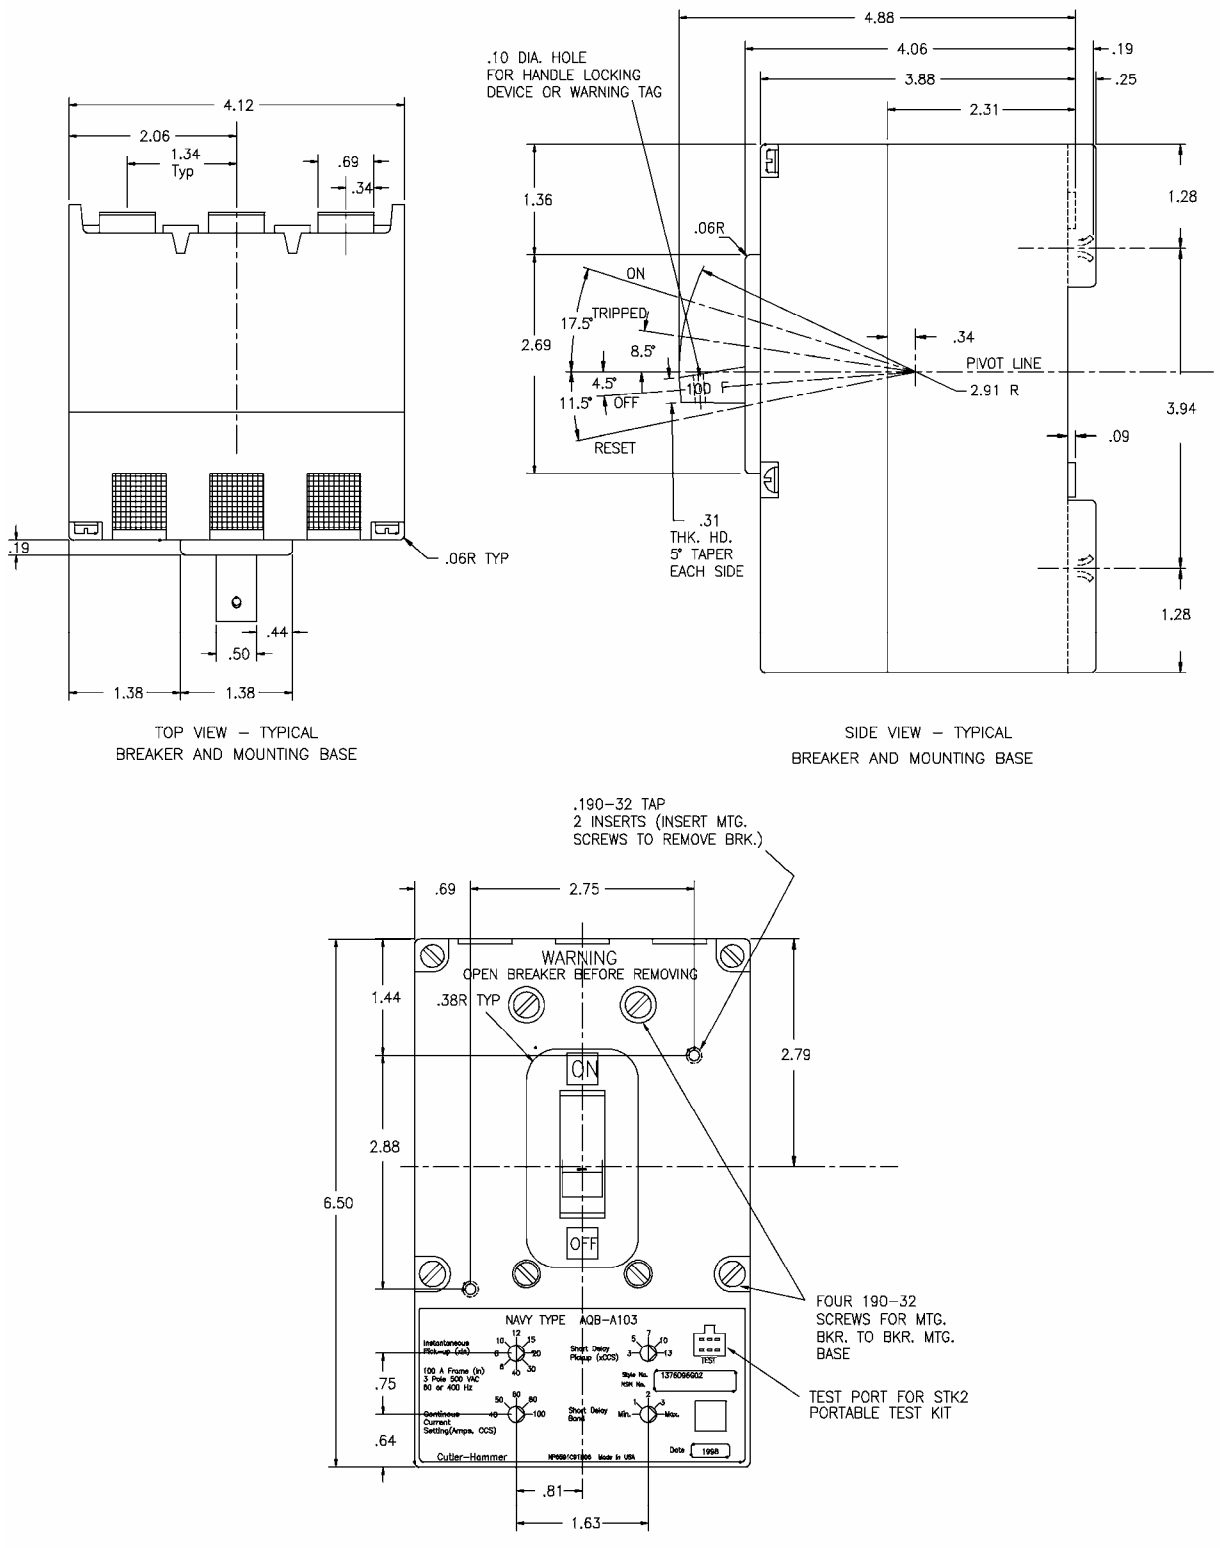


FIGURE 2. Circuit breaker types AQB-A103 and NQB-A103 outline dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:01Z
Check the source to verify that this is the current version before use.

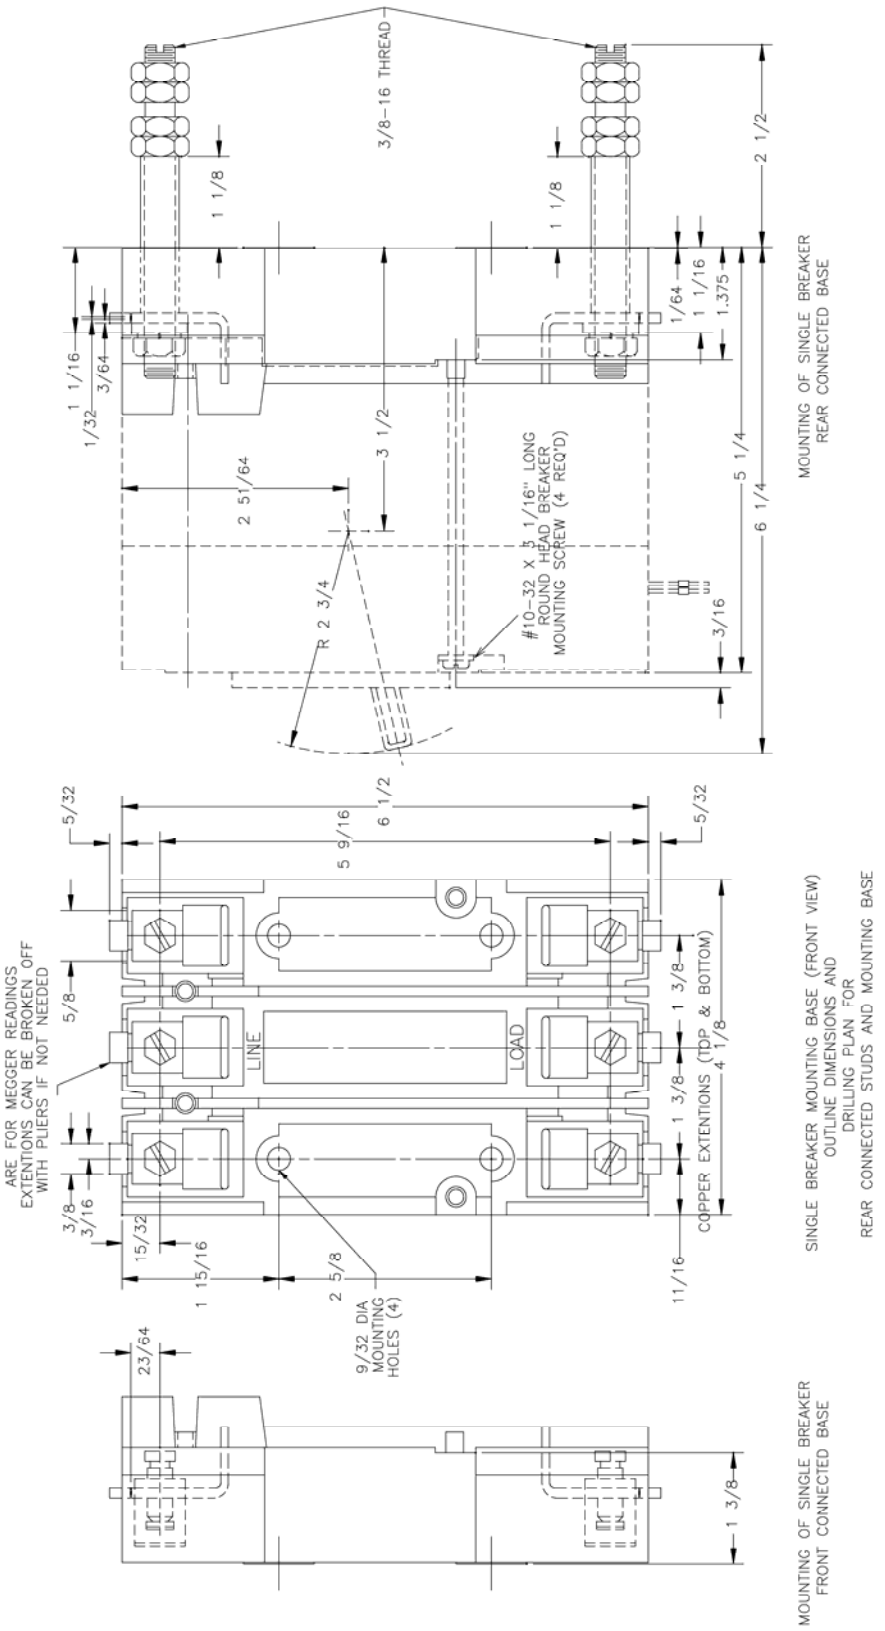


FIGURE 3. Single mounted circuit breaker types AQB-A101, AQB-A102, AQB-A103, NQB-A101, NQB-A102, and NQB-A103 mounting base dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:01Z
Check the source to verify that this is the current version before use.

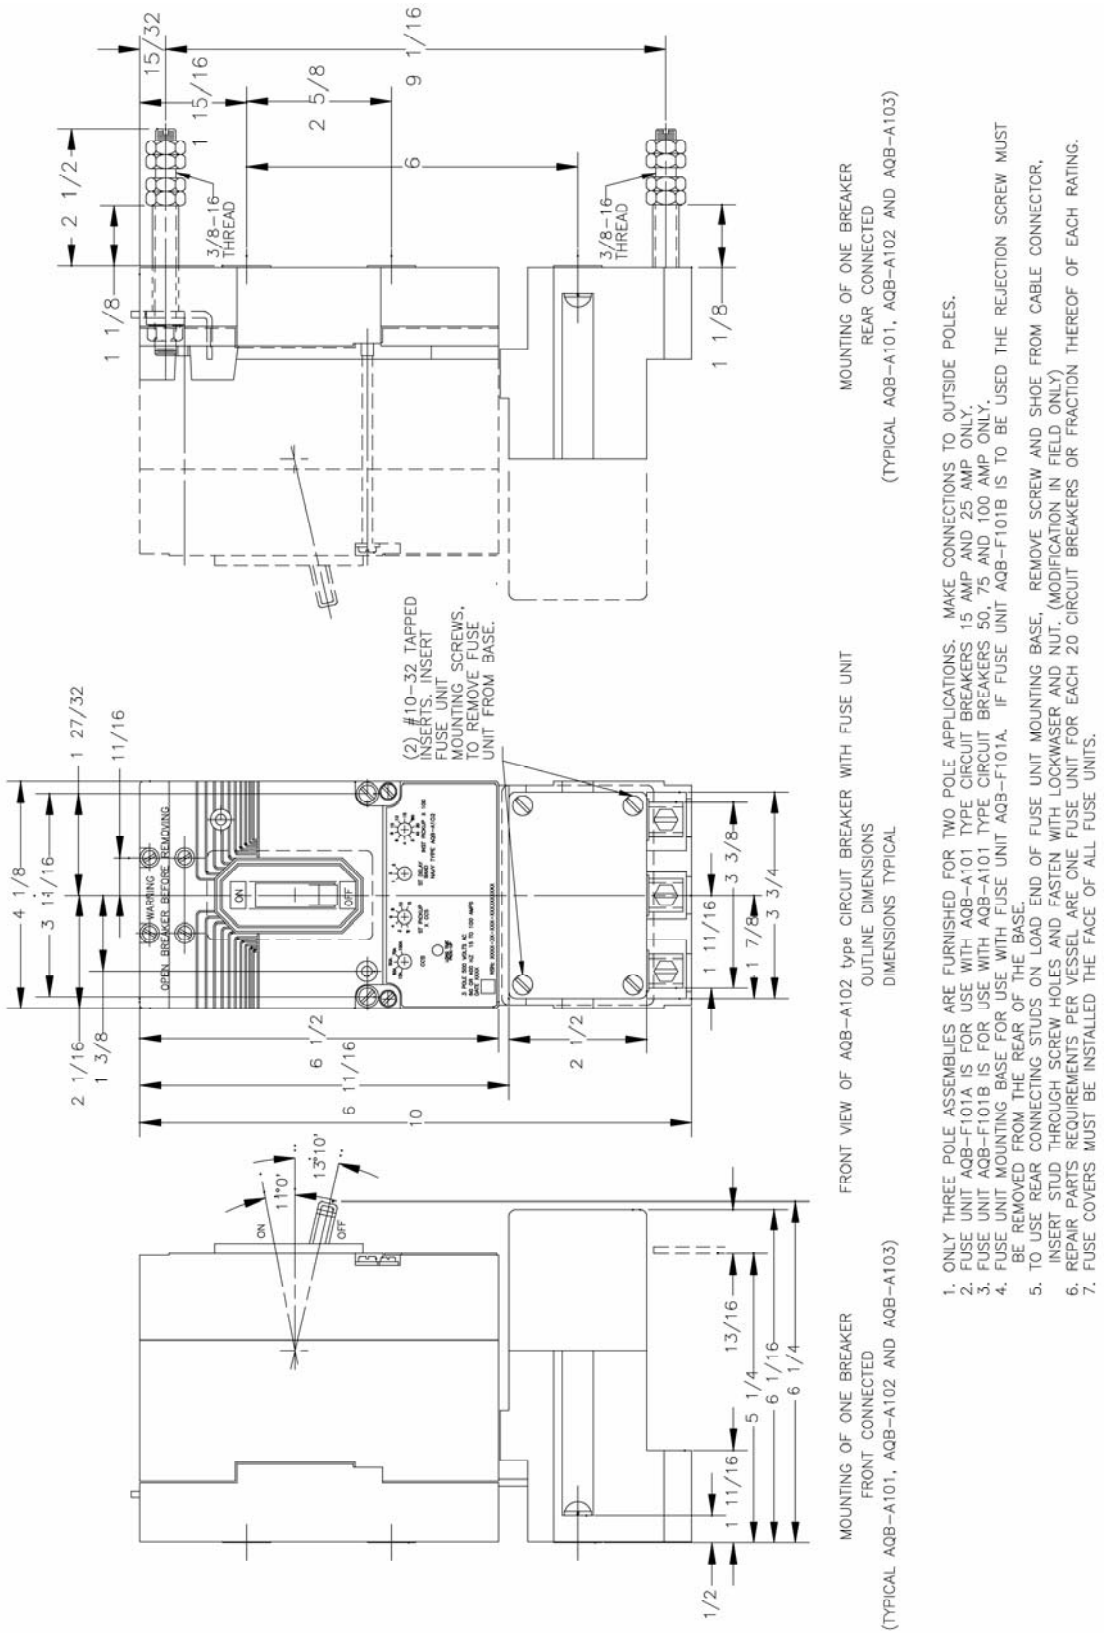


FIGURE 4. Circuit breaker types AQB-A101 and AQB-A102 with fuse unit outline and mounting dimensions (typical for AQB-A103 with fuse unit).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:01Z
Check the source to verify that this is the current version before use.

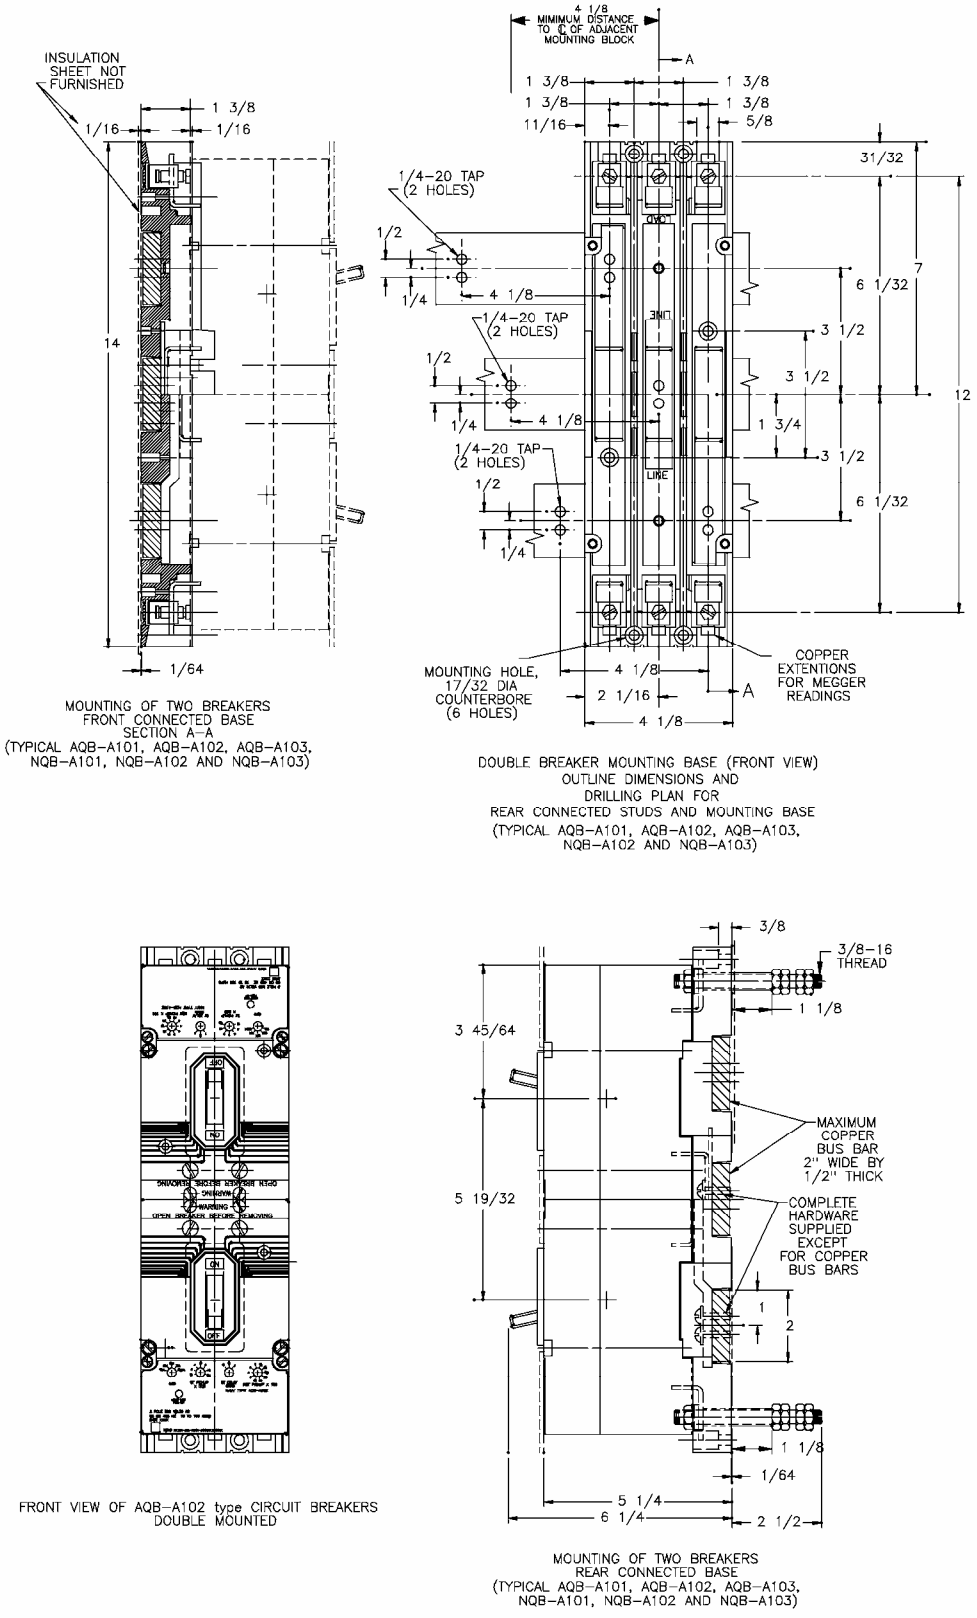


FIGURE 5. Circuit breaker types AQB-A101, AQB-A102, NQB-A101, and NQB-A102 mounting base dimensions (typical for AQB-A103 and NQB-A103).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:01Z
Check the source to verify that this is the current version before use.

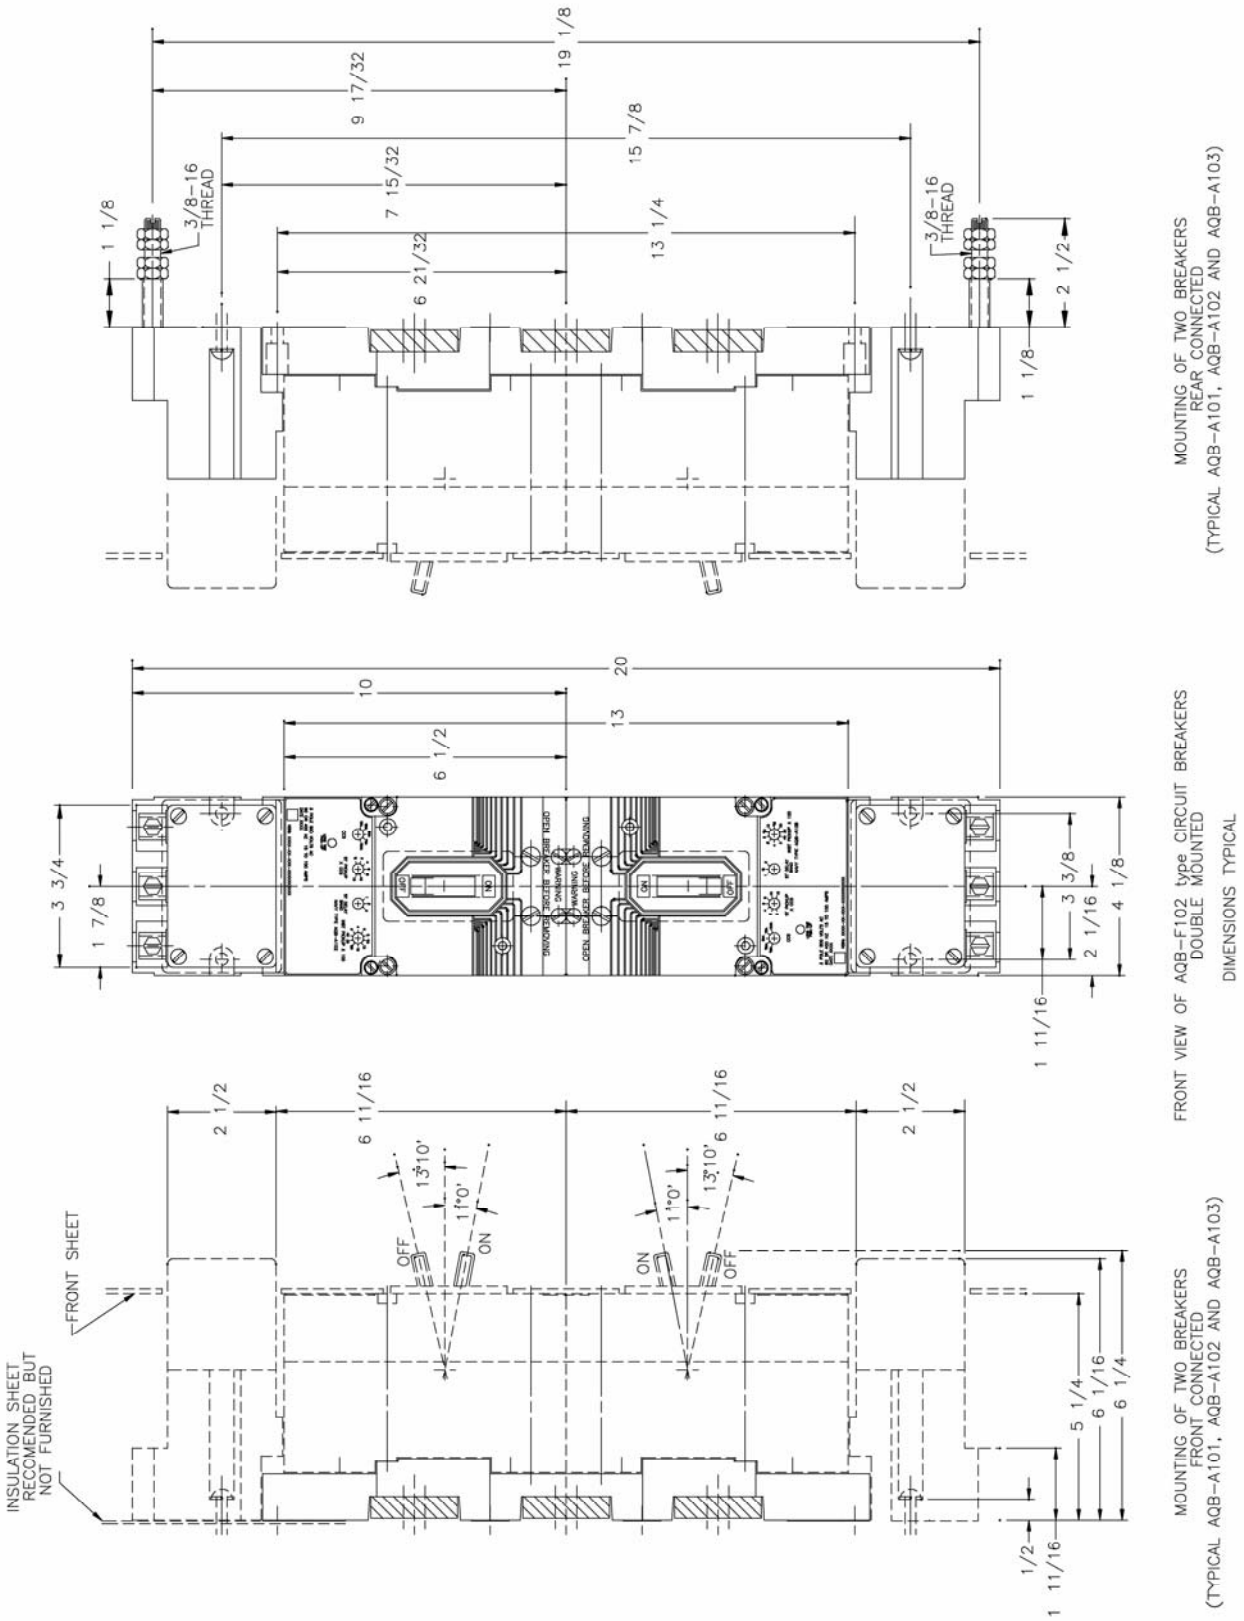


FIGURE 6. Double mounted circuit breaker types AQB-A101 and AQB-A102 with fuse units outline and mounting base dimensions (typical for AQB-A103 with fuse unit).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:01Z
Check the source to verify that this is the current version before use.

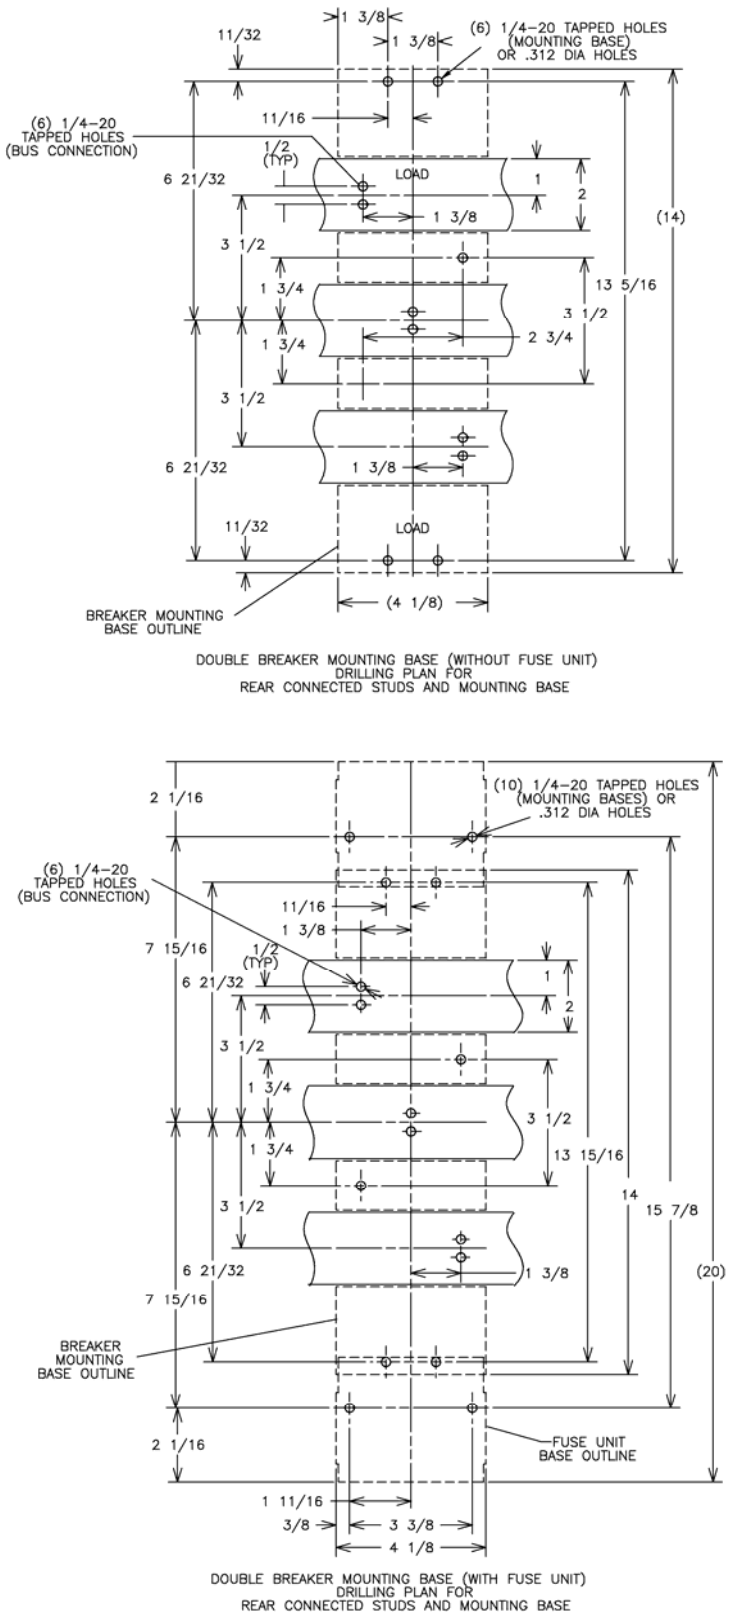


FIGURE 7. Double mounted circuit breaker types AQB-A101, AQB-A102, and AQB-A103 mounting base drill plan dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:01Z
Check the source to verify that this is the current version before use.

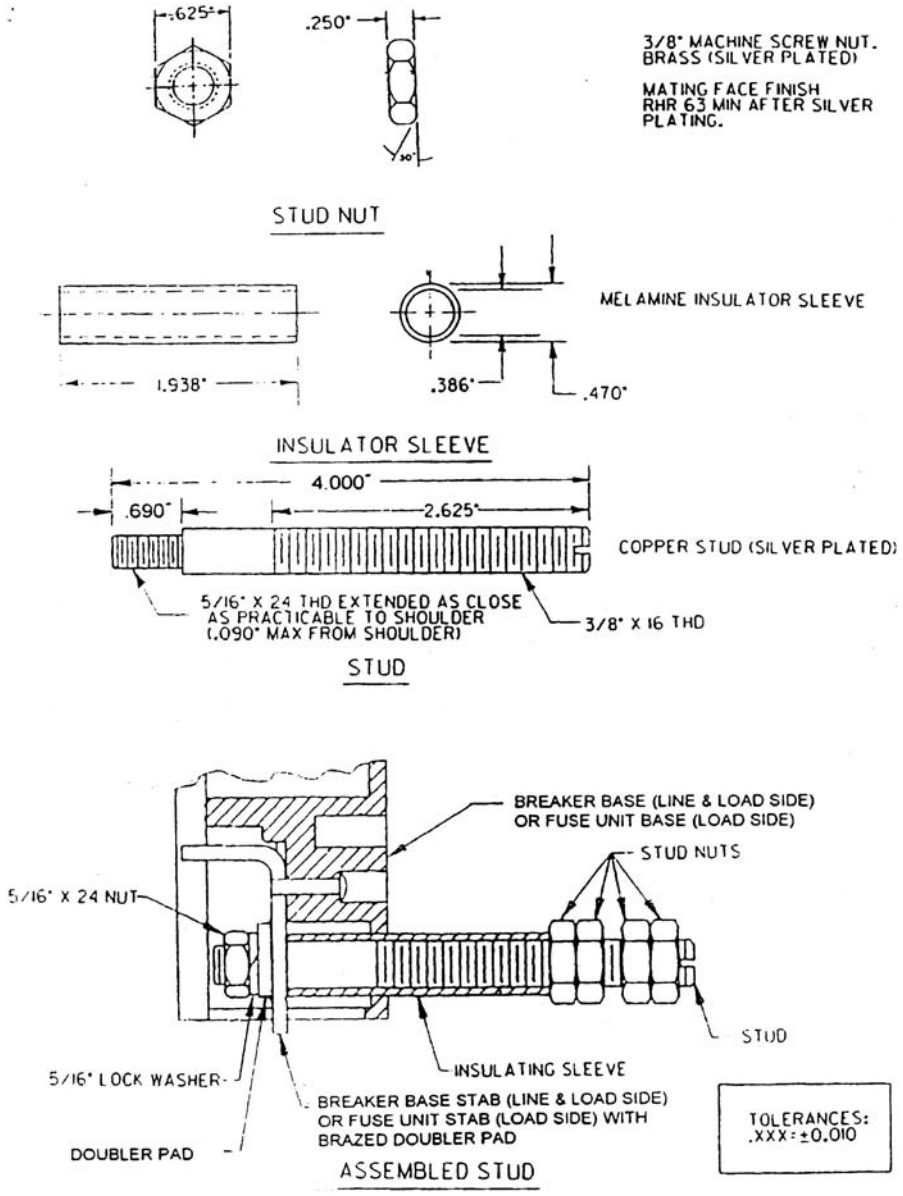
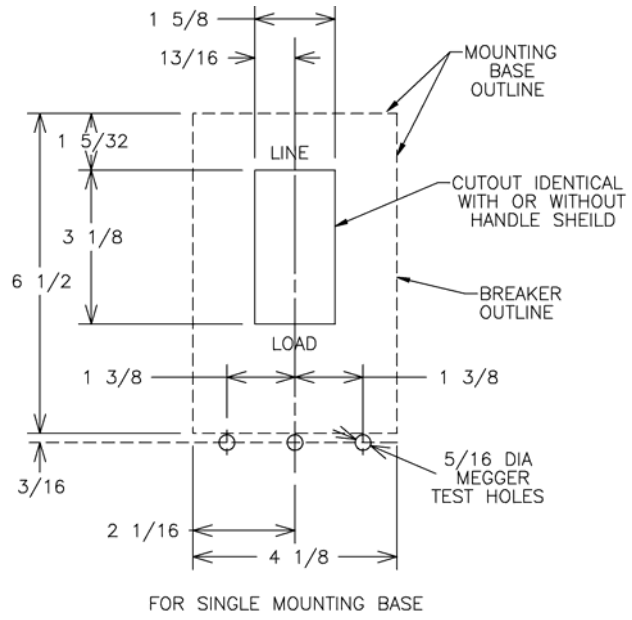


FIGURE 8. Stud assembly for circuit breaker types AQB-A101, AQB-A102, AQB-A103, NQB-A101, NQB-A102, and NQB-A103 rear connected mounting bases.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:01Z
Check the source to verify that this is the current version before use.



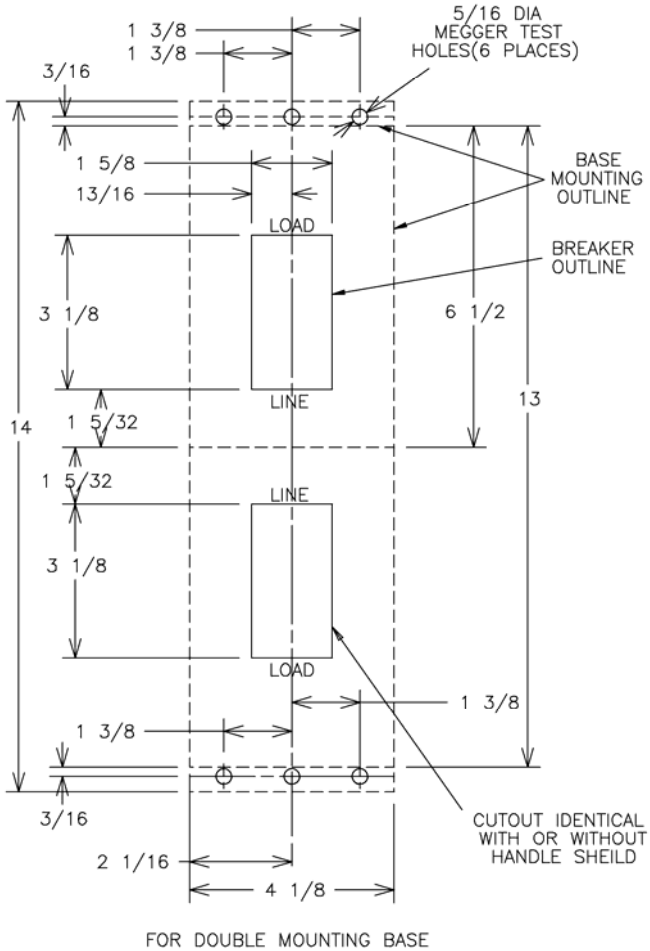


FIGURE 9. Circuit breaker types AQB-A101, AQB-A102, AQB-A103, NQB-A101, NQB-A102, and NQB-A103 front sheet cutout dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:01Z
Check the source to verify that this is the current version before use.

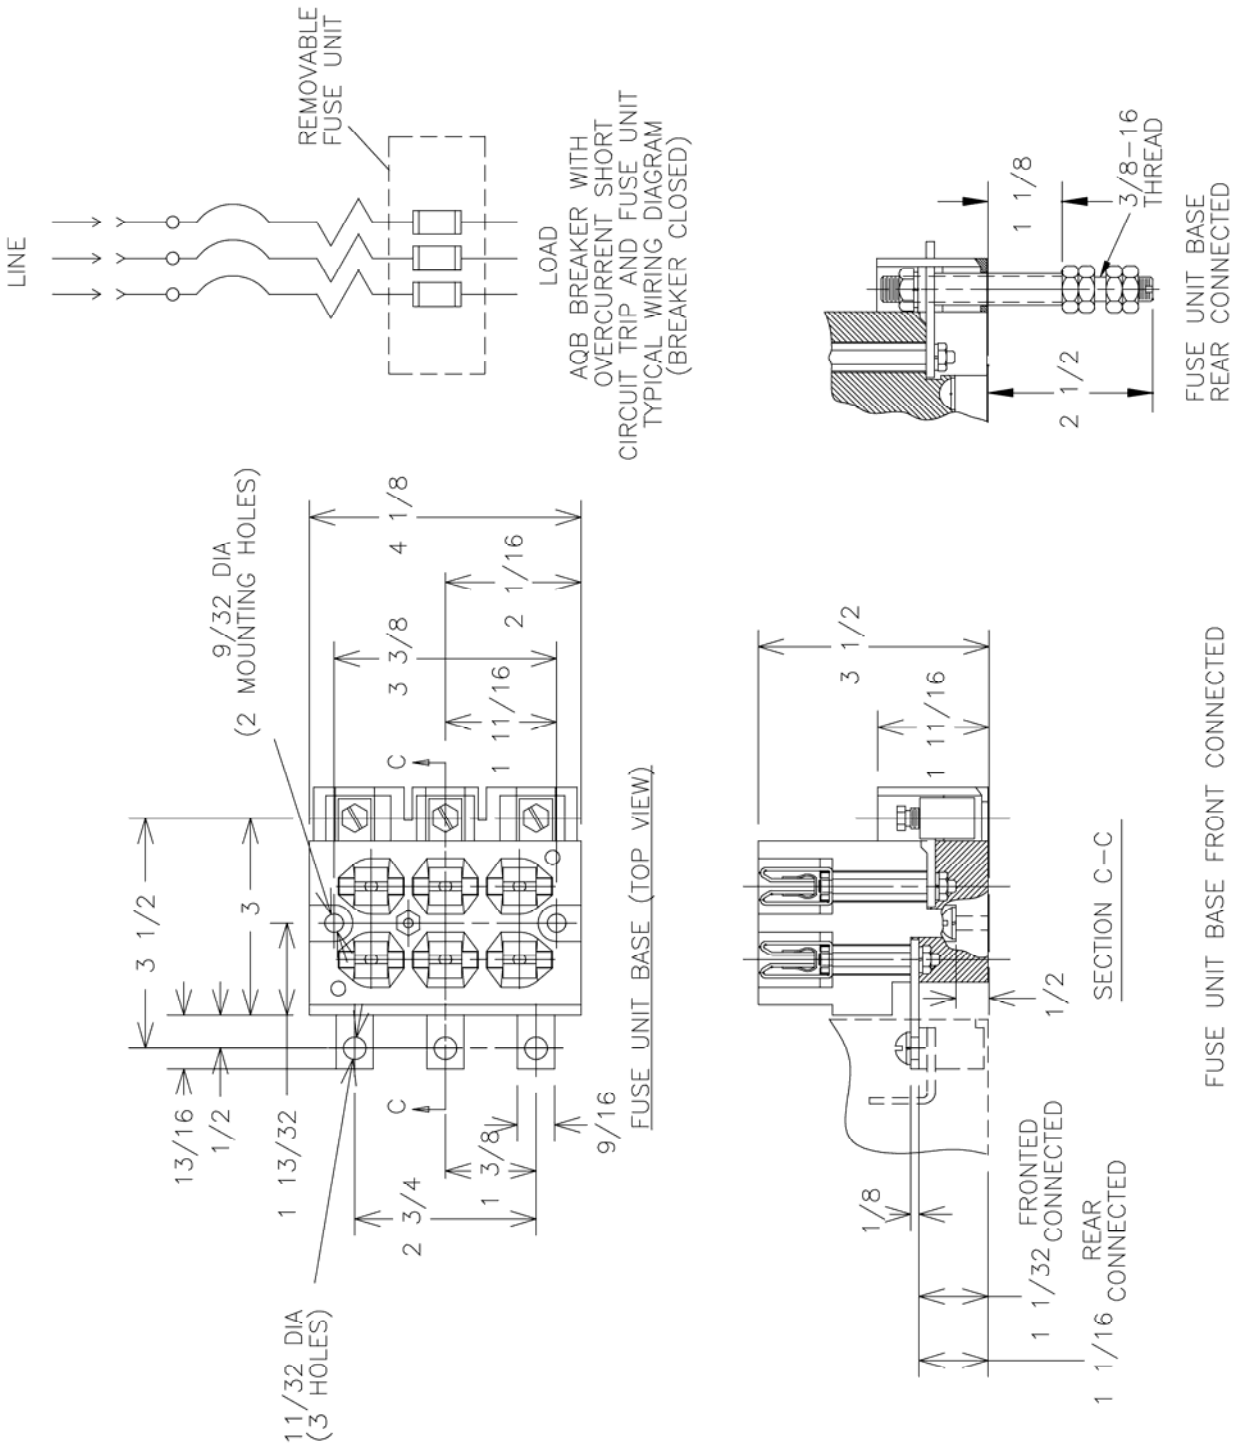


FIGURE 10. Circuit breaker types AQB-A101, AQB-A102, and AQB-A103 fuse unit outline dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:01Z
Check the source to verify that this is the current version before use.

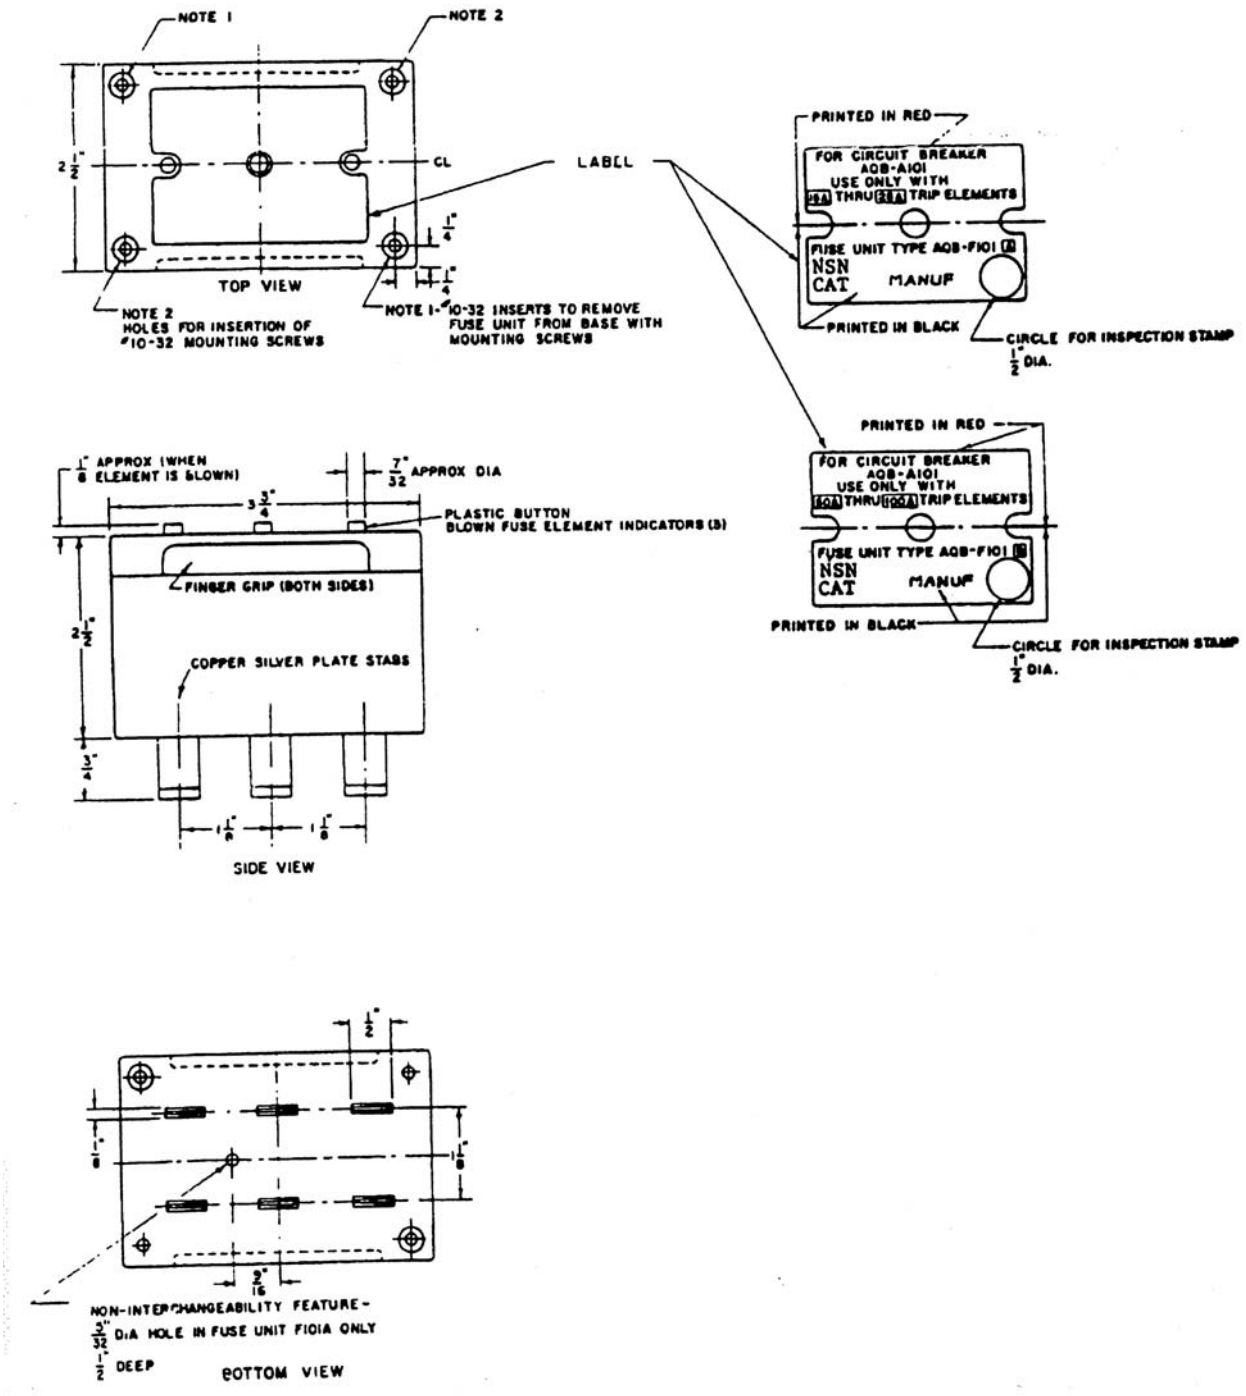


FIGURE 11. Fuse unit for circuit breaker types AQB-A101 and AQB-A102.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:01Z
Check the source to verify that this is the current version before use.

FUSE COVER KIT:

1 EACH MOLDED FUSE COVER WITH GASKET INSTALLED
1 EACH WARNING LABEL
2 EACH #10–32 X 3/4 IN. NYLON MOUNTING SCREWS

NOTE:
DIMENSIONS ARE IN INCHES

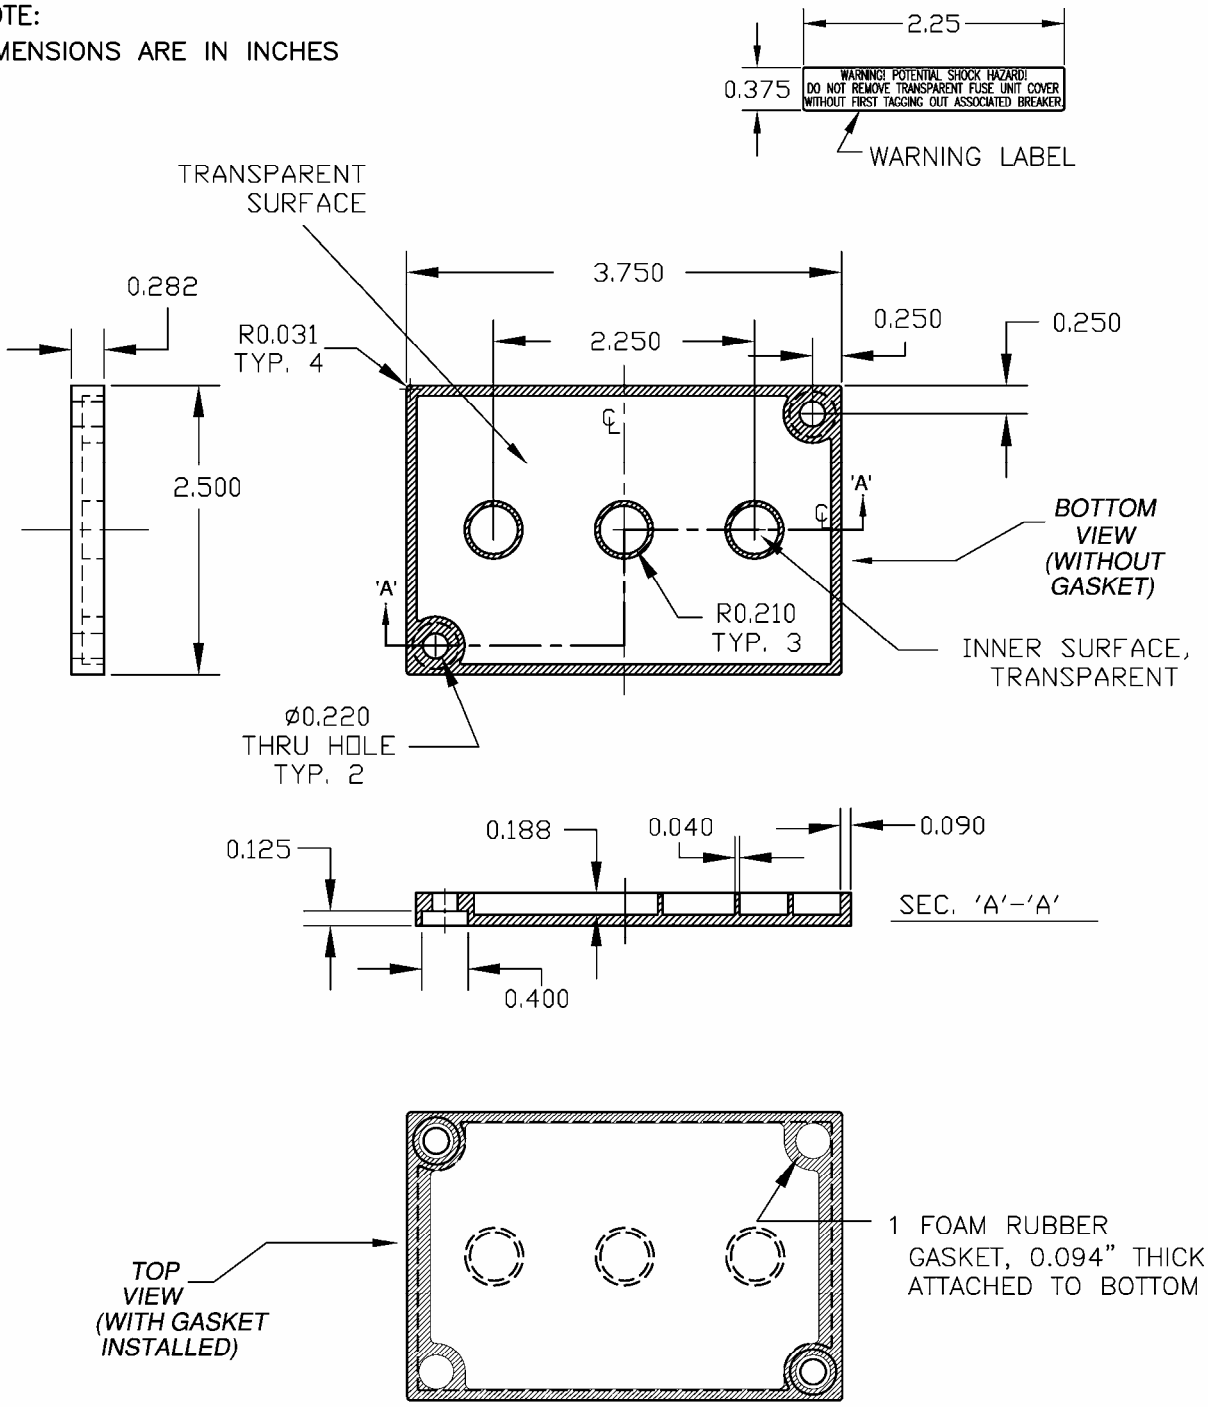


FIGURE 12. Fuse unit cover for circuit breaker types AQB-A101, AQB-A102 and AQB-A103 with fuse unit outline dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:01Z
Check the source to verify that this is the current version before use.

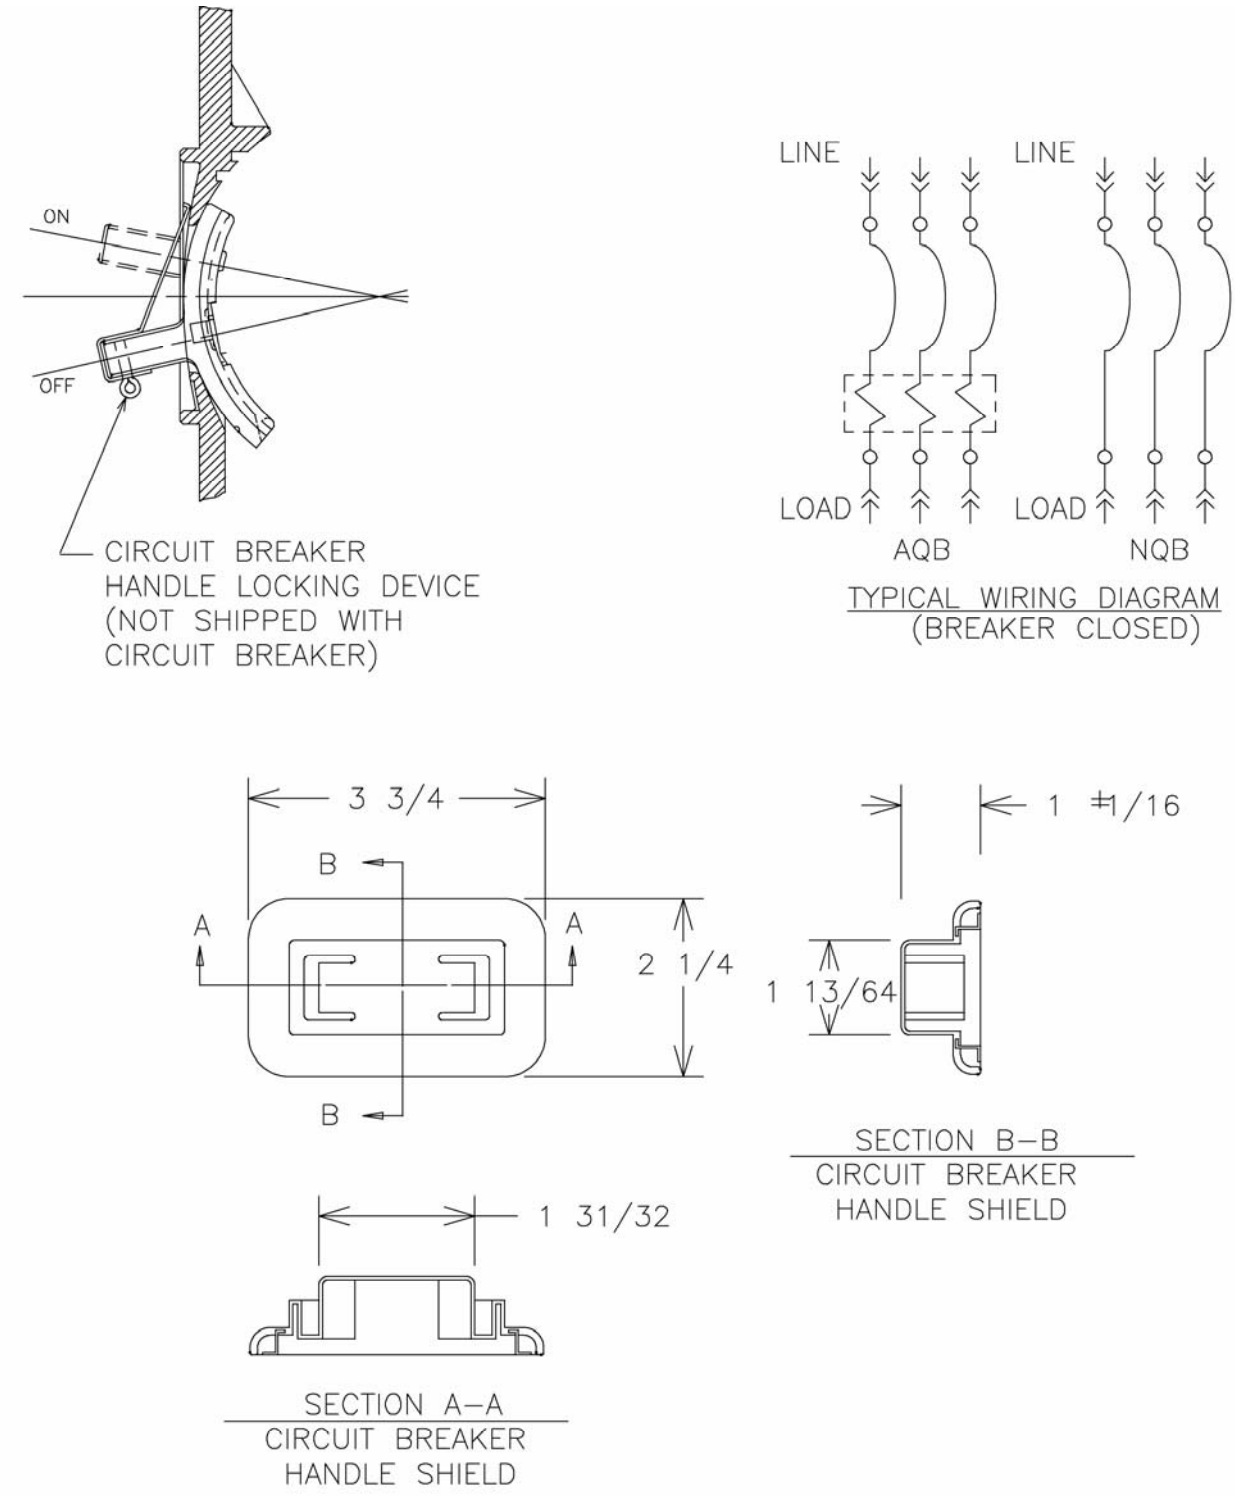


FIGURE 13. Circuit breaker types AQB-A101, AQB-A102, AQB-A103, NQB-A101, NQB-A102, and NQB-A103 handle boot and handle locking device outline dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:01Z
Check the source to verify that this is the current version before use.

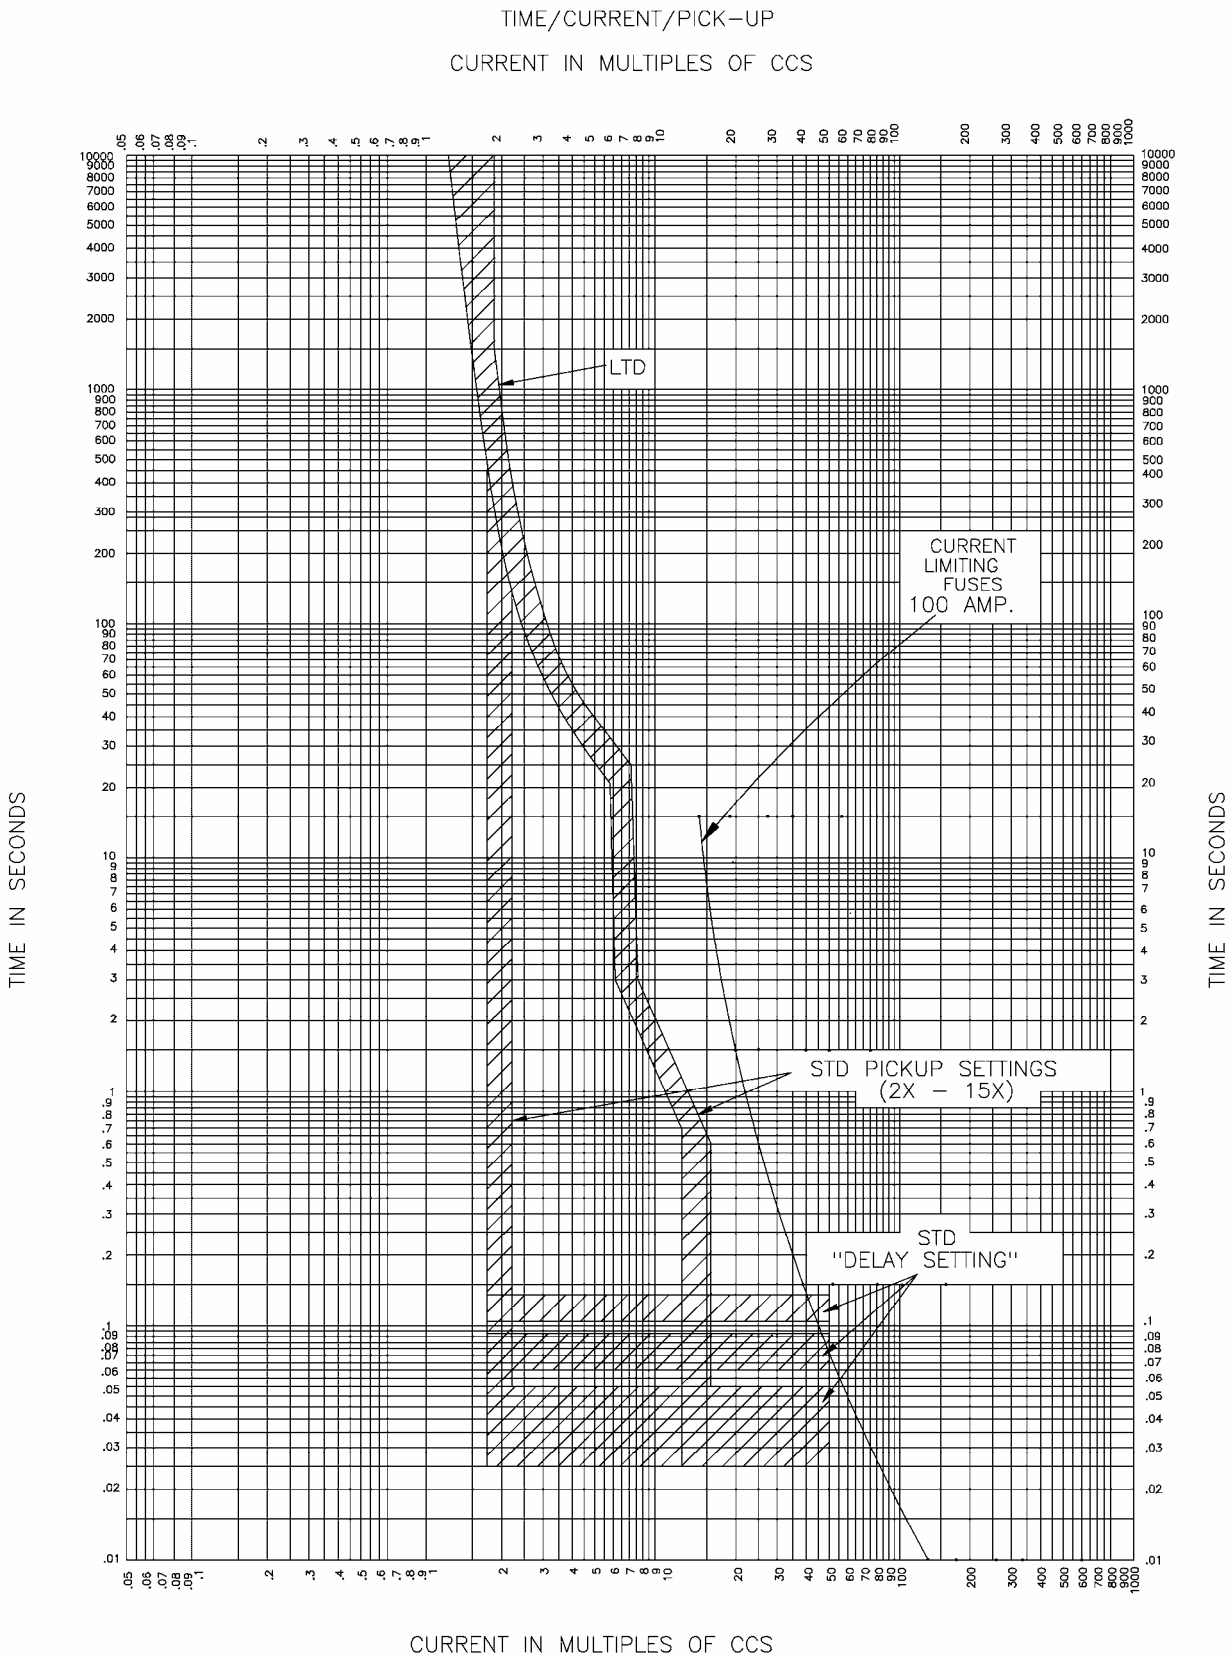


FIGURE 14. Circuit breaker type AQB-A102 time-current response.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:01Z
Check the source to verify that this is the current version before use.

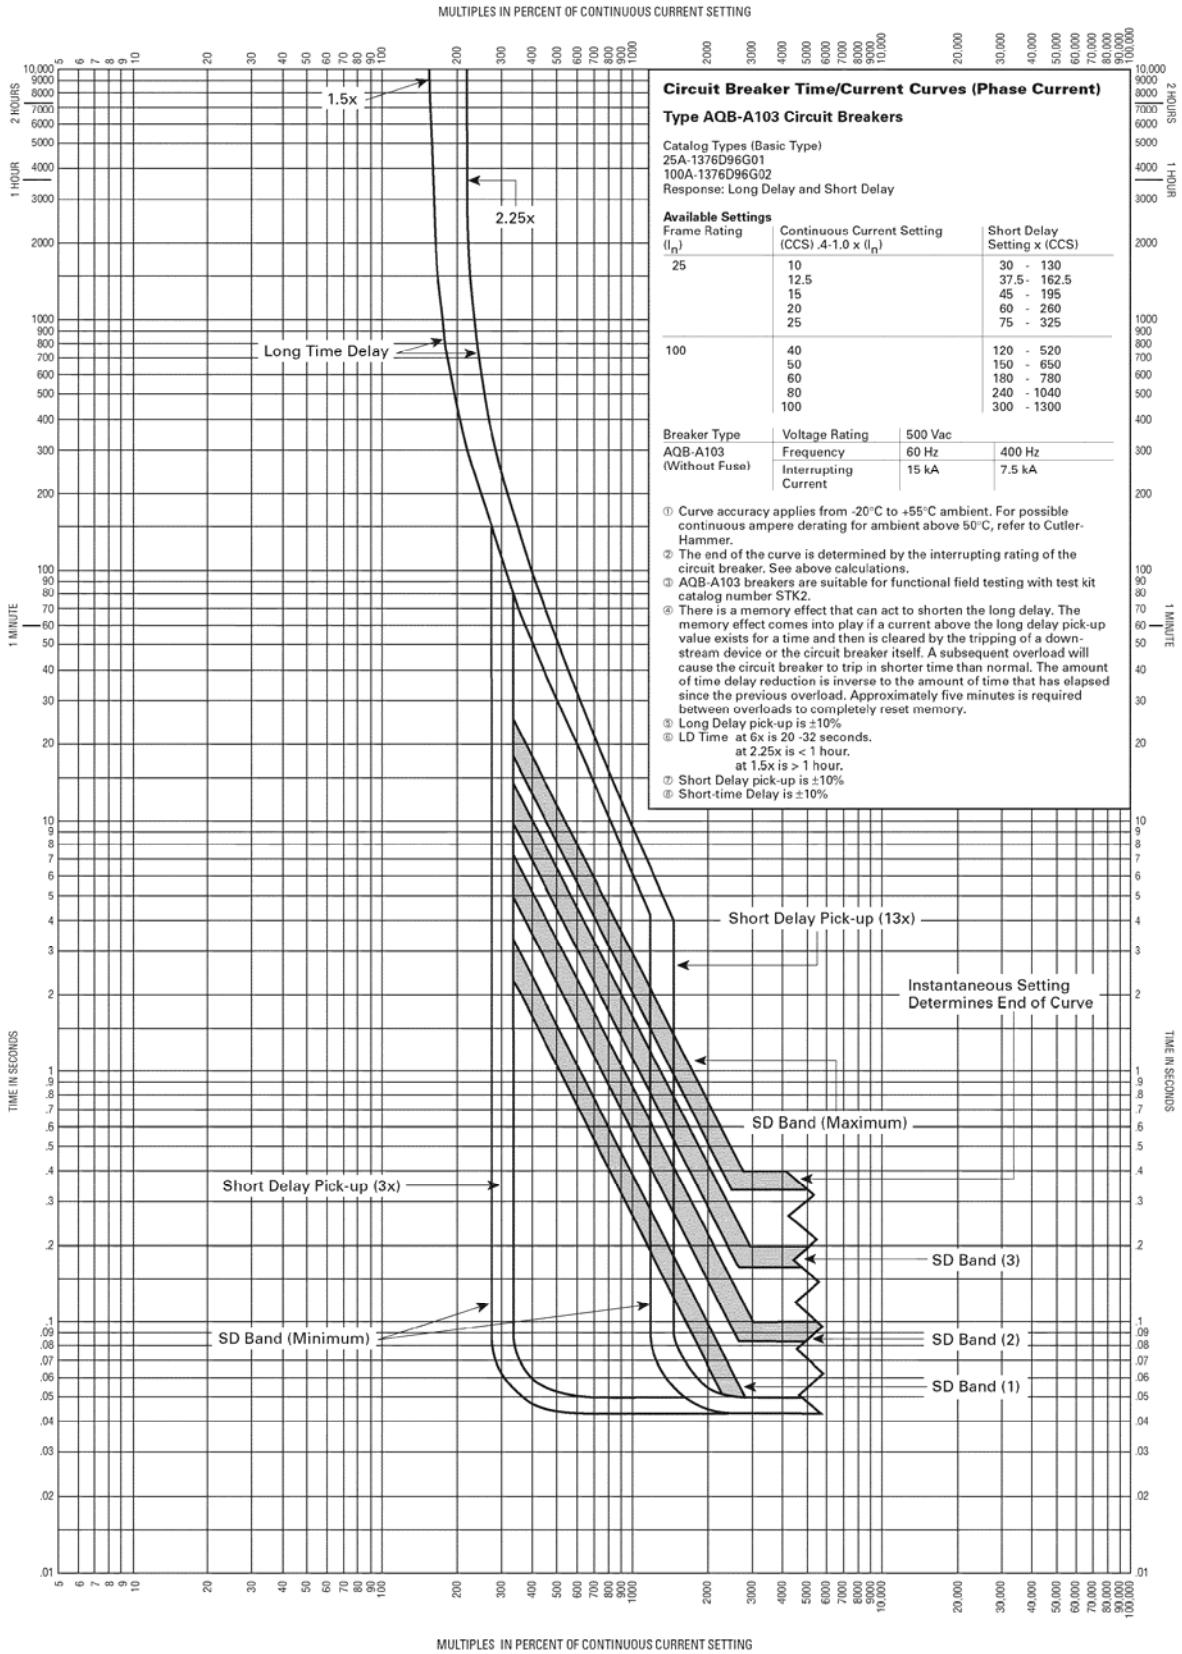


FIGURE 15. AQB-A103 long delay and short delay response.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:01Z
Check the source to verify that this is the current version before use.

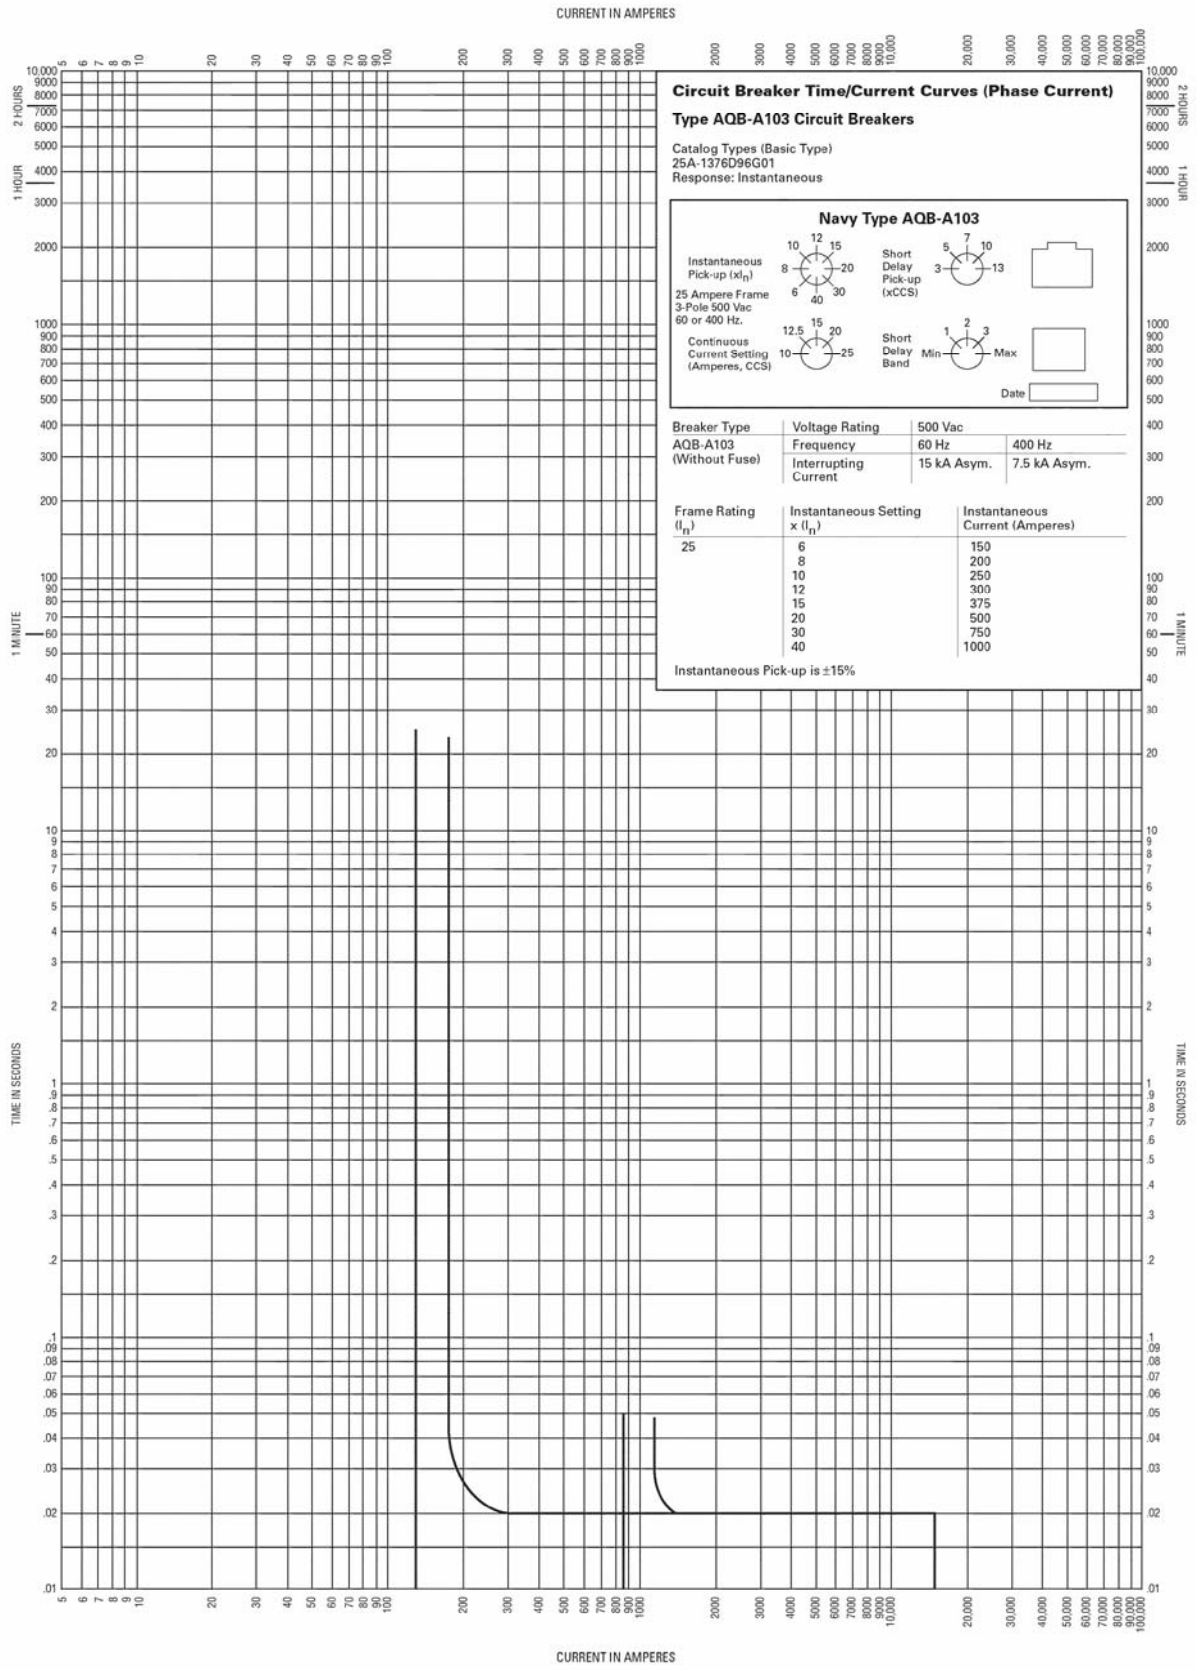


FIGURE 16. AQB-A103 25-amp frame instantaneous response.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:01Z
Check the source to verify that this is the current version before use.

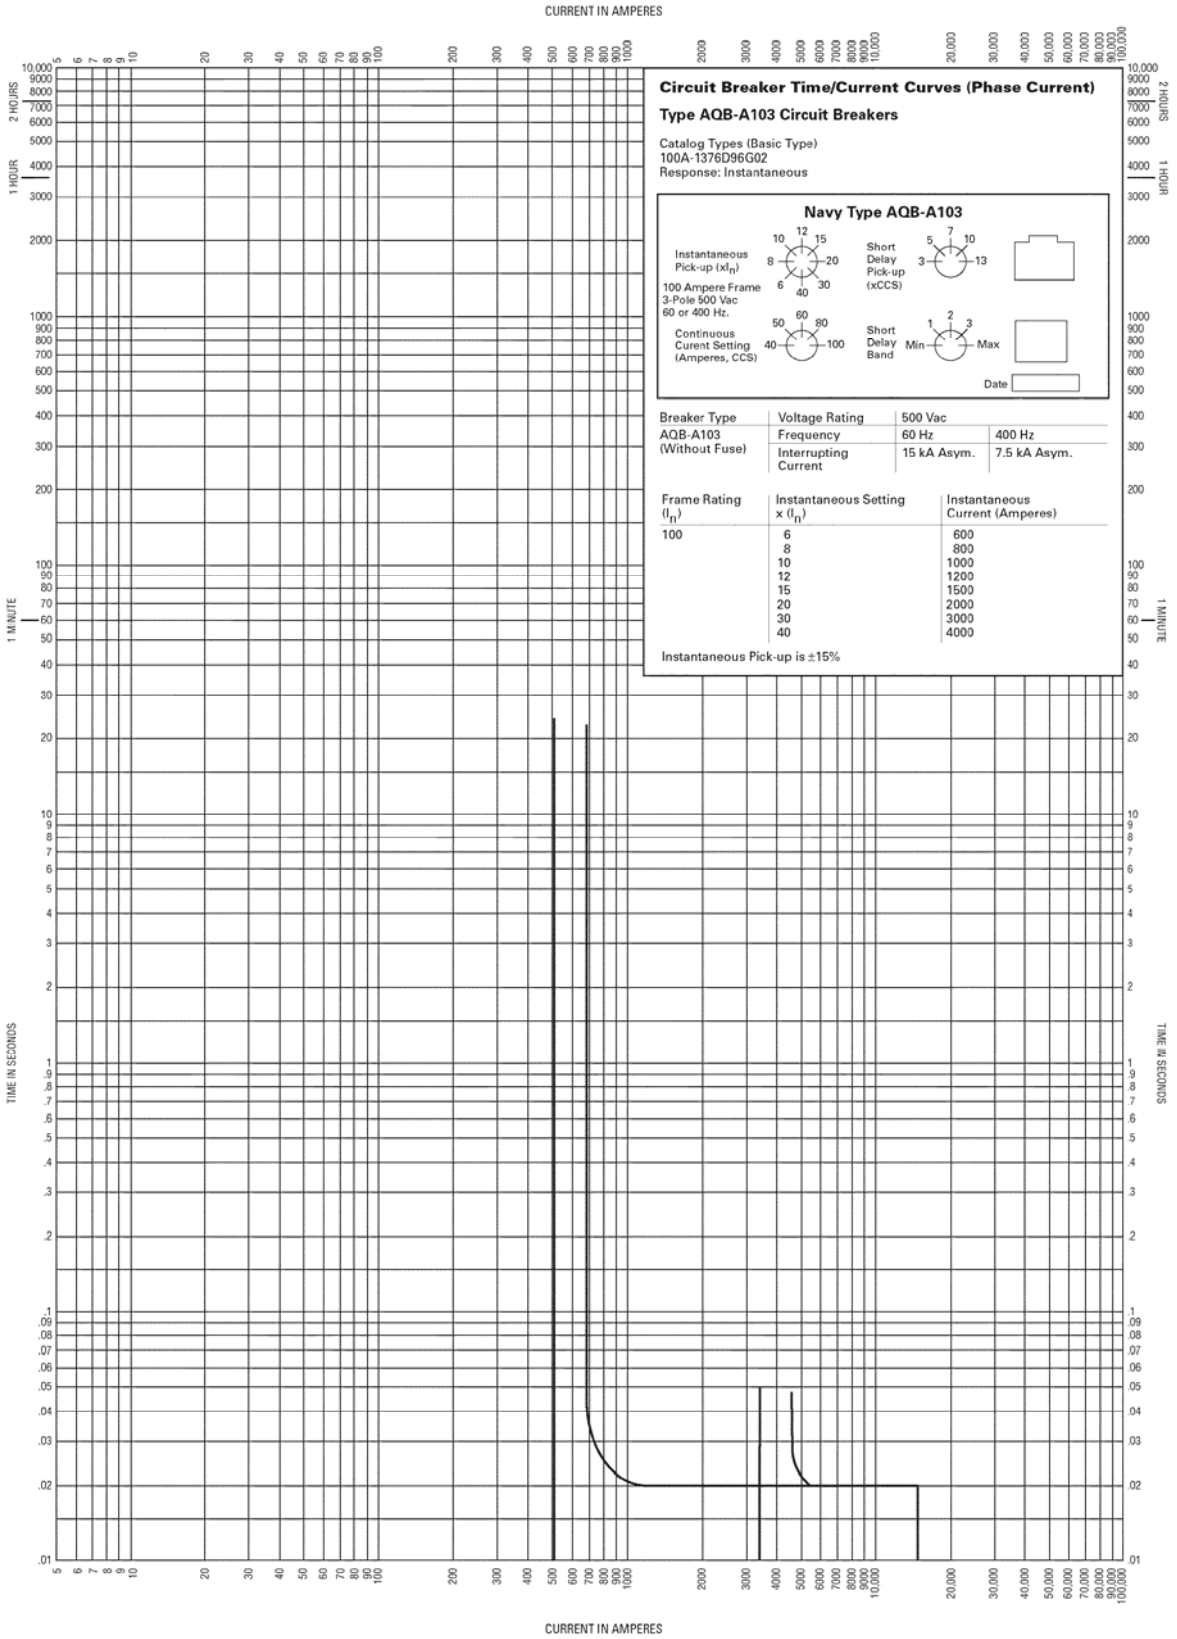


FIGURE 17. AQB-A103 100-amp frame instantaneous response.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:01Z
Check the source to verify that this is the current version before use.

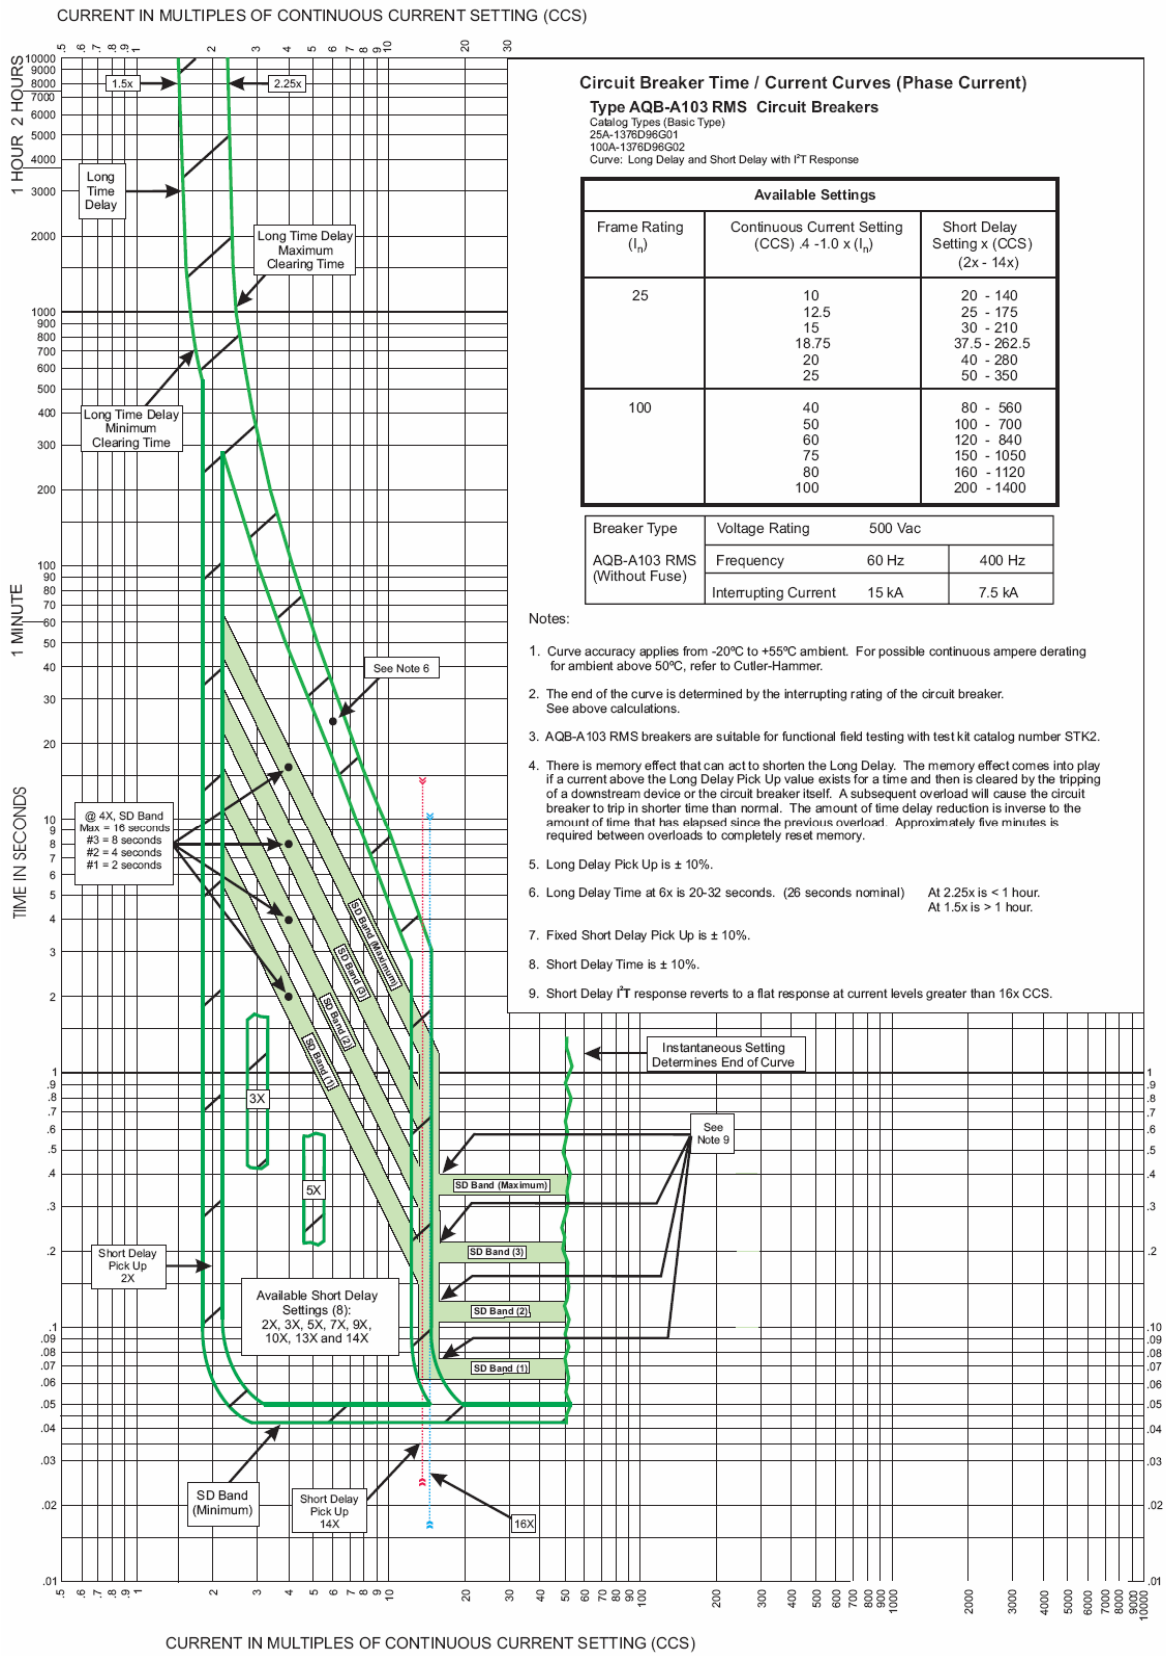


FIGURE 18 AQB-A103RMS long delay and short delay (I^2T) response.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:01Z
Check the source to verify that this is the current version before use.

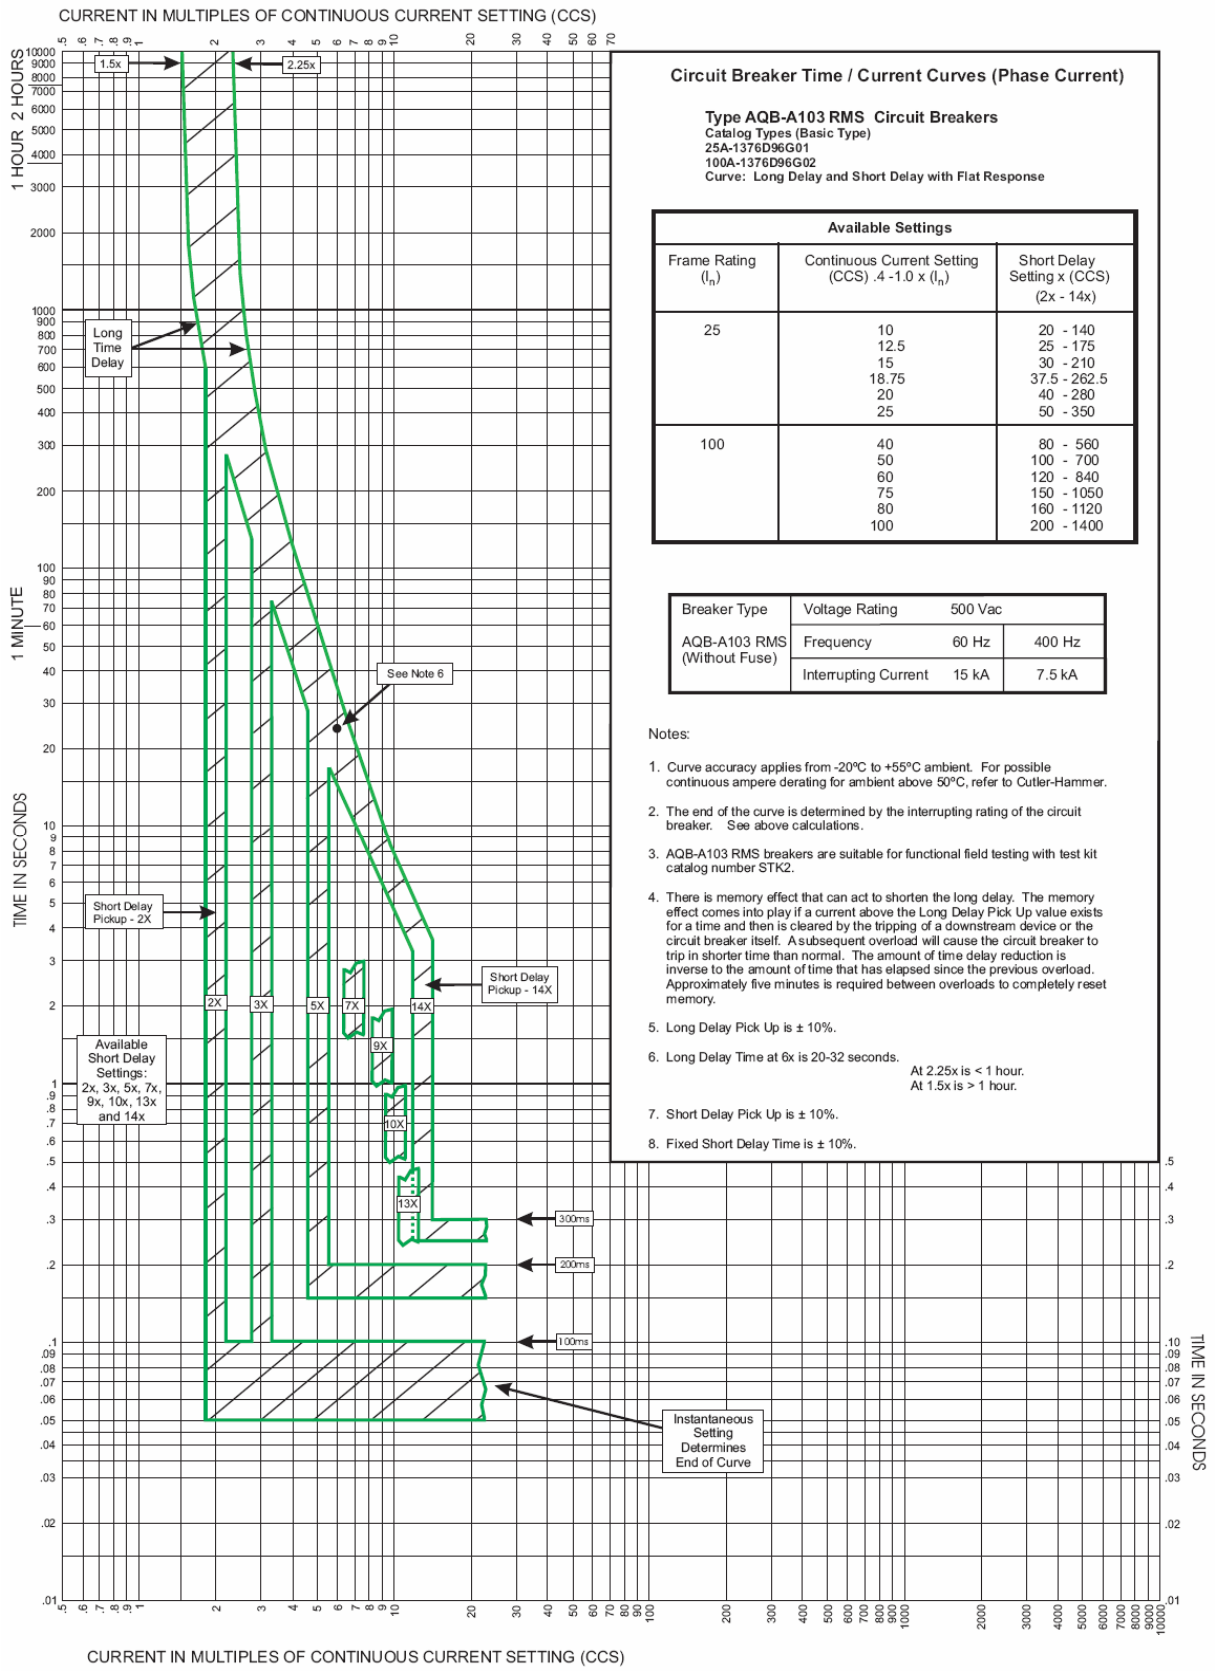


FIGURE 19 AQB-A103RMS long delay and short delay (flat) response.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:01Z
Check the source to verify that this is the current version before use.

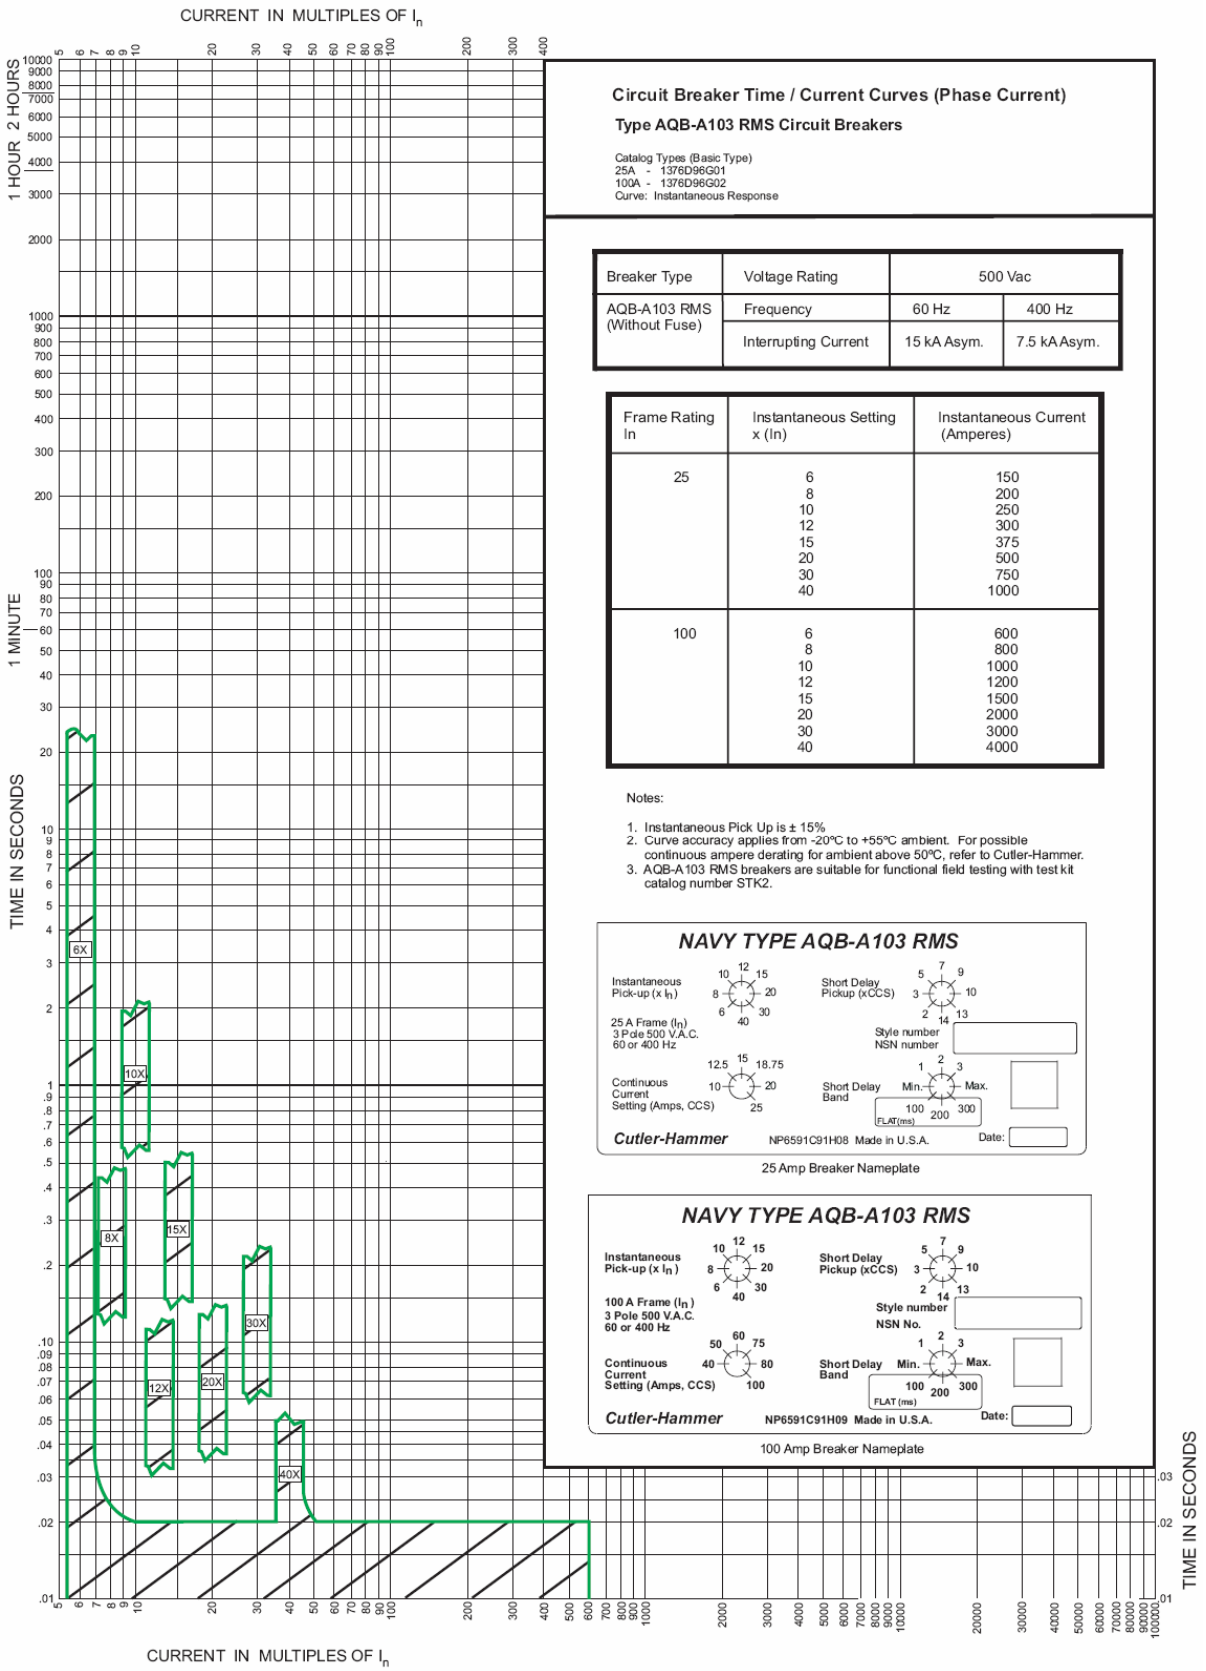


FIGURE 20 AQB-A103RMS instantaneous response.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:01Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Preparing Activity:
Navy – SH
(Project 5925-N185-004)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:01Z
Check the source to verify that this is the current version before use.