
MILITARY SPECIFICATION SHEET

TOOL KITS, ELECTRICAL CONNECTORS, CONTACTS, AND CONNECTOR AND CABLE ACCESSORIES: TOOL KIT, GENERAL PURPOSE, FOR MIL-C-22520/5 CRIMPING TOOL AND DIES

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the tool kit described herein shall consist of this document and the latest issue of Specification MIL-T-83507.

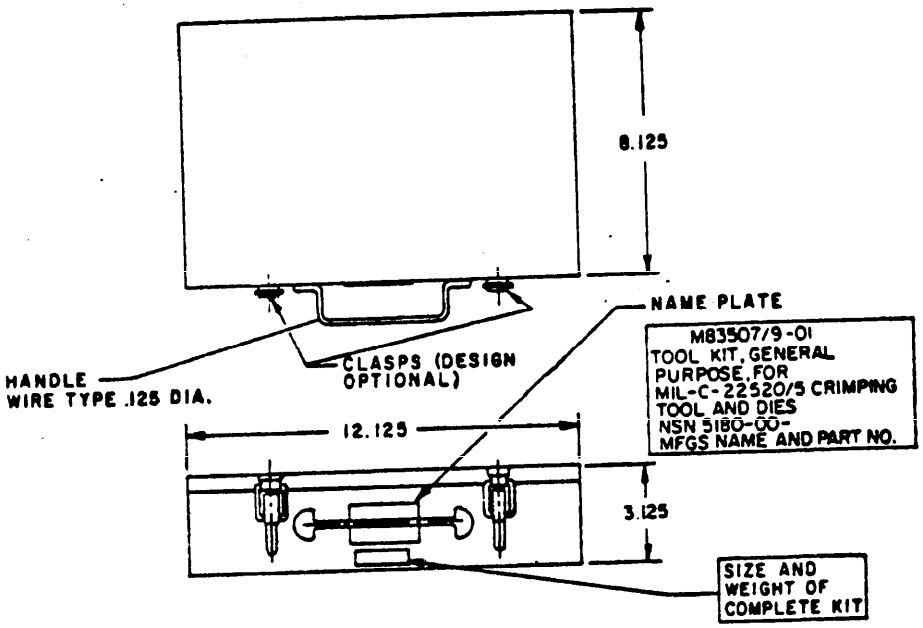

NOTES:
1. For drawing notes and metric equivalents, see figure 6.
2. Part number M83507/9-01 includes case and tools.

FIGURE 1. Tool kit, general purpose, for MIL-C-22520/5 crimping tool and dies.

FSC 5180


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:23Z
Check the source to verify that this is the current version before use.

PARTS LIST.

(1)	M83507/9-02	- Tool case assembly.
(1)	M22520/5-01	- Crimp tool frame.
(1)	M22520/5-03	- Die set.
(1)	M22520/5-04	- Die set.
(1)	M22520/5-05	- Die set.
(1)	M22520/5-06	- Die set.
(1)	M22520/5-07	- Die set.
(1)	M22520/5-08	- Die set.
(1)	M22520/5-10	- Die set.
(1)	M22520/5-17	- Die set.
(1)	M22520/5-19	- Die set.
(1)	M22520/5-21	- Die set.
(1)	M22520/5-23	- Die set.
(1)	M22520/5-27	- Die set.
(1)	M22520/5-31	- Die set.
(1)	M22520/5-33	- Die set.
(1)	M22520/5-35	- Die set.
(1)	M22520/5-37	- Die set.
(1)	M22520/5-39	- Die set.
(1)	M22520/5-41	- Die set.
(1)	M22520/5-43	- Die set.
(1)	M22520/5-45	- Die set.
(1)	M22520/5-47	- Die set.
(1)	M22520/5-49	- Die set.
(1)	M22520/5-51	- Die set.
(1)	M22520/5-53	- Die set.
(1)	M22520/5-55	- Die set.
(1)	M22520/5-61	- Die set.
(1)	M22520/5-63	- Die set.
(1)	GGGC105, type 1, class 1, style A, size 1 inch Caliper, Micrometer.	
(1 set)	Contents charts, instruction sheets and tool selection chart.	

FIGURE I. Tool kit, general purpose, for MIL-C-22520/5 crimping tool and dies - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:23Z
Check the source to verify that this is the current version before use.

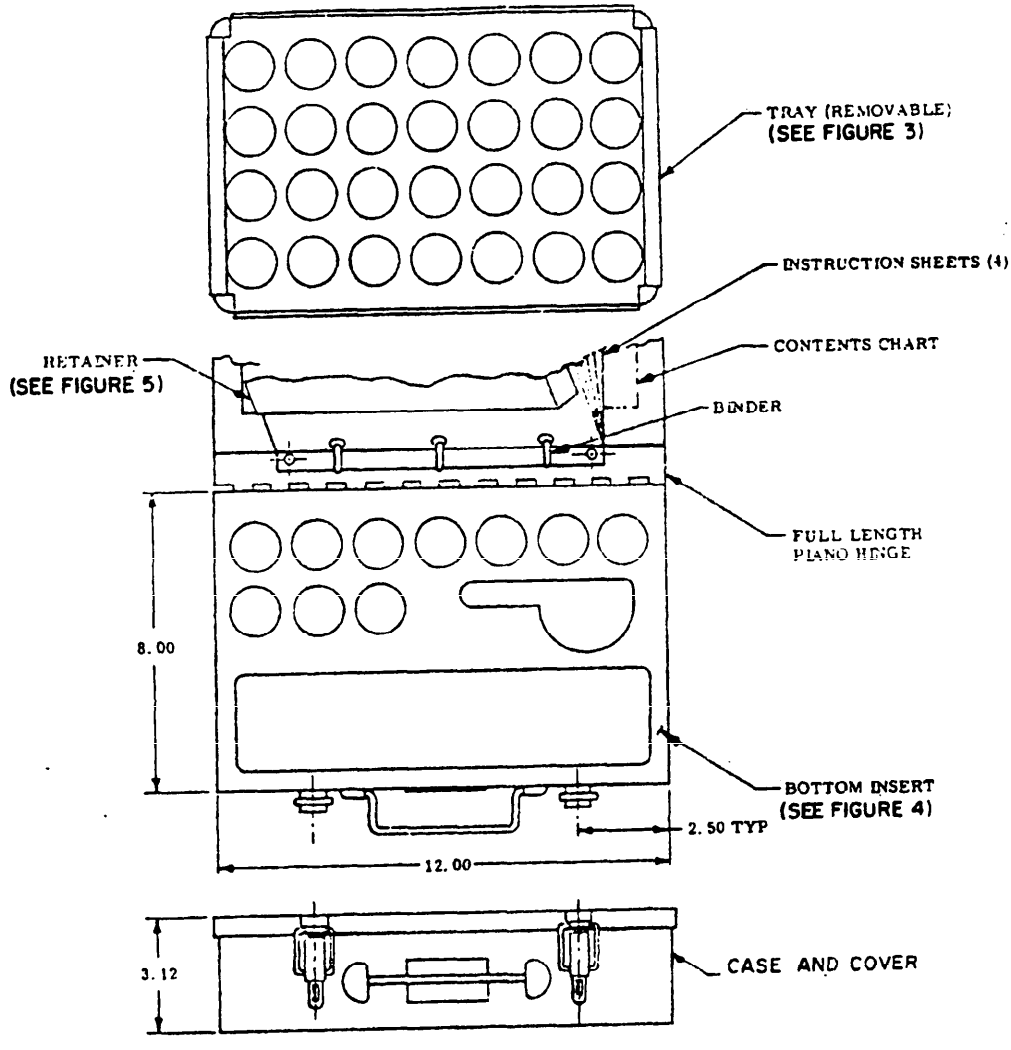

NOTES:
1. See figure 6, note 4.
2. Part number M83507/9-02 for case only (tools not included).

FIGURE 2. Tool case assembly.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:23Z
Check the source to verify that this is the current version before use.

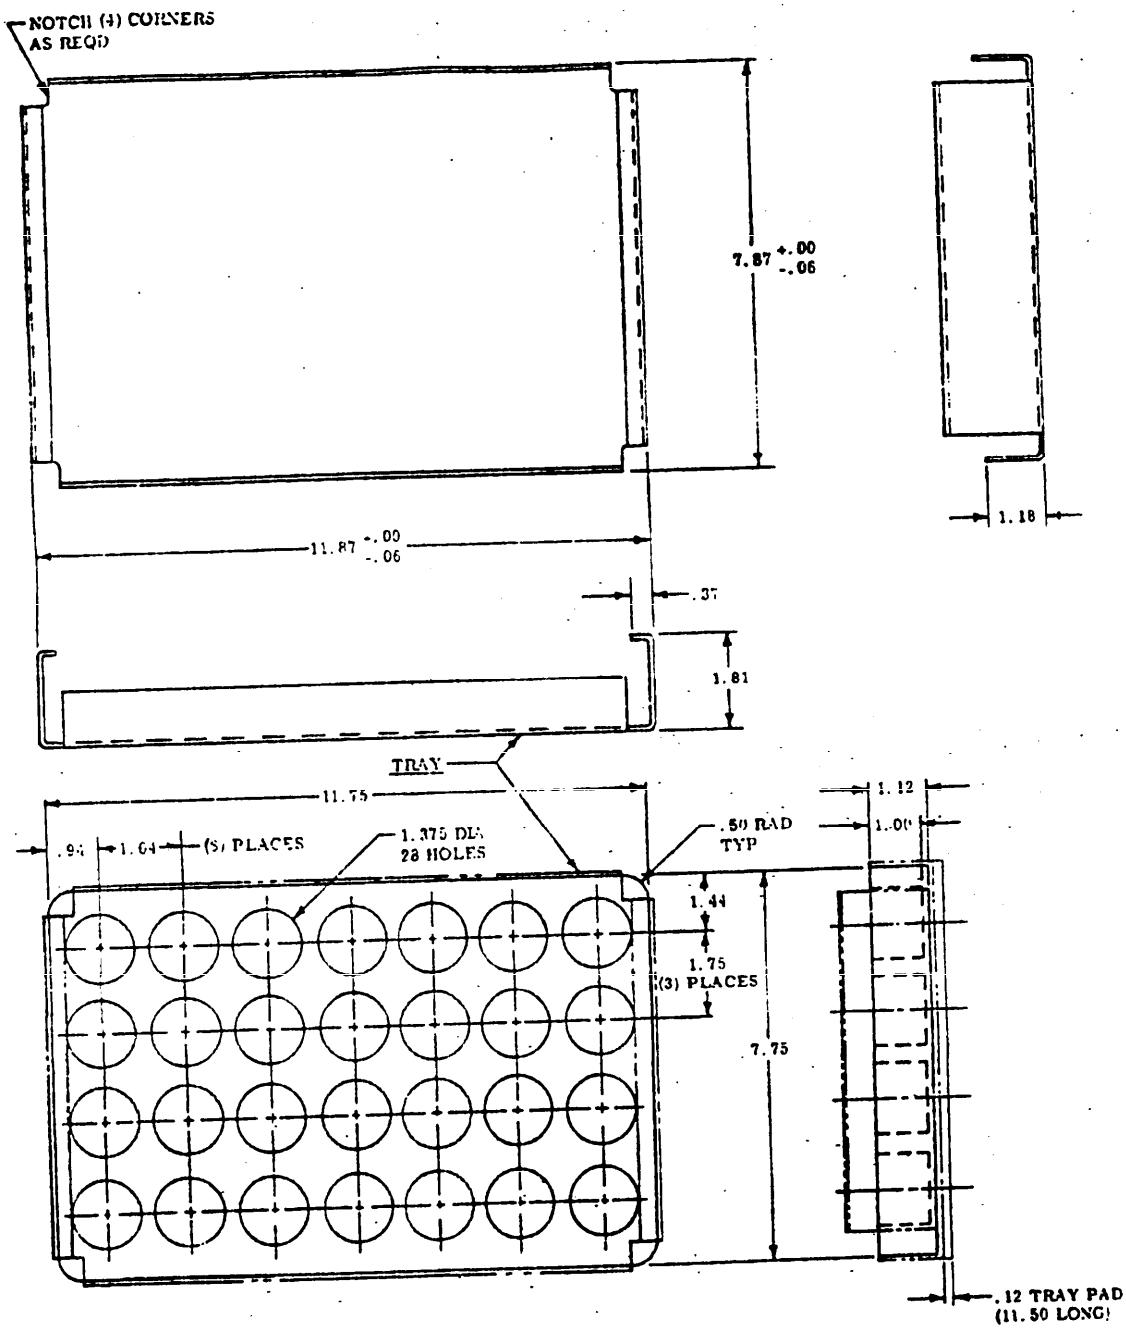

NOTES:
1. For drawing notes and metric equivalents, see figure 6.
2. This insert is part of the tool case assembly (see figure 2).


FIGURE 3. Tray insert configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:23Z
Check the source to verify that this is the current version before use.

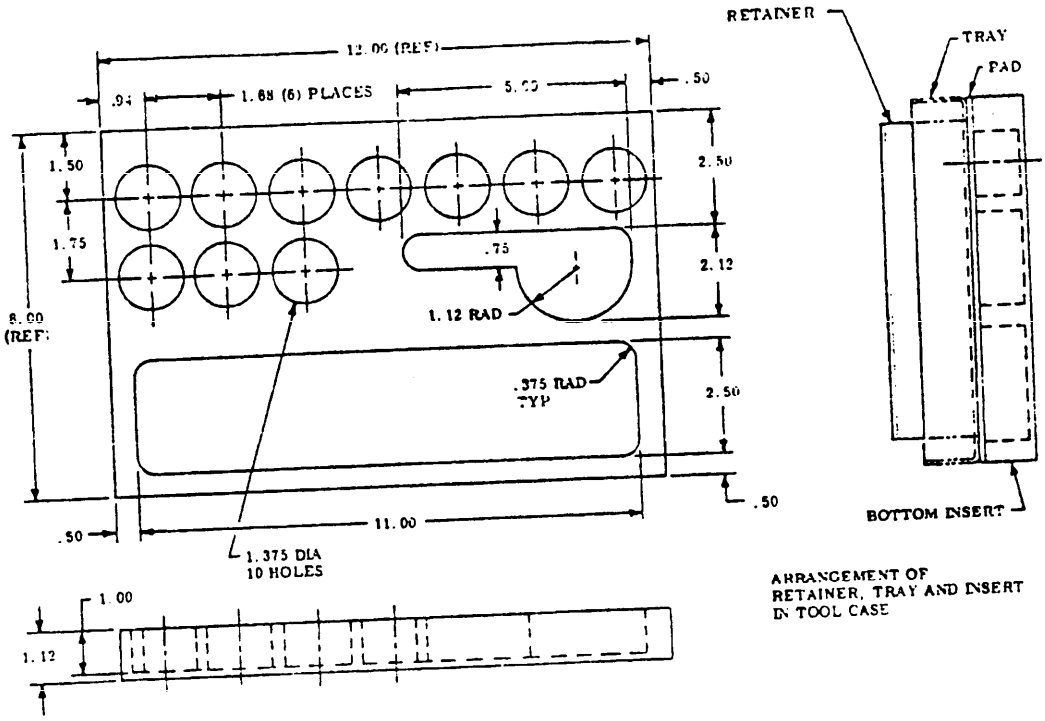

NOTES:
1. For drawing notes and metric equivalents, see figure 6.
2. This insert is part of the tool case assembly (see figure 2).

FIGURE 4. Bottom insert configuration.

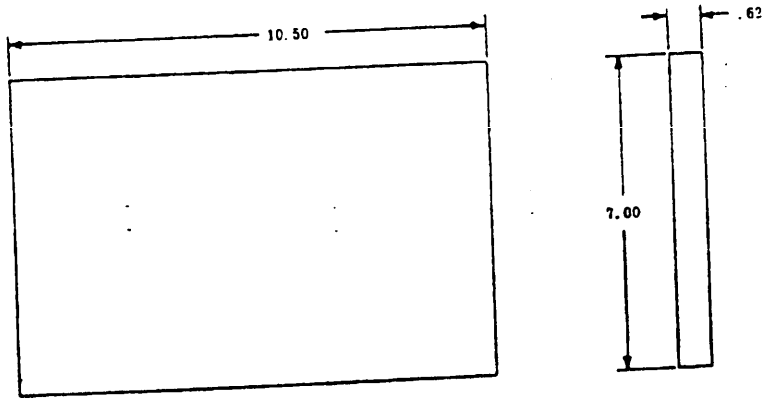

NOTES:
1. For drawing notes and metric equivalents, see figure 6.
2. This retainer is part of the tool case assembly (see figure 2).

FIGURE 5. Retainer configuration.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:23Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.06	1.5	1.12	28.4	2.50	63.5	8.125	206.38
.12	3.0	1.18	30.0	2.75	69.8	10.00	254.0
.125	3.18	1.375	34.92	3.12	79.2	10.50	266.7
.37	9.4	1.44	36.6	3.125	79.38	11.00	279.4
.375	9.52	1.50	38.1	5.00	127.0	11.50	292.1
.50	12.7	1.64	41.7	6.00	152.4	11.75	298.4
.62	15.7	1.68	42.7	7.00	177.8	11.87	301.5
.75	19.0	1.75	44.4	7.75	196.8	12.00	304.8
.94	23.9	1.81	46.0	7.87	199.9	12.125	308.0
1.00	25.4	2.12	53.8	8.00	203.2		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.031 (.79 mm).
4. Remove all burrs, break sharp edges and corners.


FIGURE 6. Drawing notes and metric equivalents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:23Z
Check the source to verify that this is the current version before use.

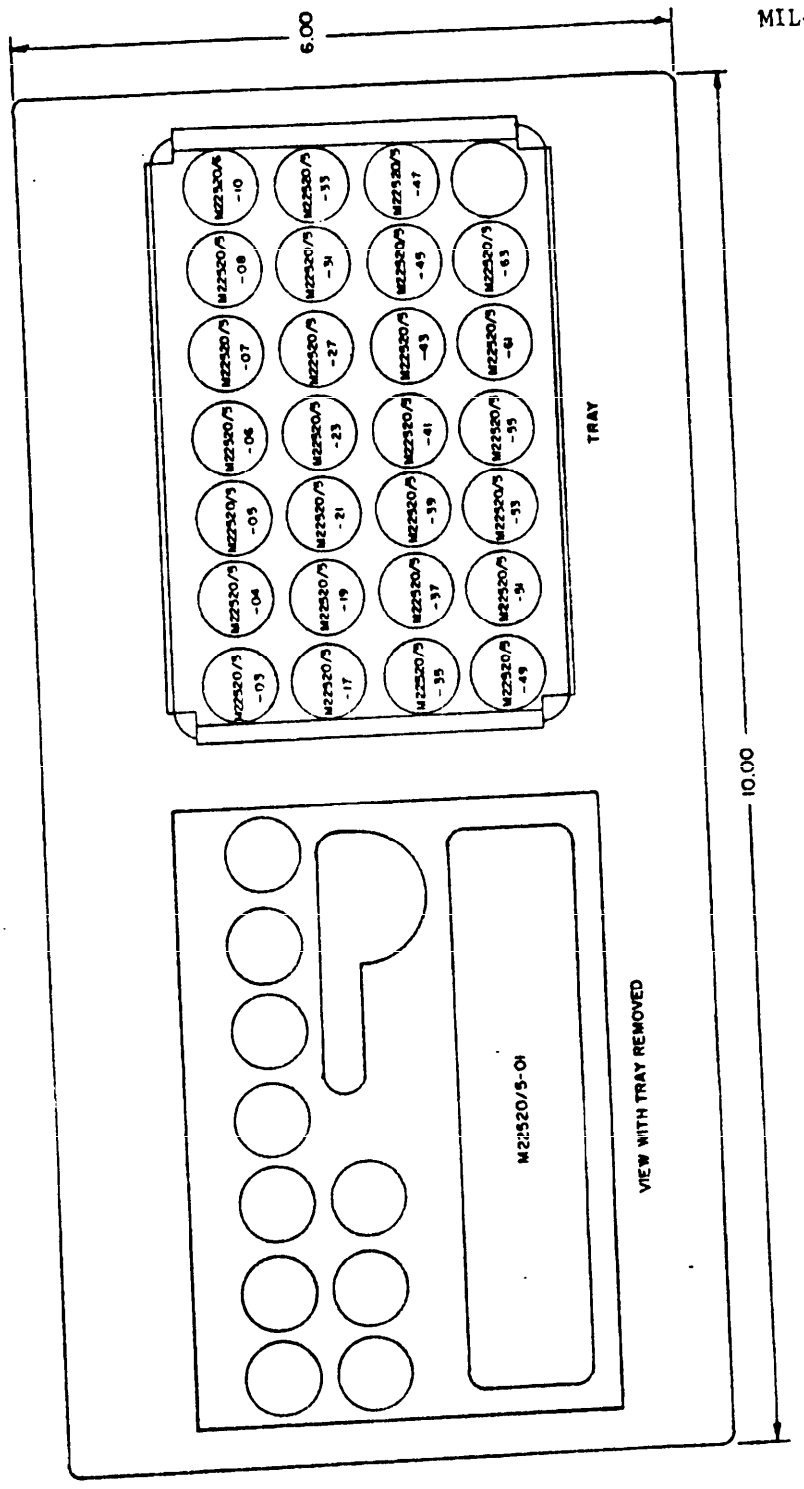

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:23Z
Check the source to verify that this is the current version before use.

INSTRUCTION SHEETS ARE AS FOLLOWS:

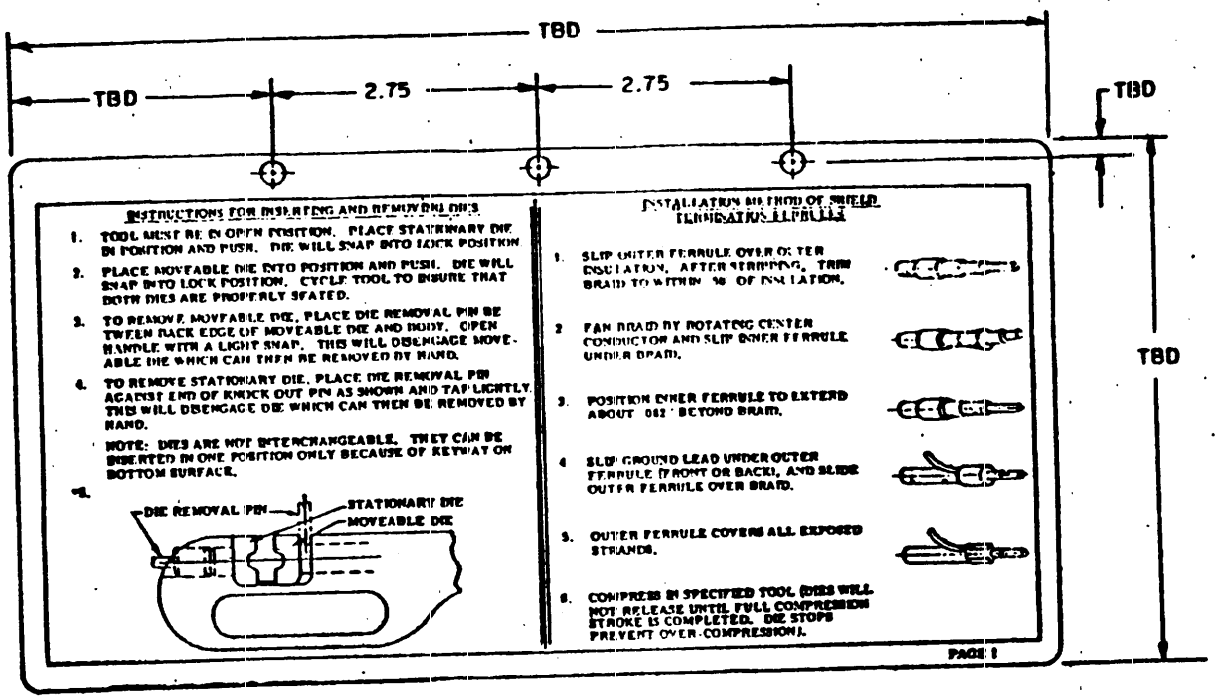

*1. DIES ARE FREE FLOATING AND WILL ALIGN DURING CRIMPING PROCEDURE.

NOTE: Dimensions apply to all instruction sheets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:23Z
Check the source to verify that this is the current version before use.


ASSEMBLY INSTRUCTIONS FOR SHIELDED PIN AND SOCKET CONTACTS

STEP 1




INSTALL SEALING BOOT AND SLIDE OUTER FERRULE ONTO CABLE, AS SHOWN, PRIOR TO STRIPPING CABLE.

STEP 2



STRIP CABLE JACKET, BRAID, AND DIELECTRIC TO DIMENSIONS INDICATED. ALL CUTS ARE TO BE SQUARE AND SHARP - IMPORTANT - DO NOT NICK BRAID, DIELECTRIC OR CENTER CONDUCTOR WHEN CUTTING. IF WIRE ENDS OF CENTER CONDUCTOR FRAY, TWIST THEM TO THEIR NORMAL LAY.

STEP 3



PLACE STRIPPED CENTER CONDUCTOR INTO CONTACT UNTIL CABLE DIELECTRIC BUTTS CONTACT AND END OF WIRE SHOWS THROUGH INSPECTION HOLE (ARROW). INSERT CONTACT INTO CRIMP TOOL UNTIL FULLY SEATED IN NEST BUSHING. CRIMP WITH ONE FULL STROKE.

STEP 4




FLARE OUT ENDS OF WIRE BRAID TO FACILITATE INSERTION OF INNER FERRULE OF BODY ASSEMBLY. (DO NOT COMB OUT WIRE BRAID).

STEP 5



INSTALL CENTER CONTACT IN BODY ASSEMBLY AND SLIDE INNER FERRULE UNDERNEATH WIRE BRAID AS SHOWN. CENTER CONTACT SHALL BE INSERTED UNTIL IT IS LOCKED IN PLACE IN BODY ASSEMBLY. A 3 LB MIN. 5 LB MAX PULL SHALL BE EXERTED ON CABLE TO ENSURE THAT THE CONTACT IS SECURELY LOCKED IN PLACE.

STEP 6



SLIDE OUTER FERRULE OVER WIRE BRAID AND UP AGAINST BODY ASSEMBLY AS SHOWN. NO BLACK SHALL EXIST IN WIRE BRAID. CRIMP OUTER FERRULE WITH M22520/5-39 (.180 HEX).

STEP 7



THE SHIELDED CONTACT NOW ASSEMBLED SHALL BE INSERTED INTO THE CONNECTOR ASSEMBLY WITH AN INSERTION TOOL. PUSH SEALING BOOT FORWARD INTO GROMMET OF CONNECTOR UNTIL O-RING RIBER OF THE BOOT HAS EFFECTED ITS SNAP-IN SEAL. THE INSTALLATION OF THE SHIELDED CONTACT IS THEN COMPLETED. FOR REMOVING CONTACT FROM CONNECTOR USE APPLICABLE REMOVAL TOOL

PAGE 2

INSTRUCTION SHEET

Source: https://assist.dla.mil -- Downloaded: 202610-23T08:23Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS FOR SELECTING MATCHING INNER AND OUTER FERRULES AND THEIR INSTALLING DIES

1. MEASURE THE DIAMETER OF THE INNER CONDUCTOR INSULATION (DIELECTRIC).
2. MEASURE THE OUTSIDE DIAMETER OF THE SHIELD.
3. FIND, ON THE CHART, THE DIAMETER RANGES WITHIN WHICH THESE DIMENSIONS WILL FIT. THE PROPER INNER AND OUTER FERRULE COMBINATIONS, AND TOOL DIE NO. ARE TABULATED ON SAME LINE READING FROM LEFT TO RIGHT.

TOOL REQUIRED: MICROMETER

SHIELD TERMINATING FERRULES

INNER CONDUCTOR INSULATION DIA. RANGE		INNER FERRULE PART NO. MS21981	OUTER CONDUCTOR SHIELD O.D.		TO CRIMP UNINSULATED OUTER FERRULE PART NO. MS21980 1/	USE		TO CRIMP INSULATED OUTER FERRULE PART NO. MS18121 1/	USE	
						DIE PART NO. M22520/5	DIE CLOSURE		DIE PART NO. M22520/5	DIE CLOSURE
MAX	MIN.		MAX	MIN.						
.038	.018	-044	.048	.028	-101	-33	B	-101	-35	B
.050	.030	-058	.060	.050	-128	-35	B	-128	-37	B
.055	.035	-063	.075	.057	-128	-35	B	-128	-37	B
.065	.043	-071	.076	.060	-128	-35	B	-128	-37	B
.063	.043	-071	.096	.072	-149	-37	B	-149	-41	B
.072	.052	-080	.095	.074	-149	-37	B	-149	-41	B
.082	.062	-090	.095	.079	-149	-37	B	-149	-41	B
.088	.068	-096	.105	.088	-156	-39	D	-156	-43	B
.093	.073	-101	.124	.106	-175	-41	B	-175	-19	B
.102	.082	-109	.130	.118	-175	-41	B	-175	-19	B
.102	.082	-109	.137	.131	-187	-43	B	-187	-45	A
.116	.096	-124	.135	.116	-187	-43	B	-187	-45	A
.116	.096	-124	.146	.128	-194	-43	B	-194	-45	A
.116	.096	-124	.151	.138	-199	-43	B	-199	-45	A
.120	.100	-125	.153	.135	-205	-19	B	-205	-19	A
.120	.100	-128	.165	.147	-219	-19	B	-219	-19	A

1/ USE (1) NO. 20 OR 22 GROUNDING WIRE

SHIELD TERMINATING FERRULES (CONTINUED)

INNER CONDUCTOR INSULATION DIA. RANGE		INNER FERRULE PART NO. MS21981	OUTER CONDUCTOR SHIELD O.D.		TO CRIMP UNINSULATED OUTER FERRULE PART NO. MS21980 1/	USE		TO CRIMP INSULATED OUTER FERRULE PART NO. MS18121 1/	USE	
						DIE PART NO. M22520/5	DIE CLOSURE		DIE PART NO. M22520/5	DIE CLOSURE
MAX.	MIN.		MAX.	MIN.						
.128	.106	-134	.148	.128	-205	-19	B	-205	-19	A
.128	.106	-134	.166	.149	-225	-45	B	-225	-19	A
.128	.106	-134	.161	.162	-232	-43	A	-232	-43	A
.141	.121	-149	.171	.153	-232	-43	A	-232	-43	A
.143	.124	-156	.192	.174	-261	-16	A	-261	-41	A
.157	.137	-165	.195	.177	-261	-19	A	-261	-41	A
.167	.147	-175	.189	.165	-261	-19	A	-261	-41	A
.167	.147	-175	.205	.185	-275	-43	A	-275	-35	A
.179	.159	-187	.215	.192	-281	-41	A	-281	-35	A
.156	.166	-194	.224	.206	-287	-41	A	-287	-35	A
.191	.171	-205	.232	.215	-297	-41	A	-297	-35	A
.191	.171	-205	.241	.223	-312	-35	A	-312	-47	--
.191	.171	-205	.250	.238	-327	-37	A	-327	-23	--
.211	.191	-219	.252	.234	-327	-37	A	-327	-23	--
.217	.191	-225	.258	.251	-348	-35	A	-348	-23	--
.224	.204	-232	.286	.266	-348	-35	A	-348	-23	--
.242	.222	-250	.297	.277	-359	-33	A	-358	-23	--
.242	.222	-250	.312	.292	-375	-47	--	-375	-49	--
.253	.233	-261	.308	.288	-375	-47	--	-375	-49	--
.259	.239	-266	.308	.284	-375	-47	--	-375	-49	--
.267	.247	-275	.312	.292	-375	-47	--	-375	-49	--
.287	.267	-275	.342	.322	-405	-23	--	-405	-51	--
.273	.253	-281	.333	.303	-405	-23	--	-405	-51	--
.279	.259	-287	.344	.324	-415	-23	--	-415	-51	--
.289	.269	-297	.359	.319	-415	-23	--	-415	-51	--
.304	.284	-312	.334	.314	-415	-23	--	-415	-51	--
.304	.284	-312	.364	.339	-460	-53	--	-460	-31	--
.340	.260	-348	.384	.325	-460	-53	--	-460	-31	--
.341	.341	-375	.448	.424	-509	-21	--	-500	-27	--

1/ USE (1) NO. 20 OR 22 GROUNDING WIRE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:23Z
Check the source to verify that this is the current version before use.

SHIELD TERMINATING FERRULES (CONTINUED)

INNER CONDUCTOR INSULATION DIA. RANGE		INNER FERRULE PART NO. MS21981	OUTER CONDUCTOR SHIELD O.D.		TO CRIMP UNINSULATED OUTER FERRULE PART NO. MS21980[1]	USE		TO CRIMP INSULATED OUTER FERRULE PART NO. MS16121[1]	USE	
						DIE PART NO. M22520/5	DIE CLOSURE		DIE PART NO. M22520/5	DIE CLOSURE
MAX.	MIN.		MAX.	MIN.						
					-101	-33	B	-348, -327	-23	B
					-128	-35	B	-101	-35	B
					-375	-47	-	-312	-47	-
					-149	-37	B	-128	-37	B
					-359	-33	A	--	--	--
					-156	-35	B	-281, -297, -267	-35	A
					-345	-39	A	--	--	--
					-175	-41	B	-149	-41	B
					-327	-39	A	--	--	--
					-187, -199, -183	-43	B	-156	-43	B
					-312	-39	A	-275	-39	A
					-205, -219	-19	B	-175	-19	B
					-281, -267, -297	-41	A	-261	-41	-
					-225	-45	B	-232	-45	A
					-215	-43	A	--	--	--
					-232	-45	A	-187, -199, -195	-45	B
					-261	-19	A	-205, -219, -225	-19	A
					-405, -415	-23	A	-359	-23	-
					-400	-53	--	--	--	--
					-500	-21	--	--	--	--
					--	--	--	-375	-49	--
					--	--	--	-405, -415	-51	--
					--	--	--	-400	-51	--
					--	--	--	-500	-27	--
					-175	-41	B	--	--	--
					-205	-19	B	--	--	--
					-261	-19	A	--	--	--
					-275	-63	—	--	--	--
					-346	-35	A	--	--	--
					-400	-61	--	--	--	--

1/ USE (1) NO. 20 OR NO. 22 GROUNDING WIRE

PAGE 5

DIES FOR COAXIAL, SHIELDED CONTACTS

PART NO.	CONTACTS ACCOMMODATED	CABLES ACCOMMODATED
M22520/5-03	M39029/6-01 M39029/13-01 M39029/14-01	RG178A/U, RG196A/U CRUMSLAW GC18K-1-225 REVERE WH-95823
M22520/5-04	M39029/6-02, -03, -04, -05, -06 M39029/13-02, -03, -04, -05, -06 M39029/14-02, -03, -04, -05, -06	RG180B/U, RG187A/U, RG195A/U, RG188A/U MICRODOT 293-3222, 250-4070 RAYCHEM 48-950, 48-502
M22520/5-06	M39029/7-001, M39029/8-001	RG178B/U, RG178A/U, RG196A/U, 30 AWG, 28 AWG
	M39029/7-002, M39029/8-002	RG174/U, RG188A/U, 26 AWG
	M39029/7-003, M39029/8-003	24 AWG
M22520/5-08	M83733/13, /14	RG179/U
M22520/5-10	ONO89586-1, -2	RG195/U

PAGE 6

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:23Z
Check the source to verify that this is the current version before use.

DIES FOR COAXIAL RADIO FREQUENCY, CLASS II CRIMP TYPE SERIES CONNECTORS

TO CRIMP INNER CONTACT PART NO. M39012/	USE		TO CRIMP OUTER FERRULE PART NO. M39012/	USE		CABLES ACCOMMODATED
	DIE PART NO. M22520/5	DIE CLOSURE		DIE PART NO. M22520/5	DIE CLOSURE	
1-10	-01	D	1-50	-01	A	RG9/U, 214/U, 225/U, 393/U
1-10	-01	B	1-51	-01	A	RG8/U, 213/U
1-11	-19	B	1-52	-19	A	RG142B/U, 400/U
2-10	-01	B	2-50	-01	A	RG9/U, 214/U, 225/U, 393/U
2-10	-01	D	2-51	-01	A	RG8/U, 213/U
2-11	-19	B	2-52	-19	A	RG142B/U, 400/U
3-10	-01	B	3-50	-01	A	RG9/U, 214/U, 225/U, 393/U
3-10	-01	D	3-51	-01	A	RG8/U, 213/U
3-11	-19	B	3-52	-19	A	RG400/U, 142B/U
5-10	-01	B	5-50	-01	A	RG9/U, 214/U, 225/U, 393/U
5-10	-01	D	5-51	-01	A	RG8/U, 213/U
5-11	-19	B	5-52	-19	A	RG142B/U, 400/U
16-10	-41	B	16-50	-41	A	RG122/U
16-11	-41	D	16-50	-41	A	RG180/U, 195/U
16-10	-19	B	16-51	-19	A	RG142B/U, 400/U
17-10	-41	B	17-50	-41	A	RG122/U
17-11	-41	D	17-50	-41	A	RG180/U, 195/U
17-10	-19	B	17-51	-19	A	RG142B/U, 400/U
18-10	-41	B	18-50	-41	A	RG122/U
18-11	-41	D	18-50	-41	A	RG180/U, 195/U
18-10	-19	B	18-51	-19	A	RG142B/U, 400/U
19-10	-41	B	19-50	-41	A	RG122/U
19-11	-41	D	19-50	-41	A	RG180/U, 195/U
19-10	-19	B	19-51	-19	A	RG142B/U, 400/U
26-10	-41	D	26-50	-41	A	RG122/U
26-11	-41	B	26-50	-41	A	RG180/U, 195/U

PAGE 7

DIES FOR COAXIAL RADIO FREQUENCY, CLASS II CRIMP TYPE SERIES CONNECTORS (CONTINUED)

TO CRIMP INNER CONTACT PART NO. M39012/	USE		TO CRIMP OUTER FERRULE PART NO. M39012/	USE		CABLES ACCOMMODATED
	DIE PART NO. M22520/5	DIE CLOSURE		DIE PART NO. M22520/5	DIE CLOSURE	
26-10	-19	B	26-51	-19	A	RG142B/U, 400/U
27-10	-41	B	27-50	-41	A	RG122/U
27-11	-41	B	27-50	-41	A	RG180/U, 195/U
27-10	-19	D	27-51	-19	A	RG142B/U, 400/U
28-10	-41	D	28-50	-41	A	RG122/U
28-11	-41	B	28-50	-41	A	RG180/U, 195/U
28-10	-19	B	28-51	-19	A	RG142B/U, 400/U
29-10	-41	B	29-50	-41	A	RG122/U
29-11	-41	D	29-50	-41	A	RG180/U, 195/U
29-10	-19	B	29-51	-19	A	RG142B/U, 400/U
30-10	-19	B	30-50	-19	A	RG400/U, 142B/U
30-11	-41	B	30-51	-41	A	RG180/U, 195/U
35-10	-01	B	35-50	-01	A	RG9/U, 214/U, 225/U, 393/U
35-11	-19	B	35-51	-19	A	RG142B/U, 400/U
36-10	-01	B	36-50	-01	A	RG9/U, 214/U, 225/U, 393/U
36-10	-19	B	36-51	-19	A	RG142B/U, 400/U
38-10	-01	D	38-50	-01	A	RG9/U, 214/U, 225/U, 393/U
38-11	-19	B	38-51	-19	A	RG142B/U, 400/U
39-10	-01	B	39-50	-01	A	RG9/U, 214/U, 225/U, 393/U
39-11	-19	B	39-51	-19	A	RG142B/U, 400/U
40-10	-01	B	40-50	-01	A	RG9/U, 214/U, 225/U, 393/U
40-11	-19	B	40-51	-19	A	RG142B/U, 400/U
55-10	SOLDER	--	55-50	-19	A	RG142B/U, 400/U
56-10	SOLDER	--	56-50	-19	A	RG142B/U, 400/U
57-10	SOLDER	--	57-50	-19	A	RG142B/U, 400/U
58-10	SOLDER	--	58-50	-19	A	RG142B/U, 400/U
59-10	SOLDER	--	59-50	-19	A	RG142B/U, 400/U

PAGE 8

Source: https://assist.dla.mil -- Downloaded: 202640-23T08:23Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and configuration: See figures 1 through 6.

Materials:
Case and cover (category 3): Sheet metal, 21 gage in accordance with QQ-S-698. Color is gray baked enamel on all metal parts.
Insert and retainer pad: Fire retardant foamed polyethylene in accordance with PPP-C-1752, color optional.
Instruction sheets and contents charts: White vinyl .020 inch (.51 mm) thick.

Clasps: Draw pull type with provision for locking device, suitably plated to resist corrosion.

Handles and hinges: Suitably plated to resist corrosion.

Binder: Loose leaf, three ring .562 inch (14.27 mm) ± .062 inch (1.57 mm) I.D., 2.75 inch (69.85 mm) center distance between rings, securely riveted to inside of cover as shown.

Nameplate: In accordance with MIL-P-19834.

Instruction sheets and contents charts (see pages 7 through 12): Lettering shall be legible and protected with a transparent coating. Contents charts (centered on inside of case cover) shall have pressure sensitive adhesive backing, and shall show the insert cavity configurations and the respective tool part numbers. A list of NSN's will also be supplied.

Part numbers:
M83507/9-01- Tool kit.
M83507/9-02- Tool case assembly.

QUALIFICATION:

Qualifying activity - Defense Electronics Supply Center, (DESC-E), Dayton, OH 45444

Custodians:
Army - EL
Navy - AS
Air Force - 85

Preparing activity:
Air Force - 85

(Project 5180-0100)

Review activities:
Army - AV, GL, MI, AR, WC
Navy - EC, OS, SH
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AT, ME
Navy - MC
Air Force - 19

Source: https://assist.dla.mil -- Downloaded: 202610-23T08:23Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:23Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-T-83507/9 Tool Kits, Electrical Connectors, Contacts and

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER Connector and Cable Accessories
FSC 5180

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 OCT 76 1426 PREVIOUS EDITION WILL BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:23Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF AIR FORCE
DOD-316

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

AFLC/LOIE/Standardization
Wright-Patterson AFB OH 45433

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:23Z
Check the source to verify that this is the current version before use.