MILITARY SPECIFICATION SHEET

SWITCHES, TOGGLE, ROCKER ACTUATED,
ONE POLE, TWO POLE, FOUR POLE, ENVIRONMENTALLY SEALED,
FLUSH AND SUB-PANEL MOUNTING

This specification is approved for use within the Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the switches described herein shall consist of this specification and the latest issue of MIL-S-3950.


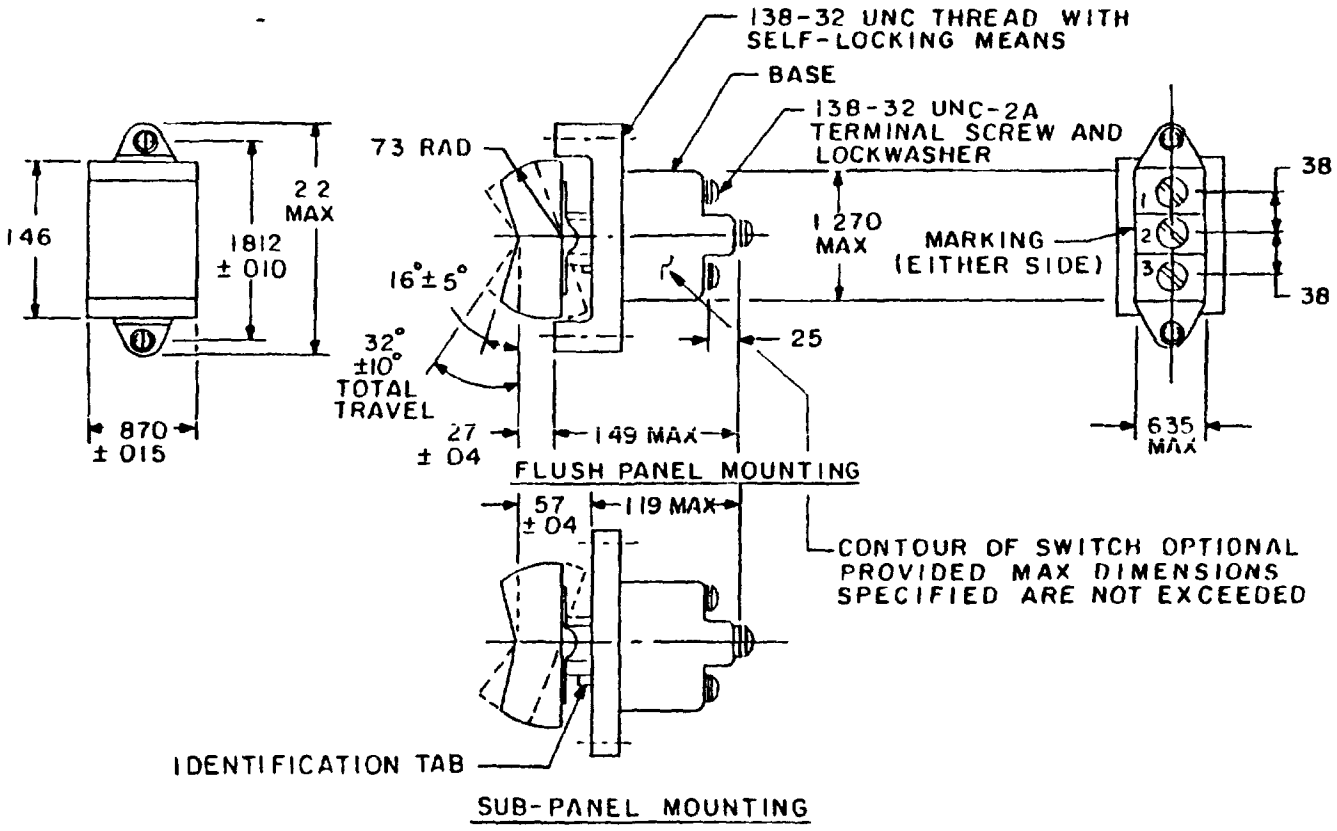


FIGURE 1. One pole switch.

AMSC N/A
FSC 5930

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited
Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:51Z
Check the source to verify that this is the current version before use.

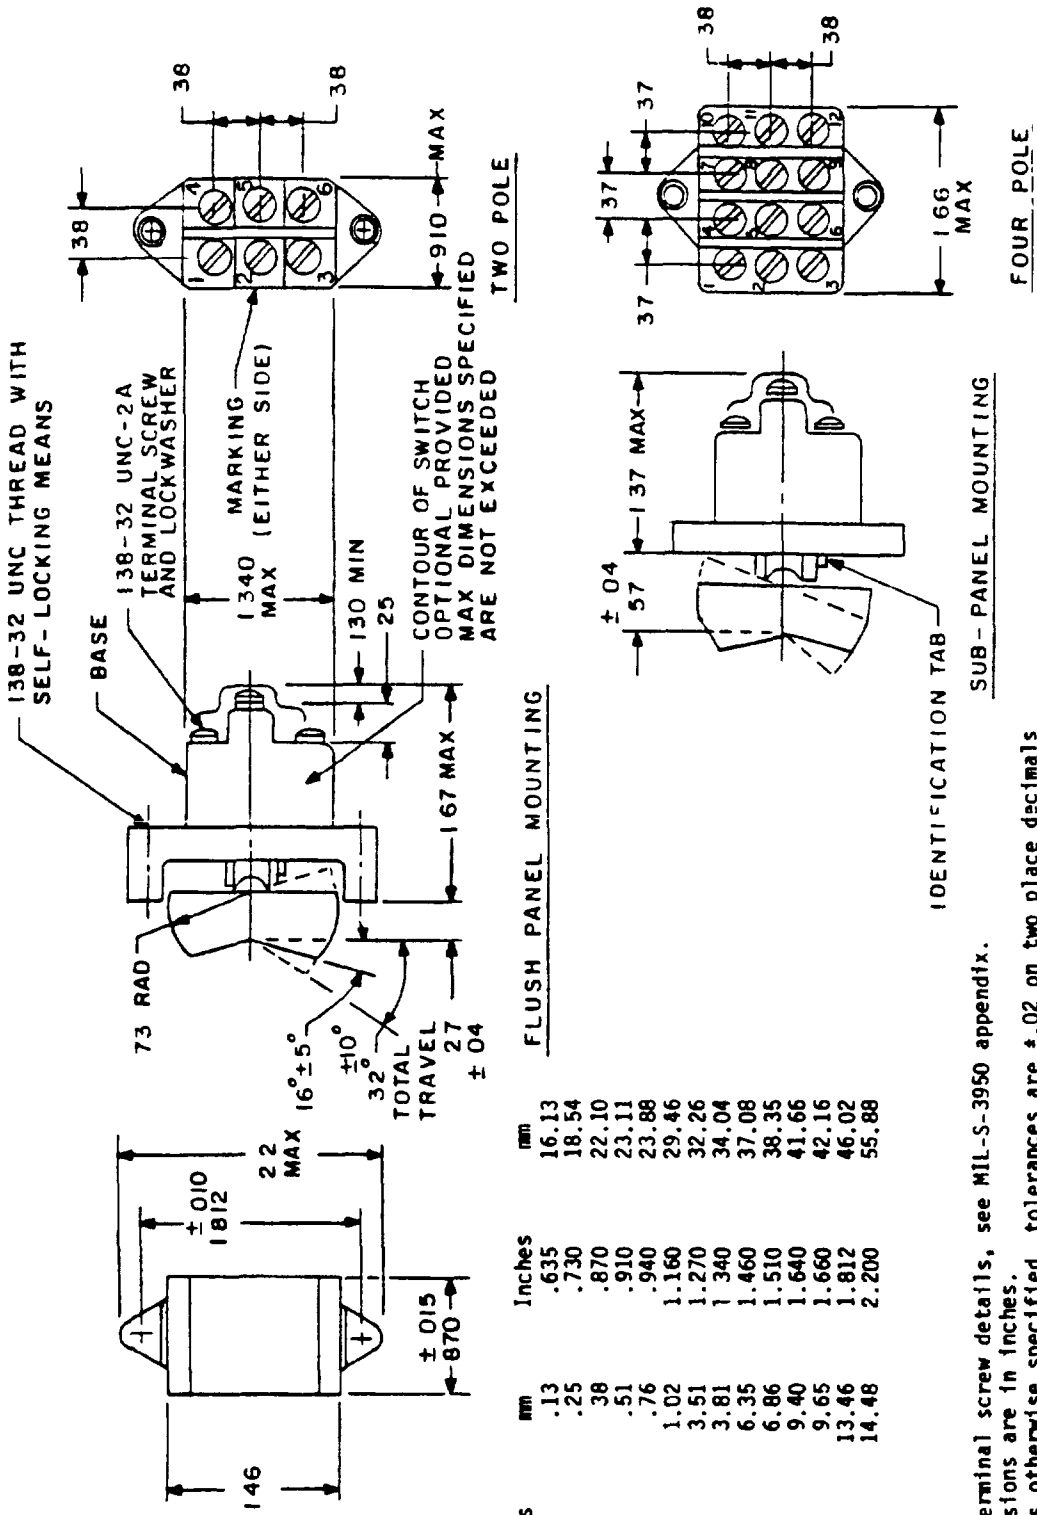

Inches	mm	Inches	mm
.005	.13	.635	16.13
.010	.25	.730	18.54
.015	38	.870	22.10
.020	.51	.910	23.11
.030	.76	.940	23.88
.040	1.02	1.160	29.46
.138	3.51	1.270	32.26
.150	3.81	1 340	34.04
.250	6.35	1.460	37.08
.270	6.86	1.510	38.35
.370	9.40	1.640	41.66
.380	9.65	1.660	42.16
.530	13.46	1.812	46.02
.570	14.48	2.200	55.88

NOTES:
1. For terminal screw details, see MIL-S-3950 appendix.
2. Dimensions are in inches.
3. Unless otherwise specified, tolerances are ±.02 on two place decimals and ±.005 on three place decimals.
4. Thread length and hole depth should be such that screws will not bottom when tightened.
5. Metric equivalents (to the nearest .01mm) are given for information only.
6. All switches on this standard are designed so that the movement of the switch mechanism is opposite to that of the rocker throw.

FIGURE 2. Two and four pole switch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:51Z
Check the source to verify that this is the current version before use.

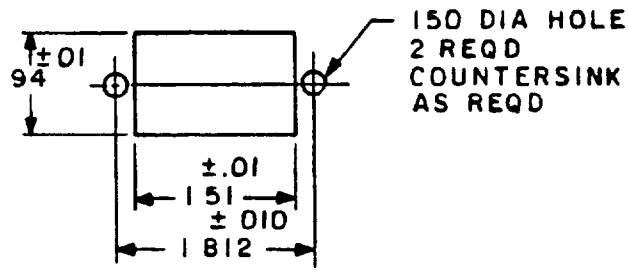


FIGURE 3. Panel cutout.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:51Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration See figures 1, 2, and 3.

Strength of toggle lever, pivot, and lever stop. The switch shall operate mechanically and electrically at a maximum load of 6 volts dc, 100 milliamperes after the following tests:

A. A 25-pound load shall be applied to the rocker button for one minute under each of the following conditions:

(1) Perpendicular to the face of the rocker button near the .73R (see figures 1 and 2). Load to be applied toward the base.

(2) Coaxial with the centerlines of the switch. Load to be applied toward the base.

Strength of mounting means:

Switches shall be mounted on a metal panel using normal mounting means and hardware. A torque of 5 pound-inches shall then be applied to the mounted switch body. When switches are tested as specified, there shall be no loosening of mounting hardware or other mechanical damage.

Mechanical endurance: Temperature extremes, -55°C +0°C, -4°C to +71°C +4°C, -0°C.

Thermal shock: Temperature extremes, -55°C +0°C, -4°C to +71°C +4°C, -0°C.

Weight:

One pole: .10 pound maximum.
Two pole .15 pound maximum.
Four pole. .22 pound maximum.

Qualification: The strength of mounting means test shall be substituted in place of the strength of mounting bushing test in the inspection sequence.

Group submission. The basic switches (to be submitted to all applicable tests) are M3950/14C35F1W and M3950/14C23S2R. In addition, the following additional switches shall be submitted to examination of product and switching characteristics.

M3950/14A27F1B.
M3950/14B28S1C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:51Z
Check the source to verify that this is the current version before use.

TABLE I Circuit code and electrical ratings for one pole switches

Circuit code number	Circuit with rocker in			Current capacity (amperes) 28 volts dc			Current capacity (amperes) 115 volts, 60 and 400 hertz ac		
	Identification tab side	Center	Opposite identification tab side	Lamp-load circuit	Resistive circuit	Inductive circuit	Lamp-load circuit	Resistive circuit	Inductive circuit
-21	1-2 ON	OFF	2-3 ON	5	20	15	3	15	10
-22	OFF	NONE	2-3 ON						
-23	1-2 ON	NONE	2-3 ON						
-24	NONE	OFF	2-3 ON						
-25	NONE	MOM OFF	2-3 ON	4	15	10	2	15	7
-26	1-2 MOM ON	NONE	2-3 ON						
-27	1-2 MOM ON	OFF	2-3 MOM ON						
-28	1-2 MOM ON	OFF	NONE						
-29	MOM OFF	NONE	2-3 ON						
-30	1-2 MOM ON	NONE	OFF						
-31	1-2 MOM ON	OFF	2-3 ON						
-32	NONE	ON 1-2	2-3 MOM ON						
-33	NONE	ON 1-2	2-3 ON	5	20	15	3	15	10

TABLE II. Circuit code and electrical ratings for two pole switches.

Circuit code number	Circuit with rocker in			Current capacity (amperes) 28 volts dc			Current capacity (amperes) 115 volts, 60 and 400 hertz ac		
	Identification tab side	Center	Opposite identification tab side	Lamp-load circuit	Resistive circuit	Inductive circuit	Lamp-load circuit	Resistive circuit	Inductive circuit
-21	ON 1-2 4-5	OFF	ON 2-3 5-6	7	20	15	4	15	15
-22	OFF	NONE	ON 2-3 5-6						
-23	ON 1-2 4-5	NONE	ON 2-3 5-6						
-24	NONE	OFF	ON 2-3 5-6						
-25	NONE	MOM OFF	ON 2-3 5-6	5	18	10	2	11	8
-26	MOM ON 1-2 4-5	NONE	ON 2-3 5-6						
-27	MOM ON 1-2 4-5	OFF	MOM ON 2-3 5-6						
-28	MOM ON 1-2 4-5	OFF	NONE						
-29	MOM OFF	NONE	ON 2-3 5-6						
-30	MOM ON 1-2 4-5	NONE	OFF						
-31	MOM ON 1-2 4-5	OFF	ON 2-3 5-6						
-32	NONE	ON 1-2 4-5	MOM ON 2 3 5-6						
-33	NONE	ON 1-2 4-5	ON 2-3 5-6	7	20	15	4	15	15
-34	ON 1 2 4 5	ON 2-3 4 5	ON 2-3 5 6						

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:51Z
Check the source to verify that this is the current version before use.

TABLE III. Circuit code and electrical ratings for four pole switches.

Circuit code number	Circuit with rocker in			Current capacity (amperes) 28 volts dc			Current capacity (amperes) 115 volts, 60 and 400 hertz ac		
	Identification tab side	Center	Opposite identification tab side	Lamp-load circuit	Resistive circuit	Inductive circuit	Lamp-load circuit	Resistive circuit	Inductive circuit
-21	1-2 7-8 ON 4-5 10-11	OFF	2-3 8-9 ON 5-6 11-12	5	20	12	4	15	15
-22	OFF	NONE	2-3 8-9 ON 5-6 11-12						
-23	1-2 7-8 ON 4-5 10-11	NONE	2-3 8-9 ON 5-6 11-12						
-24	NONE	OFF	2-3 8-9 ON 5-6 11-12						
-25	NONE	MOM OFF	2-3 8-9 ON 5-6 11-12	4	18	10	2	11	8
-26	1-2 7-8 MOM ON 4-5 10-11	NONE	2-3 8-9 ON 5-6 11-12						
-27	1-2 7-8 MOM ON 4-5 10-11	OFF	2-3 8-9 MOM ON 5-6 11-12						
-28	1-2 7-8 MOM ON 4-5 11-12	OFF	NONE						
-29	MOM OFF	NONE	2-3 8-9 ON 5-6 11-12						
-30	1-2 7-8 MOM ON 4-5 10-11	NONE	OFF						
-31	1-2 7-8 MOM ON 4-5 10-11	OFF	2-3 8-9 ON 5-6 11-12						
-32	NONE	1-2 7-8 ON 4-5 10-11	2-3 8-9 MOM ON 5-6 11-12						
-33	NONE	1-2 7-8 ON 4-5 10-11	2-3 8-9 ON 5-6 11-12	5	20	12	4	15	15
-34	1-2 7-8 ON 4-5 10-11	2-3 7-8 ON 4-5 11-12	2-3 8-9 ON 5-6 11-12						
-35	1-2 7-8 MOM ON 4-5 10-11	2-3 7-8 ON 4-5 11-12	2-3 8-9 ON 5-6 11-12	4	18	10	2	11	8
-36	1-2 7-8 MOM ON 4-5 10-11	2-3 7-8 ON 4-5 11-12	2-3 8-9 MOM ON 5-6 11-12						


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:51Z
Check the source to verify that this is the current version before use.

TABLE IV. Frame, rocker, rocker color selection table.

Frame		Rocker		Rocker color	
Style	Code letter	Style	Code number	Color	Code letter
Flush panel	F	Smooth	1	White opaque	W
				Red opaque	R
				Black opaque	B
				Translucent white	T
Sub panel	S	Serrated	2	Colorless (transparent) 1/	C

1/ A printed legend insert or decal can be located inside of rocker button. Recommended size of insert is .750 +.000, -.010 by 1.100 +.000, -.010. Legend insert is not furnished as part of switch.

Part number: The part number shall consist of the prefix M3950/14, followed in order by the appropriate alpha letter designating poles, two digit circuit code number, and the code letter or number for the frame style, rocker style, and rocker color. For explicit information, see below.

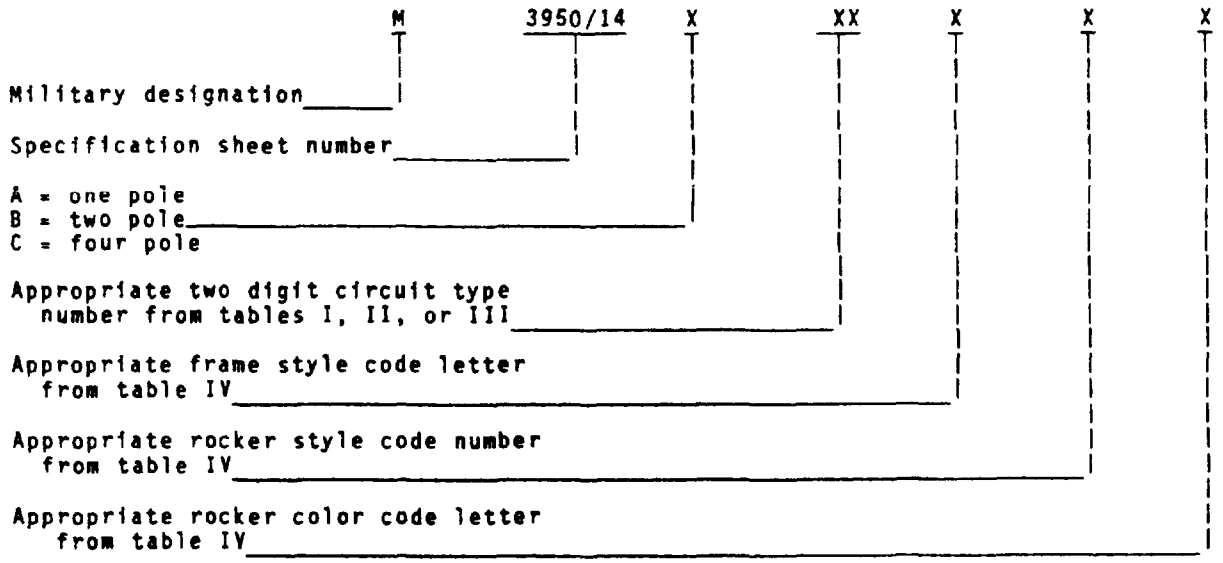

Example: M3950/14A35F1W

Custodian:
Air Force - 85

Review activity:
Air Force - 99

Preparing activity:
Air Force - 85

Agent.
DLA - ES

(Project 5930-F637)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:51Z
Check the source to verify that this is the current version before use.