MIL-N-60189(MU)
AMENDMENT 2
18 April 1967
SUPERSEDING
AMENDMENT 1
19 October 1966

MILITARY SPECIFICATION

NETWORK D CIRCUIT BOARD: 8623286

This amendment forms a part of Military Specification MIL-N-60189(MU), dated 23 February 1965.

Paragraph 3.4.4.1: Delete and substitute:

"3.4.4.1 The dynamic requirements of 3.4.1.1 shall apply except that the simulated load of Figure 3 shall be used."

Paragraph 3.4.4.3(b): Delete "6.2 plus or minus 0.31 volts." and substitute "6.0 plus or minus 0.5 volts."

Paragraph 4.5.2.2.3(c): Delete "-6.2 ± 0.3 volts." and substitute "minus 6.0 plus or minus 0.5 volts."

Paragraph 4.5.2.3.1(a): Delete "Table VI" and substitute "Table IX".

Paragraph 4.5.2.6(a)" Delete "27000 ohms ± 1 percent." and substitute "27000 ohms ± 5 percent."

Paragraph 4.5.3.5(a): Delete "-6 ± 0.5" and substitute "-6 ± 0.42".

Figure 2: Delete and substitute new Figure 2 shown on Page 2 of this amendment.

FSC 1220

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:15Z
Check the source to verify that this is the current version before use.

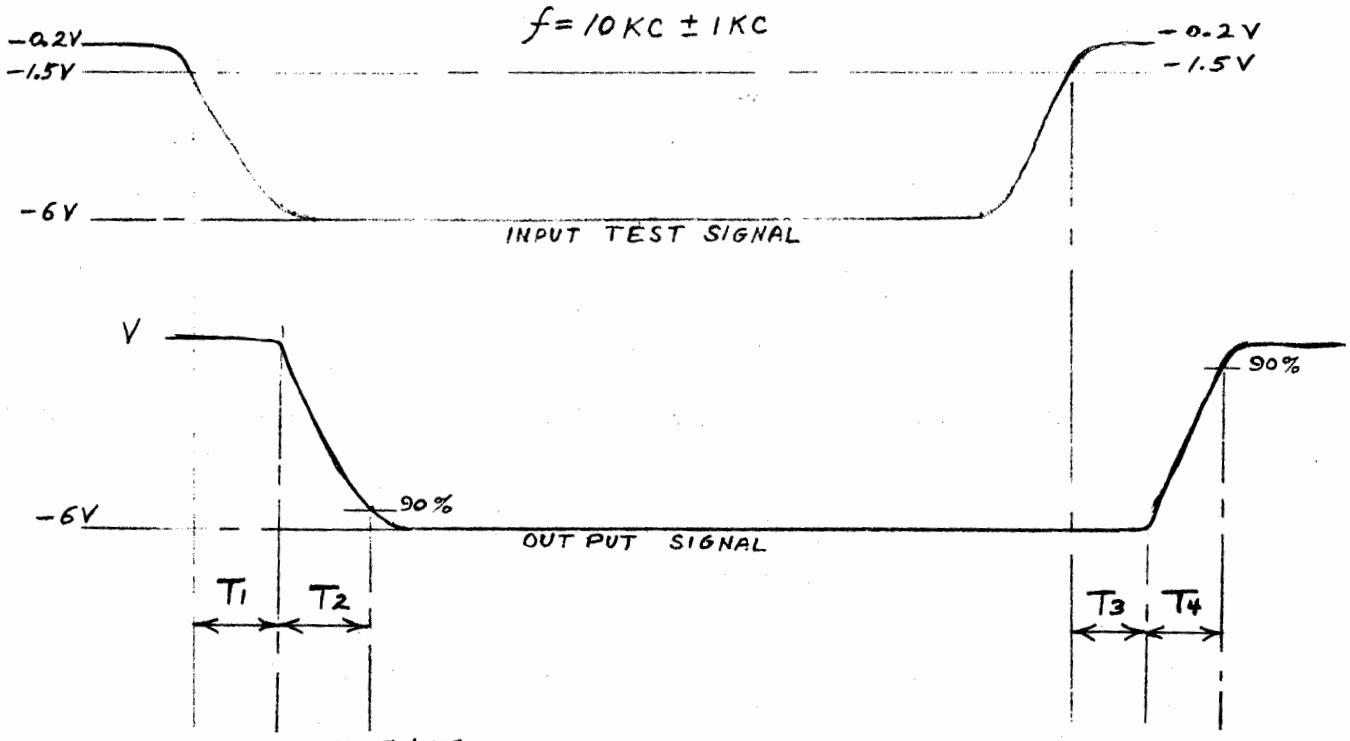

CIRCUIT	OUTPUT VOLTS	$T_1 + T_2$ < 400 NANO. SEC.		$T_3 + T_4$ < 400 NANO. SEC.	
DUR. DLR.	+3 ± 0.12				
REGULAR	−0.15 ± 0.15	$T_1 + T_2$ < 400 NANO SEC.		$T_3 + T_4$ < 400 NANO SEC.	
		T_1	T_2	T_3	T_4
CLOCK	+6 ± 1.0	< 3 μ SEC.	< 1 μ SEC.	< 3 μ SEC.	< 500 NANO SEC.
CLOCK INHIBIT	+3 ± 0.12	< 5 μ SEC.	< 1 μ SEC.	< 5 μ SEC.	< 1 μ SEC.

Delay time comparison of input and output waveforms. The delay time (T_1 and T_2) from the time the square wave applied to the input gate reaches minus 1.5 volts (going towards minus 6 volts) until the output reaches 90% of its total excursion (going towards minus 6 volts) and delay time (T_3 and T_4) measured from the time the square wave applied to the input gate reaches minus 1.5 volts (going towards zero volts) until the output reaches 90% of its total excursion (going towards the false state plus 3 volts) shall be as indicated in the table. The delay time (T_1) is measured from the time the square wave is applied to the input gate reaches minus 1.5V (going toward -6V) until output just starts descending and the delay time T_3 is measured from the time the square wave applied reaches -1.5V (going toward zero volts) until the output just starts rising. For extreme temperatures add 5% to the limits of $T_1 + T_2$ and $T_3 + T_4$.

FIGURE 2

Custodian:

Army - MU

Preparing activity:

Army - MU

Project No. 1220-A292Y

Source: https://assist.dla.mil -- Downloaded: 2026-03-23T12:26Z
Check the source to verify that this is the current version before use.