Spotify Desk | Revised compact wedge CAD

Two matching variants: SHARP corners and ROUNDED corners | manufacturer dimensions + explicit assumptions



SHARP: industrial styling reference - not a dimensioned photo



ROUNDED: R5 outer-edge CAD variant - appearance reference

CHANGES FROM EARLIER CAD

Outer width: 165 -> 156 mm | compact around right-side knob

3 key centres: X = 31.05 / 61.05 / 91.05 mm, centred on the LCD (X = 61.05 mm)

Knob centre: (138,44) mm | knob OD 15.1 mm | bezel-to-knob OD gap 16.35 mm

Front plane: 156 x 110 mm | 55 deg above desk | front chin 16 mm | rear roof 20 mm

Outside body: 156 W x 83.09 D x 106.11 H mm

All dimensions in mm. No fastener bores, USB opening or connector routing is certified.


ATTENTION: Front reference images are aesthetic concepts, not measured drawings.

The A3 technical sheets on pages 2 and 3 are true XY scale when printed at 100% on A3.

Rounded edges reduce available material near perimeter; real component and cable fit still needs testing.

Rev B | Sharp corners


A3 1:1 concept plan: front face measured along slope, side measured along desk/vertical axis

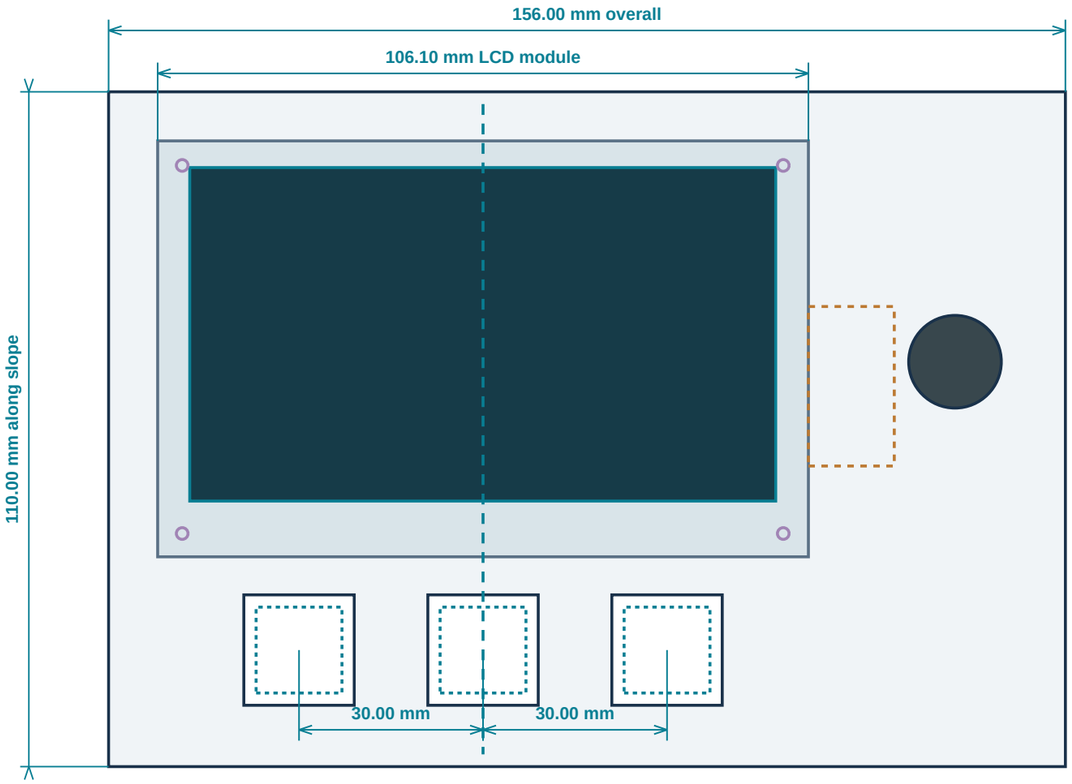

FRONT (TRUE 1:1 at A3 / no auto scaling)

Middle key at X = 61.05 = LCD centre

SIDE (55 deg from tabletop)

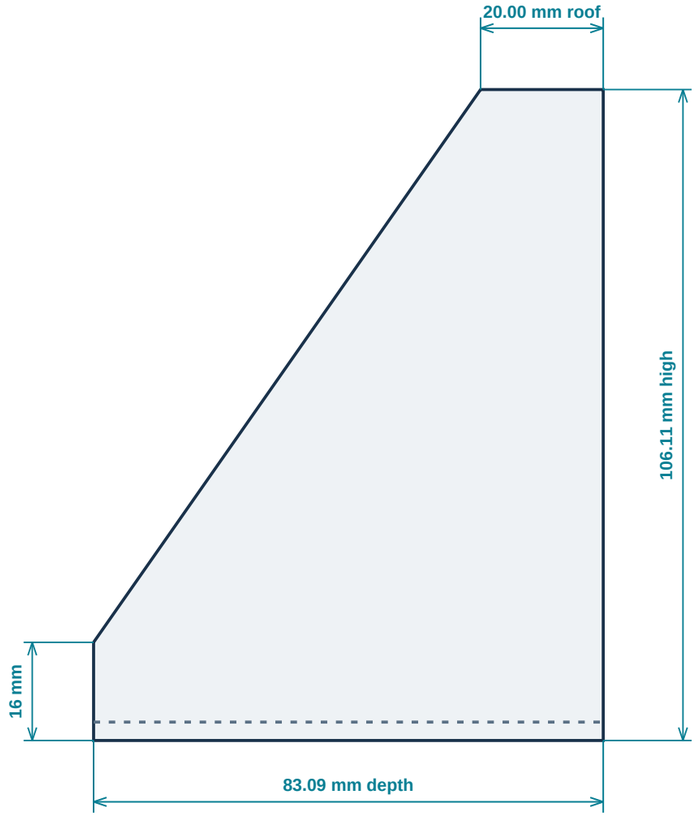

110.00 mm angled face length

Crisp edges: no external rounding

DISPLAY 106.10 x 67.80 | VIEWABLE ~95.54 x 54.36 | 98 x 60 NOMINAL MOUNT PITCH (BORE NOT VERIFIED)

KEYCAPS 18 x 18 NOMINAL | 3 KEYS AT X=31.05 / 61.05 / 91.05, V=91 | 30 MM SPACING

KNOB 15.1 DIA AT (138,44) | 10.45 RIGHT EDGE MARGIN | 16.35 LCD-TO-KNOB CLEARANCE


LCD-TO-KEYCAP GAP 6.20 | 14 MM ORANGE I2C BAND IS AN ASSUMPTION | ENCODER-TO-BAND 3.30 MM

SHARP OUTER CORNERS

CAUTION: 3 MM CASE WALL, BUTTON HOLES, KNOB BUSH HOLE AND INTERNAL Z DEPTH ARE PROTOTYPE ASSUMPTIONS

Rev B | Rounded corners


A3 1:1 concept plan: front face measured along slope, side measured along desk/vertical axis

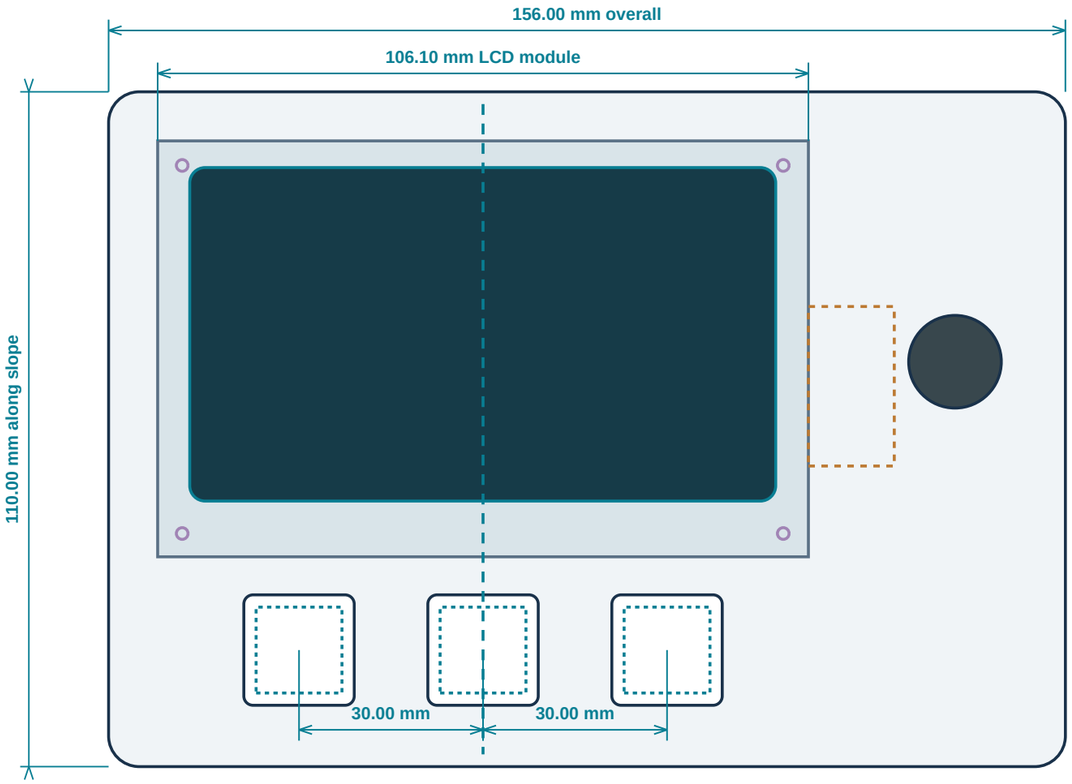

FRONT (TRUE 1:1 at A3 / no auto scaling)

Middle key at X = 61.05 = LCD centre

SIDE (55 deg from tabletop)

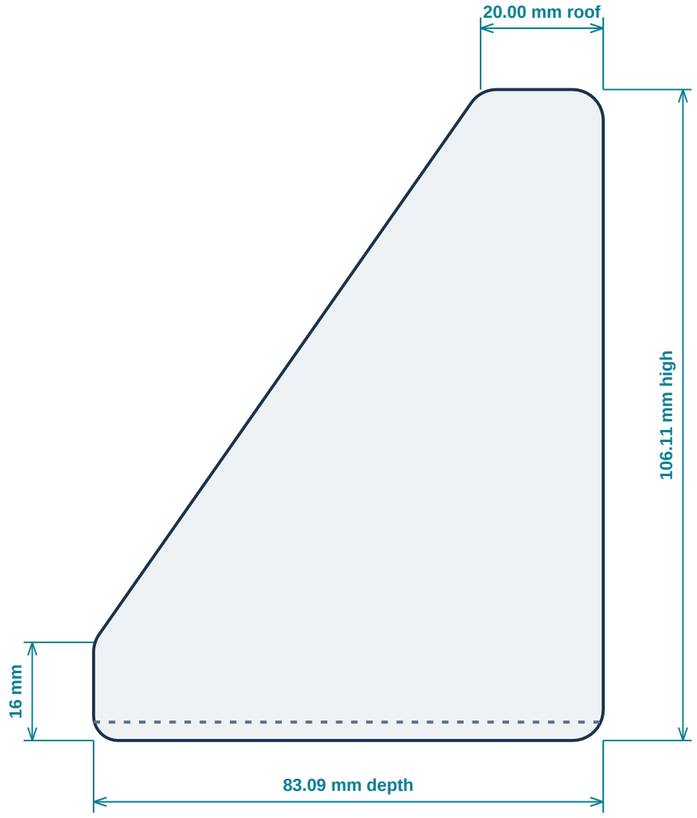

110.00 mm angled face length

R5 reference outer fillets (not approved tooling)

DISPLAY 106.10 x 67.80 | VIEWABLE ~95.54 x 54.36 | 98 x 60 NOMINAL MOUNT PITCH (BORE NOT VERIFIED)

KEYCAPS 18 x 18 NOMINAL | 3 KEYS AT X=31.05 / 61.05 / 91.05, V=91 | 30 MM SPACING

KNOB 15.1 DIA AT (138,44) | 10.45 RIGHT EDGE MARGIN | 16.35 LCD-TO-KNOB CLEARANCE

LCD-TO-KEYCAP GAP 6.20 | 14 MM ORANGE I2C BAND IS AN ASSUMPTION | ENCODER-TO-BAND 3.30 MM

R5 CORNERS

CAUTION: 3 MM CASE WALL, BUTTON HOLES, KNOB BUSH HOLE AND INTERNAL Z DEPTH ARE PROTOTYPE ASSUMPTIONS

Rev B | Assembly envelopes and approvals

CAD STEP and OpenSCAD are editable. 3D shell geometry is concept only; do not use for manufacturing without fit tests.

MANUFACTURER / USER SOURCED	ASSUMPTIONS IN THIS CAD MODEL
LCD module outer 106.1 x 67.8 mm	Front face 156 x 110, 55 degree tilt
Visible region approx 95.54 x 54.36 mm	16 mm toe, 20 mm back roof, 3 mm wall
LCD mounting pitch approx 98 x 60	R5 exterior rounds, R2.5 aperture corners
Three 18 x 18 mm user-proposed keycaps	14 x 14 mm nominal switch openings, not toleranced
KZ0087 OD 15.1, H 15.2 mm	Knob visibly stands ~8 mm proud
AW9523B PCB approx 38 x 23 mm	Display rear depth 6.8 mm and switch Z depth 16.8 mm
Encoder body footprint about 13.2 x 13.2	14 mm cable corridor and 3.3 mm nominal lateral gap
Encoder click 0.5 +/-0.2 mm	Bottom hatch opening size and wall feature

PRE-MANUFACTURING CHECKS

Confirm LCD connector orientation + bend, genuine mounting-hole diameter, USB access and antenna clearance.

Measure exact MX switch model/depth, plate clips and keycaps; test KZ0087 press/grub screw engagement.

Confirm AW9523B reset/boot wiring and input protection; the drawing does not certify 3.3 V circuits.