

1. Description


1.1. Project

Project Name	Sbus_decoding
Board Name	Sbus_decoding
Generated with:	STM32CubeMX 4.23.0
Date	11/12/2017

1.2. MCU

MCU Series	STM32F4
MCU Line	STM32F407/417
MCU name	STM32F407VETx
MCU Package	LQFP100
MCU Pin number	100


2. Pinout Configuration

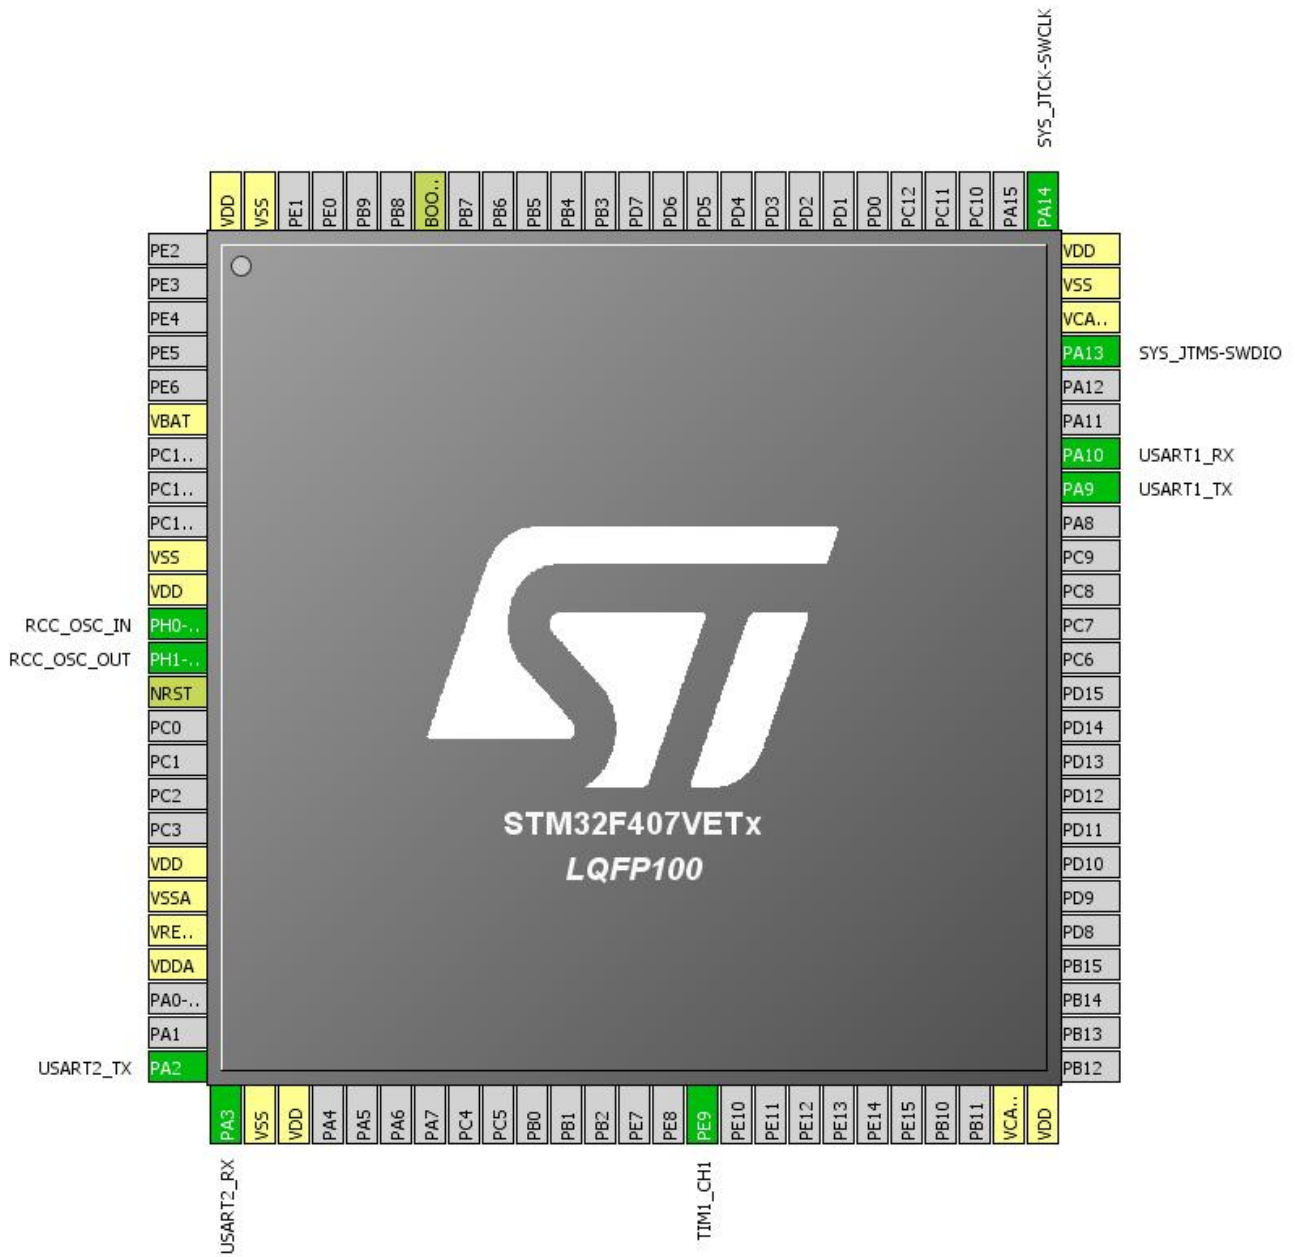

3. Pins Configuration

Pin Number LQFP100	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
6	VBAT	Power		
10	VSS	Power		
11	VDD	Power		
12	PH0-OSC_IN	I/O	RCC_OSC_IN	
13	PH1-OSC_OUT	I/O	RCC_OSC_OUT	
14	NRST	Reset		
19	VDD	Power		
20	VSSA	Power		
21	VREF+	Power		
22	VDDA	Power		
25	PA2	I/O	USART2_TX	
26	PA3	I/O	USART2_RX	
27	VSS	Power		
28	VDD	Power		
40	PE9	I/O	TIM1_CH1	
49	VCAP_1	Power		
50	VDD	Power		
68	PA9	I/O	USART1_TX	
69	PA10	I/O	USART1_RX	
72	PA13	I/O	SYS_JTMS-SWDIO	
73	VCAP_2	Power		
74	VSS	Power		
75	VDD	Power		
76	PA14	I/O	SYS_JTCK-SWCLK	
94	BOOT0	Boot		
99	VSS	Power		
100	VDD	Power		

4. Clock Tree Configuration

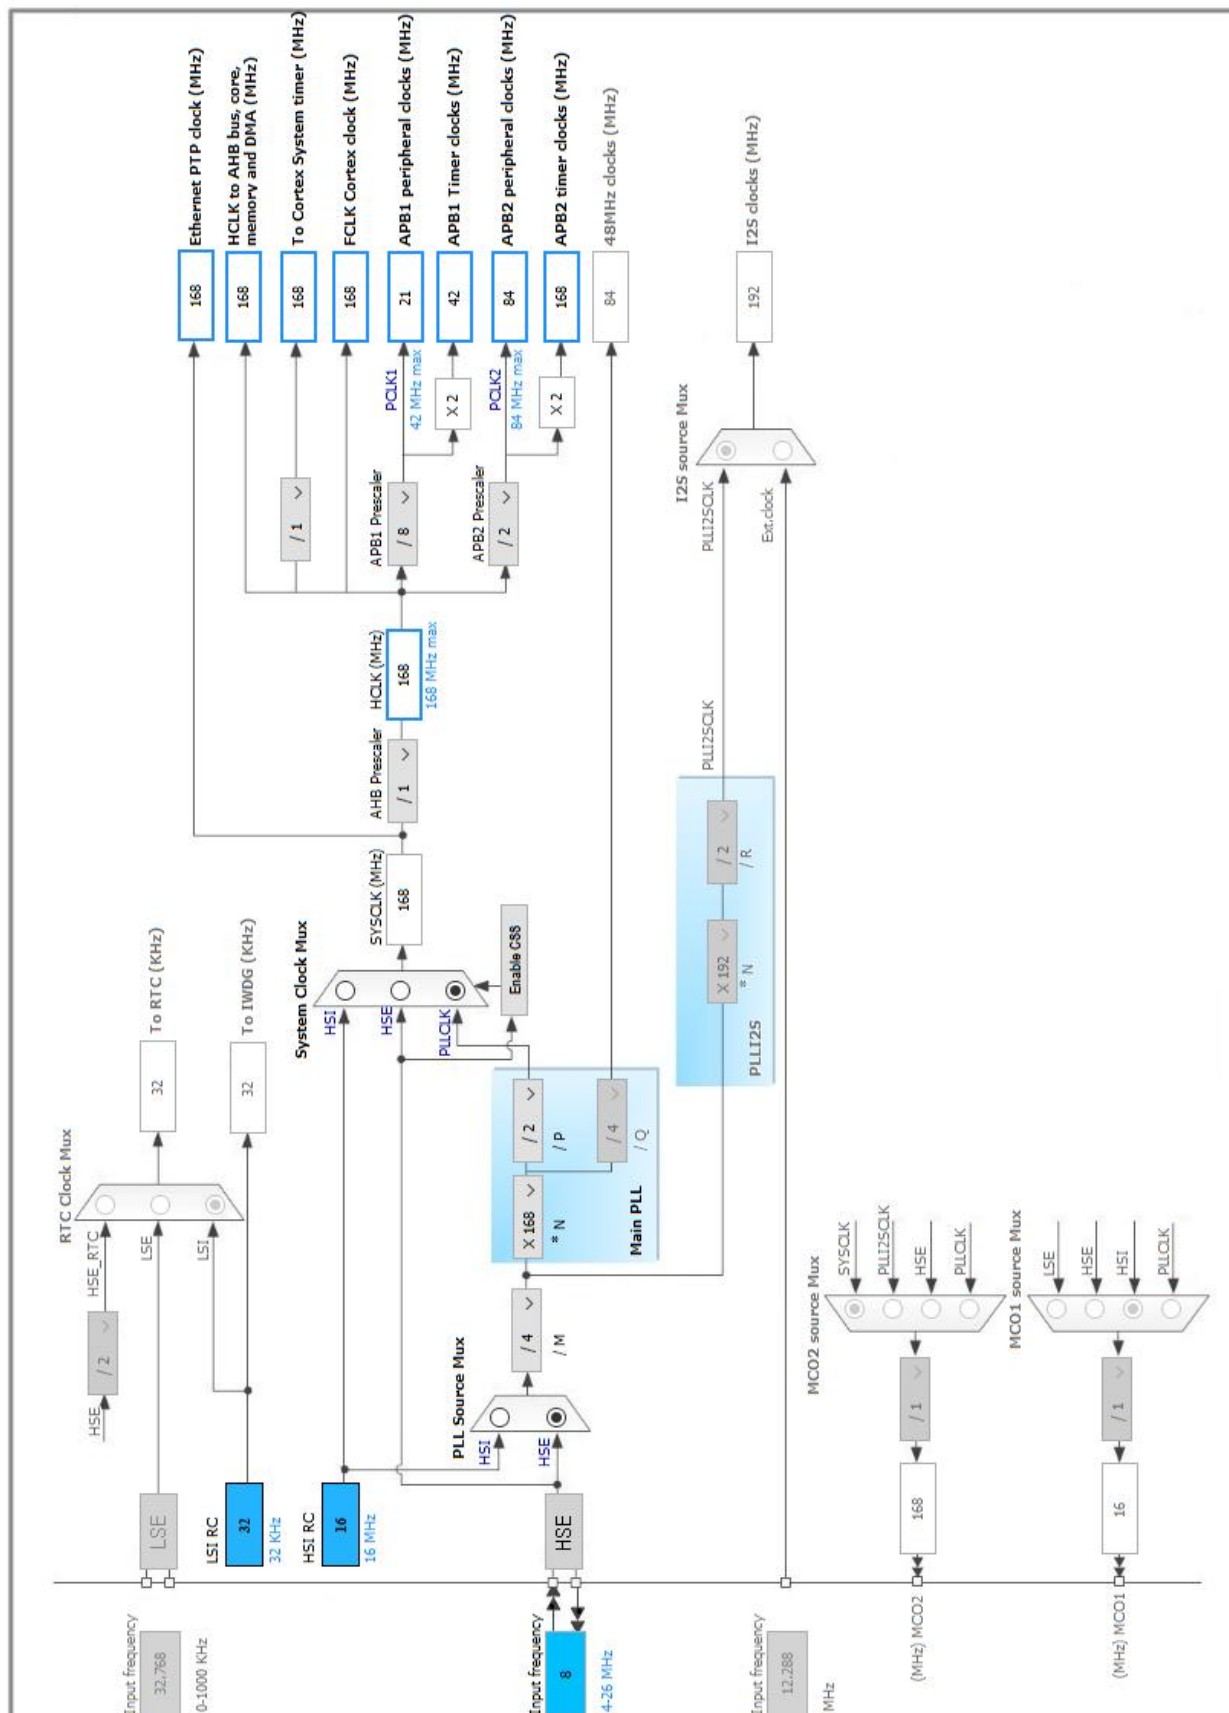

5. IPs and Middleware Configuration

5.1. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

5.1.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Enabled
Data Cache	Enabled
Flash Latency(WS)	5 WS (6 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

Power Parameters:

Power Regulator Voltage Scale	Power Regulator Voltage Scale 1
-------------------------------	---------------------------------

5.2. SYS

Debug: Serial Wire

Timebase Source: SysTick

5.3. TIM1

Channel1: PWM Generation CH1

5.3.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	40 *
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	64500 *
Internal Clock Division (CKD)	No Division
Repetition Counter (RCR - 8 bits value)	0

Trigger Output (TRGO) Parameters:

Master/Slave Mode	Disable (no sync between this TIM (Master) and its Slaves)
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

Break And Dead Time management - BRK Configuration:

BRK State	Disable
BRK Polarity	High

Break And Dead Time management - Output Configuration:

Automatic Output State	Disable
Off State Selection for Run Mode (OSSR)	Disable
Off State Selection for Idle Mode (OSSI)	Disable
Lock Configuration	Off

PWM Generation Channel 1:

Mode	PWM mode 1
Pulse (16 bits value)	0
Fast Mode	Disable
CH Polarity	High
CH Idle State	Reset

5.4. USART1

Mode: Asynchronous

5.4.1. Parameter Settings:

Basic Parameters:

Baud Rate	100000 *
Word Length	9 Bits (including Parity) *
Parity	Even *
Stop Bits	2 *

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

5.5. USART2

Mode: Asynchronous

5.5.1. Parameter Settings:

Basic Parameters:

Baud Rate	921600 *
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

* User modified value

6. System Configuration

6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
RCC	PH0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PH1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	
TIM1	PE9	TIM1_CH1	Alternate Function Push Pull	No pull-up and no pull-down	Low	
USART1	PA9	USART1_TX	Alternate Function Push Pull	Pull-up	Very High *	
	PA10	USART1_RX	Alternate Function Push Pull	Pull-up	Very High *	
USART2	PA2	USART2_TX	Alternate Function Push Pull	Pull-up	Very High *	
	PA3	USART2_RX	Alternate Function Push Pull	Pull-up	Very High *	

6.2. DMA configuration

DMA request	Stream	Direction	Priority
USART1_RX	DMA2_Stream2	Peripheral To Memory	Medium *

USART1_RX: DMA2_Stream2 DMA request Settings:

Mode: **Circular ***
Use fifo: Disable
Peripheral Increment: Disable
Memory Increment: **Enable ***
Peripheral Data Width: Byte
Memory Data Width: Byte

6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
USART1 global interrupt	true	0	0
USART2 global interrupt	true	0	0
DMA2 stream2 global interrupt	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
TIM1 break interrupt and TIM9 global interrupt	unused		
TIM1 update interrupt and TIM10 global interrupt	unused		
TIM1 trigger and commutation interrupts and TIM11 global interrupt	unused		
TIM1 capture compare interrupt	unused		
FPU global interrupt	unused		

* User modified value

7. Power Consumption Calculator report

7.1. Microcontroller Selection

Series	STM32F4
Line	STM32F407/417
MCU	STM32F407VETx
Datasheet	022152_Rev8

7.2. Parameter Selection

Temperature	25
Vdd	3.3

8. Software Project

8.1. Project Settings

Name	Value
Project Name	Sbus_decoding
Project Folder	C:\Users\20311Leesoomin\Desktop\Sbus_decoding
Toolchain / IDE	EWARM
Firmware Package Name and Version	STM32Cube FW_F4 V1.17.0

8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Add necessary library files as reference in the toolchain project configuration file
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No