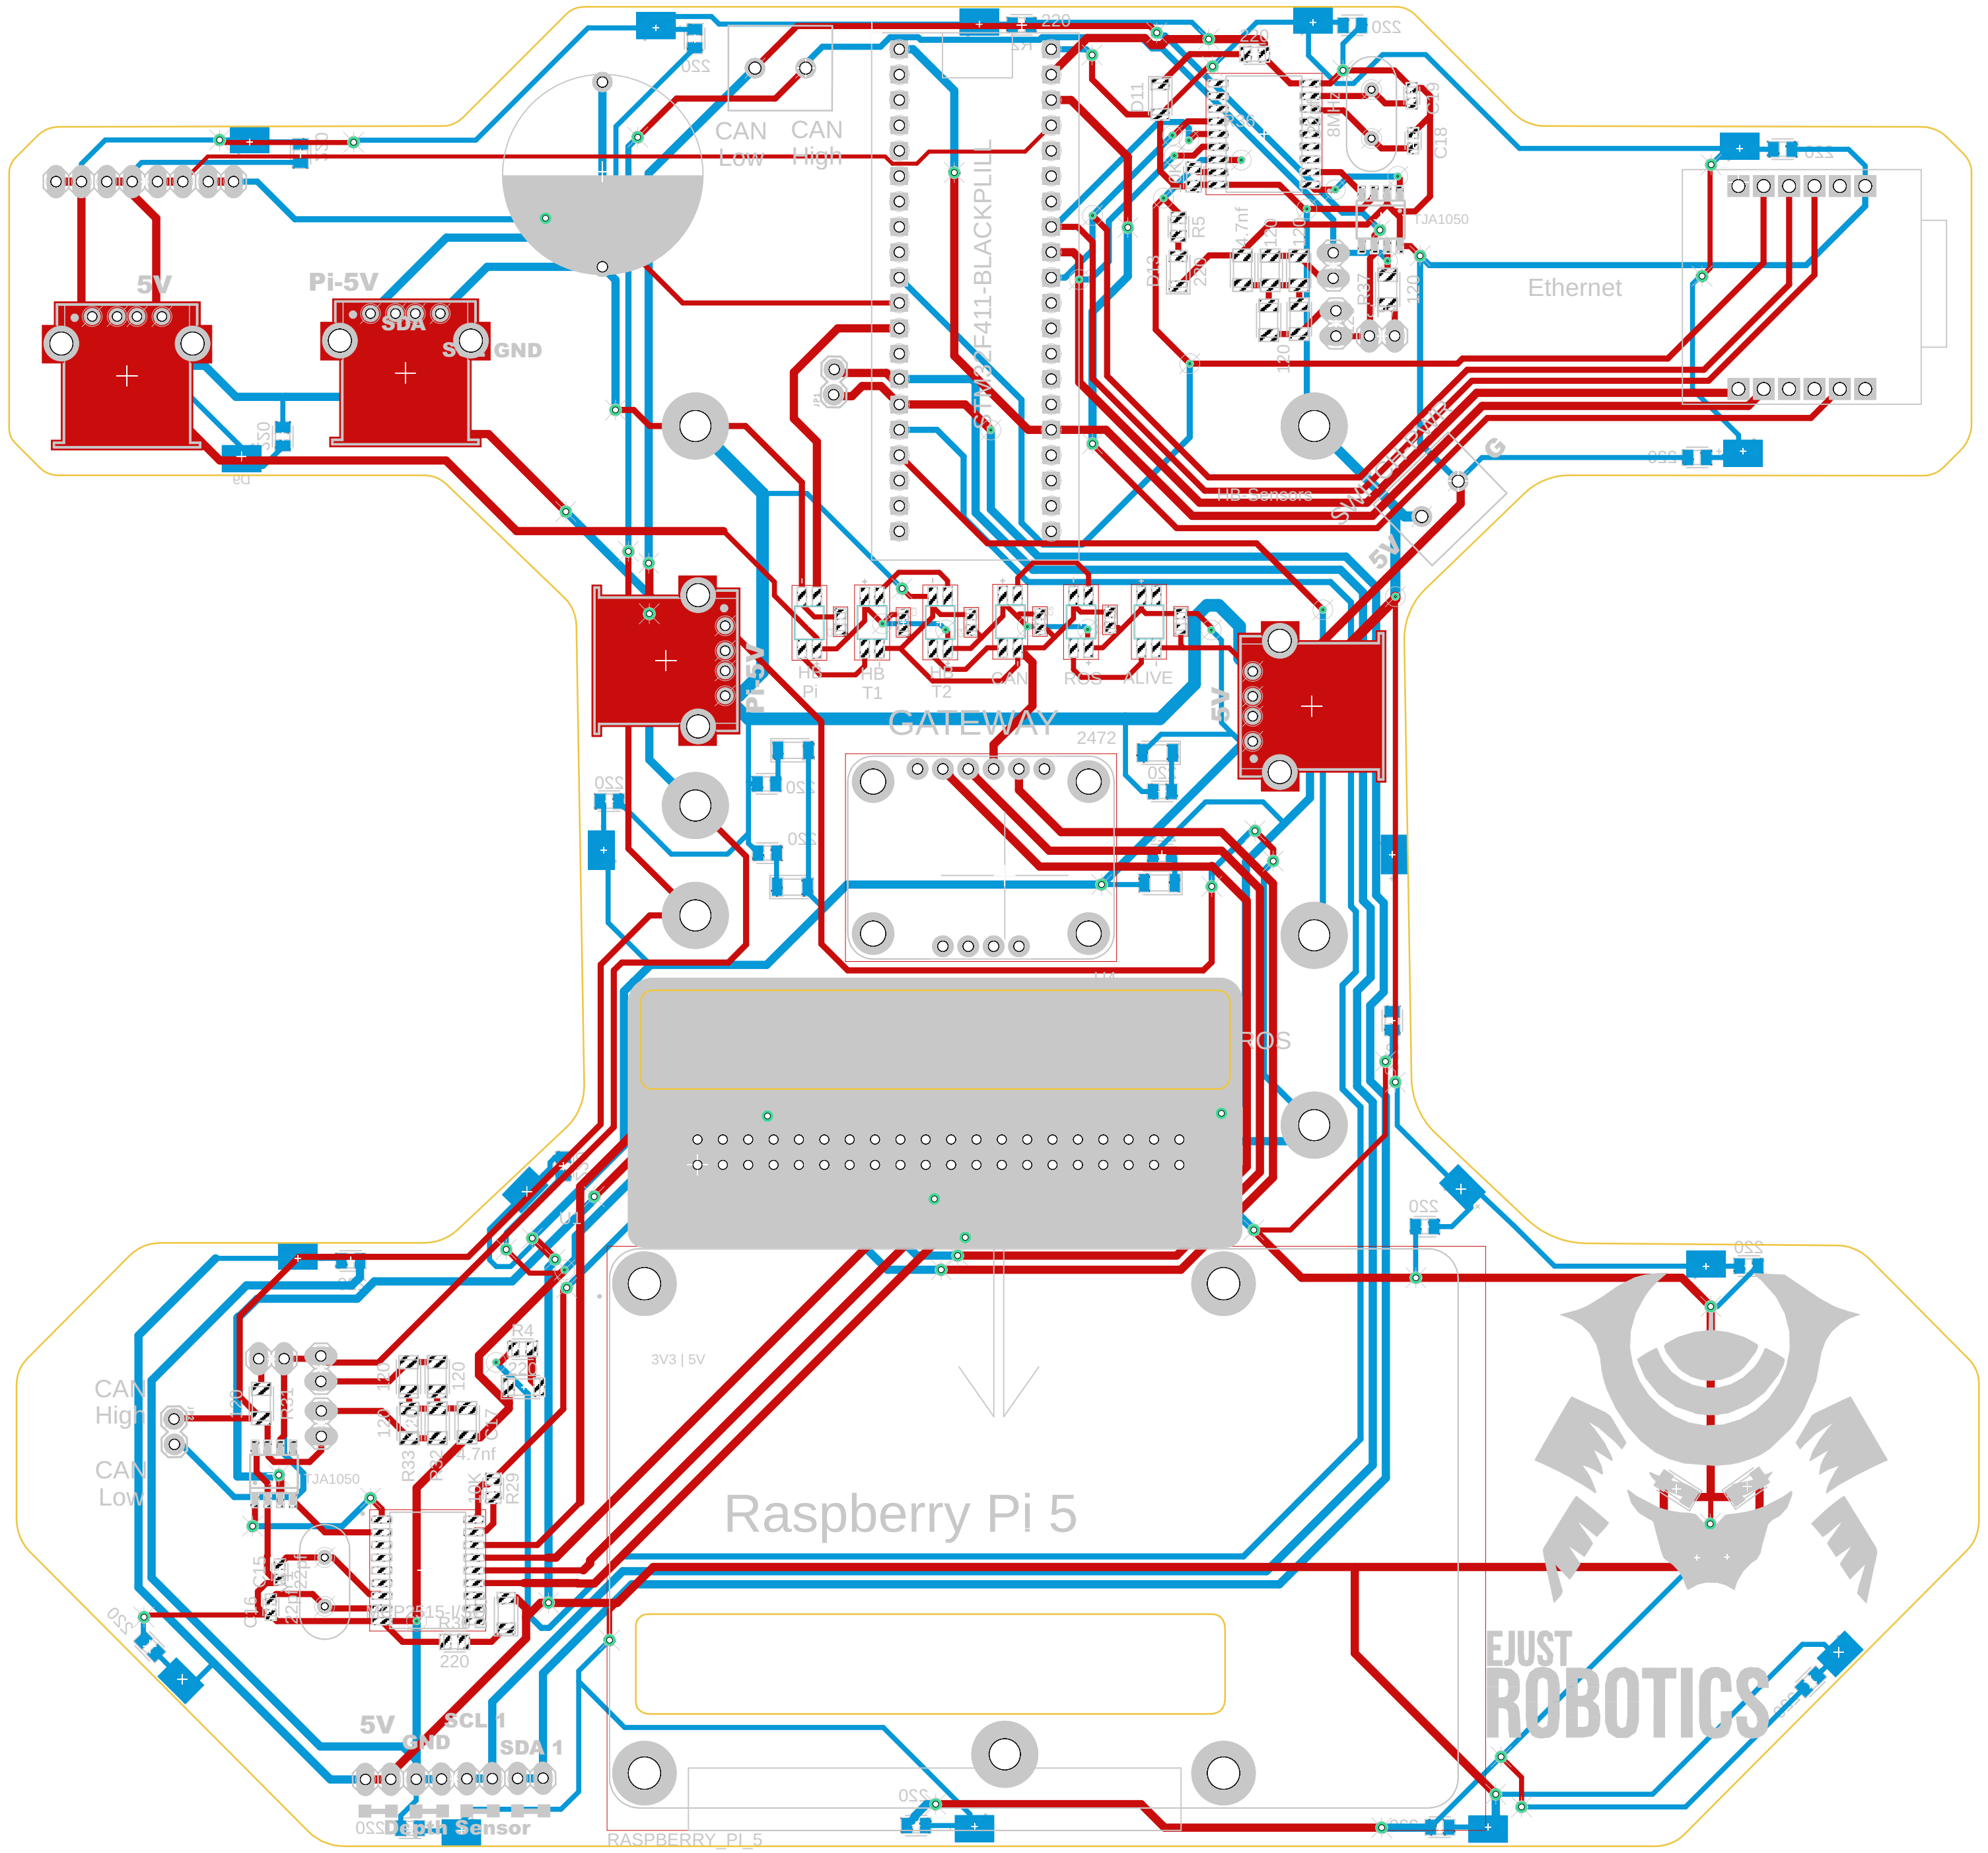
CAN
Low
CAN
High
5V
Pi-5V
SDA
SCL
GND
STM32F411-BLACKPILL
D11
R5
4.7nf
120
8MHz
C19
C18
TJA1050
R37
Ethernet
HB-Sensors
SWITCH-PWR
G
5V
HB
Pi
HB
T1
HB
T2
CAN
ROS
ALIVE
GATEWAY
2472
220
ROS
3V3 | 5V
Raspberry Pi 5
RASPBERRY_PI_5
CAN
High
CAN
Low
TJA1050
R31
R33
R32
C17
R4
10K
R29
C15
C16
22pf
MCP2515-I/SO
R30
U1
5V
GND
SCL 1
SDA 1
Depth Sensor
EJUST
ROBOTICS