

Evaluation of the reliability of RSSI for Indoor Localization

Qian Dong and Waltenegus Dargie

Chair of Computer Networks, Faculty of Computer Science, Technical University of Dresden, Germany, 01062

Email: qian.dong, waltenegus.dargie@tu-dresden.de

Abstract—In wireless sensor networks, nodes can be static or mobile, depending on the application requirements. Dealing with mobility can pose some formidable challenges in protocol design, particularly, at the link and network layers. These difficulties require mobility adaption algorithms to efficiently localize mobile nodes and predict the quality of link that can be established with these nodes. An off the shelf development platform that uses Radio Signal Strength Indication (RSSI) is mostly selected as the sensor localization method, especially in the indoor environment. Despite this, not much research work has been done to practically demonstrate the reliability of RSSI for the indoor localization. Therefore, in this paper, we tried to calibrate and map RSSI to distance by doing a series of experiments. The result shows that the RSSI technology gives an unacceptable high error and thus is not reliable for the indoor sensor localization.

Keywords—distance; localization; RSSI; wireless sensor networks;

I. INTRODUCTION

Several applications in wireless sensor networks require sensor localization technologies. Some of these applications use location information to infer the activity of mobile objects, animals, or human beings [7]. For example, biomedical sensor nodes can be attached to the bodies of patients [6] and nurses [5] to monitor their activities; workers in disaster recovery scenes [18] and oil extraction and refinery areas [4] can carry sensing devices to avoid dangerous situations; mobile sensor nodes can also be employed to report or debrief soldiers the events encountered during a mission [16].

Another reason why location information is useful is to assist mobile nodes to remain connected with a network. Mobility of sensor nodes can lead to the deterioration of the quality of an established link. This in turn may make data transmission prone to failure, increasing the cost of packet retransmission. Mobility can also cause frequent route changes and thus produces a considerable packet delivery delay, since a mobile node cannot immediately begin transmitting data upon joining a network. Instead, it has to wait for a certain amount of time before it can be fully integrated [9].

In order to reduce the end to end latency of a data transmission caused by the movement of nodes, several mobility-aware MAC protocols require location information [8]. The usefulness of the protocols highly depends on how accurately they determine the location of mobile nodes. Most

of the protocols employ RSSI for real-time localization, especially in indoor environments. Nevertheless, not much research work has been done to practically demonstrate the reliability of RSSI for indoor localization. Therefore, in this paper, we aim to calibrate and map RSSI to distance by carrying out a series of experiments. Based on the observations, the conclusion that whether RSSI is reliable and feasible for the indoor localization can be drawn.

The remaining part of this paper is organized as follows: in Section II, related work is summarized. In Section III, a brief introduction to RSSI technology is described. In Section IV, the experiment settings are presented. In Section V, the reliability of RSSI for the indoor localization is investigated and observations are discussed. Finally, in Section VI, concluding remarks are given.

II. RELATED WORK

Determination of location can be done in a number of ways. Here, only some of the approaches are briefly discussed.

1) *Global positioning system (GPS)*: GPS gives the absolute coordinates of a mobile node, but it is expensive and energy consuming [20]. It also suffers from frequent satellite disconnections in indoor environments [24].

2) *Pedometers*: A pedometer is a portable and electronic/electromechanical device that counts each step a person takes by detecting the motion of the person's hips. Algorithms for navigating a mobile node by using the hop-count based metric is simple and scalable [17]. This method, however, is highly dependent on the network density and path length, and thus is coarse-grained and error-prone [23].

3) *Robotics*: A robot can localize itself in both mapped and unmapped terrains by employing the method which represents the posterior distribution of possible locations via a set of weighted samples. New measurements such as observations of new landmarks are incorporated to filter the previous mobility prediction and update the data of location [12]. However, such estimation suffers from rotational and translational errors [26], even if a map of the environment and sensory information is given.

4) *Radio frequency identification (RFID)*: RFID is a technology that employs radio frequency signals to exchange data between a reader and an electronic tag attached to an object for the purpose of identification and tracking. RFID readers are located strategically in the field [22]. One of

its drawbacks is the relative short communication range ($1 - 2m$) and the inhibition to future extensions.

5) *Anchor node*: Anchors are a set of static nodes with globally known or unknown positions. In the literature, they are also referred to as reference nodes or seeds [12]. Anchor nodes periodically broadcast beacon messages. By receiving beacons from enough sources, mobile nodes can localize themselves. In some cases, robots equipped with GPS are deployed into a wireless sensor network to act as reference nodes, so that sensors can localize themselves with the information given by the robots [27]. The accuracy of the localization depends on the distance between the mobile and the reference points as well as the number of the anchor nodes [25]. If the distance is too long or the anchor nodes are too less, the location estimation errors can be high. Moreover, the loss or malfunctioning of anchor nodes can affect the estimation mechanism [28].

6) *Time of arrival (TOA)*: TOA finds the distance between a transmitter and a receiver via a one way propagation time by exploiting the relationship between the light speed and the carrier frequency of a signal [2]. However, all the nodes, with no information when messages will come, have to keep awake all the time.

7) *Angle of arrival (AOA)*: AOA is usually employed as prior-knowledge for the triangulation localization method [13]. The information of the arriving angle can be obtained by using either goniometers, gyroscopes or compass.

8) *Signal-to-Noise ratio (SNR)*: Deriving connectivity information from position information is not straightforward, since it requires a one-to-one mapping between distance and signal quality. SNR, that is utilized as a measure of a node's link state, is easy to be monitored and does not require any special hardware [11].

9) *Ultrasound*: A mobile node with an ultrasonic sensor measures the distance to a node by exploiting the ultrasonic signal propagation time. However, the transmission range of an ultrasound signal is small as it cannot propagate further than radio frequency wave [17]. It also adds size, cost, and energy supply to each device. Therefore even though ultrasound based localization approach can achieve high accuracy, it is not suitable for wireless sensor networks.

10) *Accelerometers*: Accelerations are generated due to both translational and rotational movements of an object. An accelerometer-based mechanism is shown to be an accurate, robust and practical method for objectively monitoring the free movement of objects and persons. The mechanism responds to both frequency and intensity of movement [28]. However, these devices increase the cost and size of a node and may not always be available or deployable. Moreover, accelerometer readings are sensitive of the node placement [21].

11) *Triangulation and trilateration*: The localization of mobile nodes can also be accomplished through triangulation in a one-hop neighborhood [3]. Once a local estimation is

made for each node, a global localization can be established by calculating differences in terms of the distance and direction between each node and a particular central node, or a dense group of nodes [3]. However, this mechanism requires the use of isotropic antennas, which is expensive and less practical.

A trilateration requires priori-knowledge of the location of at least three nodes. The distance between nodes can be determined only within a certain degree of certainty [13].

III. RSSI DESCRIPTION

Unlike all the localization approaches discussed above, RSSI [10] represents the relationship between a transmission and a received powers. It can be employed to compute the distance of separation between a transmitter and a receiver when a good portion of the electromagnetic wave propagates in a line-of-sight (LOS) link. This approach has been used in a number of mobility-aware MAC protocols.

If there is a direct path between two nodes placed in the environment in which no signal interference and attenuation occur, the received signal power, P_r , is related to the relative distance, d , between the transmitter and the receiver nodes in the inverse square law [15].

$$P_r \propto d^{-2} \quad (1)$$

However, Equation 1 expresses the ideal relationship between RSSI and the relative distance. In the real world, many factors influence the value of the received signal strength, such as reflection, refraction, diffraction, and scattering of waves caused by the nearby objects. It has been found empirically that a wall can reduce the signal power by approximately $3dBm$ on average [14]. Due to multi-path fading and non-uniform propagation of the radio signal, the received power may decay at a faster rate. This transfers the relationship between P_r and d to:

$$P_r \propto d^{-n} \quad (2)$$

Here n denotes the loss exponent. Another factor that affects the received power and thus affects localization is antenna polarization. In order to obtain the maximum received power, the antenna of the receiving node should be adjusted to the same orientation as the transmitting node [14]. The loss due to a misaligned antenna polarization [19], L , can be expressed as:

$$L = 20\log(\cos\theta) \quad (3)$$

IV. EXPERIMENT SETTINGS

The aim of our experiments is to prove whether RSSI is reliable and, hence, feasible to be used for indoor localization. The sensor platform we employed is SunSPOT motes from Sun Microsystems. These nodes integrate 802.15.4 radio (CC2420) with a built-in 2.4GHz antenna. Each RSSI

value is obtained by averaging over 8 symbol periods ($128\mu s$) in the register [1]. The distance estimation model proposed by Texas Instruments for the Chipcon CC2420 radio is given as:

$$RSSI = -(10 \times n) \log_{10}(d) - A \quad (4)$$

In Equation 4, RSSI is the radio signal strength indicator in dBm , n is the signal propagation constant or exponent, d is the relative distance between the communicating nodes, and A is a reference received signal strength in dBm (the RSSI value measured when the separation distance between the receiver and the transmitter is 1 m).

The experiment was carried out in a long corridor made up of a glass wall on one side and a concrete wall on the other side. One node was used as a base station directly connected to a laptop via a USB cable. The other node is mounted on the ankle of a user. Both nodes operated with a full battery. There were no additional obstacles standing in the communication path between the two nodes during the experiment. As a result, a good portion of the signal was propagated in a line-of-sight.

V. EXPERIMENT

In order to verify whether the RSSI values can be used to reliably determine the distance between two communicating nodes, a reference curve giving a one-to-one mapping between RSSI and the distance should be made first. This curve is regarded as the standard showing the accurate relationship between RSSI and the distance. To start with, the user moves away from the base station to test the maximum radio transmission range of the node, which was $27.5m$.

RSSI is measured as an integer value and can be converted into its corresponding dBm value by subtracting a constant (the default value is 45 [1]). Since an RSSI value cannot be a decimal or a fraction, it cannot offer enough resolution to distinguish fine-grained changes in distances. Instead, it can only provide resolution to distinguish between distances that are large enough to cause at least a unit change in dBm of the signal power at the receiving node. Therefore, it is unnecessary to test RSSI values by using small increments in distances. In our experiment, the RSSI value is tested every 1.6 meters, each test lasting for 10 seconds. By averaging all the values obtained during this time, the valid RSSI at each testing location can be calculated. All these data sets are displayed as red stars in Figure 1.

A. Reference Curve Establishment

There are two approaches for setting up a reference curve using the collected discrete data sets. The first approach starts with the evaluation of the parameter A in Equation 4. The evaluation is made by testing the RSSI value of the base station which is one meter away from the transmitting node. A is tested to be $-60.3754 dBm$. By inserting this value along with each pair of d and $RSSI$ values obtained from

the data sets into Equation 4, a suite of values of n can be acquired and the average value of n is computed as 4.2119. The values of n and A enable us to establish a reference curve, which is shown as the black dotted line in Figure 1.

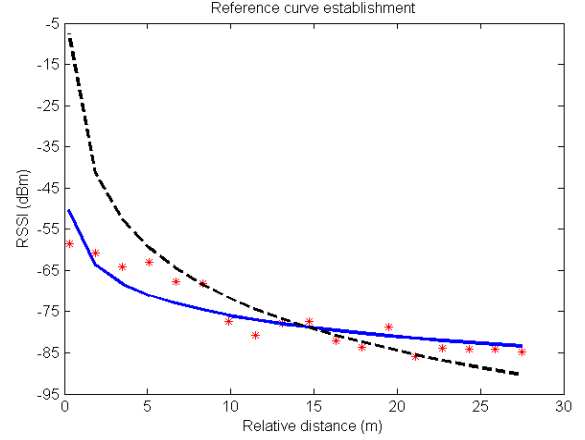


Figure 1. The establishment of the reference curve

The second approach is curve fitting. By assuming that $x = (-10) \log_{10}(d)$, a linear relationship between RSSI and x can be established ($RSSI = nx - A$). Then, using a polynomial curve fitting, both the values of n and A can be calculated. For our case, this is equal to 1.6838 and $-59.0668 dBm$, respectively. The reference curve made by this approach is illustrated by the blue solid line in Figure 1.

As can be observed from Figure 1, there is a deviation between the two reference curves. The distinction demonstrates – from one perspective – the accurate RSSI values cannot be obtained as long as the two communicating nodes are very close to each other. After noticing this phenomenon, we conducted another experiment by placing the mobile node on a waist, knee, and ankle, respectively. The result shows that the RSSI values become quite different for each node placement (body position). In other words, RSSI becomes more and more sensitive as the relative distance decreases. Therefore, the reference curve established from the second approach is considered more precise and thus is preferable to be used for the verification of the reliability of RSSI.

B. Verification of the Reliability of RSSI

So far, we examined the RSSI values in a quasi-static condition, though the distance between the transmitter and the receiver was changed slowly. Now we consider the case in which the RSSI values were read as one of the nodes moves away from the base station. In the experimenter, the mobile node was attached to the ankle of a person who was moving on average 1.4 m/s. The reason why the movement began from the maximum transmission range was to align the distance traveled during all the experiments ($27.5m$). Since the movement of human beings is slow, the walking

speed can be regarded uniform. As a result, for each pair of the data sets, the time can be transformed to the relative distance. The transformation can be expressed as:

$$d(i) = \frac{R}{t_{max} - t_{min}} t(i) \quad i \in [1, n] \quad (5)$$

Here, n is the total number of data sets, R is the maximum radio transmission range, and t_{max} and t_{min} are the beginning and the end time of the experiment, respectively. In this way, the relationship between RSSI and the distance can be established. Before verifying the reliability of RSSI for localization, a few mathematical methods have to be applied to process the data obtained from the experiment. If the processed result is close to the established reference curve, the RSSI received during the movement can determine the relative distance between the communication nodes with a certain degree of accuracy.

1) *Raw Data*: The first and, obviously, the simplest method to test the reliability of RSSI for node localization is to directly use the raw data in the experiment. As described in Figure 2, the signal fluctuation was considerably high during mobility. Moreover, for a given RSSI values, there were multiple corresponding distances. Still worse, the difference between these distances were large. For example, the RSSI value -90 dBm indicated at once a distance of 7m and 26m. Therefore, the raw data of RSSI is absolutely weak in determining the distance of a mobile node in an indoor environment.

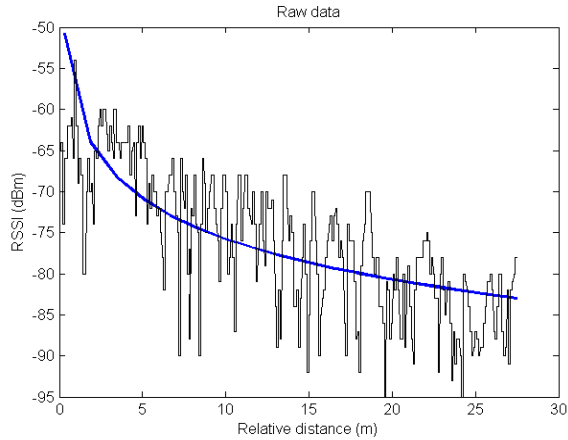


Figure 2. Utilization of the raw data for localization

2) *Moving Average Method*: In order to reduce the fluctuation of the signal, the moving average method is applied. Instead of directly using the RSSI values, the RSSI value at each time point is calculated by averaging all the previously received one hundred RSSI values. The time consumed by walking from the edge of the radio transmission range to the base station in the experiment is 21.86s. This makes the average moving speed of the node to be 1.375m/s. Since the

data sets are generated every 10 millisecond, one hundred RSSI samples will take 1 second to produce. This indicates that the RSSI value at each location can be represented by all the RSSI values in its nearby positions (1.37m). The moving average method enables a comparatively smooth RSSI curve, as displayed in Figure 3.

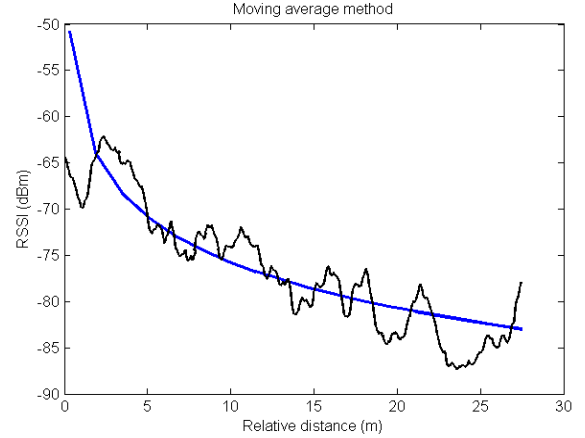


Figure 3. Utilization of the moving average method for localization

3) *Weighted Average Method*: Theoretically speaking, the change of the RSSI value should be a gradual but steady process. For a unique RSSI sample, its value should approach the data that were collected next to it. As a result, instead of giving the same weight for the previous data sets, different weight should be applied to the collected samples to enable a more accurate RSSI value for each location. The weighted average method assigns a higher weight to the sample that is closer to the target data whose RSSI value is aimed to be evaluated. However, due to the strong fluctuation of the signal, the result is quite similar with the one obtained from the moving average method. This is illustrated in Figure 4. One optimization of this approach is that the trajectory of the processed RSSI values better fits the reference curve. This indicates that the RSSI values are able to realistically determine the distance on the whole. Nevertheless, focusing on each RSSI sample, the distance it gives can still lead to a big difference in terms of the actual location.

4) *Curve fitting method*: Curve fitting uses all the samples in the experiment to predict the value of the data in the next time instant. The more samples provided, the more precise the prediction will be. Therefore, the curve fitting method will generate more accurate values of RSSI as time goes by. The curve obtained by this approach is shown in Figure 5. As can be observed, the processed RSSI value is far away from the value that is given by the reference curve when the relative distance is less than 6m. However, with the increment of the distance, the difference between the values obtained from the curve fitting method and the

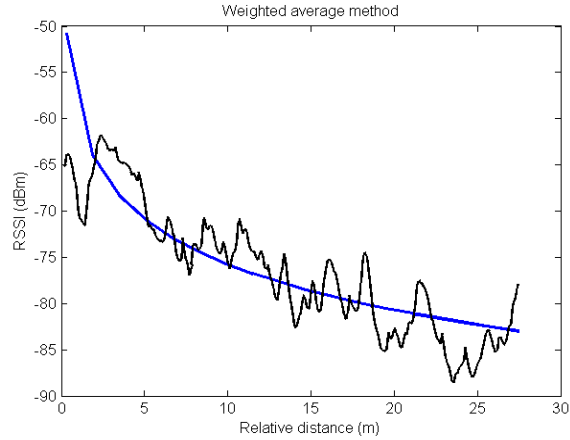


Figure 4. Utilization of the weighted average method for localization

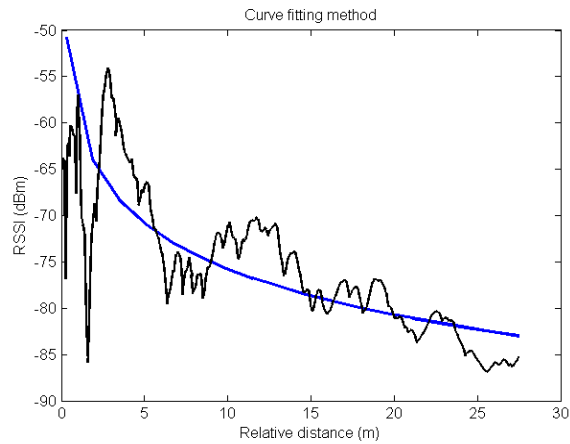


Figure 5. Utilization of the curve fitting method for localization

values provided by the reference curve decreases. Even though the result exhibits convergence to a certain extent, the localization errors cannot be disregarded.

VI. CONCLUSION

In this paper, we investigated the reliability of RSSI for an indoor localization. First, we statically measured a series of samples, based on which a reference curve that gives the accurate one-to-one mapping between the RSSI values and distance was established. Then, we made use of four estimation techniques to establish a relationship between distance and the RSSI values obtained from a mobile node. The RSSI values obtained in the mobile scenario fluctuate considerably. Hence, the inaccuracies we observed rendered RSSI as the only input to determine the location of a mobile node in an indoor environment unsuitable, regardless of the estimation techniques applied.

REFERENCES

- [1] 2.4 GHz IEEE 802.15.4 / ZigBee-ready RF transceiver. *Texas Instruments*.

- [2] Hüseyin Akcan, Vassil Kriakov, Hervé Brönnimann, and Alex Delis. GPS-Free node localization in mobile wireless sensor networks. *Proceedings of the 5th ACM international workshop on Data engineering for wireless and mobile access*, pages 35–42, 2006.
- [3] S. Capkun, M. Hamdi, and J. Hubaux. GPS-free positioning in mobile ad hoc networks. *Proceedings of the 34th Annual Hawaii International Conference on System Sciences*, 5:157–167, January 2001.
- [4] Xiaojuan Chao, Walteneus Dargie, and Guan Lin. Energy model for H2S monitoring wireless sensor network. *Proceedings of the 2008 11th IEEE International Conference on Computational Science and Engineering*, pages 402–409, 2008.
- [5] Mingang Cheng, Masako Kanai-Pak, Noriaki Kuwahara, Hiromi Itoh Ozaku, Kiyoshi Kogure, and Jun Ota. Dynamic scheduling based inpatient nursing support: applicability evaluation by laboratory experiments. *Proceedings of the 3rd ACM International Workshop on Context-Awareness for Self-Managing Systems*, pages 48–54, 2009.
- [6] S. Dagtas, Y. Natchetoi, and H. Wu. An integrated wireless sensing and mobile processing architecture for assisted living and healthcare applications. *Proceedings of the 1st ACM SIG-MOBILE international workshop on Systems and networking support for healthcare and assisted living environments*, pages 70–72, 2007.
- [7] Walteneus Dargie. Adaptive audio-based context recognition. *Trans. Sys. Man Cyber. Part A*, 39(4):715–725, July 2009.
- [8] Qian Dong and Walteneus Dargie. Analysis of the cost of handover in a mobile wireless sensor network. *The 10th International Conference on Wired/Wireless Internet Communications (WWIC 2012)*, 2012.
- [9] Qian Dong and Walteneus Dargie. A survey on mobility and mobility-aware mac protocols in wireless sensor networks. *IEEE Communications Surveys and Tutorials*, 2012.
- [10] E. Elnahrawy, Xiaoyan Li, and R.P. Martin. The limits of localization using signal strength: a comparative study. *2004 First Annual IEEE Communications Society Conference on Sensor and Ad Hoc Communications and Networks*, pages 406 – 414, October 2004.
- [11] Károly Farkas, Theus Hossmann, Franck Legendre, Bernhard Plattner, and Sajal K. Das. Link quality prediction in mesh networks. *Computer Communications*, 31:1497–1512, May 2008.
- [12] Lingxuan Hu and David Evans. Localization for mobile sensor networks. *Proceedings of the 10th annual international conference on Mobile computing and networking*, pages 45–57, 2004.
- [13] Xu Huang, M. Barralet, and D. Sharma. Behaviors of antenna polarization for RSSI location identification. *International Conference on Networks Security, Wireless Communications and Trusted Computing*, 1:151 – 154, April 2009.

- [14] Xu Huang, Mark Barralet, and Dharmendra Sharma. Accuracy of location identification with antenna polarization on RSSI. *Proceedings of the International MultiConference of Engineers and Computer Scientists*, 2009.
- [15] Byung Ki Kim, Ho Min Jung, Jae-Bong Yoo, Wan Yeon Lee, Chan Young Park, and Young Woong Ko. Design and implementation of cricket-based location tracking system. *Proceedings of world academy of science, engineering and technology*, 2008.
- [16] Sang Hyuk Lee, Soobin Lee, Heecheol Song, and Hwang Soo Lee. Wireless sensor network design for tactical military applications: remote large-scale environments. *Proceedings of the 28th IEEE conference on Military communications*, pages 911–917, 2009.
- [17] Woo-Yong Lee, Kyeong Hur, and Doo-Seop Eom. Navigation of mobile node in wireless sensor networks without localization. *IEEE International Conference on Multisensor Fusion and Integration for Intelligent Systems*, pages 1 – 7, August 2008.
- [18] Konrad Lorincz, David J. Malan, Thaddeus R. F. Fulford-Jones, Alan Nawoj, Antony Clavel, Victor Shnayder, Geoffrey Mainland, Matt Welsh, and Steve Moulton. Sensor networks for emergency response: challenges and opportunities. *IEEE Pervasive Computing*, 3:16–23, October 2004.
- [19] Konrad Lorincz and Matt Welsh. Motetrack: a robust, decentralized approach to RF-based location tracking. *Personal Ubiquitous Computing*, 11:489–503, 2007.
- [20] Raluca Marin-Perianu, Mihai Marin-Perianu, Paul Havinga, and Hans Scholten. Movement-based group awareness with wireless sensor networks. *Proceedings of the 5th international conference on Pervasive computing*, pages 298–315, 2007.
- [21] Merryn J Mathie, Adelle CF Coster, Nigel H Lovell, and Branko G Celler. Accelerometry: providing an integrated, practical method for long-term, ambulatory monitoring of human movement. *Physiological Measurement*, 25:R1–R20, February 2004.
- [22] Mun Leng Ng, Kin Seong Leong, and P.H. Hall, D.M.and Cole. A small passive UHF RFID tag for livestock identification. *IEEE International Symposium on Microwave, Antenna, Propagation and EMC Technologies for Wireless Communications*, 1:67–70, August 2005.
- [23] Dragos Niculescu and Badri Nath. DV based positioning in ad hoc networks. *Journal of Telecommunication Systems*, 22:267–280, 2003.
- [24] Frank W. Oudshoorn, Troels Kristensen, and Esmaeil Shahrak Nadimi. Dairy cow defecation and urination frequency and spatial distribution related to time limited grazing. *Livestock Science*, 113:62–73, January 2008.
- [25] Nissanka B. Priyantha, Hari Balakrishnan, Erik Demaine, and Seth Teller. Anchor-free distributed localization in sensor networks. *Technical Report, MIT Laboratory for Computer Science*, 2003.
- [26] C.K. Seovv, W.K.G. Seah, and Z. Liu. Hybrid mobile wireless sensor network cooperative localization. *IEEE 22nd International Symposium on Intelligent Control*, pages 29 – 34, October 2007.
- [27] M.L. Sichitiu and V. Ramadurai. Localization of wireless sensor networks with a mobile beacon. *IEEE International Conference on Mobile Ad-hoc and Sensor Systems*, pages 174 – 183, October 2004.
- [28] Yurong Xu, Yi Ouyang, Zhengyi Le, James Ford, and Fillia Makedon. Mobile anchor-free localization for wireless sensor networks. *Proceedings of the 3rd IEEE international conference on Distributed computing in sensor systems*, 4549:96–109, 2007.