
STM32
CubeMX

1. Description

1.1. Project

Project Name	Massage
Board Name	custom
Generated with:	STM32CubeMX 6.0.0
Date	11/16/2021

1.2. MCU

MCU Series	STM32F4
MCU Line	STM32F411
MCU name	STM32F411CEUx
MCU Package	UFQFPN48
MCU Pin number	48

1.3. Core(s) information

Core(s)	Arm Cortex-M4

2. Pinout Configuration

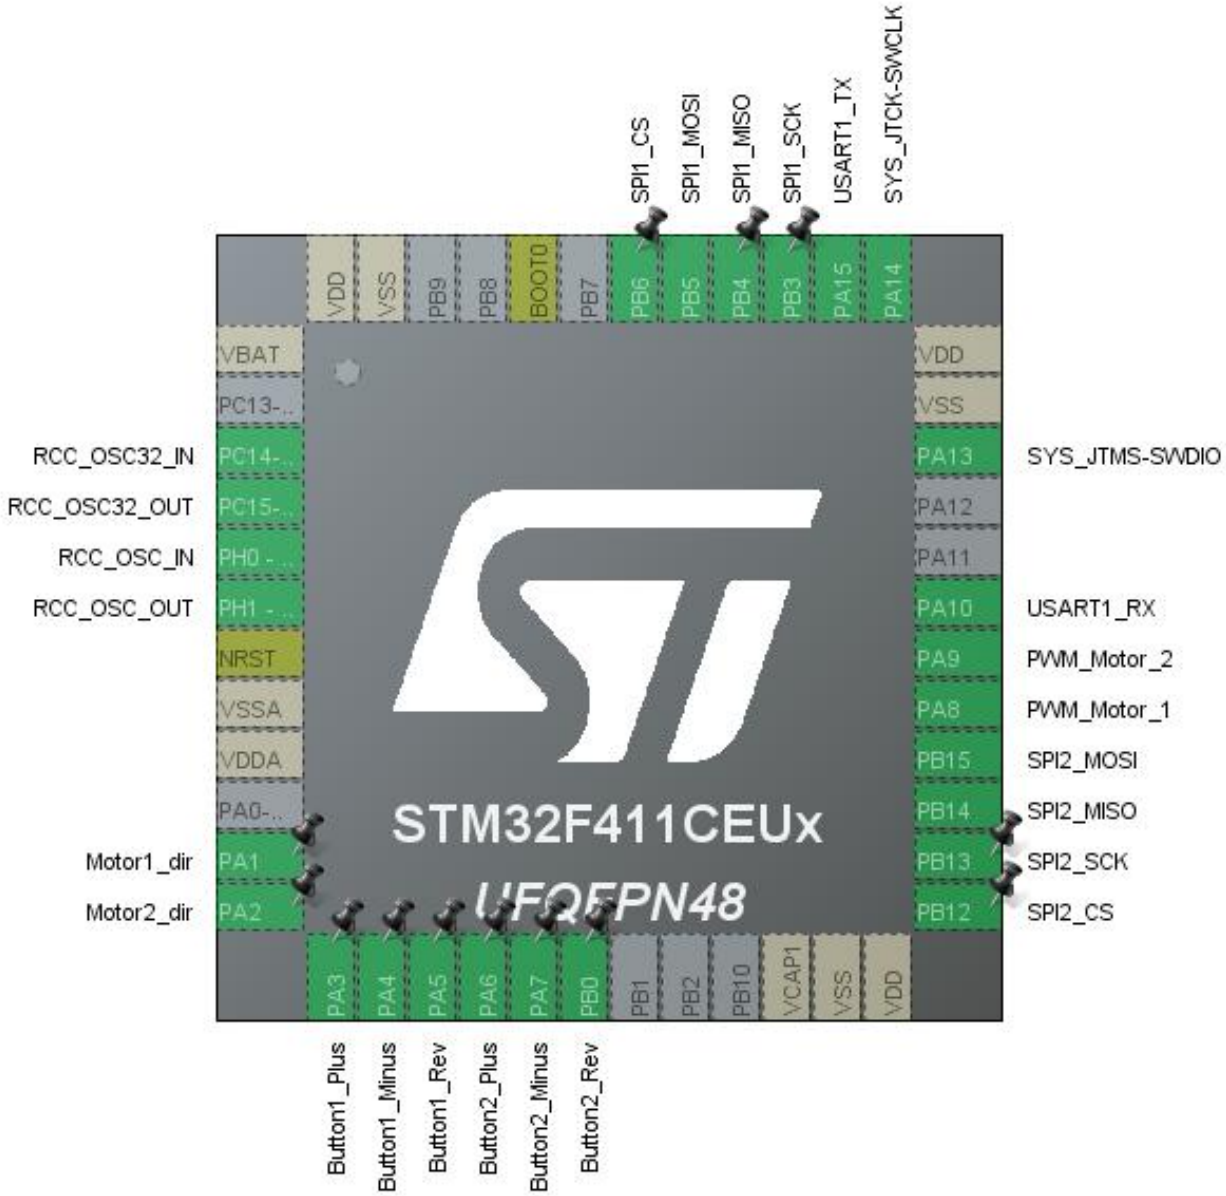

3. Pins Configuration

Pin Number UFQFPN48	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
3	PC14-OSC32_IN	I/O	RCC_OSC32_IN	
4	PC15-OSC32_OUT	I/O	RCC_OSC32_OUT	
5	PH0 - OSC_IN	I/O	RCC_OSC_IN	
6	PH1 - OSC_OUT	I/O	RCC_OSC_OUT	
7	NRST	Reset		
8	VSSA	Power		
9	VDDA	Power		
11	PA1 *	I/O	GPIO_Output	Motor1_dir
12	PA2 *	I/O	GPIO_Output	Motor2_dir
13	PA3	I/O	GPIO_EXTI3	Button1_Plus
14	PA4	I/O	GPIO_EXTI4	Button1_Minus
15	PA5	I/O	GPIO_EXTI5	Button1_Rev
16	PA6	I/O	GPIO_EXTI6	Button2_Plus
17	PA7	I/O	GPIO_EXTI7	Button2_Minus
18	PB0	I/O	GPIO_EXTI0	Button2_Rev
22	VCAP1	Power		
23	VSS	Power		
24	VDD	Power		
25	PB12 *	I/O	GPIO_Output	SPI2_CS
26	PB13	I/O	SPI2_SCK	
27	PB14	I/O	SPI2_MISO	
28	PB15	I/O	SPI2_MOSI	
29	PA8	I/O	TIM1_CH1	PWM_Motor_1
30	PA9	I/O	TIM1_CH2	PWM_Motor_2
31	PA10	I/O	USART1_RX	
34	PA13	I/O	SYS_JTMS-SWDIO	
35	VSS	Power		
36	VDD	Power		
37	PA14	I/O	SYS_JTCK-SWCLK	
38	PA15	I/O	USART1_TX	
39	PB3	I/O	SPI1_SCK	
40	PB4	I/O	SPI1_MISO	
41	PB5	I/O	SPI1_MOSI	
42	PB6 *	I/O	GPIO_Output	SPI1_CS
44	BOOT0	Boot		

Pin Number UFQFPN48	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
47	VSS	Power		
48	VDD	Power		

* The pin is affected with an I/O function

4. Clock Tree Configuration

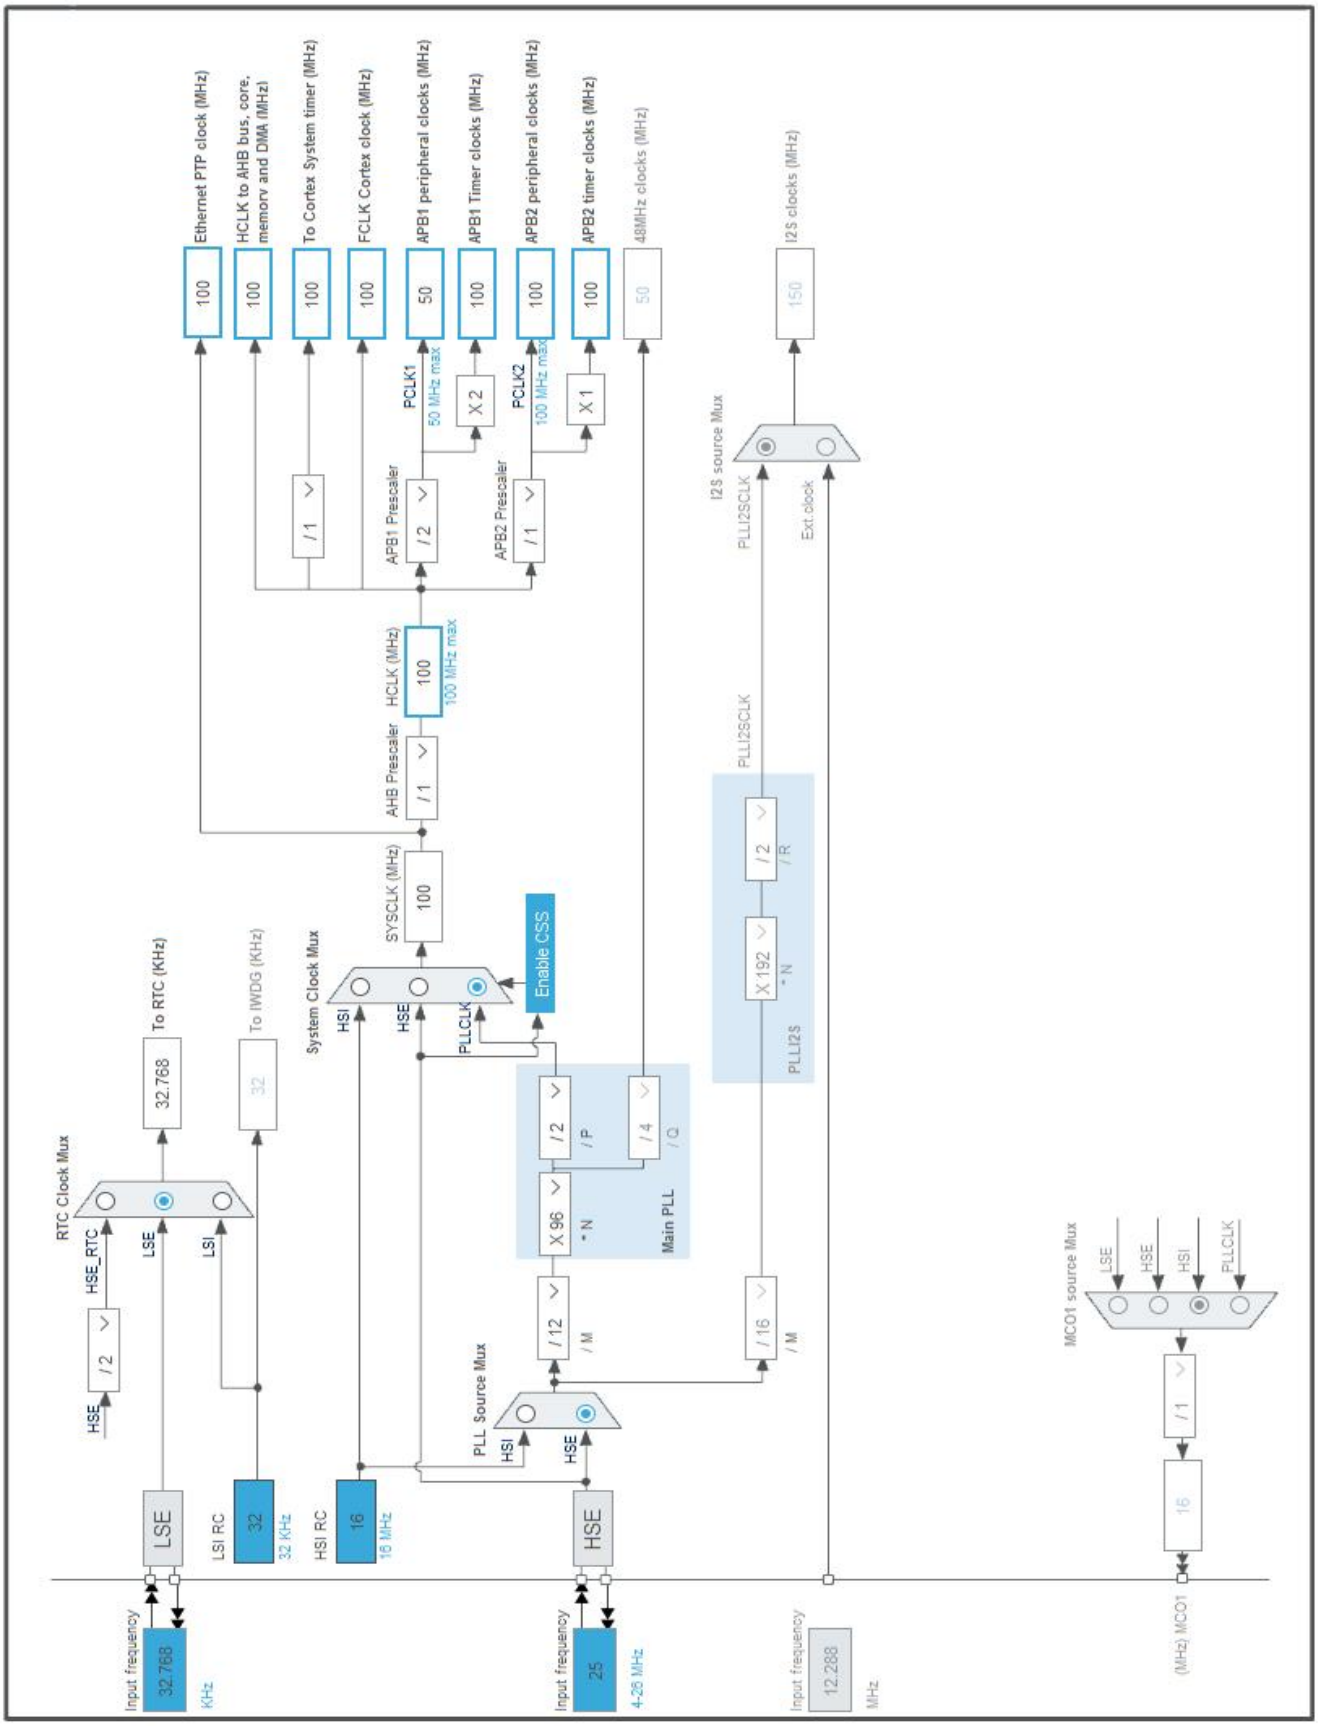

5. Software Project

5.1. Project Settings

Name	Value
Project Name	Massage
Project Folder	C:\Users\Darth\OneDrive\Documents\Massage
Toolchain / IDE	MDK-ARM V5.27
Firmware Package Name and Version	STM32Cube FW_F4 V1.25.2
Application Structure	Advanced
Generate Under Root	No
Do not generate the main()	No
Minimum Heap Size	0x200
Minimum Stack Size	0x400

5.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy all used libraries into the project folder
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	Yes
Keep User Code when re-generating	Yes
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No
Enable Full Assert	No

5.3. Advanced Settings - Generated Function Calls

Rank	Function Name	IP Instance Name
1	MX_GPIO_Init	GPIO
2	MX_DMA_Init	DMA
3	SystemClock_Config	RCC
4	MX_SPI1_Init	SPI1
5	MX_SPI2_Init	SPI2
6	MX_TIM1_Init	TIM1
7	MX_USART1_UART_Init	USART1
8	MX_RTC_Init	RTC

6. Power Consumption Calculator report

6.1. Microcontroller Selection

Series	STM32F4
Line	STM32F411
MCU	STM32F411CEUx
Datasheet	DS10314_Rev6

6.2. Parameter Selection

Temperature	25
Vdd	1.7

6.3. Battery Selection

Battery	Li-SOCL2(A3400)
Capacity	3400.0 mAh
Self Discharge	0.08 %/month
Nominal Voltage	3.6 V
Max Cont Current	100.0 mA
Max Pulse Current	200.0 mA
Cells in series	1
Cells in parallel	1

6.4. Sequence

Step	Step1	Step2
Mode	RUN	STOP
Vdd	1.7	1.7
Voltage Source	Battery	Battery
Range	Scale1-High	No Scale
Fetch Type	SRAM	n/a
CPU Frequency	100 MHz	0 Hz
Clock Configuration	HSE PLL	Regulator_LPLV Flash-PwrDwn
Clock Source Frequency	4 MHz	0 Hz
Peripherals		
Additional Cons.	0 mA	0 mA
Average Current	12.7 mA	9 µA
Duration	0.1 ms	0.9 ms
DMIPS	125.0	0.0
Ta Max	104.31	105
Category	In DS Table	In DS Table

6.5. Results

Sequence Time	1 ms	Average Current	1.28 mA
Battery Life	3 months, 19 days, 6 hours	Average DMIPS	125.0 DMIPS

6.6. Chart

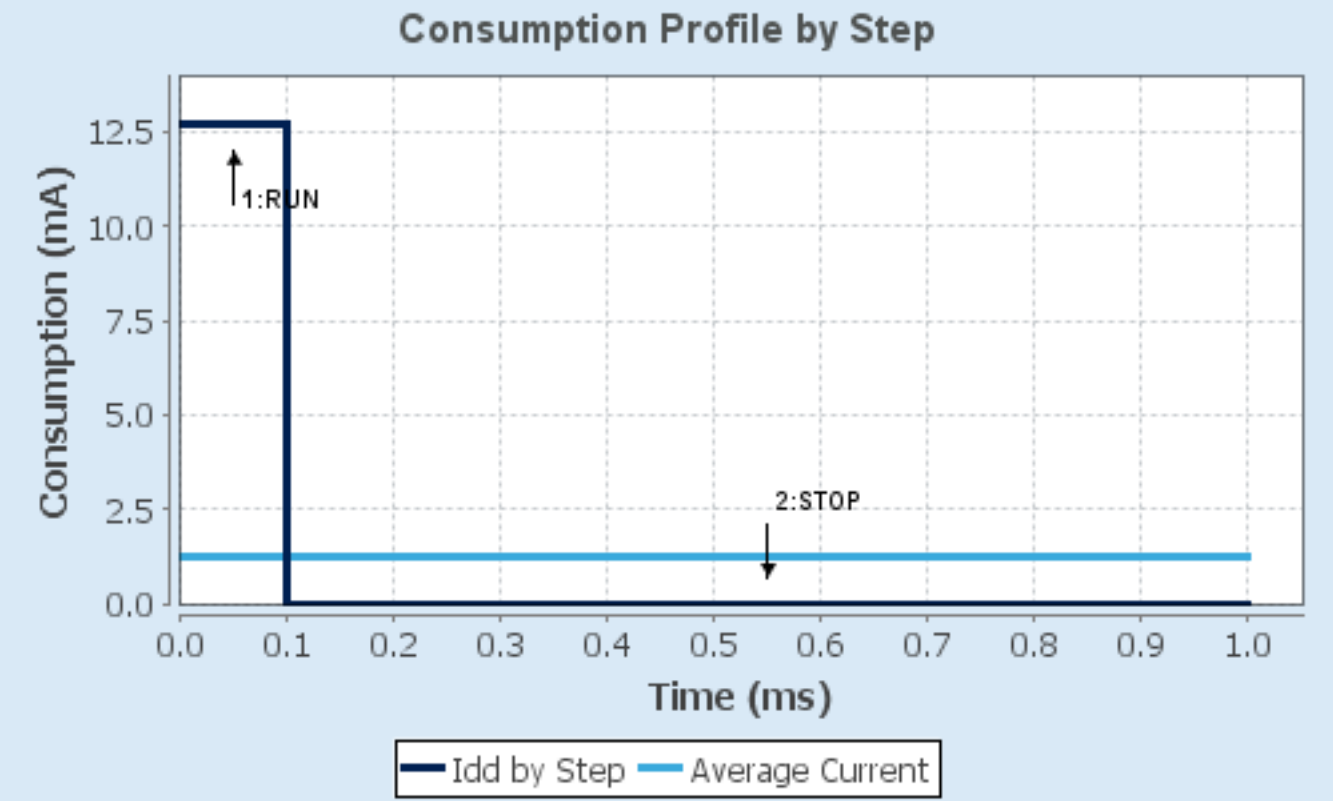
Consumption Profile by Step
Consumption (mA)
12.5
10.0
7.5
5.0
2.5
0.0
1:RUN
2:STOP
0.0
0.1
0.2
0.3
0.4
0.5
0.6
0.7
0.8
0.9
1.0
Time (ms)
Idd by Step
Average Current

7. IPs and Middleware Configuration

7.1. GPIO

7.2. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

Low Speed Clock (LSE) : Crystal/Ceramic Resonator

7.2.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Enabled
Data Cache	Enabled
Flash Latency(WS)	3 WS (4 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
TIM Prescaler Selection	Disabled
HSE Startup Timout Value (ms)	100
LSE Startup Timout Value (ms)	5000

Power Parameters:

Power Regulator Voltage Scale	Power Regulator Voltage Scale 1

7.3. RTC

mode: Activate Clock Source

mode: Activate Calendar

Alarm A: Internal Alarm

WakeUp: Internal WakeUp

7.3.1. Parameter Settings:

General:

Hour Format	Hourformat 24
Asynchronous Predivider value	127
Synchronous Predivider value	255

Calendar Time:

Data Format	**Binary data format ***
Hours	0
Minutes	0

Seconds	0
Day Light Saving: value of hour adjustment	Daylightsaving None
Store Operation	Storeoperation Reset

Calendar Date:

Week Day	Monday
Month	January
Date	1
Year	0

Alarm A:

Hours	0
Minutes	0
Seconds	0
Sub Seconds	0
Alarm Mask Date Week day	Disable
Alarm Mask Hours	Disable
Alarm Mask Minutes	Disable
Alarm Mask Seconds	Disable
Alarm Sub Second Mask	All Alarm SS fields are masked.
Alarm Date Week Day Sel	Date
Alarm Date	1

Wake UP:

Wake Up Clock	**1 Hz ***
Wake Up Counter	**60 ***

7.4. SPI1

Mode: Full-Duplex Master

7.4.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	8 Bits
First Bit	MSB First

Clock Parameters:

Prescaler (for Baud Rate)	2
Baud Rate	**50.0 MBits/s ***
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

Advanced Parameters:

CRC Calculation	Disabled

NSS Signal Type	Software

7.5. SPI2

Mode: Full-Duplex Master

7.5.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	8 Bits
First Bit	MSB First

Clock Parameters:

Prescaler (for Baud Rate)	2
Baud Rate	**25.0 MBits/s ***
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

Advanced Parameters:

CRC Calculation	Disabled
NSS Signal Type	Software

7.6. SYS

Debug: Serial Wire

Timebase Source: SysTick

7.7. TIM1

Channel1: PWM Generation CH1

Channel2: PWM Generation CH2

7.7.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	**2-1 ***
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	**50000-1 ***
Internal Clock Division (CKD)	No Division
Repetition Counter (RCR - 8 bits value)	0
auto-reload preload	Disable

Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

Break And Dead Time management - BRK Configuration:

BRK State	Disable
BRK Polarity	High

Break And Dead Time management - Output Configuration:

Automatic Output State	Disable
Off State Selection for Run Mode (OSSR)	Disable
Off State Selection for Idle Mode (OSSI)	Disable
Lock Configuration	Off

PWM Generation Channel 1:

Mode	PWM mode 1
Pulse (16 bits value)	0
Output compare preload	Enable
Fast Mode	Disable
CH Polarity	High
CH Idle State	Reset

PWM Generation Channel 2:

Mode	PWM mode 1
Pulse (16 bits value)	0
Output compare preload	Enable
Fast Mode	Disable
CH Polarity	High
CH Idle State	Reset

7.8. USART1

Mode: Asynchronous

7.8.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

*** User modified value**

8. System Configuration

8.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
RCC	PC14-OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15-OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	
	PH0 - OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PH1 - OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SPI1	PB3	SPI1_SCK	Alternate Function Push Pull	No pull-up and no pull-down	**Very High ***	
	PB4	SPI1_MISO	Alternate Function Push Pull	No pull-up and no pull-down	**Very High ***	
	PB5	SPI1_MOSI	Alternate Function Push Pull	No pull-up and no pull-down	**Very High ***	
SPI2	PB13	SPI2_SCK	Alternate Function Push Pull	No pull-up and no pull-down	**Very High ***	
	PB14	SPI2_MISO	Alternate Function Push Pull	No pull-up and no pull-down	**Very High ***	
	PB15	SPI2_MOSI	Alternate Function Push Pull	No pull-up and no pull-down	**Very High ***	
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	
TIM1	PA8	TIM1_CH1	Alternate Function Push Pull	No pull-up and no pull-down	Low	PWM_Motor_1
	PA9	TIM1_CH2	Alternate Function Push Pull	No pull-up and no pull-down	Low	PWM_Motor_2
USART1	PA10	USART1_RX	Alternate Function Push Pull	No pull-up and no pull-down	**Very High ***	
	PA15	USART1_TX	Alternate Function Push Pull	No pull-up and no pull-down	**Very High ***	
GPIO	PA1	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	Motor1_dir
	PA2	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	Motor2_dir
	PA3	GPIO_EXTI3	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	Button1_Plus
	PA4	GPIO_EXTI4	External Interrupt Mode with	No pull-up and no pull-down	n/a	Button1_Minus

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
			Rising edge trigger detection			
	PA5	GPIO_EXTI5	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	Button1_Rev
	PA6	GPIO_EXTI6	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	Button2_Plus
	PA7	GPIO_EXTI7	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	Button2_Minus
	PB0	GPIO_EXTI0	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	Button2_Rev
	PB12	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	SPI2_CS
	PB6	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	SPI1_CS

8.2. DMA configuration

DMA request	Stream	Direction	Priority
USART1_RX	DMA2_Stream2	Peripheral To Memory	Low
USART1_TX	DMA2_Stream7	Memory To Peripheral	Low

USART1_RX: DMA2_Stream2 DMA request Settings:

Mode:	**Circular ***
Use fifo:	Disable
Peripheral Increment:	Disable
Memory Increment:	**Enable ***
Peripheral Data Width:	Byte
Memory Data Width:	Byte

USART1_TX: DMA2_Stream7 DMA request Settings:

Mode:	Normal
Use fifo:	Disable
Peripheral Increment:	Disable
Memory Increment:	**Enable ***
Peripheral Data Width:	Byte
Memory Data Width:	Byte

8.3. NVIC configuration

8.3.1. NVIC

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
RTC wake-up interrupt through EXTI line 22	true	0	0
RCC global interrupt	true	0	0
EXTI line0 interrupt	true	0	0
EXTI line3 interrupt	true	0	0
EXTI line4 interrupt	true	0	0
EXTI line[9:5] interrupts	true	0	0
TIM1 update interrupt and TIM10 global interrupt	true	0	0
USART1 global interrupt	true	0	0
RTC alarms A and B interrupt through EXTI line 17	true	0	0
DMA2 stream2 global interrupt	true	0	0
DMA2 stream7 global interrupt	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
TIM1 break interrupt and TIM9 global interrupt	unused		
TIM1 trigger and commutation interrupts and TIM11 global interrupt	unused		
TIM1 capture compare interrupt	unused		
SPI1 global interrupt	unused		
SPI2 global interrupt	unused		
FPU global interrupt	unused		

8.3.2. NVIC Code generation

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
Non maskable interrupt	true	true	false
Hard fault interrupt	true	true	false
Memory management fault	true	true	false

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
Pre-fetch fault, memory access fault	true	true	false
Undefined instruction or illegal state	true	true	false
System service call via SWI instruction	true	true	false
Debug monitor	true	true	false
Pendable request for system service	true	true	false
System tick timer	true	true	true
RTC wake-up interrupt through EXTI line 22	true	true	true
RCC global interrupt	true	true	false
EXTI line0 interrupt	true	true	true
EXTI line3 interrupt	true	true	true
EXTI line4 interrupt	true	true	true
EXTI line[9:5] interrupts	true	true	true
TIM1 update interrupt and TIM10 global interrupt	true	true	true
USART1 global interrupt	true	true	true
RTC alarms A and B interrupt through EXTI line 17	true	true	true
DMA2 stream2 global interrupt	true	true	true
DMA2 stream7 global interrupt	true	true	true

*** User modified value**

9. System Views

9.1. Category view

9.1.1. Current

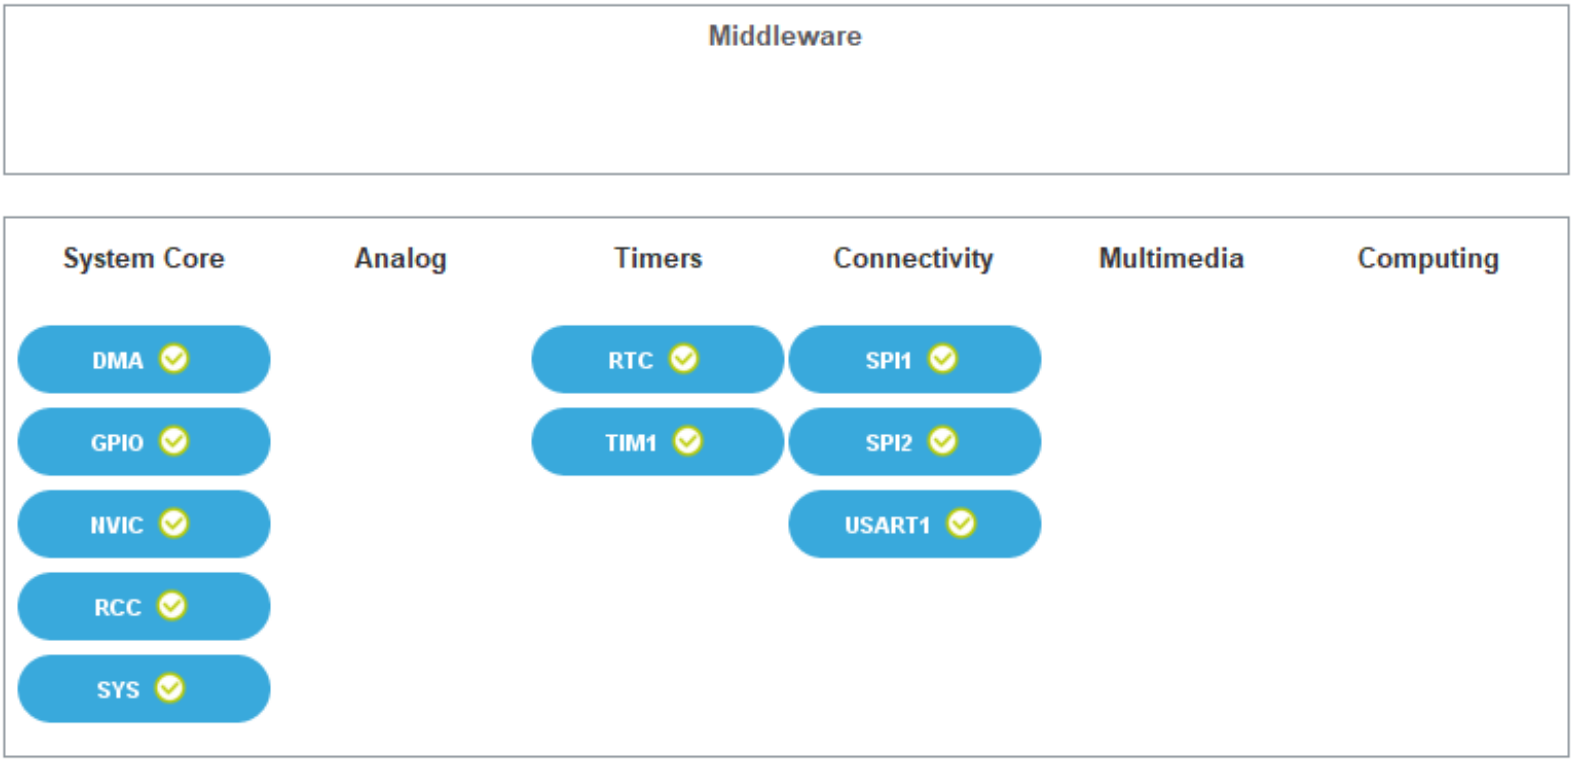

10. Docs & Resources

Type	Link
Datasheet	http://www.st.com/resource/en/datasheet/DM00115249.pdf
Reference manual	http://www.st.com/resource/en/reference_manual/DM00119316.pdf
Programming manual	http://www.st.com/resource/en/programming_manual/DM00046982.pdf
Errata sheet	http://www.st.com/resource/en/errata_sheet/DM00137034.pdf
Application note	http://www.st.com/resource/en/application_note/CD00167594.pdf
Application note	http://www.st.com/resource/en/application_note/CD00211314.pdf
Application note	http://www.st.com/resource/en/application_note/CD00249778.pdf
Application note	http://www.st.com/resource/en/application_note/CD00259245.pdf
Application note	http://www.st.com/resource/en/application_note/CD00264321.pdf
Application note	http://www.st.com/resource/en/application_note/CD00264342.pdf
Application note	http://www.st.com/resource/en/application_note/CD00264379.pdf
Application note	http://www.st.com/resource/en/application_note/DM00024853.pdf
Application note	http://www.st.com/resource/en/application_note/DM00040802.pdf
Application note	http://www.st.com/resource/en/application_note/DM00040808.pdf
Application note	http://www.st.com/resource/en/application_note/DM00042534.pdf
Application note	http://www.st.com/resource/en/application_note/DM00046011.pdf
Application note	http://www.st.com/resource/en/application_note/DM00072315.pdf
Application note	http://www.st.com/resource/en/application_note/DM00073742.pdf
Application note	http://www.st.com/resource/en/application_note/DM00073853.pdf
Application note	http://www.st.com/resource/en/application_note/DM00080497.pdf
Application note	http://www.st.com/resource/en/application_note/DM00081379.pdf
Application note	http://www.st.com/resource/en/application_note/DM00115714.pdf
Application note	http://www.st.com/resource/en/application_note/DM00129215.pdf
Application note	http://www.st.com/resource/en/application_note/DM00156364.pdf
Application note	http://www.st.com/resource/en/application_note/DM00160482.pdf

Application note	http://www.st.com/resource/en/application_note/DM00144612.pdf
Application note	http://www.st.com/resource/en/application_note/DM00213525.pdf
Application note	http://www.st.com/resource/en/application_note/DM00220769.pdf
Application note	http://www.st.com/resource/en/application_note/DM00257177.pdf
Application note	http://www.st.com/resource/en/application_note/DM00272912.pdf
Application note	http://www.st.com/resource/en/application_note/DM00226326.pdf
Application note	http://www.st.com/resource/en/application_note/DM00236305.pdf
Application note	http://www.st.com/resource/en/application_note/DM00281138.pdf
Application note	http://www.st.com/resource/en/application_note/DM00296349.pdf
Application note	http://www.st.com/resource/en/application_note/DM00325582.pdf
Application note	http://www.st.com/resource/en/application_note/DM00327191.pdf
Application note	http://www.st.com/resource/en/application_note/DM00354244.pdf
Application note	http://www.st.com/resource/en/application_note/DM00315319.pdf
Application note	http://www.st.com/resource/en/application_note/DM00380469.pdf
Application note	http://www.st.com/resource/en/application_note/DM00395696.pdf
Application note	http://www.st.com/resource/en/application_note/DM00431633.pdf
Application note	http://www.st.com/resource/en/application_note/DM00493651.pdf
Application note	http://www.st.com/resource/en/application_note/DM00536349.pdf
Application note	http://www.st.com/resource/en/application_note/DM00725181.pdf