


Hexagon shaft



Hall sensor
16 PPR
Double channel

Lead connection

No.	Function	Description
1	Motor +	
2	Motor -	
3	Hall Sensor Vcc	5~12 V
4	Hall sensor GND	
5	Hall sensor A out	
6	Hall sensor B out	

58W4466128500-175K

Motor speed: 12v. 8500rpm

Reduction Ratio: 175: 1

Output speed: 49 RPM and no load


Output rated speed: 41 rpm at load 6.5N.M

Rated torque: 6.5N.M

Rated current: 6A

Stalled current: 25A

Output power :50 watt

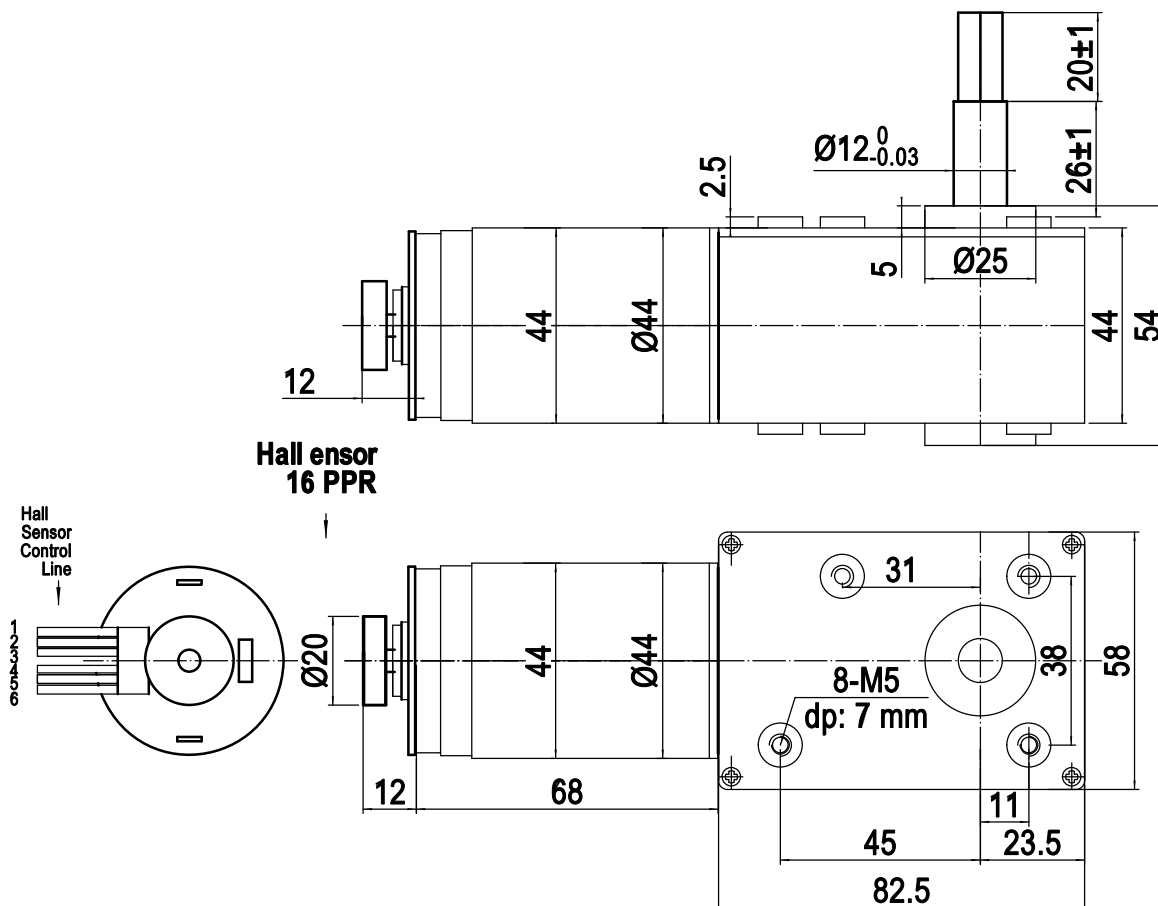

KSTONEMOTOR	SCALE	1:1	UNIT	mm	UNSPECIFIED TOLERANCE: 0~6: ±0.1>6~30: ±0.2 >30~120:±0.3>120: ±0.5 ANGLES: ±30'	
			SIZE	A4		
	MATERIAL				TITLE	
DRAWN	Kenny				58W4468128500-175K	
	20201015					
CHECKED	FINISH				SHEET 1 OF 1	REV A
					DWG.NO.	