
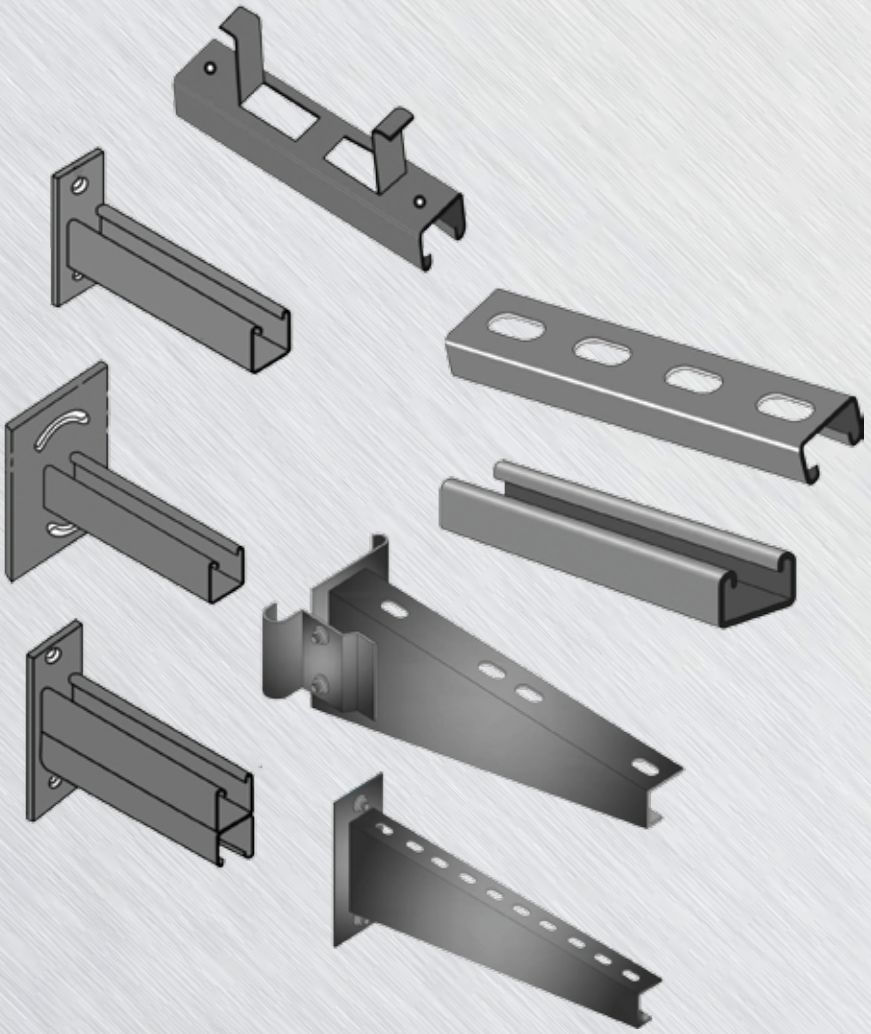


CHANNELS & SUPPORTS SYSTEM

MODERN METAL INDUSTRIES


General Technical Information

1

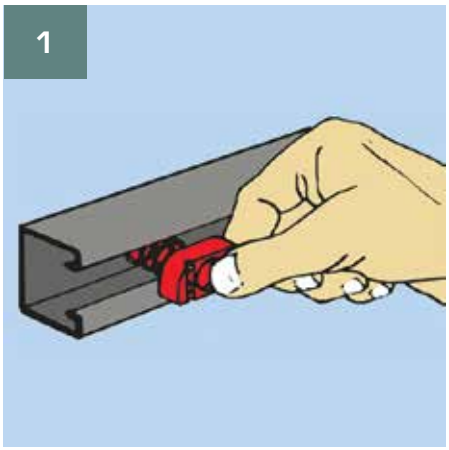


Strong, Fast, Economical and Adjustable Insert the spring unt anywhere along the continuous channel. The rounded nut ends permit easy insertion.

2

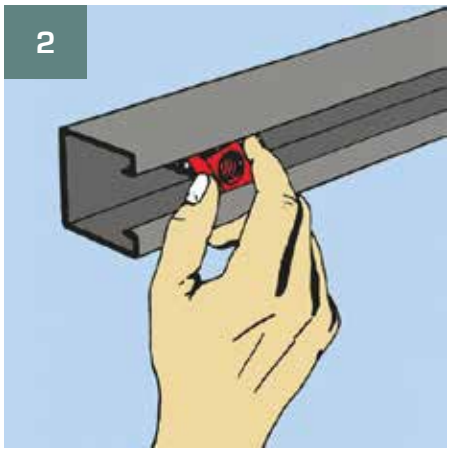


A 90° clockwise turn aligns the grooves in the nut with the inturned edges of the channel.Fittings can be placed anywhere along the channel opening, permitting comlete freedom of adjustment the need for drilling holes is eliminated.

3

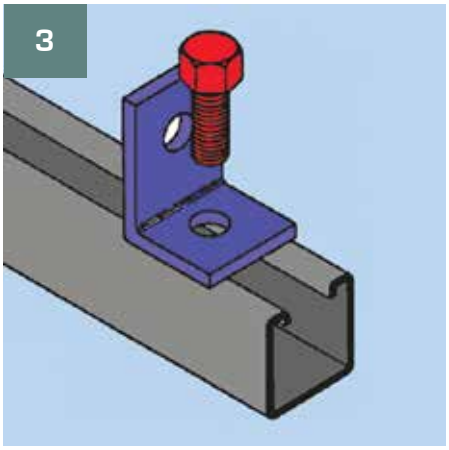


Insert the bolt through the fitting and into the spring nut, (see illustration 5 for end view showing the nut in place)

4

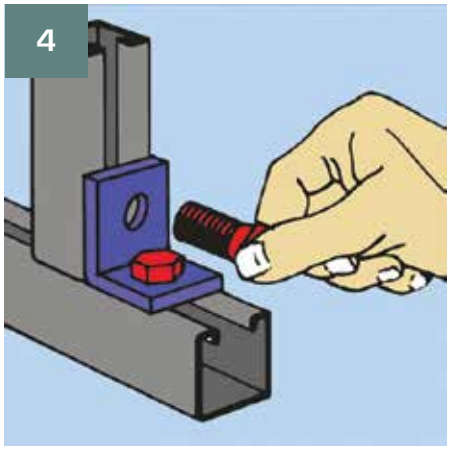

Additional channel sections can now be bolted to the fitting already in place by following procedure described in steps 1-3.

5

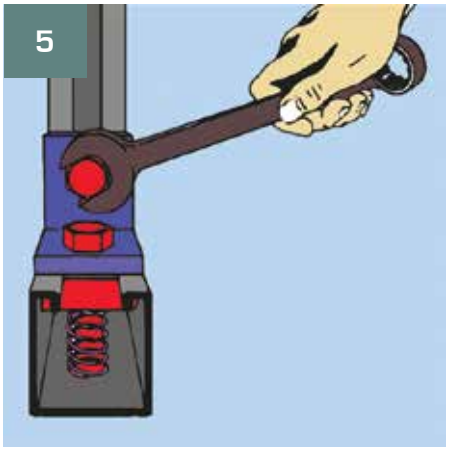


Tightening with a wrench locks the serrated teeth of the nut into the inturned edges of the channel, to complete a strong, vise-like connection.

100%	Adjustable
100%	Reusable
No	Welding
No	Drilling
No	Special Tools


General Technical Information

Utility Stands

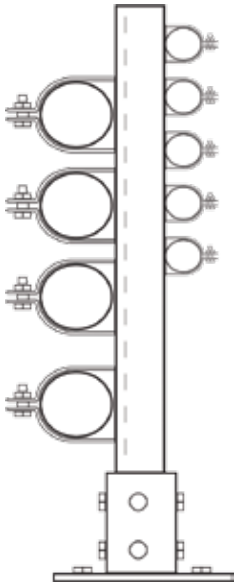


Strut can be configured into functional equipment service stands.

Panel Supports

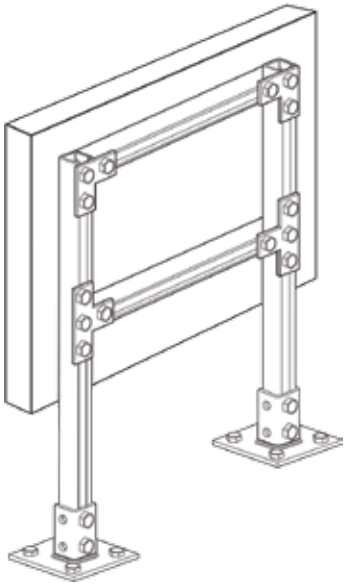


Panel supports can be configured into a variety of support appliceations and attached to existing structurals for stationary or overhead mounting of panel boards, electronics machinery, HVSC, etc.

Suspended Support Configuration

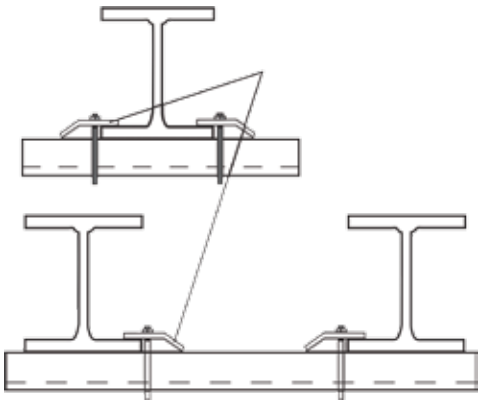

Clamps fit many beam types including; I-Beam, and T-Bar constructions.


Beam Clamp Support

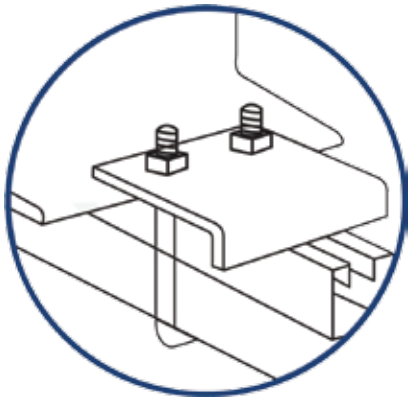

Beam Clamp Supports can be attached to various sized widths of “I-Beams“ flange thicknesses.


General Technical Information

Hanging

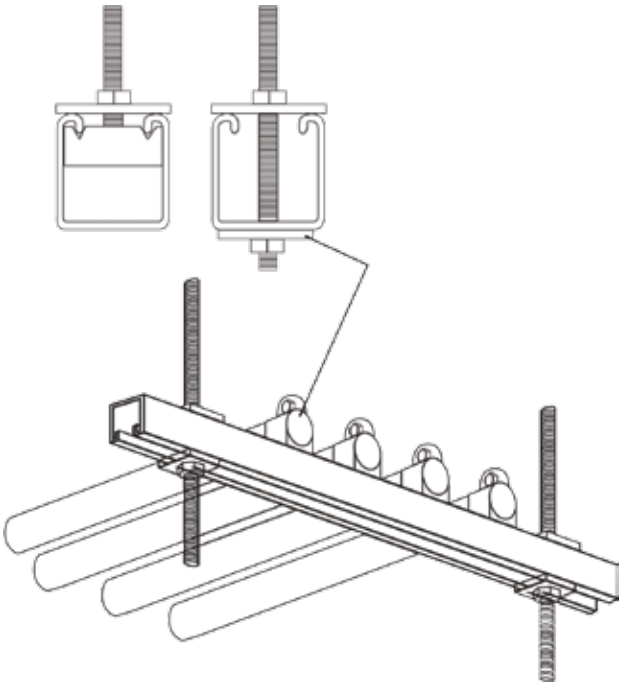


Overhead hanging schemes provide field flexibility

Complex Made Easy

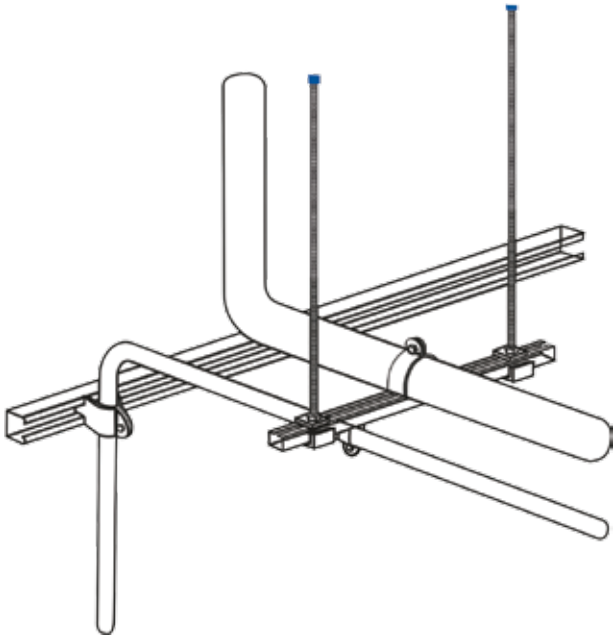


Strut systems make 90° turns a simple adjustment from plane to plane.

Pipe Support

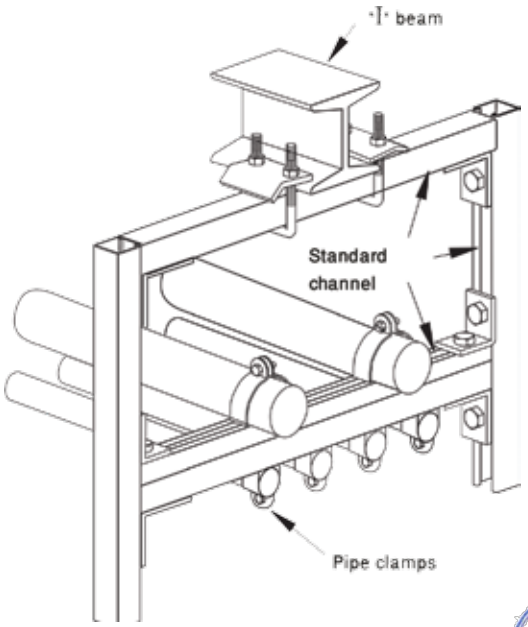


Wall Mount Configuration

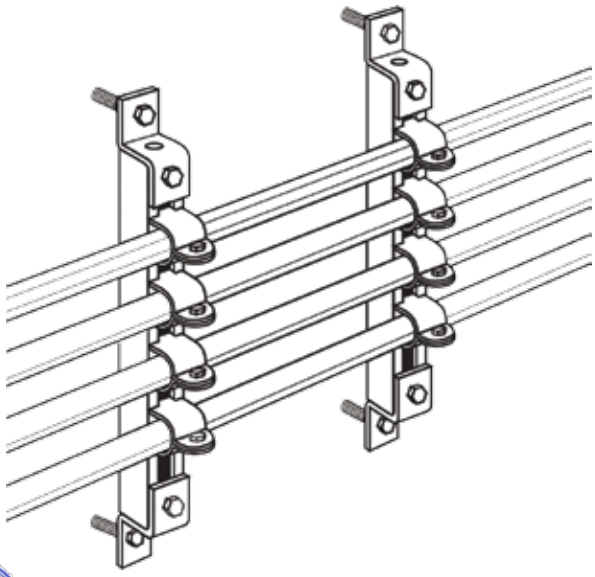


General Technical Information

Standard Channel & Fitting Assembly


The factory punched holes in channel allow fittings to be attached to either side.

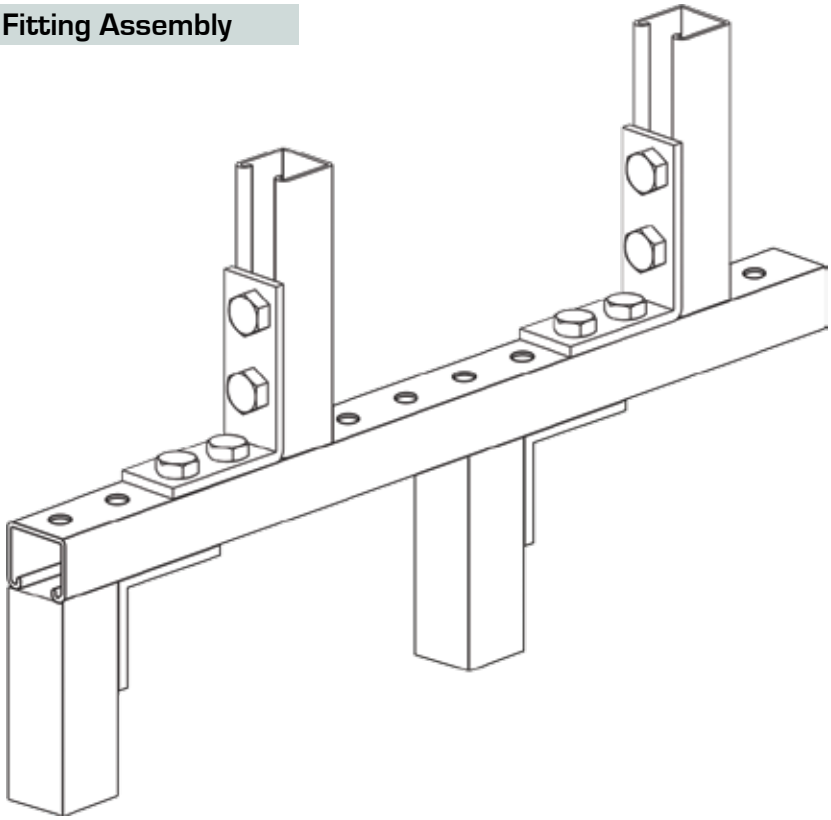

Suspended Support Configuration




Radiused corner spring nuts insert and turn easily.




Case hardened nut teeth grip the channel's inner edge.


Hundreds of fittings for parctically any contingency.

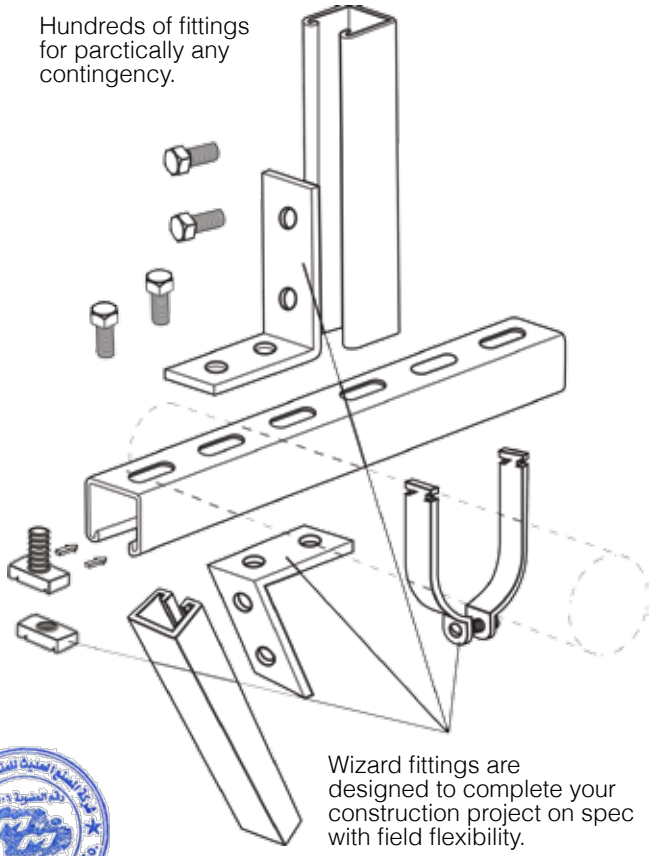


Wizard fittings are designed to complete your construction project on spec with field flexibility.


Support System - Brackets

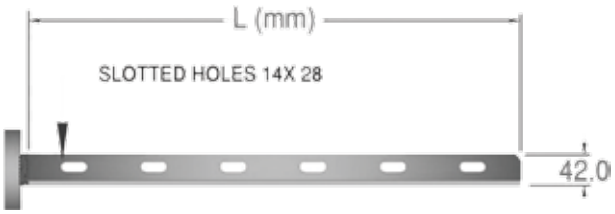

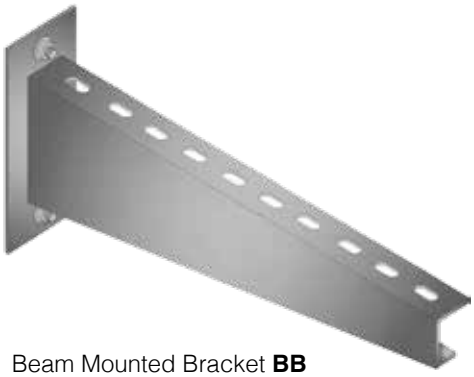

Beam Mounted Bracket **BB**

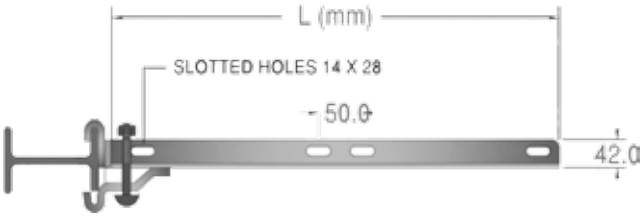

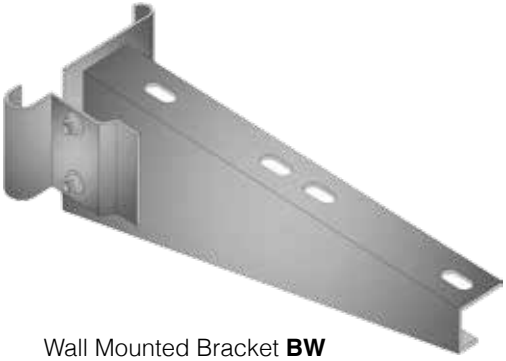

Wall Mounted Bracket **BW**

Ordering Code				/	

Bracket	BW	BB							
Black Steel	BST								
Hot Dip Galvanized after Fabrication	HDG								
Hot Dip Galvanized and powder Coating	HDP								
Mill Galvanized	MG								
Steel Epoxy Coating	EPC								
Aluminum	AL								
Stainless Steel 304	S4								
Stainless Steel 316	S6								
Thickness (T) mm	1.5 - 6.0								
Width (W) mm	60	110	160	210	310	460	610	910	1010

Ordering Code Example : BBHDG2.5/600


NOTES:

- Support Bracket length = Cable Tray Width + 10 m
- Special orders can be manufactured upon requ


Support System - C-Channels



C-Plain Channel **CP**

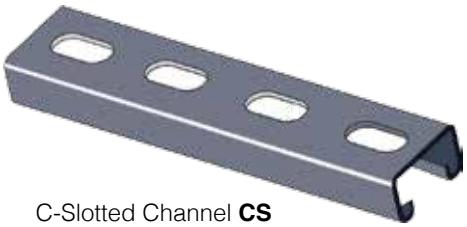

C-Slotted Channel **CS**

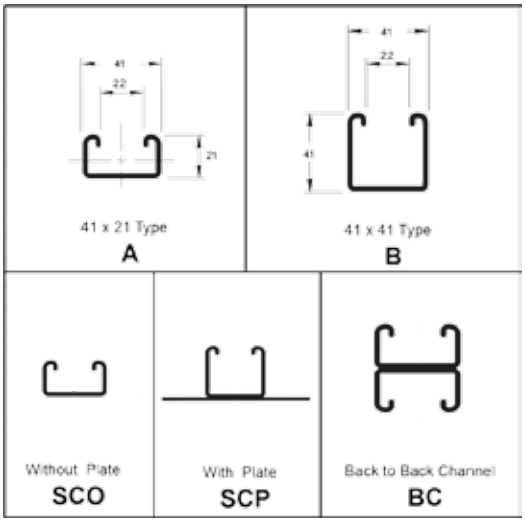

Ordering Code							/	


C-Channel	CP	CS
(41x21) Type	A	
(41x21) Type	B	
Single Channel	SCO	SCP
Back to Back Channel	BC	
Black Steel	BST	
Hot Dip Galvanized after Fabrication	HDG	
Hot Dip Galvanized and powder Coating	HDP	
Mill Galvanized	MG	
Steel Epoxy Coating	EPC	
Aluminum	AL	
Stainless Steel 304	S4	
Stainless Steel 316	S6	
Thickness (T) mm	1.5	2.0	2.5
Length (L) mm	200 - 6000	

Ordering Code Example : CPASCOHDG2.0/1500


NOTES:

• Special orders can be manufactured upon request


Support System - Cantilever Arms

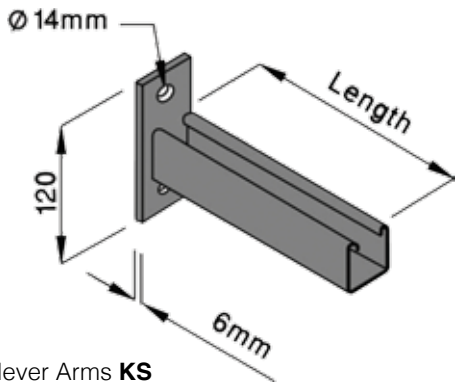

Single Cantilever Arms **KS**

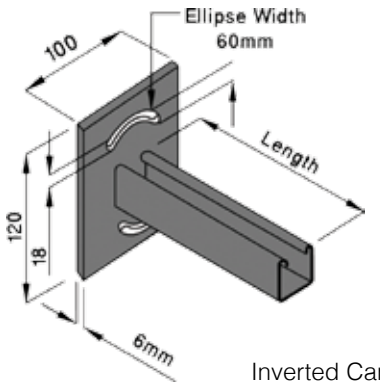

Inverted Cantilever **KI**

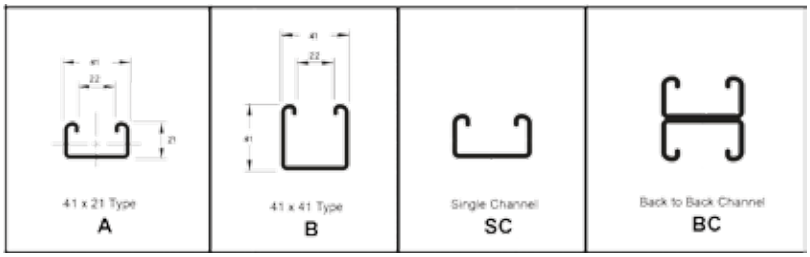

Ordering Code						/	

Cantilever Arms	KS	KI
(41x21) Type	A	
(41x21) Type	B	
Single Channel	SC	
Back to Back Channel	BC	
Black Steel	BST	
Hot Dip Galvanized after Fabrication	HDG	
Hot Dip Galvanized and powder Coating	HDP	
Mill Galvanized	MG	
Steel Epoxy Coating	EPC	
Aluminum	AL	
Stainless Steel 304	S4	
Stainless Steel 316	S6	
Thickness (T) mm	1.5	2.0	2.5
Length (L) mm	69	110	160	210	310	460	610	910	1010

Ordering Code Example : KSABCHDG2.0/1500

NOTES:

- Support Bracket length = Cable Tray Width + 10 m
- Special orders can be manufactured upon requ

Support System - C-Channel Loading Data

41 x 21 C-CHANNEL

Span or Column Unsupported Height in mm	Uniform Load at 175/ N/mm Stress kg	Deflection in mm at 175/ N/ mm	Uniform Load at Max. Deflec. of 1/1200 th. Span. kg	Uniform Load at Max. Deflec. of 1/360 th. Span. kg	Max. Load of Column loaded @ Centroid kg	Max. Load of Column loaded @ Slot face kg
250	553	0.45	-	-	3993	1042
500	276	1.81	-	212	3379	995
750	184	4.07	169	94	2198	859
1000	138	7.24	95	53	1353	690
1250	110	1132	61	33	896	548
1500	92	1630	42	23	(634)	(437)
1750	79	22.19	31	-	(471)	(353)
2000	69	28.99	23	-	-	-

41 x 21 C-CHANNEL SLOTTED

Span or Column Unsupported Height in mm	Uniform Load at 175/ N/mm Stress kg	Deflection in mm at 175/ N/ mm	Uniform Load at Max. Deflec. of 1/1200 th. Span. kg	Uniform Load at Max. Deflec. of 1/360 th. Span. kg	Max. Load of Column loaded @ Centroid kg	Max. Load of Column loaded @ Slot face kg
250	558	0.50	-	-	-	-
500	254	2.01	-	174	-	-
750	169	4.54	139	77	-	-
1000	127	8.07	78	43	-	-
1250	101	12.61	50	27	-	-
1500	84	18.17	34	-	-	-
1750	72	24.73	25	-	-	-
2000	63	32.30	-	-	-	-

41 x 41 C-CHANNEL

Span or Column Unsupported Height in mm	Uniform Load at 175/ N/mm Stress kg	Deflection in mm at 175/ N/ mm	Uniform Load at Max. Deflec. of 1/1200 th. Span. kg	Uniform Load at Max. Deflec. of 1/360 th. Span. kg	Max. Load of Column loaded @ Centroid kg	Max. Load of Column loaded @ Slot face kg
250	1769	0.23	-	-	5869	1693
500	884	0.95	-	-	5379	1650
750	589	2.15	-	571	4479	1554
1000	442	3.82	-	321	3373	1395
1250	535	5.97	-	205	2556	1232
1500	294	8.60	257	142	2020	1093
1750	252	11.70	188	104	1656	976
2000	221	15.29	144	80	1395	879
2250	169	19.35	114	63	1198	797
2500	176	23.89	92	51	1044	725
2750	160	28.91	76	42	(919)	(663)
3000	147	34.40	64	35	(816)	(607)

41 x 41 C-CHANNEL SLOTTED

Span or Column Unsupported Height in mm	Uniform Load at 175/ N/mm Stress kg	Deflection in mm at 175/ N/ mm	Uniform Load at Max. Deflec. of 1/1200 th. Span. kg	Uniform Load at Max. Deflec. of 1/360 th. Span. kg	Max. Load of Column loaded @ Centroid kg	Max. Load of Column loaded @ Slot face kg
250	1638	0.27	-	-	5351	1660
500	819	1.05	-	-	5100	1635
750	546	2.35	-	483	4412	1557
1000	409	4.18	-	271	3284	1389
1250	327	6.54	313	174	2436	1211
1500	273	241	217	120	1899	1062
1750	234	12.81	159	88	1546	941
2000	204	16.73	122	67	1297	843
2250	182	21.18	[illegible]	53	1113	761
2500	163	26.15	[illegible]	43	970	691
2750	148	31.64	[illegible]	35	(588)	(631)
3000	136	37.65	[illegible]	30	(761)	(578)

Support System - C-Channel Loading Data

41 x 21 BACK C-CHANNEL

Span or Column Unsupported Height in mm	Uniform Load at 175/ N/mm Stress kg	Deflection in mm at 175/ N/ mm	Uniform Load at Max. Deflec. of 1/1200 th. Span. kg	Uniform Load at Max. Deflec. of 1/360 th. Span. kg	Max. Load of Column loaded @ Centroid kg	Max. Load of Column loaded @ Slot face kg
250	1558	0.26	-	-	8228	1834
500	779	1.07	-	-	7740	1809
750	519	2.42	-	446	6865	1756
1000	389	4.30	-	251	5367	1639
1250	311	6.72	289	160	3882	1468
1500	259	9.68	201	111	2838	1289
1750	222	13.18	147	82	2143	1123
2000	194	17.21	113	62	(1668)	(779)
2250	173	21.79	89	49	(1334)	(852)
2500	155	26.90	72	40	(1090)	(745)
2750	141	32.55	59	33	(906)	(655)
3000	129	38.73	50	27	-	-

41 x 41 BACK TO BACK C-CHANNEL

Span or Column Unsupported Height in mm	Uniform Load at 175/ N/mm Stress kg	Deflection in mm at 175/ N/ mm	Uniform Load at Max. Deflec. of 1/1200 th. Span. kg	Uniform Load at Max. Deflec. of 1/360 th. Span. kg	Max. Load of Column loaded @ Centroid kg	Max. Load of Column loaded @ Slot face kg
250	-	-	-	-	119952	2880
500	-	-	-	-	11682	2864
750	1670	1.21	-	-	11186	2833
1000	1253	2.15	-	-	10451	2783
1250	1002	3.36	-	-	9305	2695
1500	835	4.84	-	718	7790	2551
1750	716	6.59	-	527	6293	2367
2000	626	8.61	-	404	5068	2170
2250	556	10.89	-	319	4127	1977
2500	501	13.45	456	258	3410	1796
2750	455	16.27	384	213	2858	1630
3000	417	19.37	323	179	(2427)	(1480)


41 x 41 (3x) BACK TO BACK C-CHANNEL


Span or Column Unsupported Height in mm	Uniform Load at 175/ N/mm Stress kg	Deflection in mm at 175/ N/ mm	Uniform Load at Max. Deflec. of 1/1200 th. Span. kg	Uniform Load at Max. Deflec. of 1/360 th. Span. kg	Max. Load of Column loaded @ Centroid kg	Max. Load of Column loaded @ Slot face kg
250	-	-	-	-	16677	4151
500	-	-	-	-	16154	4118
750	-	-	-	-	15093	4045
1000	-	-	-	-	13151	3891
1250	-	-	-	-	10586	3631
1500	-	-	-	-	8175	3297
1750	1586	4.33	-	-	6353	2955
2000	1387	5.66	-	1361	5007	2627
2250	1233	7.16	-	1075	4024	2328
2500	1110	8.84	-	871	3293	2063
2750	1009	10.70	-	720	2744	1833
3000	925	12.74	-	605	(2325)	(1636)

41 x 41 C-CHANNEL WITH PLATE


Span or Column Unsupported Height in mm	Uniform Load at 175/ N/mm Stress kg	Deflection in mm at 175/ N/ mm	Uniform Load at Max. Deflec. of 1/1200 th. Span. kg	Uniform Load at Max. Deflec. of 1/360 th. Span. kg	Max. Load of Column loaded @ Centroid kg	Max. Load of Column loaded @ Slot face kg
250	1292	0.17	-	-	-	-
500	1096	0.69	-	-	-	-
750	730	1.55	-	-	-	-
1000	548	2.77	-	-	-	-
1250	438	4.33	-	351	-	-
1500	365	6.23	-	244	-	-
1750	313	84.8	-	179	-	-
2000	274	11.08	247	137	-	-
2250	243	14.03	198	108	-	-
2500	219	17.32	158	87	-	-
2750	199	20.96	131	72	-	-
3000	182	24.94	110	61	-	-

Support System - Concrete Insert C-Channel

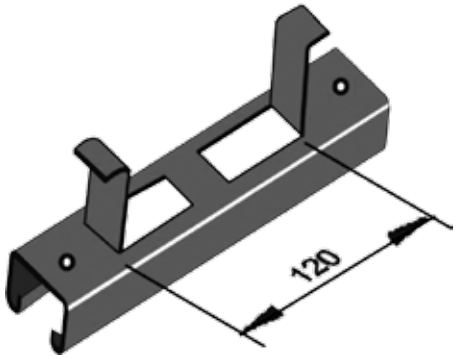

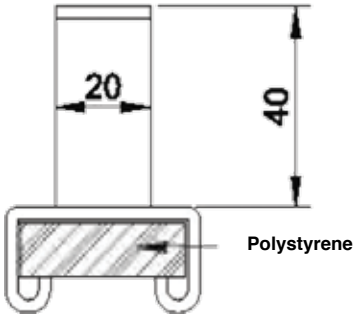

C-Channel Concrete Insert **UCI**

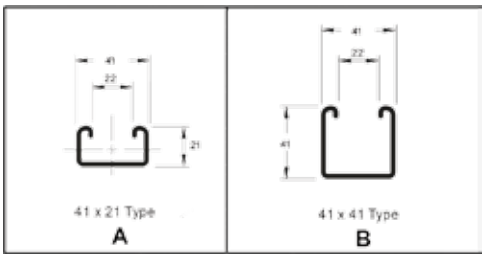

Ordering Code					/	

Cantilever Arms	KS	KI	
(41x21) Type	A		
(41x41) Type	B		

Black Steel	BST
Hot Dip Galvanized after Fabrication	HDG
Hot Dip Galvanized and powder Coating	HDP
Mill Galvanized	MG
Steel Epoxy Coating	EPC
Aluminum	AL
Stainless Steel 304	S4
Stainless Steel 316	S6


Thickness (T) mm	1.5	2.0	2.5
Length (L) mm	1000 - 6000		

Ordering Code Example : UCIBHDG1.5/1500

NOTES:

- Support Bracket length = Cable Tray Width + 10 m
- Special orders can be manufactured upon requ

Support System - I-Support

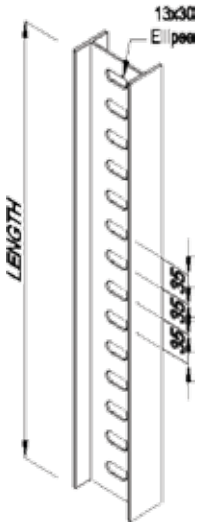

I-SUPPORT **IS**

Ordering Code	IS		

I - Supoort	IS

Black Steel	BST
Hot Dip Galvanized after Fabrication	HDG
Hot Dip Galvanized and powder Coating	HDP
Mill Galvanized	MG
Steel Epoxy Coating	EPC
Aluminum	AL
Stainless Steel 304	S4
Stainless Steel 316	S6


Length (L) mm	1000 - 6000

Ordering Code Example : IS HDG 3000


* I-Support thickness as per Standard.

NOTES:


- Support Bracket length = Cable Tray Width + 10 mm.
- Special orders can be manufactured upon request.




Code: **IS 01**




Code: **IS 02**




Code: **IS 03**




Code: **IS 04**




Code: **IS 05**



Code: **IS 06**

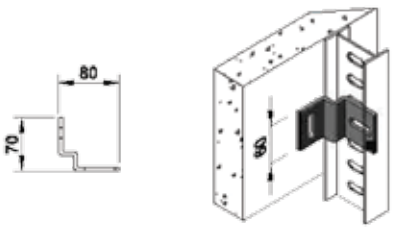


Code: **IS 07**

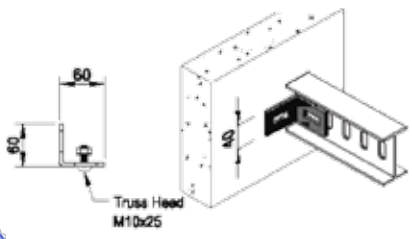


Code: **IS 08**


Support System - I-Support

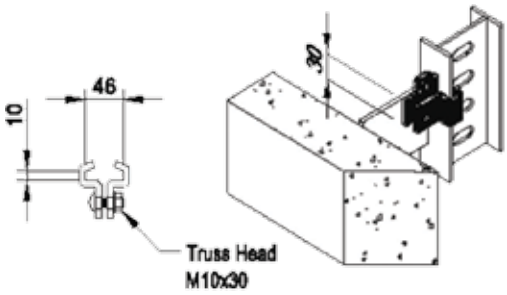


CODE: **IS 09**

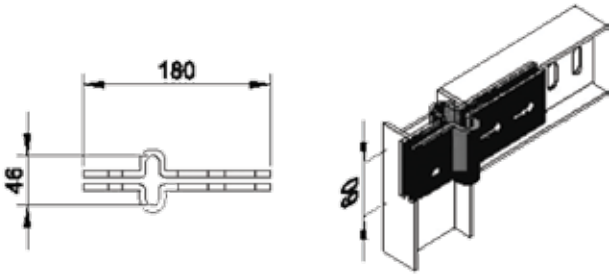

CODE: **IS 10**

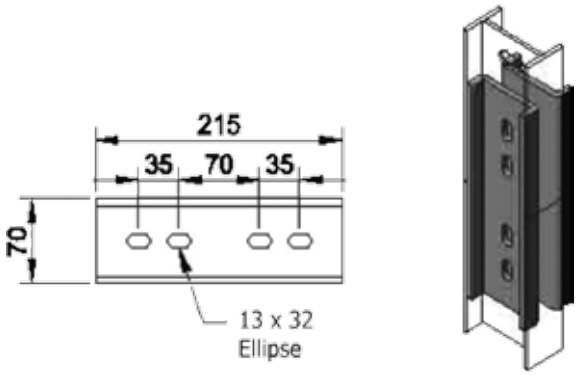

CODE: **IS 11**

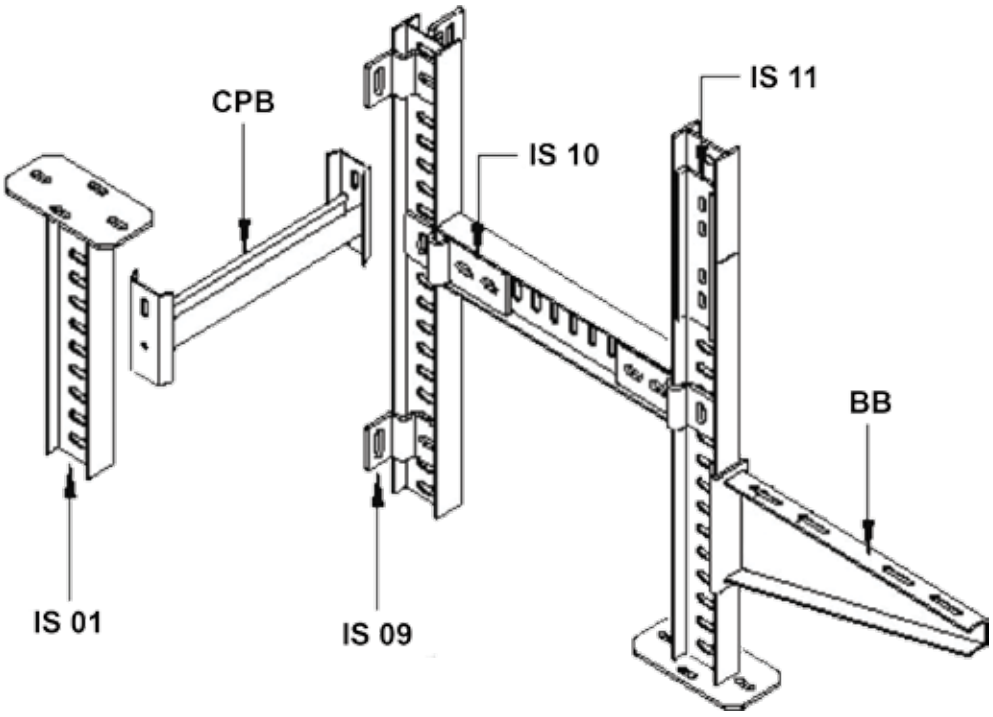


APPLICATION

NOTES:

• Support Bracket length = Cable Tray Width + 1[illegible]

Support System - U-Support

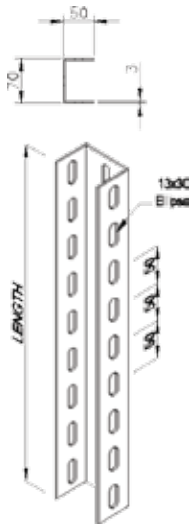

I-SUPPORT **US**

Ordering Code	US		

I - Supoort	US

Black Steel	BST
Hot Dip Galvanized after Fabrication	HDG
Hot Dip Galvanized and powder Coating	HDP
Mill Galvanized	MG
Steel Epoxy Coating	EPC
Aluminum	AL
Stainless Steel 304	S4
Stainless Steel 316	S6


Length (L) mm	1000 - 6000

Ordering Code Example : US HDG 3000


* I-Support thickness as per Standard.

NOTES:


- Special orders can be manufactured upon request.




CODE: **US 01**




CODE: **US 02**

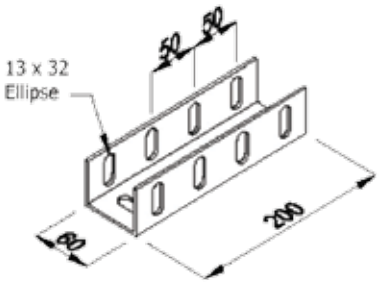

CODE: **US 03**

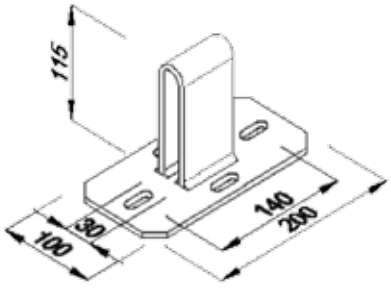



CODE: **US 04**





CODE: **US 05**


Support System - C-Channel wth Bracket

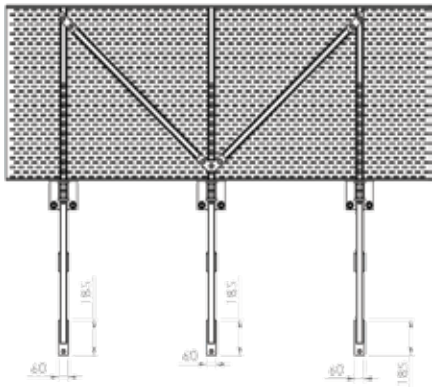

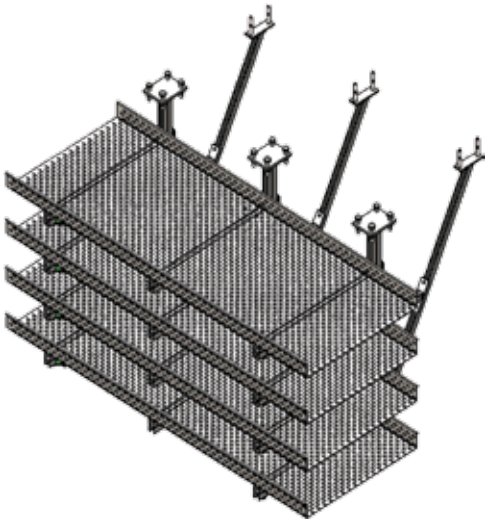

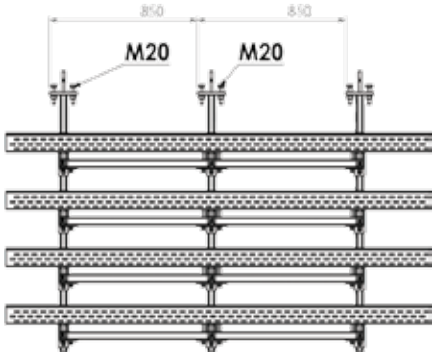


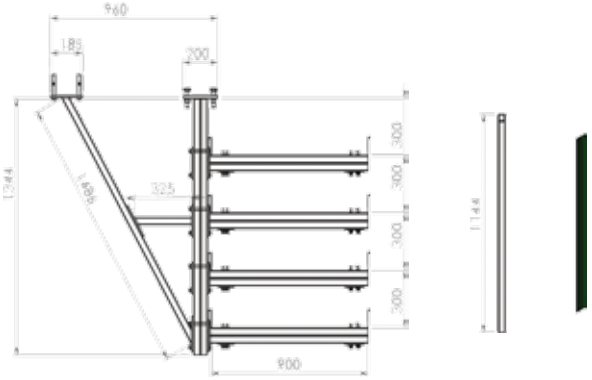

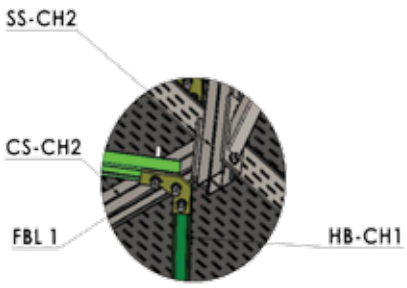


DETAIL AK
SCALE 2 : 15

CODE OF ITEM.	DESCRIPTION
CS-CH2	CANTILEVER SUPPORT 41X41X2.5 _ C-CHANNEL BACK-TO-BACK
SS-CH2	SUSPENDED SUPPORT 41 X41 X2.5 _ C-CHANNEL BACK-TO-BACK
HB-CH1	HORIZONTAL BRACING 41 X 41 X 2.5 _ C- CHANNEL
VB-CH1	VERTICAL BRACING 41 X 41 X2.5 _ C-CHANNEL
HS-CH1	HORIZONTAL SUPPORT 41 X 41 X 2.5
EPL1	END PLATE 185 X 60 X 12
HPL1	HEAD PLATE 200X 175 X 16
HPL2	HEAD PLATE 185 X 60 X 16
CPL	COVER PLATE 185 X60 X12
FPL1	FIXING PLATE 173 X 90 X 6
FPL2	FIXING PLATE 125 X 41 X6

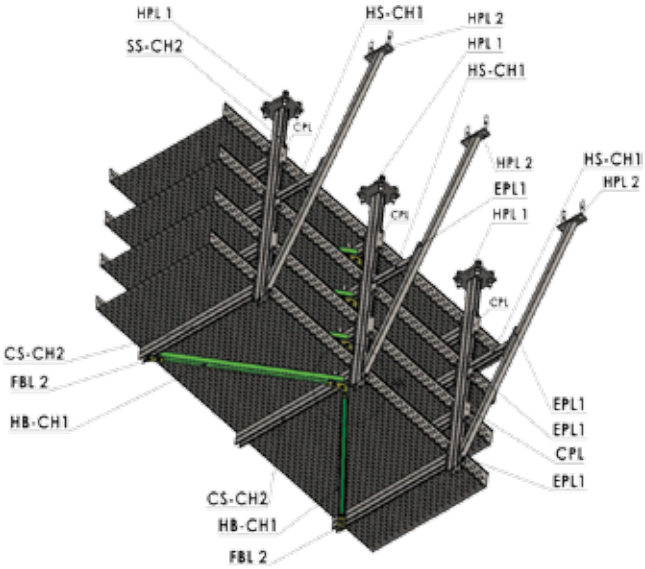


4 LAYER C-CHANNEL W/BR[illegible]OR CABLE TRAY 900


Support System - Accessories




CAC 01




CAC 02

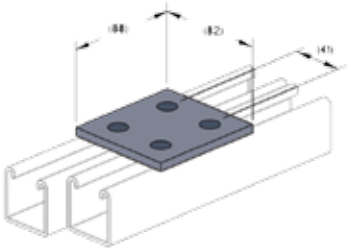


CAC 03




CAC 04

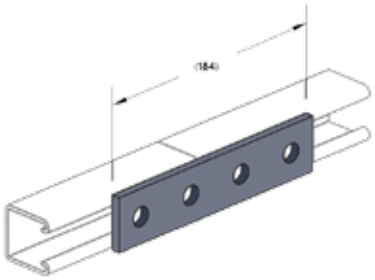


CAC 05




CAC 06




CAC 07

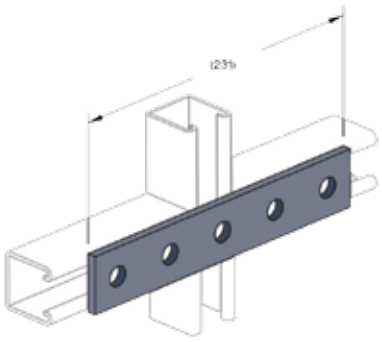


CAC 08




CAC 09




CAC 10

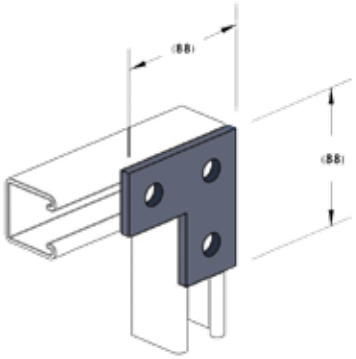




CAC 12


Support System - Accessories




CAC 13




CAC 14




CAC 15




CAC 16




CAC 17




CAC 18




CAC 19




CAC 20




CAC 21




CAC 22






CAC 24


Support System - Accessories




CAC 25




CAC 26

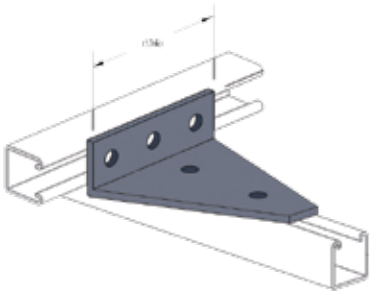


CAC 27




CAC 28




CAC 29




CAC 30

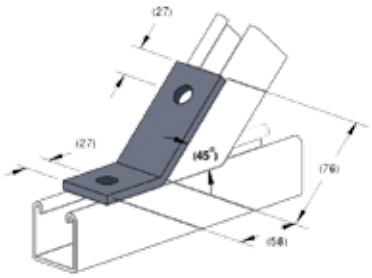


CAC 31

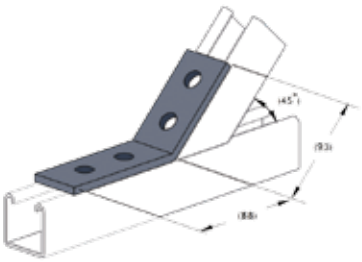


CAC 32



CAC 33

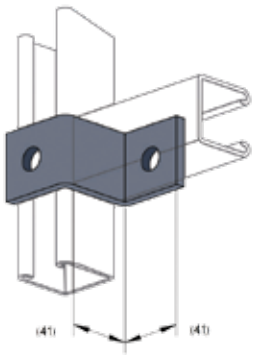


CAC 34

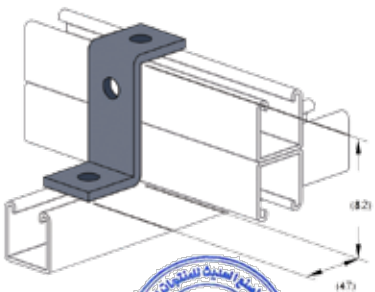


CAC 36


Support System - Accessories




CAC 37




CAC 38




CAC 39




CAC 40




CAC 41




CAC 42




CAC 43




CAC 44




CAC 45



CAC 46




CAC 47




CAC 48


Support System - Accessories




CAC 46




CAC 47




CAC 48







CAC 49




CAC 50







CAC 51




CAC 52







CAC 53




CAC 54








CAC 55



CAC 56









CAC 58

Modern Metal Industries Co.
C.C. No. 73106


Support System - Accessories




CAC 58




CAC 59

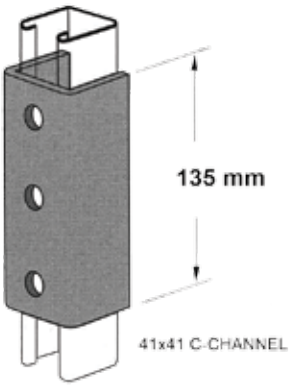


CAC 59




CAC 60

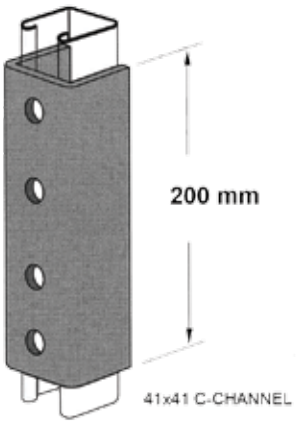


CAC 61

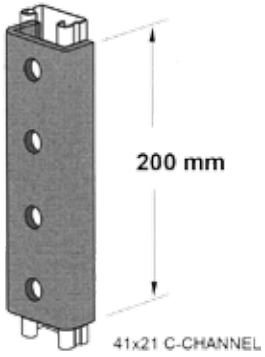

CAC 62

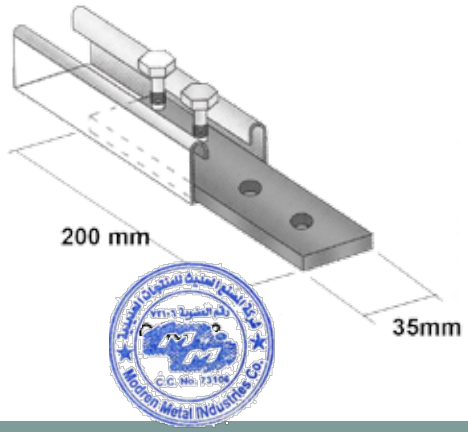

Support System - Channel & Supports Application

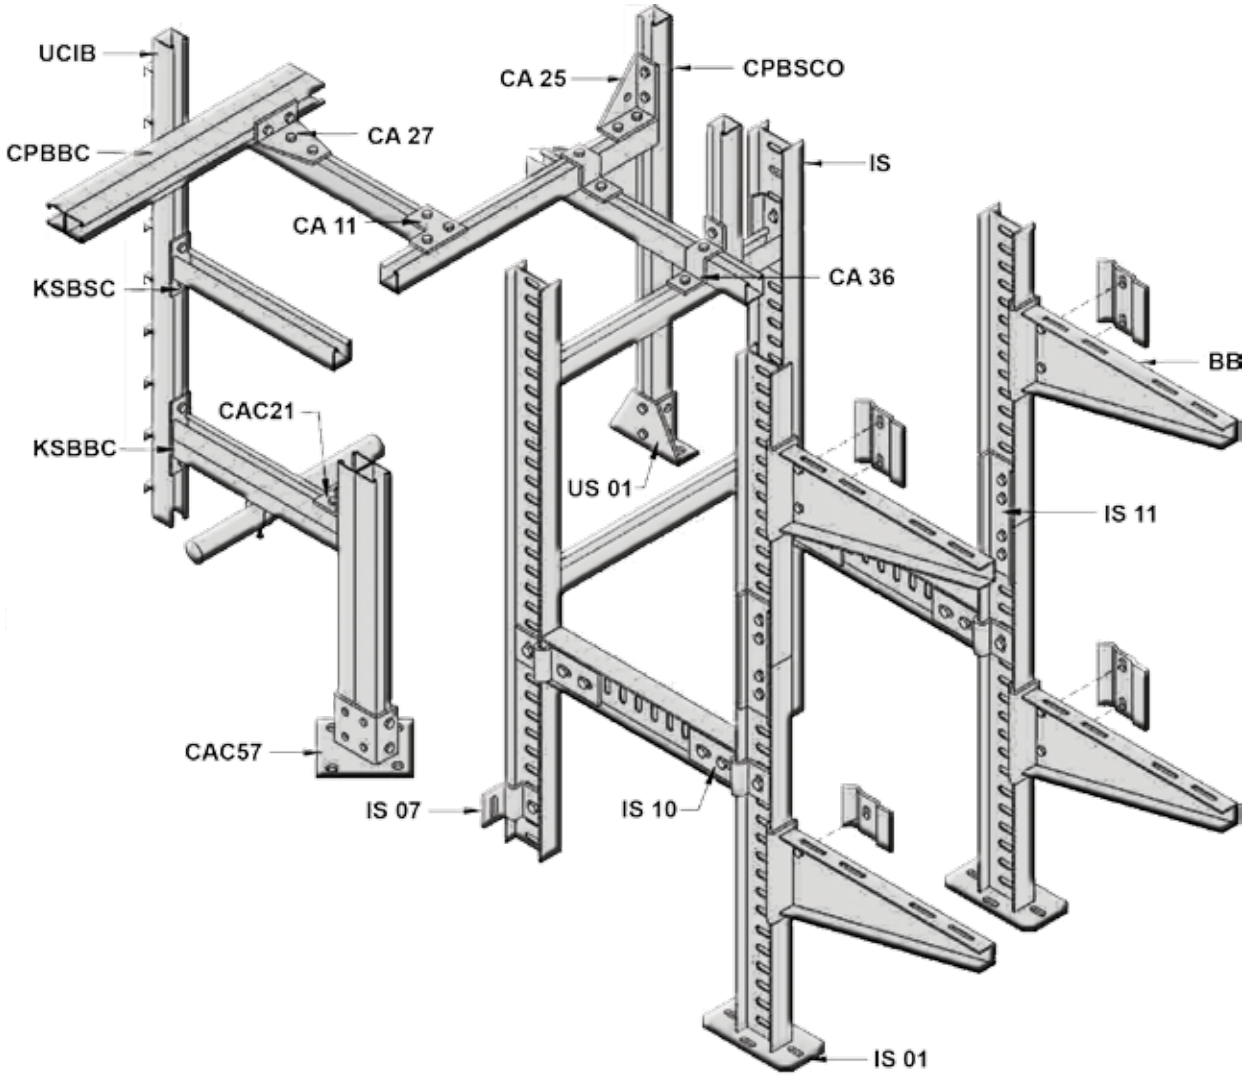




Accessories - Fastening Hardwares



THEADED RODS
(TR)

Ordering Code	TR		
Threaded Rod	TR		
Elctro - Galvanized	EG		
Hot Dip Galvanized	HDG		
Stainless Steel 304	S4		
Stainless Steel 316	S6		
Sizes (mm)	6	8	10	12



STUD CONNECTORS
(SC)

Ordering Code	SC		
Stud Connector	SC		
Elctro - Galvanized	EG		
Hot Dip Galvanized	HDG		
Sizes (mm)	6	8	10	12

BOLTS



HEXAGONAL BOLTS
(B1)



ROUND HEAD BOLTS
(B2)

Ordering Code			
Hexagonal Bolt	BH		
Stud Head Bolt	BR		
Elctro - Galvanized	EG		
Hot Dip Galvanized	HDG		
Stainless Steel 304	S4		
Stainless Steel 316	S6		

Sizes (mm)						
	6x16	6x20	6x25	6x30	6x40	6x50
	8x20	8x30	8x40	8x50		
	10x25	10x35	10x50	10x60		
	12x20	12x40	12x50	12x75		

Accessories - Fastening Hardwares



SHORT SPRING NUTS
(SN2)



LONG SPRING NUTS
(SN1)



PLAIN SPRING NUTS
(SN3)

Ordering Code				
Short Spring Nuts	SNS			
Long Spring Nuts	SNL			
Plain Spring Nuts	SNP			
Sizes (mm)	6	8	10	12



HEXAGONAL NUTS
(HN)

Ordering Code	HN		
Hexagonal Nuts	HN		
Elctro - Galvanized	EG		
Hot Dip Galvanized	HDG		
Stainless Steel 304	S4		
Stainless Steel 316	S6		
Sizes (mm)	6	8	10	12



SQUARE NUTS
(SN)

Ordering Code	SN		
Square Nuts	SN		
Elctro - Galvanized	EG		
Hot Dip Galvanized	HDG		
Stainless Steel 304	S4		
Stainless Steel 316	S6		
Sizes (mm)	6	8	10	12

Accessories - Fastening Hardwares



FLAT WASHERS
(FW)

Ordering Code	FW		
Flat Wahers	FW		
Elctro - Galvanized	EG		
Hot Dip Galvanized	HDG		
Stainless Steel 304	S4		
Stainless Steel 316	S6		
Sizes (mm)	6	8	10	12



SPRING WASHERS
(SW)

Ordering Code	SW		
Spring Washers	SW		
Elctro - Galvanized	EG		
Hot Dip Galvanized	HDG		
Stainless Steel 304	S4		
Stainless Steel 316	S6		
Sizes (mm)	6	8	10	12



UNIFIX
(UFX)

Ordering Code	UFX		
Unifix	UFX		
Elctro - Galvanized	EG		
Hot Dip Galvanized	HDG		
Sizes (mm)	6	8	10	12



Contact Us

MMICO., Jeddah Industrial (2),
Jeddah, saudi Arabia 21551 - P.O.Box 42530
+966 12 6532361
+966 12 6533714
info@mmico.com.sa
www.mmico.com.sa
9200 11 787