
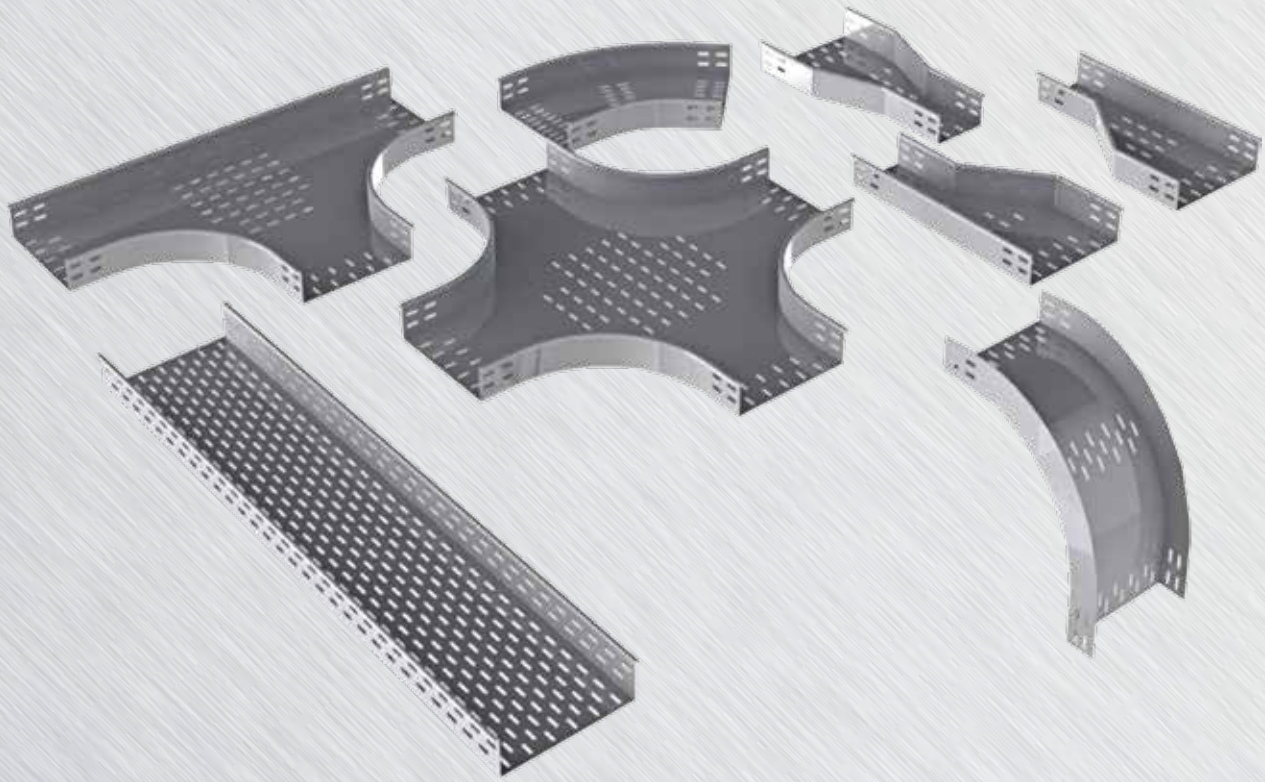



CABLE TRAY

MODERN METAL INDUSTRIES

Cable Tray Typical Layout

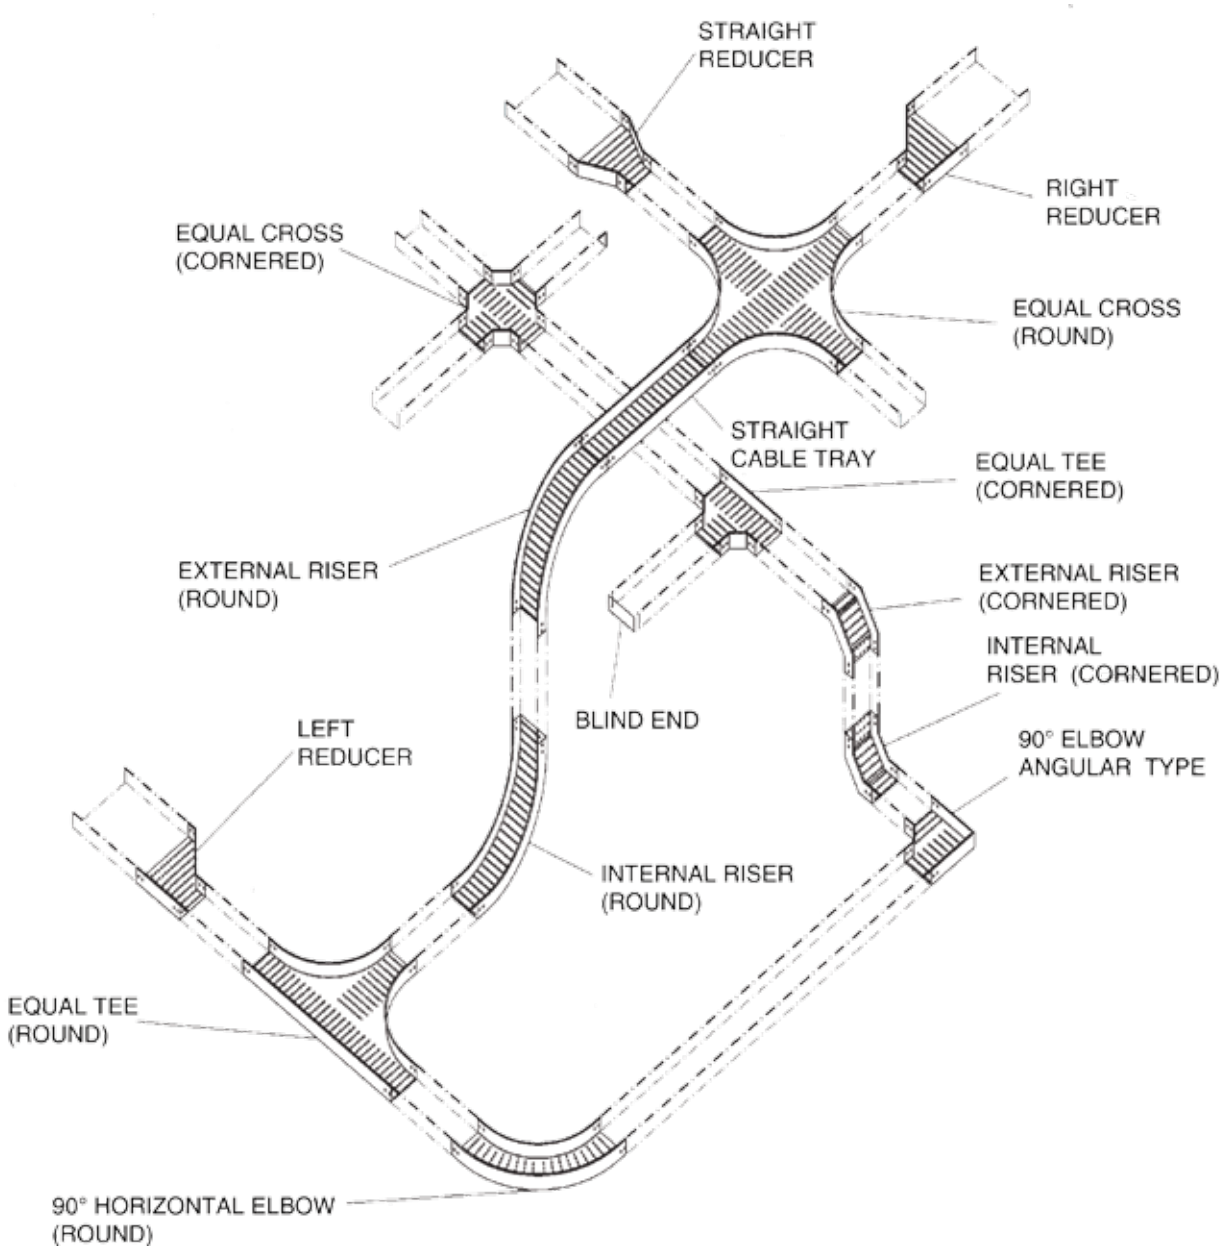

General Technical Information

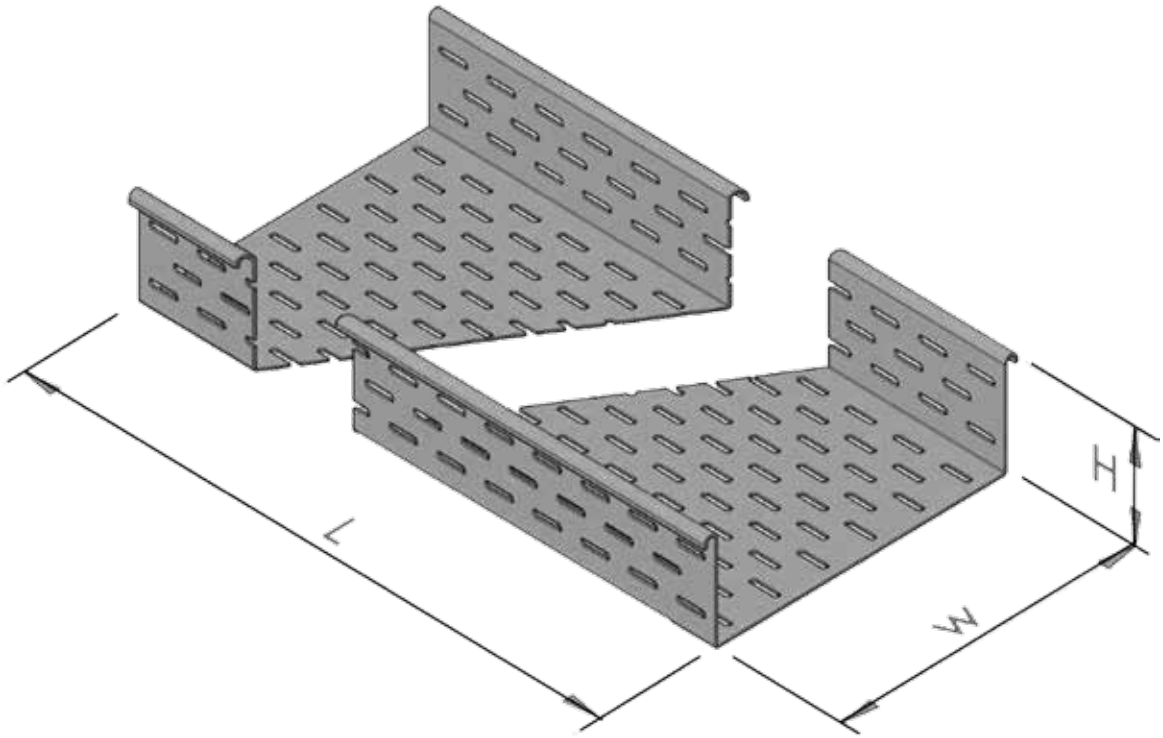


MMICO Classic preforated steel cable trays comply with the most well known standards name - VE-1, G.I to BS 2989, cold rolled to BS 2994 1976 galvanizing to BS EN ISO 1462 or ASTM 123. MMICO cable trays are provided with continuous returned flanges which helps sustain the desired cable loding.


Manufactured from a series of welded C-Channel System and Tubular pipe swaged system with standard Height of 110, 135, 160 185mm. (4.25”, 5.25”, 6.25”, 7.25”). Side rail flanges could be inward or outward. Standard length 2.44 to 6.0 M.

COMPLIANCE STATEMENT

Modern Metal Industries Company never makes any design changes or new products. All products are being manufactured and in compliance with the SAUDI ARAMCO Engineering Standard SAES-P-104 and SAMSS and as well as other related International Standards

General Technical Information

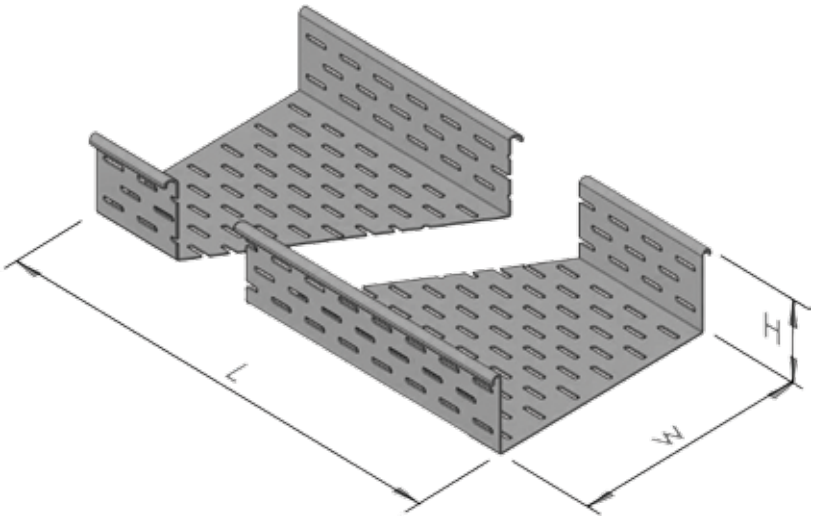


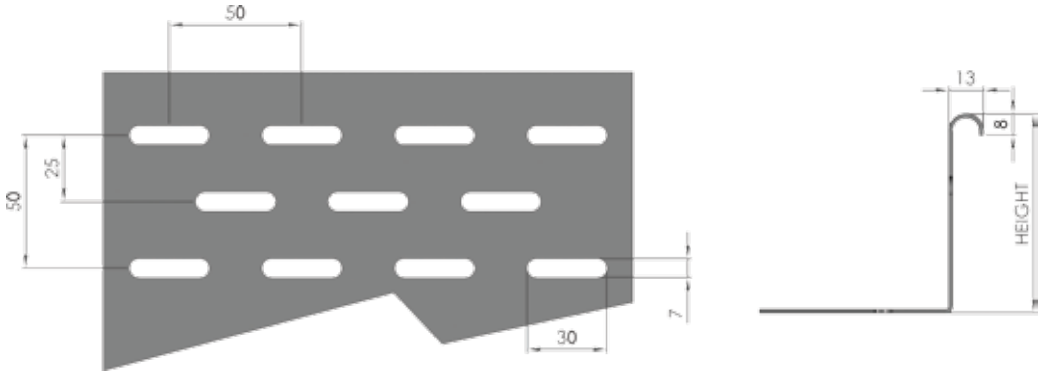


LIGHT DUTY CABLE TRAY
‹›U›› Shaped with returned flange, manufactured from 1.2 to 1.5 mm thickness perforated shets, flanges could be inward or woutward. Tray height is normally 35 & 50 standard length of 2.44 to 3.0 M.

HEAVY DUTY CABLE TRAY
‹›U›› Shaped with returned flange, manufactured form 1.5 to 2.0 mm thickness perforated sheets, flanges could be inward or outward. tray height is normally 50 to 100 mm standard length 2.44 to 3.0 M.

Cable Tray Straight

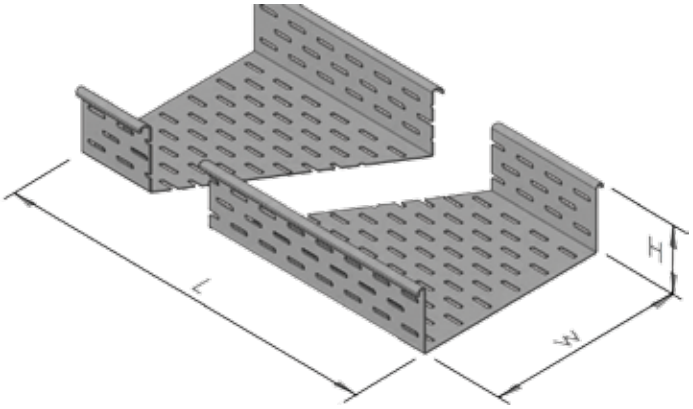

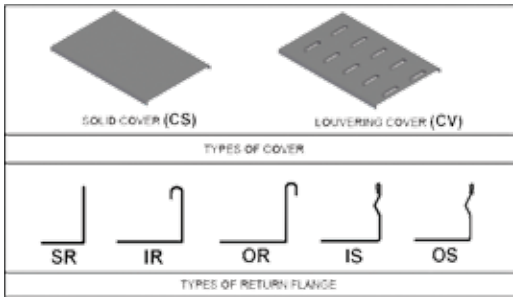

Ordering Code	CT					/		/		/	


Cable Tray	CT									
With Cover	CS	CV								
Without Cover	-									
Straight	SR									
Round Inside Return	IR									
Round Outside Return	OR									
Inside Return Flonge Snap On	IS									
Oulside Return Flange Snap On	OS									
Black Steel	BST									
Hot Dip Galvanized after Fabrication	HDG									
Hot Dip Galvanized and powder Coating	HDP									
Mill Galvanized	MG									
Steel Epoxy Coating	EPC									
Aluminum	AL									
Stainless Steel 304	S4									
Stainless Steel 316	S6									
Width (W) mm	50	100	150	200	300	450	600	900	1000	
Helght (H) mm	50	75	85	100						
Thickness (T) mm	1.0	1.25	1.5	2.0						
Length (L) mm	2000	2440	3000							

Ordering Code Example : CTCSORHDG600/50/2.0/3000


NOTES:

- Cover fixation as per required. (For types of Fixations, see page160)
- Standard cover thickness is 1.5 mm for below 300 mm width and 2 mm for 300 mm width above.
- Special orders can be manufactured upon request.


Cable Tray Horizontal Elbow



Round Type



Cornered Type

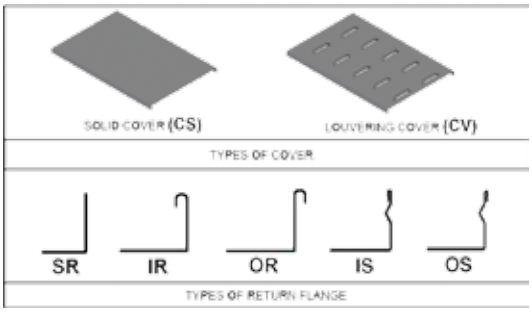

Ordering Code	CTLH							/		/		/	


Cable Tray Horizontal Elbow	CTLH						
With Cover	CS	CV					
Without Cover	-						
Angle	45°	90°					
Round Type	D						
Cornered Type 45	R						
Radius	300	600	900				
Straight	SR						
Round Inside Return	IR						
Round Outside Return	OR						
Inside Return Flonge Snap On	IS						
Oulside Return Flange Snap On	OS						
Black Steel	BST						
Hot Dip Galvanized after Fabrication	HDG						
Hot Dip Galvanized and powder Coating	HDP						
Mill Galvanized	MG						
Steel Epoxy Coating	EPC						
Aluminum	AL						
Stainless Steel 304	S4						
Stainless Steel 316	S6						
Width (W) mm	50	100	150	200	300	1100	
Helght (H) mm	50	75	85	100			
Thickness (T) mm	1.0	1.25	1.5	2.0			

Ordering Code Example : CTLHCS45D300ORHDG200/75/1.5

NOTES:

- Cover fixation as per required.
- Standard cover thickness is 1.5 mm for below 3[illegible]mm width and 2 mm for 300 mm width above.
- Special orders can be manufactured upon req[illegible]

Cable Tray Vertical Elbow

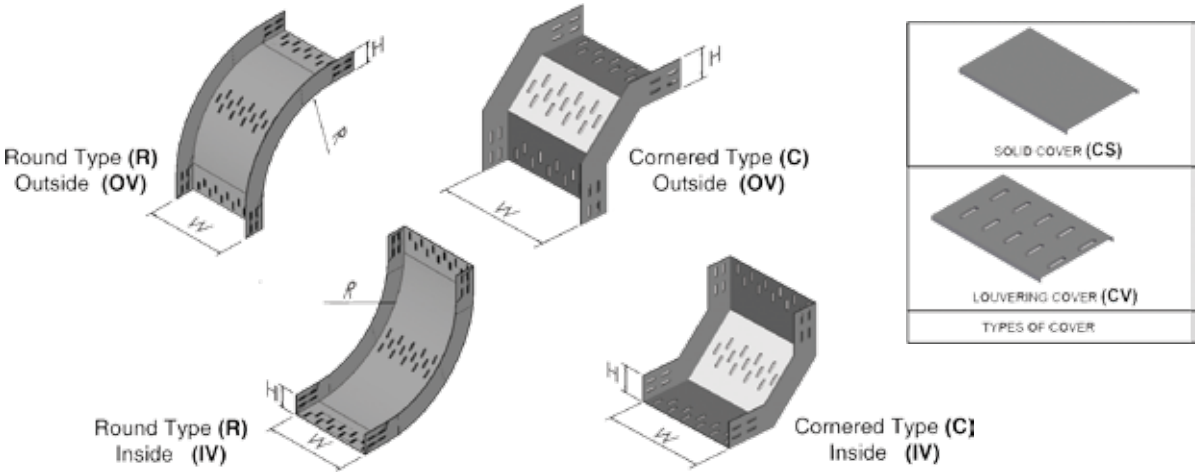

Ordering Code	CTLV							/		/		/	


Cable Tray Horizontal Elbow	CTLH									
With Cover	CS	CV								
Without Cover	-									
Angle	45°	90°								
Outside Vertical Elbow	OV									
Inside Vertical Elbow	IV									
Round Type	D									
Cornered Type 45	R									
Radius	300	600	900							
Black Steel	BST									
Hot Dip Galvanized after Fabrication	HDG									
Hot Dip Galvanized and powder Coating	HDP									
Mill Galvanized	MG									
Steel Epoxy Coating	EPC									
Aluminum	AL									
Stainless Steel 304	S4									
Stainless Steel 316	S6									
Width (W) mm	50	100	150	200	300	450	600	900	1000	
Helght (H) mm	50	75	85	100						
Thickness (T) mm	1.0	1.25	1.5	2.0						

Ordering Code Example : CTLVCS45OVD300HDG200/75/1.5


NOTES:

- Cover fixation as per required.
- Only straight type of return flange for this fittings.
- Standard cover thickness is 1.5 mm for below 300 mm width and 2 mm for 300 mm width above.
- Special orders can be manufactured upon request.


Cable Tray Horizontal Tee

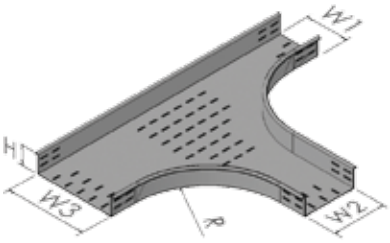

Round Type **R**

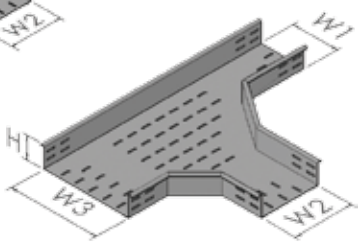

Cornered Type **C**

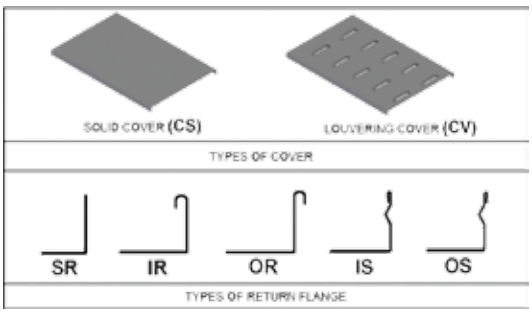

Ordering Code	CTT							/		/		/	


Cable Tray Horizontal Elbow	CTT									
With Cover	CS	CV								
Without Cover	-									
Round Type	D									
Cornered Type 45	R									
Radius	300	600	900							
Straight	SR									
Round Inside Return	IR									
Round Outside Return	OR									
Inside Return Flonge Snap On	IS									
Oulside Return Flange Snap On	OS									
Black Steel	BST									
Hot Dip Galvanized after Fabrication	HDG									
Hot Dip Galvanized and powder Coating	HDP									
Mill Galvanized	MG									
Steel Epoxy Coating	EPC									
Aluminum	AL									
Stainless Steel 304	S4									
Stainless Steel 316	S6									
Width (W1/W2/W3) mm	50	100	150	200	300	450	600	900	1000	
Helght (H) mm	50	75	85	100						
Thickness (T) mm	1.0	1.25	1.5	2.0						

Ordering Code Example : CTTCSD300ORHDG450/300/200/100/2.0


NOTES:

- Cover fixation as per required.
- Standard cover thickness is 1.5 mm for below 3[illegible] mm [illegible] and 2 mm for 300 mm width above.
- Special orders can be manufactured upon req[illegible]


Cable Tray Horizontal Cross



Cornered Type **C**

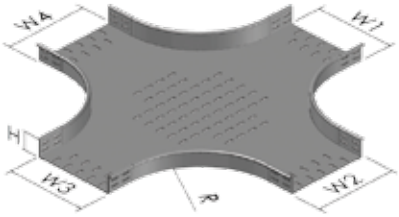

Round Type **R**

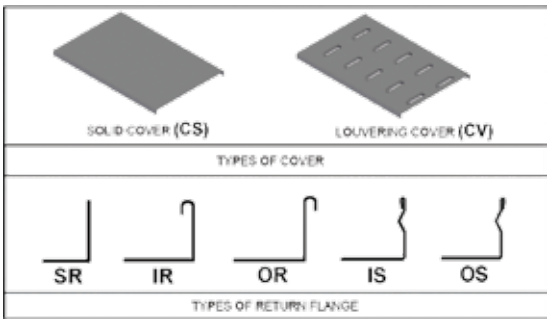

Ordering Code	CTX							/		/		/	


Cable Tray Horizontal Elbow	CTX									
With Cover	CS	CV								
Without Cover	-									
Round Type	D									
Cornered Type 45	R									
Radius	300	600	900							
Straight	SR									
Round Inside Return	IR									
Round Outside Return	OR									
Inside Return Flonge Snap On	IS									
Oulside Return Flange Snap On	OS									
Black Steel	BST									
Hot Dip Galvanized after Fabrication	HDG									
Hot Dip Galvanized and powder Coating	HDP									
Mill Galvanized	MG									
Steel Epoxy Coating	EPC									
Aluminum	AL									
Stainless Steel 304	S4									
Stainless Steel 316	S6									
Width (W1/W2/W3/W4) mm	50	100	150	200	300	450	600	900	1000	
Helght (H) mm	50	75	85	100						
Thickness (T) mm	1.0	1.25	1.5	2.0						

Ordering Code Example : CTXCSD300ORHDG450/200/300/600/100/2.0


NOTES:

- Cover fixation as per required.
- Standard cover thickness is 1.5 mm for below 2[illegible] mm width and 2 mm for 300 mm width above.
- Special orders can be manufactured upon req[illegible]


Cable Tray Reducers




Left Hand Reducer **LH**



Right Hand Reducer **RH**



Straight Reducer **ST**

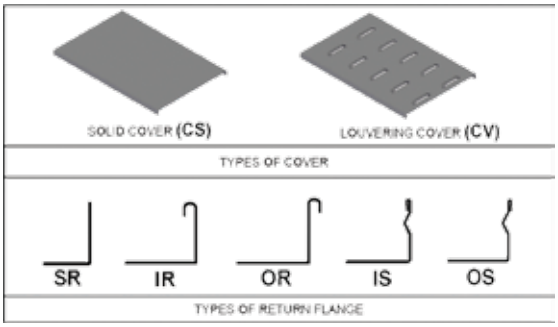

Ordering Code	CTX						/		/		/	

Cable Tray Horizontal Elbow	CTX	
With Cover	CS	CV
Without Cover	-	
Starigth	ST	
Right Hand	RH	
Left hand	LH	
Straight	SR	
Round Inside Return	IR	
Round Outside Return	OR	
Inside Return Flonge Snap On	IS	
Oulside Return Flange Snap On	OS	
Black Steel	BST	
Hot Dip Galvanized after Fabrication	HDG	
Hot Dip Galvanized and powder Coating	HDP	
Mill Galvanized	MG	
Steel Epoxy Coating	EPC	
Aluminum	AL	
Stainless Steel 304	S4	
Stainless Steel 316	S6	


Width (W1/W2/W3/W4) mm	50	100	150	200	300	450	600	900	1000
Helght (H) mm	50	75	85	100					
Thickness (T) mm	1.0	1.25	1.5	2.0					

Ordering Code Example : CTYCSRHORHDG600/450/100/2.0


NOTES:

- Cover fixation as per required.
- Standard cover thickness is 1.5 mm for below 300 mm width and 2 mm for 300 mm width above.
- Round type bend is not available for this fittings.
- Special orders can be manufactured upon request.


Cable Tray Accessories



Straight Joint
(CT01)




Angle Straight Connector
(CT02)



Angle Joint
(CT03)




VerticalJoint
(CT04)




End PlateJoint
(CT05)



Reducing Connector
(CT06)



Fish Plate
(CT07)



Drop Out
(CT08)

Cable Tray Accessories



Separator Strip
(CT09)



Cover Side Clamp
(CT10)



Cover Double Clamp Connector
(CT11)



Cover Bracket
(CT12)



Cover Lock Device
(CT13)



Wrap Around Cover Connector
(CT14)