Method for Walk Correction using Leading Edge Slope:

Derived from dual threshold feature of TOFHIR2C

CMS

cms-dpg-conveners-mtd@cern.ch

Discussion draft; not approved for public release.

Abstract

Precision timing at the HL-LHC requires rapid, repeatable calibration as detector response evolves. With many interactions per bunch crossing, an external particle-arrival time reference is not readily available. The CMS barrel timing layer (BTL) therefore motivates calibration procedures based on internal measurements and a consistent parametrization across about 330 000 channels.

We extend an earlier dual-threshold bench study to BTL sensors and TOFHIR2C readout exposed to a 180 GeV pion beam. Two threshold-crossing times provide a leading-edge slope proxy. Its mean dependence on charge defines an inverse-slope walk correction with one amplitude parameter, AWC, per channel and configuration.

Comparison with independent microchannel-plate (MCP) reference calibrations shows good agreement between the correction shapes. Internal charge and slope information provide candidate predictors of AWC, with the MCP results serving as benchmarks. These results support development of a reference-free calibration procedure; predictive precision and transfer to other operating conditions require further validation.

BTL and TOFHIR2C: Refs. [3, 7]; dual-threshold motivation and bench study: Ref. [5].

Charge-based calibration works, but its coefficients vary

The MCP reference note obtains good walk descriptions with a quadratic in inverse charge [6]:

$$W_i(Q) = a_i + b_i/Q + c_i/Q^2.$$

Bar	SiPM	a_i [ns]	b_i [ns ADC]	c_i [ns ADC^2]
7	Left	0.0796	238.3	-2.156×10^4
7	Right	-0.5155	422.6	-5.583×10^4
8	Left	0.1218	198.5	-1.523×10^4
8	Right	-0.2292	388.9	-5.132×10^4

With Q expressed as raw, uncalibrated ADC values, the shape coefficients vary substantially across these four SiPMs.

Two bars in the reference module. Earlier time-of-flight calibration experience: ALICE [1, 2]. Q is not gain-calibrated across SiPMs; a_i includes an arbitrary timing offset. Coefficient variation alone is not a measure of calibration precision.

TOFHIR2C measures the leading-edge slope with two thresholds

Larger pulses cross a fixed threshold earlier: the timestamp depends on amplitude [4]. Two-threshold timing has earlier implementations [8, 9]; TOFHIR2C provides both crossings [7, 5].

$$I_1 < I_2, \qquad t_1 < t_2, \qquad S = \frac{I_2 - I_1}{t_2 - t_1} \quad [\mu\mathrm{A/ns}].$$


Locally, an approximately linear leading edge gives

$$\Delta t \simeq \frac{\Delta I}{S}.$$

Physical model: describe amplitude walk with an inverse slope, rather than an independent polynomial shape for every channel.

S is a finite-interval slope proxy, not the instantaneous derivative. The dual-threshold sample uses $\Delta I = 7.8125\,\mu\mathrm{A}$ from the implemented threshold conversion. The fitted AWC need not equal this threshold separation. GitHub: timing and threshold reconstruction [11].

Measure the charge-to-slope mapping using internal hits

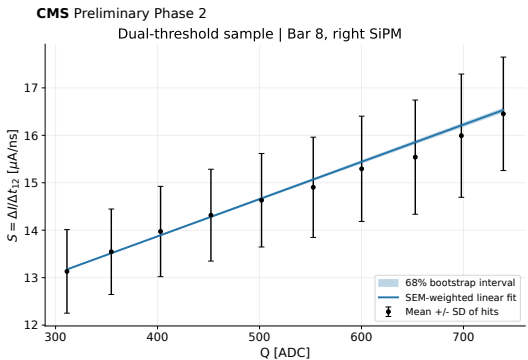

Typical single-hit relative uncertainties: Direct slope: $\sim 15\%$; charge: $< 5\%$. Use the more precise Q to estimate the mean slope:

$$\overline{S}_i(Q) = c_{0,i} + c_{1,i} Q.$$

Ten SEM-weighted profile means; no MCP time.

Reference module, bar 8, right SiPM: 19 312 hits. Both SiPMs required; other module unconstrained. Physical threshold crossings; peak-right charge selection. Points: mean slopes; bars: hit SD, not mean uncertainty. Band: conditional 68% interval from 1000 hit-bootstrap refits with fixed bins.

One amplitude describes walk once the slope is calibrated


$$W(Q) = \frac{\mathrm{AWC}}{\overline{S}(Q)}, \qquad t_{\mathrm{corr}} = t_{\mathrm{measured}} - W(Q).$$

- Internal hits determine $\overline{S}(Q)$, the mean slope at a given charge, for each SiPM.
- One parameter, AWC (in μA), sets the walk magnitude.
- AWC is constant per SiPM and configuration; the correction varies with Q.
- Channel timing offsets are a separate calibration.

The remaining task is to predict AWC from internal observables. Use the MCP-calibrated channels to develop and test that prediction.


Apply the model within its calibrated charge range, with $\overline{S}(Q) > 0$. The slope fit alone does not fix AWC. The common functional form follows the dual-threshold model in Ref. [5].

Candidate 1: AWC versus inverse slope coefficient

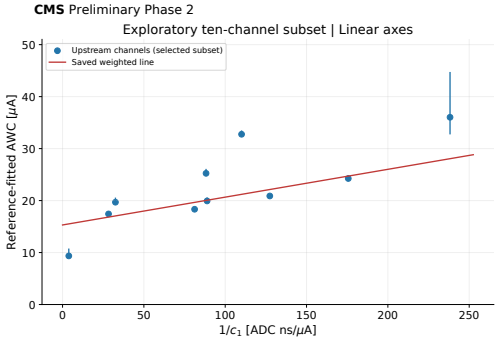

An exploratory trend: AWC versus $1/c_1$, the inverse slope-to-charge coefficient. Each point is one SiPM, not a charge bin. AWC is benchmarked against MCP; c_1 uses internal hits. The ten-SiPM trend motivates prediction, but the line is not a precision calibration ($\chi^2/\mathrm{ndf} = 538.6/8$). Bars: slope-only 16–84% bootstrap intervals; reference errors and correlations are omitted. More independent data are needed.

Candidate 2: shared fractional-charge response

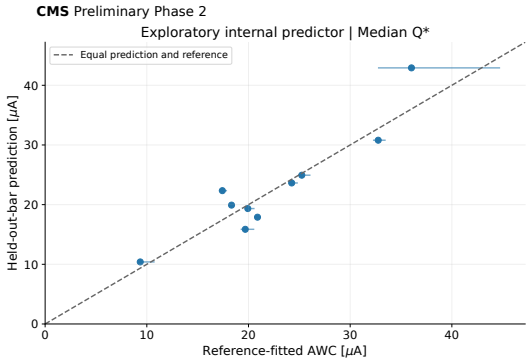

Hypothesis: common $K \simeq -dW/d\ln Q$ at Q_*, not a derived law.


$$\mathrm{AWC}_{\mathrm{pred}} = K\,\frac{\overline{S}(Q_*)^2}{c_1\,Q_*}.$$

Q_*: selected-charge median per SiPM.
Learn K on other bars; predict the excluded bar.
RMS error: 3.22 μA; fractional RMS: 14.1%.


Ten SiPMs, six held-out bars. K uses other bars' MCP-calibrated AWC. Dashed line: equality. Horizontal bars: conditional reference-AWC intervals, not prediction intervals. Empirical hypothesis only: full prediction uncertainties, correlations and transfer to new configurations remain unvalidated.

The single-amplitude model closely follows the MCP curves

Bar 8, left SiPM

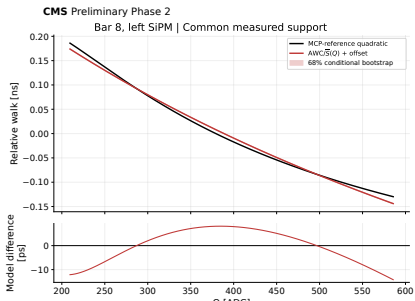


Bar 7, right SiPM

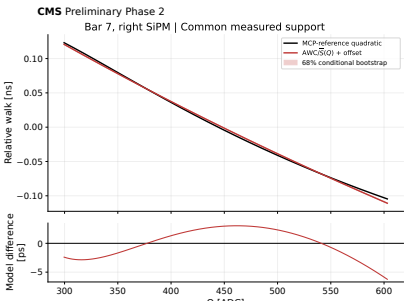

Reference module. Black: MCP quadratic; red: dual-threshold model. Different-event samples; AWC and offset fitted only in common populated charge intervals. Bar 8, left SiPM: 6.80 ps RMS curve mismatch. Lower panels show curve differences, not event resolution. Bands propagate slope-fit statistics with the MCP curve fixed. MCP clock alignment uses LOWESS [10]. This benchmarks shapes, not AWC prediction.

Residual charge dependence after the AWC correction

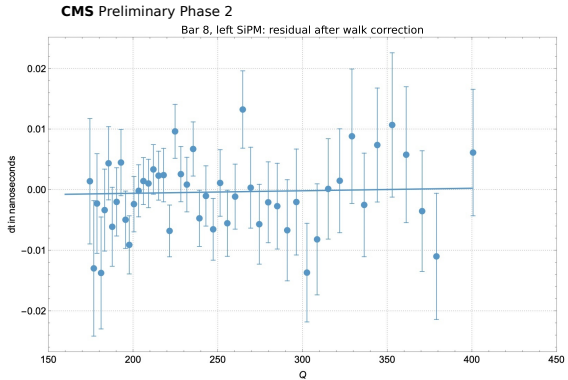

Bar 8, left SiPM

Inspect the timing residual versus charge after the inverse-slope correction.

$0.01\,\mathrm{ns} = 10\,\mathrm{ps}$.

The residual linear trend is nearly flat over the displayed range.

This is not a single-hit timing-resolution measurement.

Original detector note, Figure 5: residual MCP-referenced timing, $t_{\mathrm{thr1}} - t_0$, after applying the AWC-type walk correction. Points and error bars are reproduced unchanged; the line is the original residual linear fit. This historical figure complements the curve-to-curve comparison on the preceding slide.

References

[1] "Performance of the ALICE Time-Of-Flight detector at the LHC", Eur. Phys. J. Plus (2013) 128: 44

[2] "PID performance of the ALICE-TOF detector at Run 2", N. Jacazio in Proceedings of LHCP2018, https://pos.sissa.it/321/232/.

[3] CMS Collaboration, "A MIP Timing Detector for the CMS Phase-2 Upgrade". Technical Report CERN-LHCC-2019-003. CMS-TDR-020, CERN, Geneva, 2019 and "A High-Granularity Timing Detector for the ATLAS Phase-II Upgrade", CERN-LHCC-2020-007; ATLAS-TDR-031

[4] W. R. Leo, "Techniques For Nuclear and Particle Physics Experiments", p.326, Springer-Verlag Berlin Heidelberg.

[5] S. White and A. Boletti, "Amplitude Walk in Fast Timing: The Role of Dual Thresholds" 2026 JINST V21 P02001.

[6] S. White and Licheng J. Zhang, "September 2025 BTL Testbeam Reference Bar Walk Calibration from Hamamatsu MCP-PMT ",cms note.

[7] E. Albuquerque et al., "TOFHIR2: The readout ASIC of the CMS Barrel MIP Timing Detector", arxiv:2404.01208

[8] J.E. Grund, SLAC-PUB-2416 (Oct. 1979).

[9] A.R. Frolov, T.V. Oslopova, Yu.N. Pestov, "Double threshold discriminator for timing measurements", Nuclear Instruments and Methods Volume 356, Issues 2/3 (1995) https://doi.org/10.1016/0168-9002(94)01239-3.

[10] W. S. Cleveland, "Robust Locally Weighted Regression and Regression Scatterplots", J. Amer. Statist. Assoc. **74** (1979) 829.

[11] GitHub repository, https://github.com/De-Cristo/LecroyTranslator4CMSTimingDetector.