
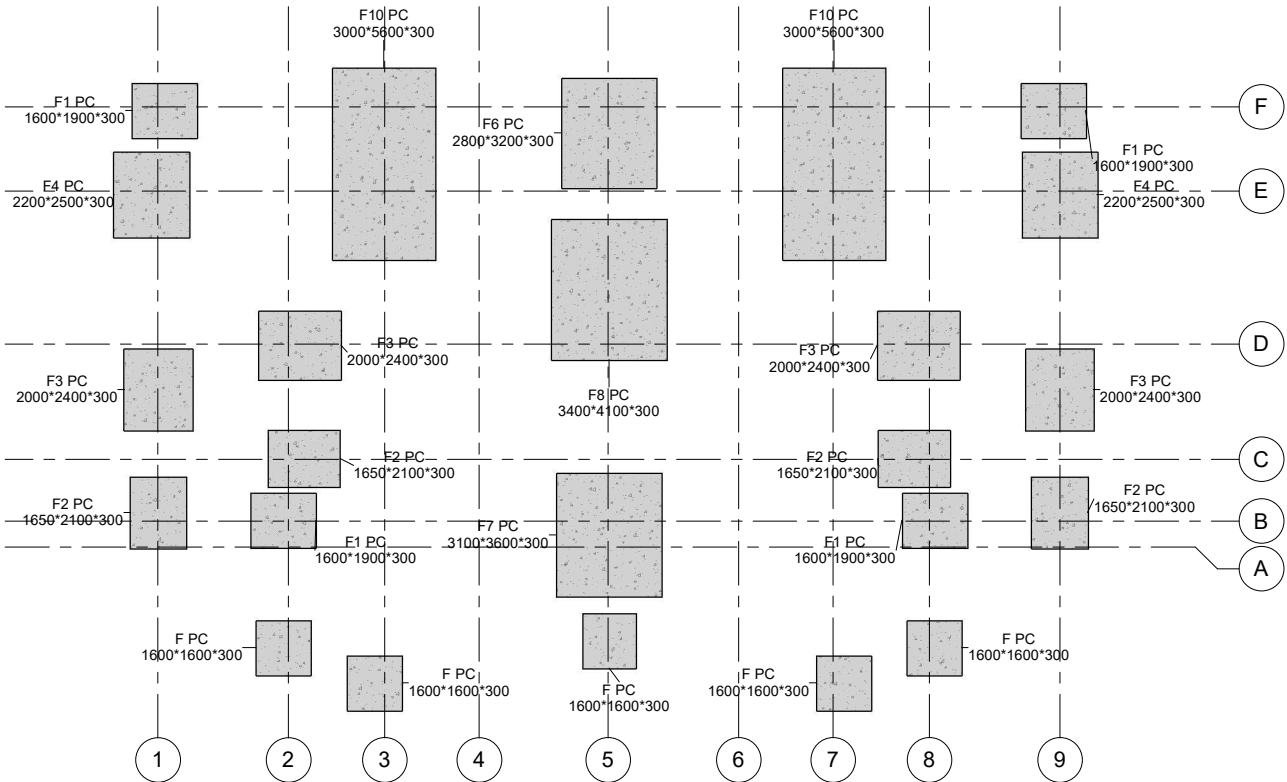
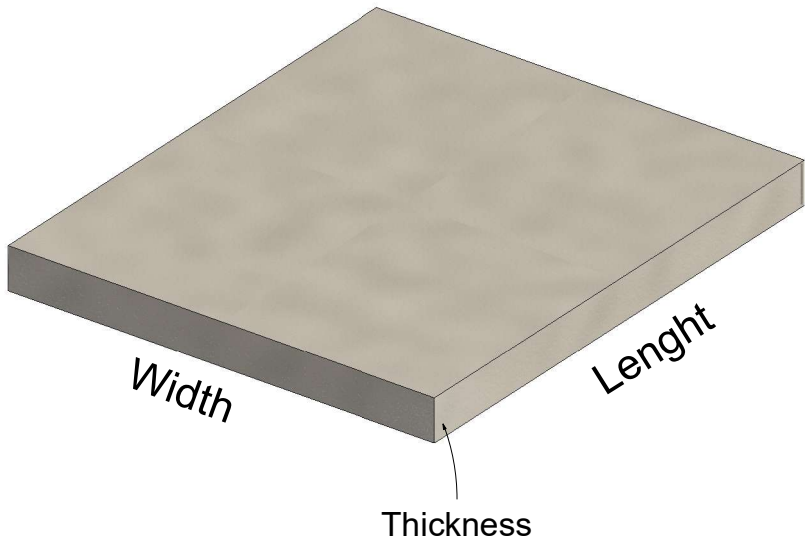



01.01 Isolated PC Footing Quantity Survey			Section: 03.00.01 - Cast In Place Concrete Plain Concrete with minimum of Compressive Strenght of -- Days of -- MPA accoring to specifications including all necessary Formwork,Isolation & Construction Joints,Additives,etc. according to specifications an ddrawings						
Level : (+98.30) PC Founadtion									
Villa Type A3									
Level	Type	Count	Area = Length * Width			Volume = Area * Thickness		Notes	
			Length	Width	Area (M2)	Thickness	Volume (M3)		
PC Foundation	F1 PC 1600*1900*300	4	1.90	1.60	3.04	0.30	3.648		
PC Foundation	F2 PC 1650*2100*300	4	2.10	1.65	3.47	0.30	4.158		
PC Foundation	F3 PC 2000*2400*300	4	2.40	2.00	4.80	0.30	5.760		
PC Foundation	F4 PC 2200*2500*300	2	2.50	2.20	5.50	0.30	3.300		
PC Foundation	F6 PC 2800*3200*300	1	3.20	2.80	8.96	0.30	2.688		
PC Foundation	F7 PC 3100*3600*300	1	3.60	3.10	11.16	0.30	3.348		
PC Foundation	F10 PC 3000*5600*300	2	5.60	3.00	16.80	0.30	10.080		
PC Foundation	F PC 1600*1600*300	5	1.60	1.60	2.56	0.30	3.840		
Grand total		23						36.822	



<u>GENERAL NOTES</u>			
<u>LEGEND</u>			
			
<u>KEY PLAN</u>			
</			