# WATER HORSE

Ahmed Ayman, Kareem Tantawy, Ahmed Negm

Abstract: Egypt has faced a series of exhausting grand challenges in recent centuries that have slowed its march forward. Among all of these issues, the problem of water scarcity has reached a tipping point since the increasing population. It necessitates a fast and comprehensive response. Finally, Egypt has its own plans for desert reclamation. Unfortunately, these plans have run into a series of challenges, including a lack of adequate facilities and overcrowding. The purpose of the study is to develop a new approach to enhancing clean water resources. Considering all of the benefits and drawbacks of the prior solutions, it was clear that the chosen solution, the atmospheric water generator, was the right approach. The refrigeration system is an effective method for achieving the desired goals. The prototype was developed with precise measurable design requirements, which are producing drinkable water and satisfying human needs. The major finding is the prototype was hardy work with less efficiency in the low humidity regions and times. By comprehensively testing the prototype, the result is preferable than expected as it confirmed that the project fulfilled its design requirements and is ready to be impactful if put into action.

Introduction: One of the most significant bits of evidence of Egypt's suffering was a 50 percent increase in the price of drinking water since June 3, 2018. The scarcity of water resources has an impact on Egypt's economy and other facets of Egyptian life, including public health, daily living, citizens' income, and agriculture quality and quantity, all of which have exacerbated the crisis on other Egypt's grand challenges. Such a water crisis must be resolved, from public health issues to economic depression and the failure to restore desert regions. As illustrated in figure (1), 55.5 billion cubic meters of water were primarily derived from the Nile River.
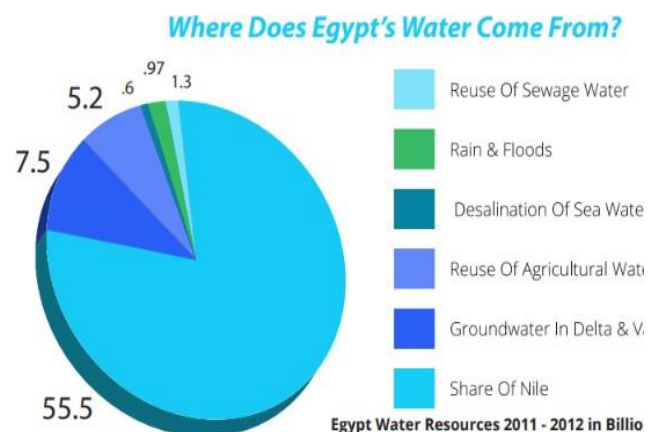

*Figure 1 shows Egypt water resources in 2011.*

This stress causes urban congestion along the Nile River. Consequently, arid areas in Egypt reach more than 93%, which causes pollution from CO2, and other hazardous industrial, and sewer wastes. According to studies, Egypt's water sustainability requires 110 cubic meters of water per year in 2019. Many other countries and businesses have attempted to overcome this problem in recent years. Some were successful, while others faltered. In India, for example, the Nemmeli atmospheric water generator system provides water in streets for public consumption. Nemmeli is producing a relatively tiny amount of freshwater daily due to its small scale, although supplying healthy and fresh water to people in public spaces at a relatively high cost. As a result, the objectives of this project were not met. Drupps, a Swedish project, met its primary goal of providing more than 150 cubic meters of water each day.

Drupps, on the other hand, was successful as it provided this massive amount of industrial water considered its point of strength. However, it is quite expensive. In light of this, it was agreed and decided to develop a project that would produce more water in less time. The chosen project involved creating an atmospheric water generator, producing water from water vapor in the air. To achieve this solution, water vapor condenses on the surface of stainless-steel revolutions at a surface temperature of -15 degrees Celsius. Thus, water vapor changes to ice. Therefore, an extraction fan is used to melt ice into liquid distilled water. It is unhealthy to drink distilled water. As a consequence, mineralizing the water was necessary. The project's features allowed it to meet the design criteria of efficiency and drinkable water parameters. The prototype was tested to prove its validity after the scientific calculations were considered. Furthermore, the prototype was completed and the results exceeded expectations. Consequently, the project met the design criteria and would be successful in the real world if implemented. The prototype's materials (Shown in table 1) and construction process are mentioned in the next section.

Materials:

The materials used are labeled in Table (1):

Name	Quantity	Description	Photo
Compressor	One	Device for compressing the air	

R134a gas	90 gm	A fluid used in enthalpy refrigeration	
Condenser	One	A heat exchanger affects the refrigerant	
Filter of refrigerator	One	A Filter for any impurities in the refrigerant	
Capillary tube	One	A small-diameter tube for decreasingrefrigerant temperature	
Evaporator	One	The cold part for condensing the water	
Bio Ceramic filter	One	A filter for mineralizing the water	
Arduino Uno	One	The brain of the operations done bythe code	
Relay module	One	A mechanical switch turns the current on or off	
DHT 11 Sensor	One	Sensor for measuring temperature andsensor.	

Methods:

Step 1: The compressor was stabilized on a stand and connected with the condenser by welding using tin (Sn) containing a small percentage of copper (Cu).

Step 2: The refrigerant filter was welded with the condenser and the capillary tube from the two sides.

Step 3: The evaporator was soldered with the capillary tube and a copper tube connected with the compressor.

Step 4: The refrigerant system was charged. by R134a (Tetrafluoroethane) using the compressor, and the compressor was connected with the electricity.

Step 5: An extraction fan was put above the evaporator and a container was put under the surface of it.

Step 6: The distilled water was crossed in a bio ceramic filter to get the needed minerals to be drinkable water.

Step 7: Programming the Arduino code on The Arduino IDE.

Step 8: Connect the (Sensor & Arduino) to the laptop.

Test plan: The prototype was tested for 8 minutes and 4 minutes for rest and some steps were done to achieve the design requirements.

Design requirement

1. Water parameters:

• Letting the prototype in an open area.

• Testing the results in the night and in the day for more accurate results.

• Checking the humidity before testing. If it is more than 50% it will turn on.

• Collecting the water then filtering it with any filter paper.

• Flowing the water through some mineral balls for increasing the needed minerals.

• Testing the sample in Desert Center Research

2. Satisfy human needs:

• Calculating the human needs average.

• Measure the collected water in one hour either per day or per night.

• Calculate the average then assuming its collection is linear.

Results: To be considered successful, a project must pass an accurate test plan to see whether it satisfies the design requirements for why it was constructed in the first place. On the other hand, it was difficult to deal with the compressor leaking after changing the evaporator material since a hole was left without welding inconspicuously. The second design criterion was severely impacted since the collected water reduced when the evaporator became warmer than it should have been.

The design goal for this project was to test the water parameters while also meeting human demands. Lastly, the unfavorable aspects of this undertaking were identified early on. Both design criteria yielded a sequence of unfavorable outcomes.

The prototype evaporator was built with copper first, which has adverse effects on water after being searched, and after a short amount of time, it begins to react with the water and create a solution consists rust of coper. That caused the parameters for drinking water yield a negative result.

After correcting the negative results, the prototype works as expected and the results achieved the design requirements. Firstly, the measured water parameters were 7.35 pH with error ± 0.05 and 242 ppm with error ±8 ppm. (Shown in Table (2)) and that achieves the required water parameters. After that, the collecting average amount of water was approximately 88.5 ml per hour according to the calculations through the average humidity (%68.16) and temperature (12.16o C) as in table (3). The test plan has been repeated at morning, night and by using calculator, the resulted average amount of water per day equal 2.124 Liters as shown in table (4).

Water Parameters	pH	TDS
Water sample	7.35 ± 0.05	242 $\pm$ 8 ppm

Table (2)

Trial		Night		Morning		
Humidity	81	81	84	54	54	55
Temperature	9	11	10	15	14	14
Average	68.16% Humidity			12.16º C Temperature		

Table (3)

Trial	Morning	Night
Collection per hour	70 ml	107 ml
Average per hour	88.5 ml per hour	
Average per day	2.124 L per day	

Table (4)

Analysis: The scientific base of the prototype (constructing and designing) is one of the most important steps that had to be made to accomplish the design requirements.

Aiming for decreasing the surface area's temperature to condense the water over it is the idea of the prototype. The water is collected beneath the evaporator. This water contains fewer Hydrogen moles, making it a less acidic.

Dew Point: The temperature of the water condenses (changes its state from gas (vapor) to liquid) on a surface area called DEW Point. The dew point depends on two different variables (At the sea-level pressure). As studied in CH 2.02, it depends on the air temperature and saturation mixing ratio as shown in figure (2). The dew point is the temperature at which the water vapor pressure equals the saturated water pressure, so the water has to be in vapor equilibrium. Below this temperature, the water begins to condense and changes to the dew. The condensed water begins to increase and is collected in a tank.
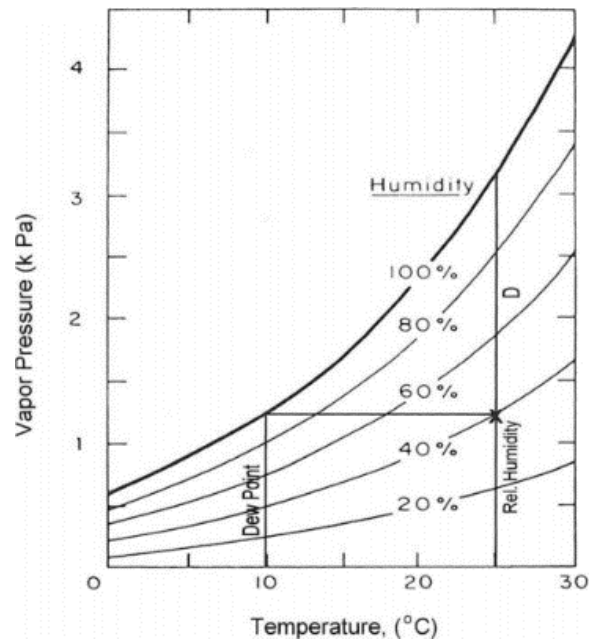
Figure 2 shows the relation between vapor pressure and temperature.

- **Refrigeration System:** A refrigeration system is required to make a surface area approximately continuously cold for condensing the water on its surface. As mentioned in PH 1.10, the performance of any refrigeration circuit is calculated by $Q_c \div W_{in}$ which Q_C refers to the heat removed from the refrigerant, and the W_{in} represents the amount of heat that has to be added, keeping the circuit in 0 net. Consequently, a closed enthalpy circuit is used to condense water. A compressor and an evaporator are used to increase the refrigerant fluid's temperature, and a condenser and capillary tube are used to decrease its temperature.

In brief, the compressor compresses the fluid. Then, it moves through the condenser by using the temperature of the surrounding place. For instance, it moves through the

capillary to decrease its temperature below the dew point by decreasing the fluid's pressure. Finally, it goes through the evaporator and decreases the temperature of the surrounding air.

The next step taken must be explained is how each component works and contributes in the outcome of the project.

- **Refrigerant:** The refrigerant can decrease and increase its temperature by only changing the pressure. The refrigerant R134a (1,1,1,2 Tetrafluoroethen- e) has its thermodynamics properties as shown in table (5). The R134a reaches 67.5 C after the compressing then reaches 32 C after the condensing phase since it is all

Pressure	Temperature	Specific volume (m^3/kg)		Enthalpy (kJ/kg)		Entropy (kJ/kg.K)	
kPa	°C	Sat Liq vf	Sat Vap vg	Sat Liq hf	Sat Vap hg	Sat Liq sf	Sat Vap sg
1200	46.3	0.0008935	0.0167	117.8	273.9	0.4245	0.9131
1400	52.4	0.0009167	0.0141	127.3	276.2	0.4533	0.9106
1600	57.9	0.0009401	0.0121	136.0	277.9	0.4792	0.9080
1800	62.9	0.0009640	0.0106	144.1	279.2	0.5031	0.9051
2000	67.5	0.0009888	0.0093	151.8	280.1	0.5252	0.9020
2500	77.6	0.0010569	0.0069	169.7	280.9	0.5755	0.8925
3000	86.2	0.0011413	0.0053	186.6	279.2	0.6215	0.8792

Table (5) shows the thermodynamic properties of R134a.

before the capillary tube. The capillary reaches the refrigerant to 15 C. Finally, it returns to the compressor for re-execute the circuit.

Materials analysis:

- **Compressor:** A refrigeration circuit is needed to keep the collecting surface (Evaporator) cold. In order to achieve this, there are some components needed. Starting with the compressor as shown in figure (3), the compressor is used to compress the refrigerant, increasing its pressure and temperature (known by W_{in}) by using the piston part. The piston part
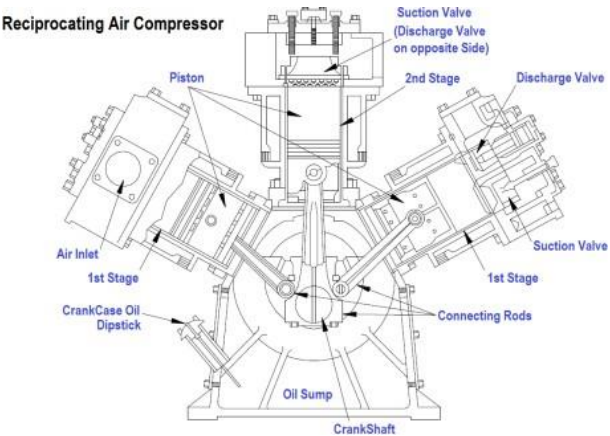

Figure 3 shows the inner components of the compressor.

compresses the air by changing the cross-sectional area. First, the air enters the cylinder (facing the piston), and by pulling the piston, there must be an alternative air filling the vacuum created by the piston. Then the air inlet with the high cross-sectional area closes, and the air outlet with the low cross- sectional area closes. As mentioned in PH 1.09, using the continuity equation:

$A_1V_1 = A_2V_2$ (A for area, V for velocity, 1&2 for comparison), it is found that by changing the area, the velocity must increase, and unavoidable the pressure and temperature increases by increasing the velocity.

The compressor used is ADW57 1/6 HP. Consequently, it uses 136 W (before saving energy) to proceed means it used 136 joules per second.

- **Condenser:** After the compressor stage, the refrigerant goes through a condenser. The condenser in the refrigeration system removes the heat in the refrigerant, decreasing its pressure. It converts the refrigerant to the gaseous state with a much low temperature. The condenser capacity (Q_k) can be formulated as follows:

$Q_k = Q_o + N - Q_h$ (kcal/h)

- Q_0 = Evaporator capacity + increase of enthalpy up to the cylinder.
- N = Compression work in kcal/h.
- Q_h = Heat emission from compressor pot.

Therefore, the refrigerant moves through the filter drier to get out of all the impurities it took from the condenser. For instance, the refrigerant shifts through the capillary tube after the condensing phase to downturn both its temperature and pressure.

- **Capillary tube:** When the refrigerant leaves the condenser and enters the capillary tube, its pressure drops down suddenly due to the very small diameter of the capillary, and this is the main rule of the capillary since two factors.

1- The refrigerant has to deal with the friction between the refrigerant and the tubes' wall.

2- The refrigerant decreases to vapor pressure as its pressure reduces.

Consequently, the saturation pressure, when the vapor pressure equals its liquid, decreases mean the vapor pressure is decreased and the refrigeration temperature also decreases. The capillary tube is a non-adjustable device which means it is designed to pursue a specific condition. This project used a 1/6 H.P compressor which needs 0.78 with 5 feet long to

REF	hp	-10 LOW	+20 MED	+45 HIGH
R134A / R401A	1/8 hp	121" # 5	92" #5	53" # 5
R401B/R406A	1/6 hp	78" # 5	106" #1	79" # 1
R409A/R500	1/5 hp	59" # 1	39" #1	26" # 1
	1/4 hp	47" # 1	99" #2	66" # 2
	1/3 hp	102" # 2	79" #2	39" # 2
	1/2 hp	105" # 3	52" # 3	99" # 4
	3/4 hp	66" # 3	101" #4	79" # 4
	1 hp	39" # 3	92" #4	59" # 4
	1-1/2 hp	92" # 4	66" #4	47" # 4
	2 hp	61" # 4	44" #4	29" # 4

Table (6) shows the capillary tubes sizes for some

achieve -10 C for the evaporator as shown in Table (6). That will change the refrigerant from a liquid state into a gaseous state with low temperature.

- **Evaporator:** The evaporator is a surface made from the stainless-steel, so it doesn't affect the water chemically. Stainless steel, a mixture of Iron (Fe), Chromium (Cr), and Carbon (C). Besides these, it also contains Nickel (Ni), which does contribute to transferring temperature from its entire area to the surrounding one. Since the project was designed on a small scale, the evaporator was designed for 17 revolutions. To calculate the surface area, illustrate the evaporator as it is a cylinder. Therefore, its lateral area is equal to $2\pi r_1 h$.

- $r_1 =$ *the radius of the evaporator's tube* $= 4\,e{-}1\ cm$

- $r_2 =$ *the radius of the revolution* $= 8.5\ cm$

- $h = 17\ r_2$ (*as there's 17 revolution of the Evaporator*)

Then the overall calculation is equaled $2\pi \times 0.4 \times 17\,(8.5) \approx 363.17\ cm2 = 3.6317\ e^{-2}\ m^2$

Moreover, colliding the water with the cold surface area causes it to be collected into a tank. However, the water needs to be modified chemically before drinking.

- **Nutrition:** Mentioned in ES 2.03 that Some minerals are pretty valuable and healthy to be added to the water; these minerals can't be found in distilled water. A solution required for this is adding mineral balls to the water. It dissolves and maintains the mineral levels for the drinking water.

The bio ceramic filter is used for this nutrition. Solubility of some mineral balls affects the flowing water to its pH to increase, and the food has been added.

There are four stages of the bio ceramic filter:

First stage: "Hydrogen water ceramic balls" used to maintain the water's pH.

Second stage: "Durable Alkaline Ceramic Balls" Used for restoring the pH of the water from 7.0 to 8.5 and mineralizing the water with some essential minerals.

Third stage: "Maifan Stone Ball" adds some essential minerals to the water as Potassium, Manganese, Sodium, Magnesium, Calcium, Zinc, etc. As shown in figure (4).

K	15.72	Fe	0.01	Mo	3.76
Na	18.55	H2SiO3	80.56	Cu	7.6
Ca	19.34	P	0.32	Co	0.384
Mg	5.88	F	0.9	Se	9.5
Mn	0.051	B	0.17	Li	0.36
Sr	0.99	Zn	0.22		

Figure 4 shows the added minerals by bio ceramic filter.

Fourth stage: Reducing the water's TDS.

Conclusion: The results of the designed prototype were positive as it was able to achieve the selected design requirements which are the expected effectiveness and the water parameters. In addition, the solution is reliable and the prototype can satisfy the usage of an individual person daily and more by collecting 2.124 liters per day. Finally, the prototype was implemented and the plan went as anticipated.

Recommendation:

It is clear to use the prototype's recommendation in both the real project and the prototype:

Prototype recommendations:

- **R600a:** R600a (Isobutane) is the recommended refrigerant instead of R134a. It has the same Ozone Depletion Potential as R134 a. However, R134a has a global warming potential of 1430, which is higher than isobutane (R600A), which has a global warming potential of just 3.

- **DHT22 sensor:** The DHT22 sensor is recommended to be used instead of DHT11 as it is more accurate, but it is 5 times the DHT11's price.

- **Distances** between the evaporator's revolutions should be increased. If the spaces between the revolutions were larger, the amount of water collected would increase.

- **The tropical compressor** as shown in figure (5) is recommended as it can provide continuous work and is environmentally friendly. But it wasn't be used as its high price.

Figure 5 shows the tropical Compressor.

- **Using contractor** instead of relay in the Arduino because contractors have its own special property that can turn the current off if there is any overload.

Real-life Recommendation:

- **Enlarging scale:** Egypt's homes have an average size of 3.59 persons in 2021. Our prototype has a rate of 2.124 L/day and the average water usage per person is 2 L/person, the real-life application must provide 7.625 per day. Therefore, the surface for the real project can be calculated by it and the surface of the evaporator to be 0.125 m^2.

- **Location:** The recommended region is North coast or Mahalla Elkobra as they have the greatest humidity percentages in Egypt as shown in figure (6) and that will increase the rate of collection. In addition, putting it in a arid area to save the required money for transferring drinking water.
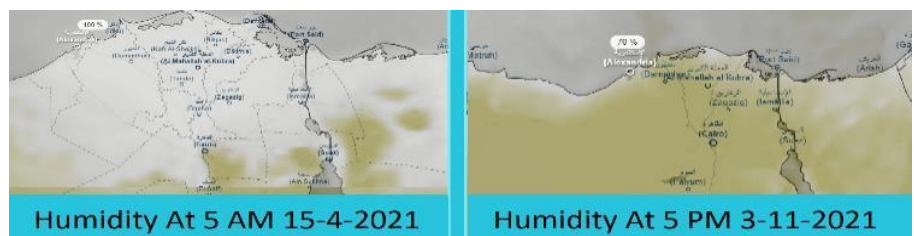

Humidity At 5 AM 15-4-2021   Humidity At 5 PM 3-11-2021

Figure 6 shows the comparison between the humidity in same places at different times.

Resources:

- Ayers, R.S., & Westcot, D.W. (1976). Water quality for agriculture.

- Zumdahl, S. S., Zumdahl, S. A., DeCoste, D. J., & Adams, G. M. (2018). Properties of Solution. In Chemistry. essay, Cengage Learning.

- Bottoms, I. (2014). Water Pollution in Egypt. Causes and Concerns. Egyptian Center for Economic & Social Rights.

- It's About Time, Inc. (2016). EarthComm: Project-based space and Earth System Science.

- Smirnov, B. M. (2020). Water condensation processes in atmospheric air. Springer Atmospheric Sciences, 37–69.