HOW TO TALK

- **Listen first.** Never talk over anyone.
- **Press, pause, speak, release.** Hold the side button, wait a second, talk under 30 seconds, let go. Leave gaps so an emergency can get in.
- **Use callsigns, not names or addresses.** Anyone can listen to any channel.
- **Start on low power.** Switch to high only if no one hears you.
- **Say your FCC callsign if you hold a license:**
  Ham: every 10 minutes and when you finish.
  GMRS: every 15 minutes and when you finish.
  FRS: not needed.

```
Maverick: "Iceman, this is Maverick, over."
Iceman: "Maverick, go ahead, over."
Maverick: "At the north lot, all OK, no needs, over."
Iceman: "Roger. Iceman out."
```

OVER	I'm done talking. Your turn.
OUT	Conversation over. Never "over and out."
ROGER / WILCO	Understood. / Understood and will comply.
SAY AGAIN	Please repeat that.
STAND BY	Wait. I'll come back to you.
RADIO CHECK	How do you hear me? Answer "loud and clear," "readable" or "weak."
BREAK BREAK	I must interrupt with something urgent.
EMERGENCY	Said 3 times: a life is in danger. Everyone else stops and listens.

When you check in, say in this order:
callsign, where you are, how you are, what you need.

PHONETIC ALPHABET AND MORSE CODE

A	Alfa	• –	**N**	November	– •
B	Bravo	– • • •	**O**	Oscar	– – –
C	Charlie	– • – •	**P**	Papa	• – – •
D	Delta	– • •	**Q**	Quebec	– – • –
E	Echo	•	**R**	Romeo	• – •
F	Foxtrot	• • – •	**S**	Sierra	• • •
G	Golf	– – •	**T**	Tango	–
H	Hotel	• • • •	**U**	Uniform	• • –
I	India	• •	**V**	Victor	• • • –
J	Juliett	• – – –	**W**	Whiskey	• – –
K	Kilo	– • –	**X**	X-ray	– • • –
L	Lima	• – • •	**Y**	Yankee	– • – –
M	Mike	– –	**Z**	Zulu	– – • •

Numbers: say one digit at a time.

0 zero	**1** wun	**2** too	**3** tree	**4** fower
5 fife	**6** six	**7** seven	**8** ait	**9** niner

Example: 146.760 is said
"wun fower six decimal seven six zero."

Why these words? Letters like B, D, E and P sound alike through static. Each phonetic word stays distinct even when half of it is lost, and it's used worldwide. The numbers follow the same idea: "niner" keeps 9 from sounding like 5, "tree" survives when the "th" drops out, and "fower" isn't heard as "for."

TODAY'S PLAN

P	Primary	ch _____	_____
A	Alternate	ch _____	_____
C	Contingency	ch _____	_____
E	Emergency		_____

BUILD A PACE PLAN FOR EACH OPERATION

Four ways to reach each other, each by a different path, so one failure can't cut the group off.

1. **Size it up:** who, how far apart, how long, which licenses.
2. **Primary:** the shortest reach that covers everyone.
   Same site: a Trumpet channel (31–36) every radio there can use. Each has its own privacy code (see notes).
   Across town: 38 (ham) or 39 (GMRS).
3. **Alternate:** a different path, like the other repeater.
4. **Contingency:** usually 3, which every radio has.
   Lost contact? 3-3-3: listen on 3 for 3 minutes at the top of every 3rd hour (12, 3, 6, 9).
5. **Emergency:** no radio needed: a rally point and time, or a runner. Last resort on the radio: 20.
6. **Assign:** callsigns, a net control (who runs the channel) and check-in times. Write them in Notes, brief everyone, test before splitting up.

NOTES

Callsign _____ Ham _____ GMRS _____

Radio model _____

Transmits on FRS/GMRS: ☐ Yes ☐ No, listen only

Programmed on _____ by _____

Trumpet Net

Version 15.1

In what place therefore ye hear the sound of the trumpet, resort ye thither unto us: our God shall fight for us.
Nehemiah 4:20

WHAT THIS IS


Every Trumpet Net radio has the same channel list, so a channel number means the same thing on every radio. Keep this sheet with your radio.

YOUR FIRST FIVE MINUTES

1. Turn the radio on and set the volume about halfway.
2. Go to channel 0 (or 108). It should read VER 15 (version 15).
3. Go to channel 3 and listen.
4. Ask someone nearby for a radio check.

PICK THE CHANNEL BY THE JOB

Local event	3, or a Trumpet channel (31–36) with its privacy code
Household	An FRS/GMRS channel your family picks
Across town	38, the ham repeater 39, the GMRS repeater, for GMRS only
Severe weather	Listen on 40 (county emergency net). Keep group talk on 38.
Out of the area	Listen to that region's main repeater. Call on 100 or 20.

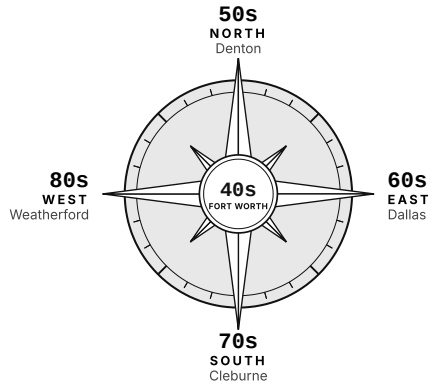

How far will a handheld radio reach?
Radio to radio: about 1 mile in town, 2–3 in the open.
Through a repeater: 20–40 miles, but only if you're close enough to reach the repeater. A handheld usually needs to be within about 10–20 miles of it, less among buildings.
Height matters most. Get up high and away from buildings.

Ham and GMRS channels need the matching license to transmit. FRS (1–22) and MURS need none. Anyone may use any channel when a life is in danger.
Repeaters belong to local clubs, and their nets come first. Don't talk on 40 unless you're part of its emergency net or a life is in danger.
Repeater data: RepeaterBook, October 2026.

Trumpet Net Master Channel Guide

List version 15 · Oct 18, 2026 · channels 0 and 108 show the version

TX, who may transmit: F anyone · M MURS radio
G GMRS license · H ham license · L listen only · E emergency use only
† county emergency channel · **TA** talkaround
SHIFT repeater offset, MHz · **TONE** in Hz (D = digital code)
Names: city + end of frequency (FW 940 = Fort Worth 146.940)
Scan list: 3, 20, 23, 38, 39, 40, 50, 60, 70, 80, 90, 100

CH	NAME	FREQ	SHIFT	TONE	TX	NOTES
VER · VERSION CHECK						
0	VER 15	146.520			**H**	List version (= 100)
FRS · FAMILY RADIO SERVICE						
1	FRS 1	462.5625			**F**	
2	FRS 2	462.5875			**F**	
3	FRS 3	462.6125			**F**	Everyone, local
4	FRS 4	462.6375			**F**	
5	FRS 5	462.6625			**F**	
6	FRS 6	462.6875			**F**	
7	FRS 7	462.7125			**F**	
8	FRS 8	467.5625			**F**	Low power (0.5 W)
9	FRS 9	467.5875			**F**	Low power (0.5 W)
10	FRS 10	467.6125			**F**	Low power (0.5 W)
11	FRS 11	467.6375			**F**	Low power (0.5 W)
12	FRS 12	467.6625			**F**	Low power (0.5 W)
13	FRS 13	467.6875			**F**	Low power (0.5 W)
14	FRS 14	467.7125			**F**	Low power (0.5 W)
15	FRS 15	462.550			**F**	Repeater 115 output
16	FRS 16	462.575			**F**	Repeater 116 output
17	FRS 17	462.600			**F**	Repeater 117 output
18	FRS 18	462.625			**F**	Repeater 118 output
19	FRS 19	462.650			**F**	Repeater 119 output
20	FRS 20	462.675			**F**	Travel / calling
21	FRS 21	462.700			**F**	Repeater 121 output
22	FRS 22	462.725			**F**	Repeater 122 output
EMERGENCY · SEA MARINE, SAR RESCUE						
23	SEA 16	156.800			**E**	Distress & calling
24	SEA 09	156.450			**E**	Boater hailing
25	SEA 22	157.100			**E**	Coast Guard
26	SEA 68	156.425			**E**	Boats, working
27	SAR 16	155.160			**E**	Search & rescue
28	VCALL	155.7525			**E**	Public safety calling
29	UCALL	453.2125			**E**	Public safety calling
30						*empty*
TRUMPET NET (TPT) · OWN CODES						
31	**TPT 1**	462.6625		179.9	**F**	= ch 5 + code 29
32	**TPT 2**	462.6875		151.4	**F**	= ch 6 + code 24
33	**TPT 3**	151.880		203.5	**M**	= ch 124 + code 32
34	**TPT 4**	151.940		186.2	**M**	= ch 125 + code 30
35	**TPT 5**	146.430		218.1	**H**	2m simplex + code 34
36	**TPT 6**	147.510		250.3	**H**	2m simplex + code 38
37	**ASPC**	146.445		233.6	**H**	2m simplex · ham
38	**TPT RP**	146.760	−0.6	110.9	**H**	Ham repeater (= 41)
39	**TPT GR**	462.725	+5	141.3	**G**	GMRS repeater (= 122)

No channel is private. Tones only filter what *your* radio plays. Just because you don't hear others doesn't mean they can't hear you.

CH	NAME	FREQ	SHIFT	TONE	TX	NOTES
40S · FORT WORTH & ARLINGTON						
40	FW 940	146.940	−0.6	110.9	**H†**	K5FTW Fort Worth
41	FW 760	146.760	−0.6	110.9	**H**	K5FTW Fort Worth
42	FW UHF	444.100	+5	110.9	**H**	K5FTW Fort Worth
43	FW 200	147.200	+0.6	110.9	**H**	WZ5TX Fort Worth
44	COW280	147.280	+0.6	110.9	**H**	K5COW Fort Worth
45	COW442	442.200	+5	110.9	**H**	K5COW Benbrook
46	FW 840	146.840	−0.6	110.9	**H**	W5SH Fort Worth
47	FW 125	442.125	+5	156.7	**H**	KA5GFH Fort Worth
48	FW 680	146.680	−0.6	110.9	**H**	K5FTW Fort Worth
49	FW TA	146.940		110.9	**H**	Talkaround for 40
50S · NORTH						
50	DEN920	146.920	−0.6	110.9	**H†**	W5NGU Denton
51	DEN170	145.170	−0.6	110.9	**H**	W5NGU Denton
52	DEN444	444.050	+5	110.9	**H**	W5NGU Denton
53	DEC780	146.780	−0.6	131.8	**H†**	W5KMC Decatur
54	DEC442	442.600	+5	131.8	**H**	W5WFR Decatur
55	SHR000	147.000	+0.6	100.0	**H†**	W5RVT Sherman
56	SHR280	147.280	+0.6	107.2	**H**	W5COP Sherman
57	SHR444	444.750	+5	100.0	**H**	W5RVT Sherman
58	ROSSTN	145.490	−0.6	85.4	**H†**	WD5U Rosston
59	DEN TA	146.920		110.9	**H**	Talkaround for 50
60S · EAST: DALLAS & COLLIN						
60	DAL880	146.880	−0.6	110.9	**H†**	W5FC Dallas
61	DALNET	146.880	−0.6	114.8	**H**	W5FC Dallas, net
62	DAL442	442.425	+5	110.9	**H**	W5FC Dallas
63	DAL640	146.640	−0.6	118.8	**H**	K5AHT Dallas
64	DAL700	146.700	−0.6	110.9	**H**	W5EBQ Dallas
65	ARL140	147.140	+0.6	110.9	**H**	K5SLD Arlington
66	MCK740	146.740	−0.6	110.9	**H†**	W5MRC McKinney
67						*empty*
68						*empty*
69	DAL TA	146.880		110.9	**H**	Talkaround for 60
70S · SOUTH						
70	CLB490	145.490	−0.6	88.5	**H†**	KB5YBI Cleburne
71	CLB444	444.000	+5	136.5	**H**	N5OAN Cleburne
72	GRN080	147.080	+0.6	88.5	**H†**	WD5GIC Granbury
73	HIL780	146.780	−0.6	123.0	**H†**	WB5YFX Hillsboro
74	WAC660	146.660	−0.6	123.0	**H†**	K5AB Waco
75	WAC360	147.360	+0.6	123.0	**H**	AA5RT Waco
76	BEL140	147.140	+0.6	123.0	**H**	W5BEC Belton
77						*empty*
78						*empty*
79	CLB TA	145.490		88.5	**H**	Talkaround for 70
80S · WEST & FAR						
80	WTH040	147.040	+0.6	110.9	**H†**	WB5IDM Weatherford
81	WTH443	443.800	+5	110.9	**H**	WB5IDM Weatherford
82	WTH900	146.900	−0.6	110.9	**H**	KG5CW Weatherford *
83	MW 470	145.470	−0.6	85.4	**H†**	KC5IUR Min. Wells *
84	MW 640	146.640	−0.6	85.4	**H**	W5ABF Mineral Wells
85	BRAZOS	146.860	−0.6	156.7	**H**	W5PPC Brazos
86	WF 940	146.940	−0.6	192.8	**H†**	W5US Wichita Falls
87	WF 140	147.140	+0.6	192.8	**H**	N5WF Wichita Falls
88	ABL760	146.760	−0.6	146.2	**H†**	KC5OLO Abilene
89	WTH TA	147.040		110.9	**H**	Talkaround for 80

CH	NAME	FREQ	SHIFT	TONE	TX	NOTES
WX WEATHER (NOAA) · DOT BUSINESS						
90	WX 1	162.550			**L**	Fort Worth KEC55
91	WX 2	162.400			**L**	Dallas, Abilene
92	WX 3	162.475			**L**	Sherman, Waco
93	WX 4	162.425			**L**	Not local
94	WX 5	162.450			**L**	Not local
95	WX 6	162.500			**L**	Not local
96	WX 7	162.525			**L**	Corsicana, Min. Wells
97	REDDOT	151.625			**L**	Business · events
98	PURDOT	151.955			**L**	Business
99	YELDOT	464.550			**L**	Business
2M SIMPLEX · S2 = 2-METER						
100	CALL2M	146.520			**H**	Calling
101	S2 550	146.550			**H**	
102	S2 580	146.580			**H**	Dallas RACES
103	S2 400	146.400			**H**	
104	S2 420	147.420			**H**	
105	S2 555	147.555			**H**	Rockwall ARES
106	S2 540	147.540			**H**	
107	GADFAM	147.435		241.8	**H**	2m simplex · ham
108	VER 15	147.570			**H**	Version backup
70CM SIMPLEX · S7 = 70-CENTIMETER						
109	CALL70	446.000			**H**	Calling
110	S7 025	446.025			**H**	
111	S7 050	446.050			**H**	
112	S7 075	446.075			**H**	
113	S7 100	446.100			**H**	
114	S7 500	446.500			**H**	
RPT · GMRS REPEATERS (GENERAL MOBILE RADIO SERVICE)						
115	RPT 15	462.550	+5	141.3	**G**	WQUM597 Dallas
116	RPT 16	462.575	+5	141.3	**G**	
117	RPT 17	462.600	+5	141.3	**G**	
118	RPT 18	462.625	+5	141.3	**G**	
119	RPT 19	462.650	+5	141.3	**G**	
120	RPT 20	462.675	+5	141.3	**G**	
121	RPT 21	462.700	+5	141.3	**G**	
122	RPT 22	462.725	+5	141.3	**G**	WRPL432 Haltom City
MURS · MULTI-USE RADIO SERVICE						
123	MURS 1	151.820			**M**	
124	MURS 2	151.880			**M**	
125	MURS 3	151.940			**M**	
126	BLUDOT	154.570			**M**	MURS 4
127	GRNDOT	154.600			**M**	MURS 5

ADD A CHANNEL BY HAND (UV-5R)

1. Press **VFO/MR** for frequency mode, then type the frequency (146520).
2. Repeater only: **MENU 25** shift + or −, **MENU 26** offset (00.600 on 2m, 05.000 on 70cm), **MENU 13** tone.
3. Tone both ways (like TPT): also **MENU 11**, same tone.
4. Save: **MENU 27**, pick an empty channel, **MENU** to store, **EXIT**.
5. Press **VFO/MR** to go back to channels.

Menu numbers are for the standard UV-5R. Names need CHIRP.

* A star means we couldn't confirm that repeater was still on the air as of version 15 (October 18, 2026). Test it before you count on it.