
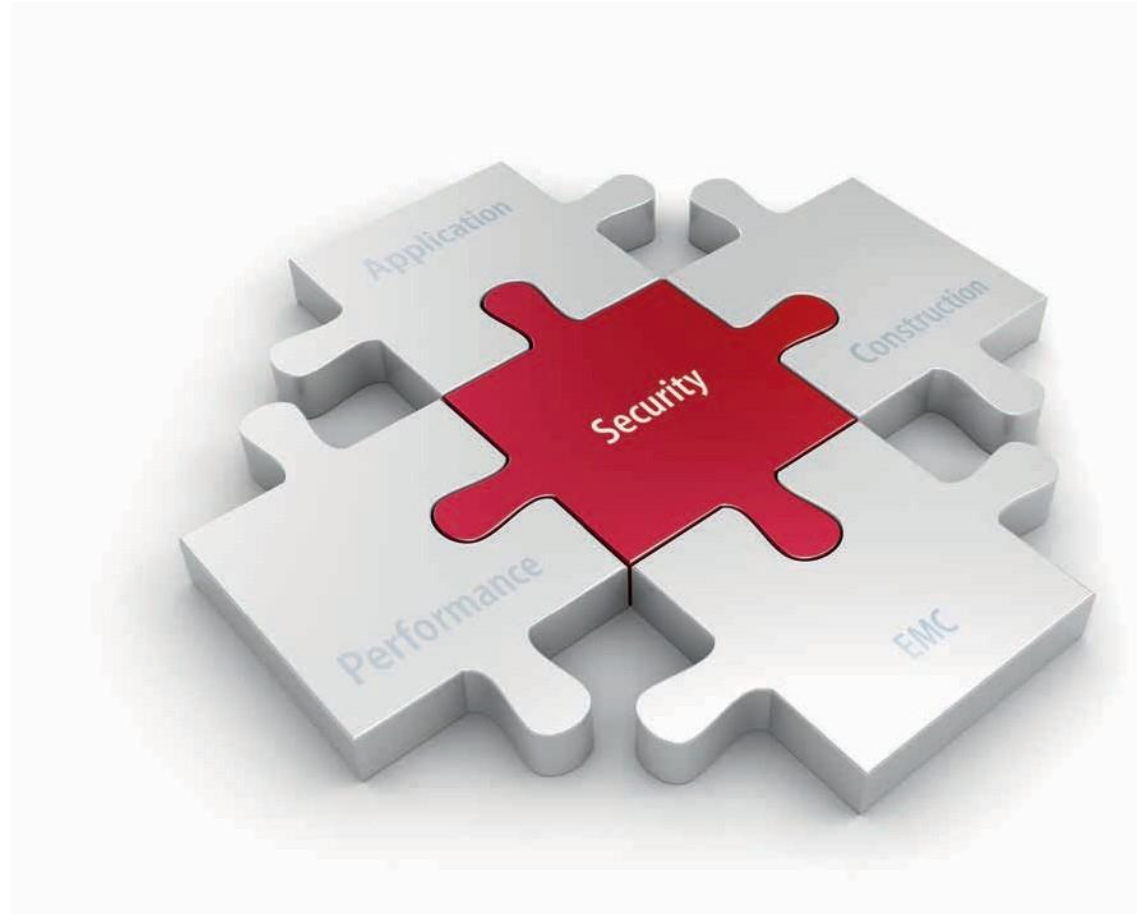


Infrastructure

SPACE concept

Finding the right data cable

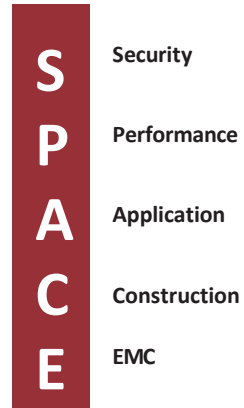

SPACE matrix

Example of a data cable with the code **S₃P₄A₄C₅E₅** :

S₃ It passes the fire test according to IEC 60332-3-24
(Security Level **3**)

P₄ It meets the minimum requirements of the Class F_A
(Performance Level **4**)

A₄ It is dimensioned for applications with more than 10
GbE (Application Level **4**)

C₅ It consists of a conductor with AWG22 (Construction Level **5**) and thus has low attenuation values and an increased max.
current

E₅ The coupling attenuation is >80 dB (EMC Level **5**)

Security (fire behaviour)

S	1	2	3	4	5
	IEC 60332-2-2	IEC 60332-1-2	IEC 60332-3-24	EFP Grade 1	EFP Grade 2

Performance (cabling class, bandwidth)

P	1	2	3	4	5
	> Class E > 250 MHz	> Class E _A > 500 MHz	> Class F > 600 MHz	> Class F _A > 1000 MHz	> Class "G" > 1200 MHz

Application (Ethernet,TV)

A	1	2	3	4	5
	> 100 MbE	> 1 GbE	Up to 10 GbE	> 10 GbE	> 10 GbE TV

Construction (conductor dimensions, tensile strength)

C	1	2	3	4	5
	AWG 27	AWG 26/25	AWG24	AWG 23	AWG22

EMC (coupling attenuation)

E	1	2	3	4	5
	> 40 dB	> 50 dB	> 60 dB	> 70 dB	> 80 dB

Solution Speed



Unshielded
1 Gbit/s





Shielded
10 Gbit/s



Shielded
40 Gbit/s

Easy 1 2 3 Assembly

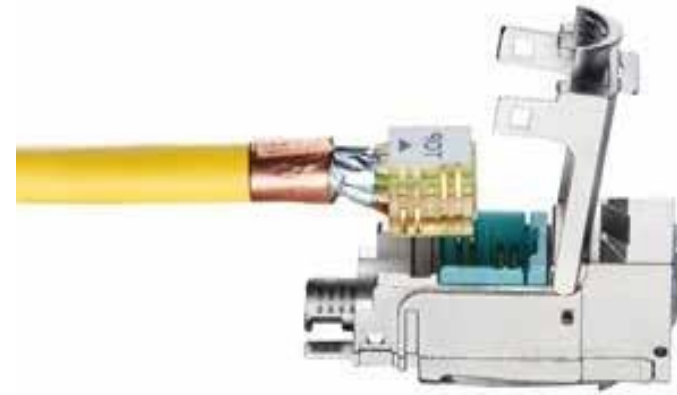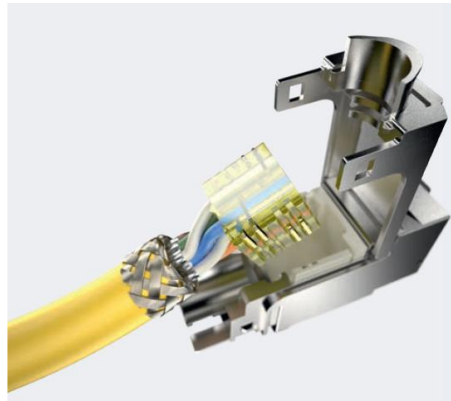


Copper LEO (Light Emitting Outlet)



Data Center



Easy to Organize

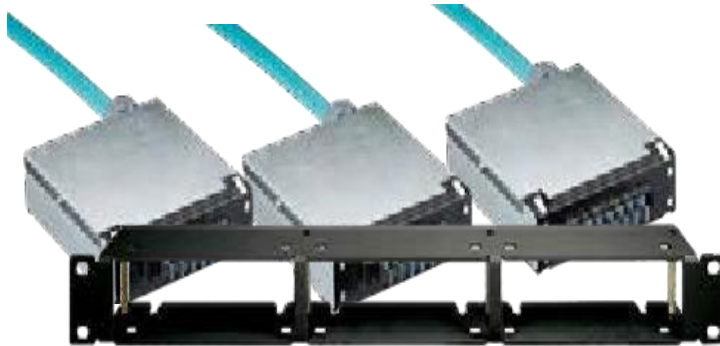

Industrial



flame retardant



oil resistant



low smoke
zero halogen

