

ROTARY TORQUE SENSOR

RT迴轉式扭力計，係專為旋轉中量測扭力而設計之感測器，採用剪力式轉軸應力量測結構，剛性強、結構穩固、轉速高。採用碳式傳遞量測訊號、雜訊低、重量輕、一體式設計、簡潔美觀及堅固耐用。


RT Rotary Torque sensor is a special design for measuring the torque on a continual rotation shaft. It constructs of a rigid spindle with shear strain detect sensor. The high-speed carbon brush picks up torque signal. Yet, that is low noise, small, light and precise.



■ 特點 Features

- 體積小 Small
- 剛性強 Rigid
- 高轉速 High speed
- 低雜訊 Low noise
- RT-0.25, 0.5, 1, 2.5, 5, 10, 25, 50, 100, 250, 500, 1k, 2k, 2.5k, 5k, 10k Nm

■ Installation Dimensions

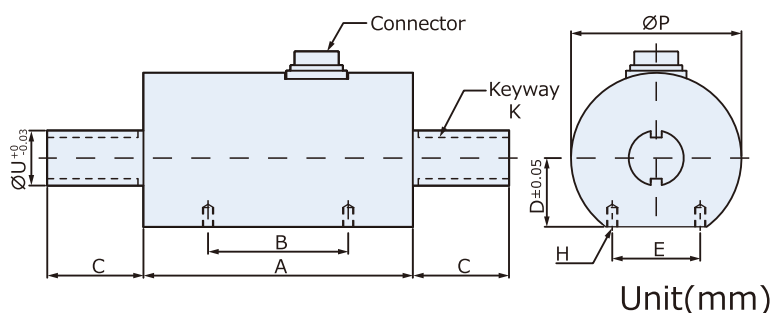

TYPE	A	B	C	D	E	H	K	P	U	容許轉速
RT-0.25 Nm	96	51	20	18	32	M4×0.7 x7 deep	3×1.8	52	10	200 RPM
RT-0.5 Nm										
RT-1 Nm										
RT-2.5 Nm										
RT-5 Nm										
RT-10 Nm										
RT-25 Nm	98	51	35	25	32	M4×0.7 x7 deep	4×2.5	62	20	200 RPM
RT-50 Nm										
RT-100 Nm										
RT-250 Nm	115	65	60	36	44	M6×1.0 x8 deep	10×5	88	40	100 RPM
RT-500 Nm										
RT-1 k Nm										
RT-2 k Nm										
RT-2.5 k Nm	120	65	85	48	50	M6×1.0 x8 deep	12×5	113	55	100 RPM
RT-5 k Nm	131	65	98.5	49	50	M6×1.0 x8 deep	16×6	114	65	100 RPM
RT-10 k Nm	131	75	135	61	60	M6×1.0 x8 deep	25×9	140	90	100 RPM

■ Specification

額定輸出 Rated Output	1.0mV/V
總和誤差 Total Error	±0.3%R.O.
重現性 Repeatability	±0.2%R.O.
潛變 Creep	0.1%/20min
輸入阻抗 Input Resistance	430 or 385 or 350Ω
輸出阻抗 Output Resistance	350Ω
最大輸入電壓 Max. Excitation Voltage	20v
建議輸入電壓 Recommended Excitation Voltage	10v
使用範圍 Safe Temp. Range	-10°C~50°C
溫度對零點之影響 Temp. Effect on Zero Balance	0.05%R.O./10°C
溫度對額定輸出之影響 Temp. Effect on Rated Output	0.03%Load/10°C
零點誤差 Zero Balance	±3%R.O.
容許負荷 Safe Over Load Rating	150%
導線長度 Cable Length	3m
接線方式 Cable Connection	Input:Red(+)Exci : Black(-)Exci Output:Green(+)Sign White(-)Sign