

Bareboard Specifications

- 1. 10Oz outer copper weight
- 2. Layer Stackup: Use any 6 layer stackup
- 3. Dielectric: TG155 or higher glass transition temperature FR4
- 4. Vias: Force complete tenting
- 5. Surface Finish: ENIG
- 6. Silkscreen Color: White (Top and Bottom)
- 7. Soldermask Color: Green
- 8. PCB Thickness: 1.6mm


Layer Stack Legend

Material	Layer	Thickness	Dielectric Material	Type	Gerber
	Top Overlay			Legend	GTO
	Top Solder	0.01mm	Solder Resist	Solder Mask	GTS
Copper	Top Layer (SIG)	0.04mm		Signal	GTL
Prepreg		0.07mm	PP-006	Dielectric	
CF-004	Layer 1 (GND)	0.04mm		Internal Plane	GP1
Prepreg		0.07mm	PP-006	Dielectric	
CF-004	Layer 3 (SIG)	0.04mm		Signal	G1
		0.32mm	FR-4	Dielectric	
CF-004	Layer 4 (PWR)	0.04mm		Signal	G2
Prepreg		0.07mm	PP-006	Dielectric	
CF-004	Layer (GND)	0.04mm		Internal Plane	GP2
Prepreg		0.07mm	PP-006	Dielectric	
Copper	Bottom Layer (SIG)	0.04mm		Signal	GBL
Surface Material	Bottom Solder	0.01mm	Solder Resist	Solder Mask	GBS
	Bottom Overlay			Legend	GBO
Total thickness: 0.84mm					


Drill Table

Symbol	Count	Hole Size	Plated	Hole Tolerance
▽	817	0.30mm	Plated	
○	20	0.80mm	Plated	
□	104	0.89mm	Plated	
✕	3	0.99mm	Non-Plated	
☆	4	2.37mm	Non-Plated	
⊕	4	3.20mm	Plated	
952 Total				


View from Top side (Scale 1:1)

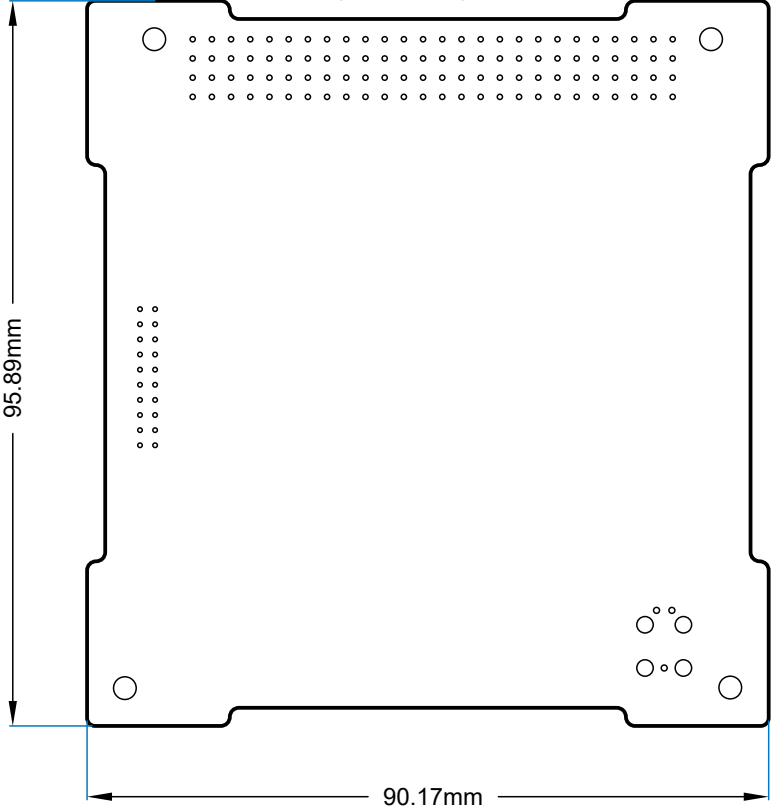

View from Bottom side (Scale 1:1)

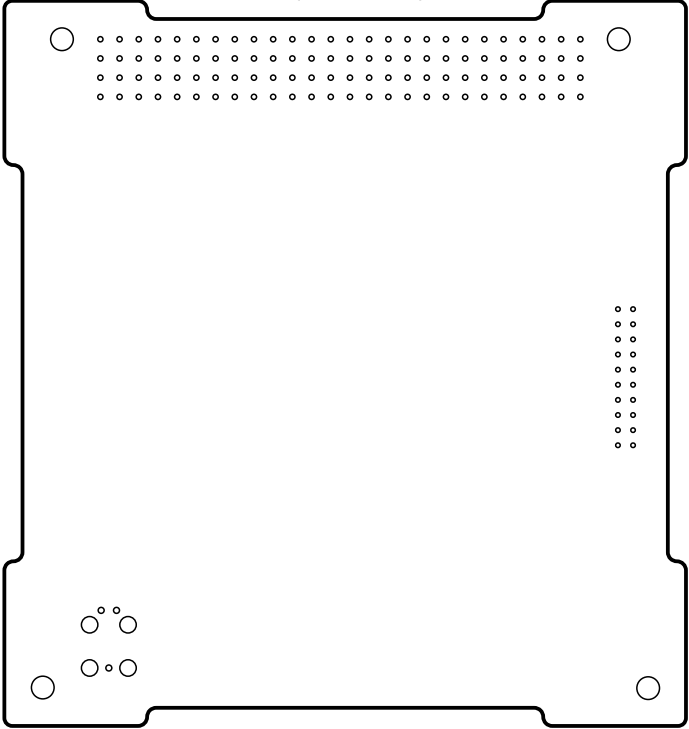


Drill Drawing View (Scale 1:1)

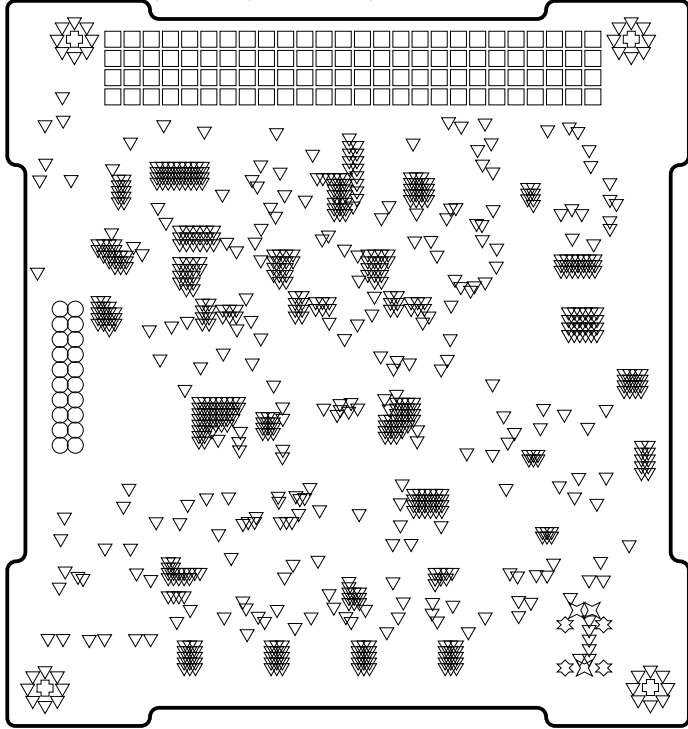

Title: Power Distribution Module

Size: A3 Project: PDM Rev: 1
Date: 29/04/2026 Drawn By: TH Sheet: 1 of 2



Assembly Instructions

- 9. Solder composition: Use leaded solder
- 10. Check BOM for not placed components

