

HALF-SECTION (10:1)

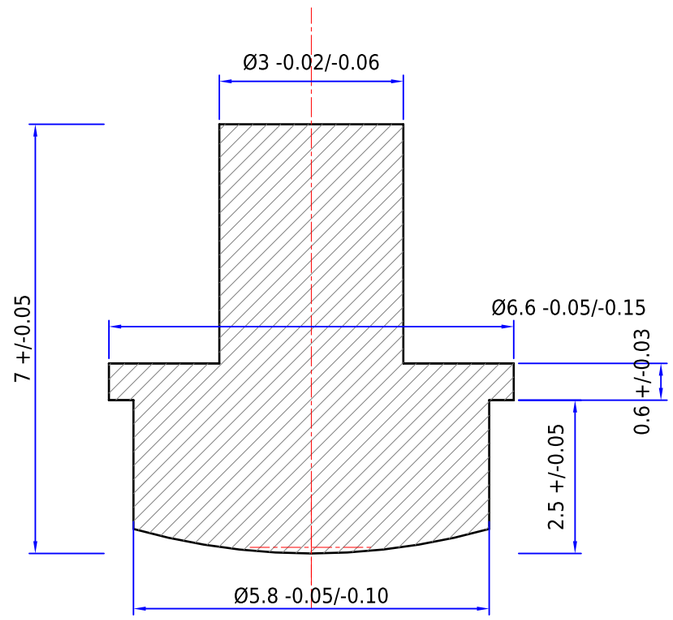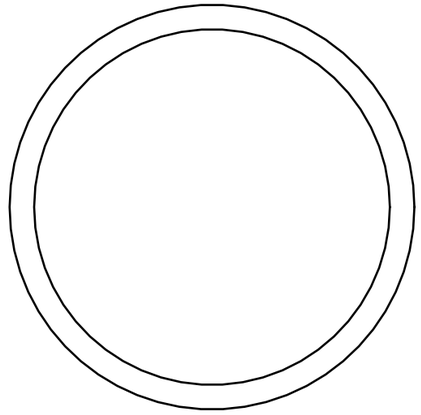

VIEW from -Z (10:1)

NOTES
1 Material SUS304, bead blast. General tolerances ISO 2768-mK. Geometry per FlashKa_cap_main.step (axis at the origin in the STEP; here it is moved to X 10.0).
2 Small turned part (head Ø5.8). The JLCCNC quote may refuse it by size: confirm with the instant quote. If refused, any CNC service (PCBWay, Xometry, a local workshop) can make it from the same STEP and this PDF, or use the resin caps from the print kit (FlashKa_print_kit.stl).
3 The cap must move freely: after the blast, check it falls through the tube (Ø6.0 bore, Ø6.8 above the step) with no catch.
4 Cap stroke and tolerance stack: docs/ch13_v0.6_presenter.md, 13.4.2 (nominal free play 0.30, worst case 0.00, RSS 0.14).

| ID | FEATURE | SPECIFICATION | TOLERANCE / NOTE |
|---|---|---|---|
| 1 | Material | stainless steel SUS304 (1.4301), turned from bar; no thread | |
| 2 | Head (visible) | Ø5.8, domed end: 0.4 sag, apex at Z -0.1 (flush with the bottom face -0.1); cylinder up to the flange; fits the Ø6 tube bore hole (0.1 per side) | Ø +0/-0.05<br>Ra 1.6 before blast |
| 3 | Flange | Ø6.6 x 0.6 thick, rests on the tube step (Z 2.4) | Ø +0/-0.1; thickness +/-0.03 |
| 4 | Stem | Ø3.0 from the flange to the stem end at Z 6.9 (free play 0.30 above the switch actuator at Z 7.2) | Ø +0/-0.06 |
| 5 | Overall length | 7 from the dome apex to the stem end (stack: free play 0.30 nominal) | +/-0.05 |
| 6 | Edges | break all edges 0.1; stem end face flat, square to the axis within 0.03 | |
| 7 | Finish | fine glass-bead blast (matte), no coating, no marking | |
| 8 | Quantity | 1 per keychain | |

# BUTTON CAP - MAIN (1x)

| | |
|---|---|
| Part: FK-H-03  FlashKa_cap_main.step | SCALE 2:1 (details as marked)  SHEET 1/1 |
| FlashKa Keychain v0.6  2026-10-16 | Units mm  \|  ISO 2768-mK |