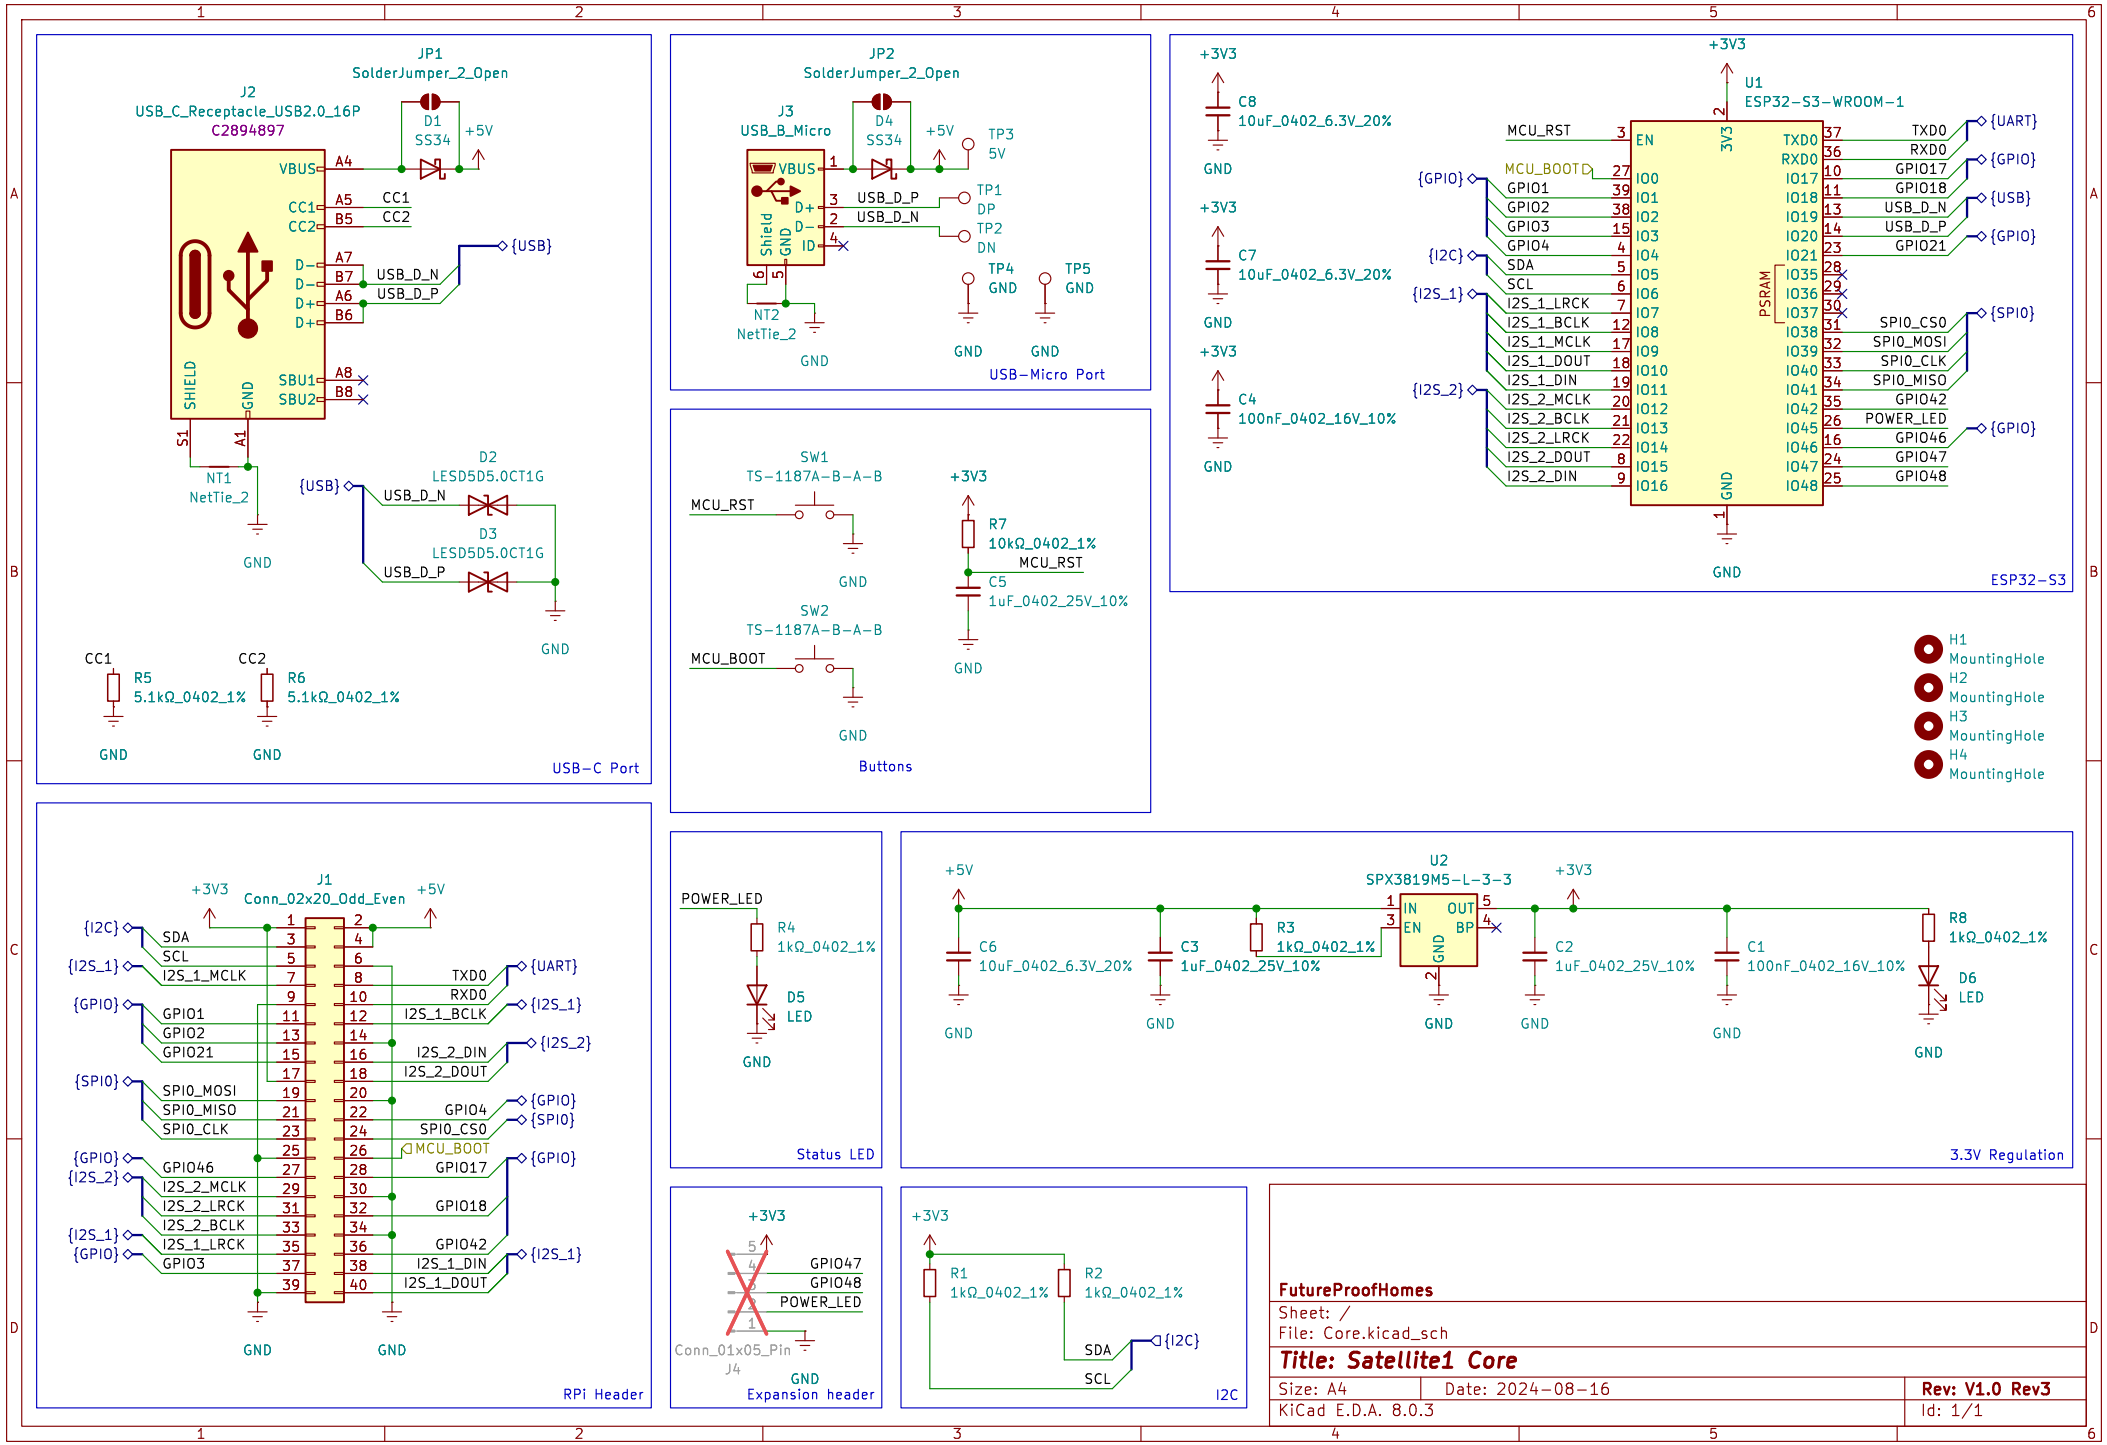
USB-C Port
J2
USB_C_Receptacle_USB2.0_16P
C2894897
JP1
SolderJumper_2_Open
D1
SS34
+5V
VBUS
CC1
CC2
D-
D+
USB_D_N
USB_D_P
{USB}
SHIELD
GND
SBU1
SBU2
NT1
NetTie_2
D2
LESD5D5.0CT1G
D3
LESD5D5.0CT1G
R5
5.1kΩ_0402_1%
R6
5.1kΩ_0402_1%
USB-Micro Port
J3
USB_B_Micro
JP2
SolderJumper_2_Open
D4
SS34
TP3
5V
TP1
DP
TP2
DN
TP4
GND
TP5
GND
NT2
NetTie_2
Buttons
SW1
TS-1187A-B-A-B
SW2
TS-1187A-B-A-B
MCU_RST
MCU_BOOT
R7
10kΩ_0402_1%
C5
1uF_0402_25V_10%
ESP32-S3
U1
ESP32-S3-WROOM-1
C8
10uF_0402_6.3V_20%
C7
10uF_0402_6.3V_20%
C4
100nF_0402_16V_10%
+3V3
EN
3V3
PSRAM
{GPIO}
{I2C}
{I2S_1}
{I2S_2}
{UART}
{SPI0}
{USB}
H1
MountingHole
H2
MountingHole
H3
MountingHole
H4
MountingHole
RPi Header
J1
Conn_02x20_Odd_Even
Status LED
POWER_LED
R4
1kΩ_0402_1%
D5
LED
3.3V Regulation
U2
SPX3819M5-L-3-3
C6
10uF_0402_6.3V_20%
C3
1uF_0402_25V_10%
R3
1kΩ_0402_1%
C2
1uF_0402_25V_10%
C1
100nF_0402_16V_10%
R8
1kΩ_0402_1%
D6
LED
Expansion header
Conn_01x05_Pin
J4
I2C
R1
1kΩ_0402_1%
R2
1kΩ_0402_1%
SDA
SCL
FutureProofHomes
Sheet: /
File: Core.kicad_sch
Title: Satellite1 Core
Size: A4
Date: 2024-08-16
Rev: V1.0 Rev3
KiCad E.D.A. 8.0.3
Id: 1/1