1080P HD WIFI Camera User Manual

NOTE :

1. This camera ONLY support 2.4G Wi-Fi, it can't support 5G Wi-Fi

2. Due to the longtime of transport, the camera's battery might be low power, please charging 3-5 hours if low/no power, when charging the camera, you must keep camera in turn on condition.

3. Micro SD card is an optional accessory, if you want to save video on micro card, choose the SD including model, please format the micro SD card before install on camera;

4. This is a high-tech product, please read the instructions carefully before use.

If you meet any problem in install/use our product, please email contact us with order ID, we are pleased to provide solution in detail and assistant, thank you.

LED light display information

Blue light is power indicator, the blue light will continue shine when camera on turn on condition;

Red light is WIFI indicator, led light quick flash mean cameras in router mode;

Red light slow flash mean cameras in phone connection mode;

IF not sure camera in which mode, you could reset (long press reset button 10 second) camera and it will switch to phone connection mode first
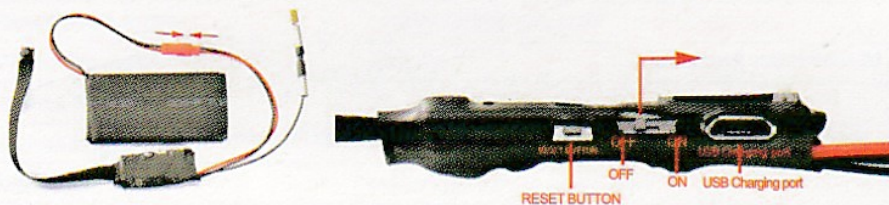
Package

1 x WIFI Camera

1 x USB charging cable

1 x user manual

1 x CD

I. finish below step before step II.

For 1080P DIY MODULE CAMERA

1. Connect the main engine with included battery by red plug

2. Pull switch to right side turn on the camera, if you purchased item included a micro SD card, you need to insert the micro SD card before turn on camera.


FOR CLOCK AND OTHER WIFI CAMERA

Open the back cover and turn on the switch, and close the back cover. Insert TF card (if available) before close back cover
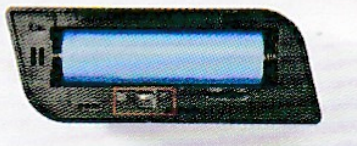
For 1080P SMOKE DETECTOR CAMERA

Lock the base on smoker detector and put it on ceiling as photo, according camera lens direction mark base's screw location on ceiling, then take off the base and fix it on ceiling with screw.

Turn on the switch and start step **II**, if have micro SD card, unscrew the screw and open back cover and install it.
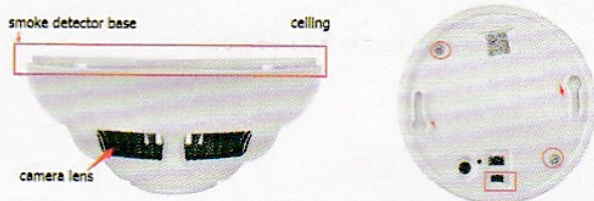
II. APP software download

1. **ISO:** for iPhone, search APP software name "**hdminicam**" in App store, or could scan above QR code to download and install it

2. **Android:** For Android phones, search APP software name" **hdminicam**" in Google Play, or could scan above QR code to download and install it
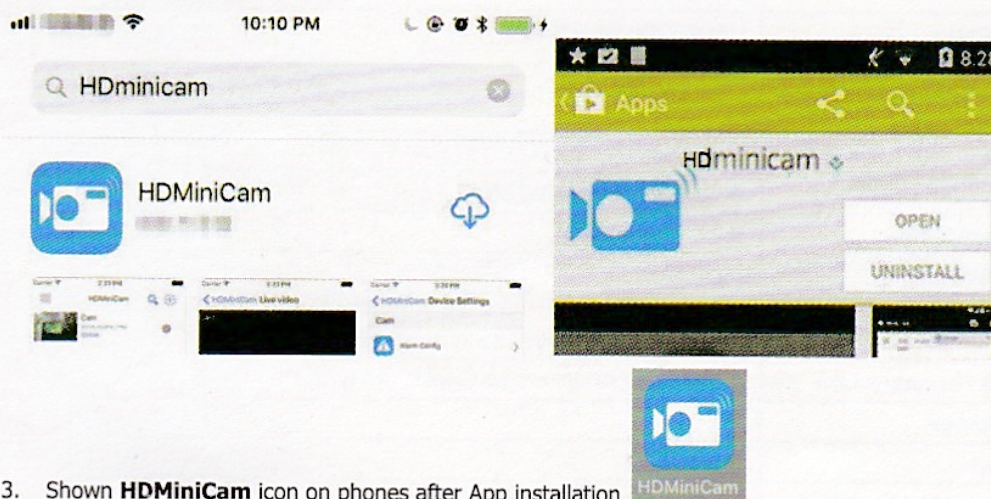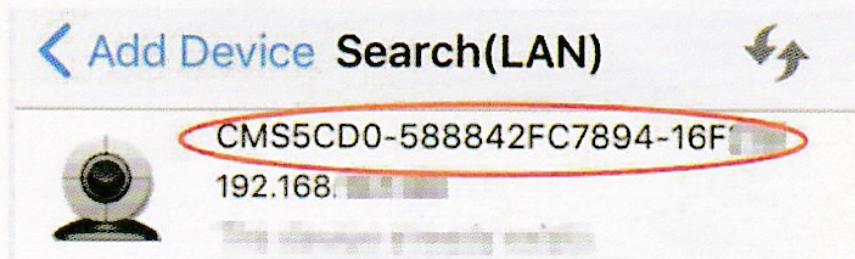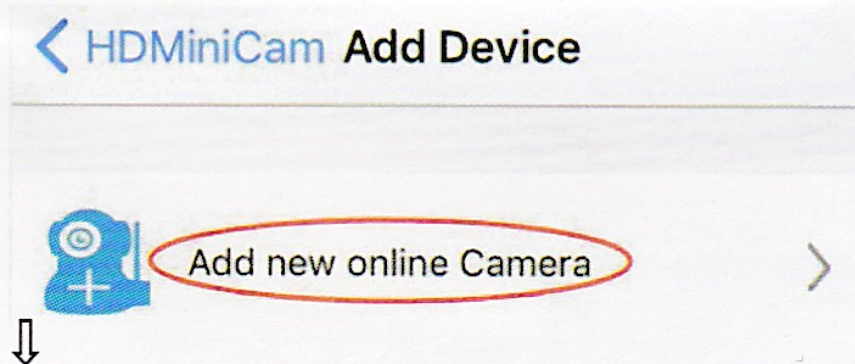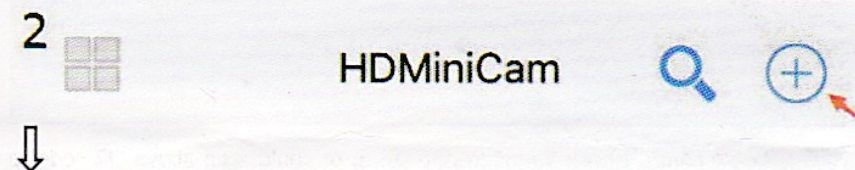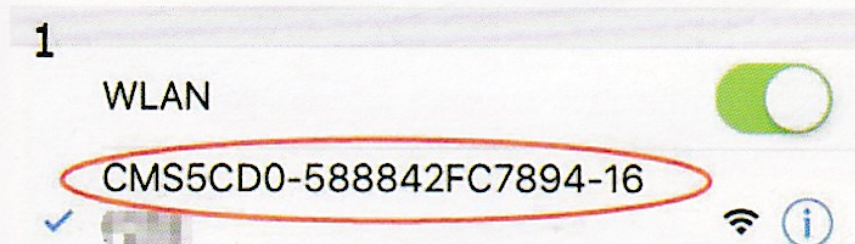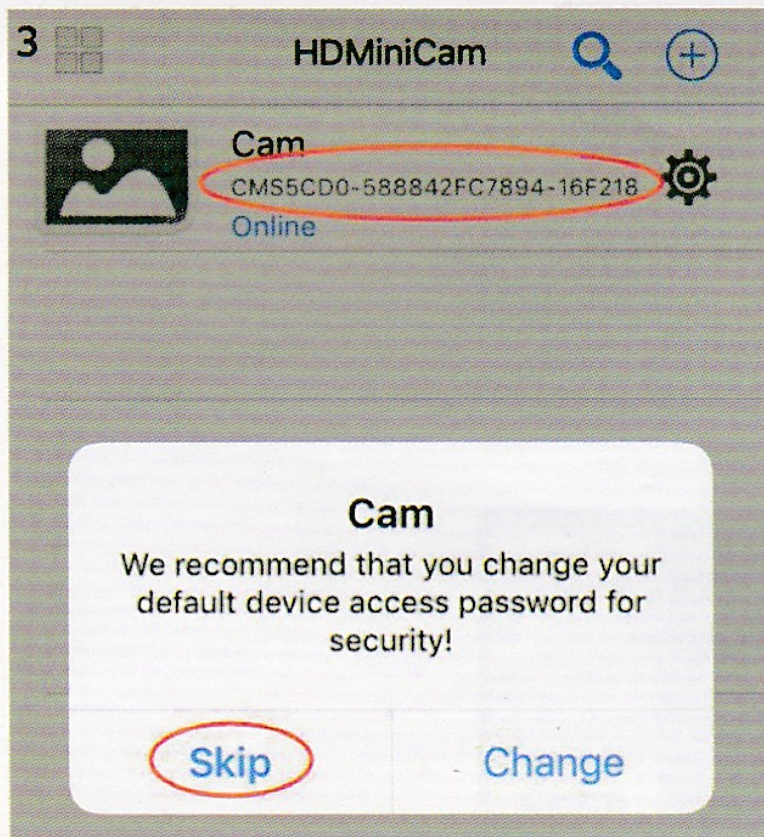

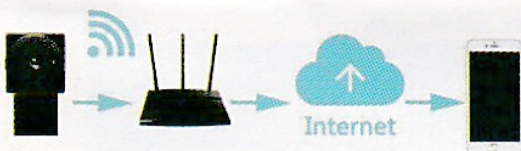3. Shown **HDMiniCam** icon on phones after App installation

Hotspot

1. Enter the phone **setting** where WIFI signal inside, find the camera Wi-Fi signal and connect as the picture shown(the Wi-Fi name should match the code on camera)
2. Open the phone App (**HDMiniCam**), click on the **plus sign** to add into the **Add device**.
3. Click to go online camera, click skip to watch videos.

1

WLAN

CMS5CD0-588842FC7894-16

2   **HDMiniCam**   🔍 ⊕

⇩

< HDMiniCam **Add Device**

Add new online Camera   ›

⇩

< Add Device **Search(LAN)**

CMS5CD0-588842FC7894-16F

192.168.

3 HDMiniCam

Cam
CMS5CD0-588842FC7894-16F218
Online

Cam
We recommend that you change your default device access password for security!

Skip — Change

IV. Camera WIFI remote settings.

Internet

1. Click on the small gear [icon] enter **Advance configuration**.

2. Find the install location of the WIFI signal router, configure the camera to enter a password into the router.

3. Click OK, waiting for the camera to complete restart, it takes about 40 seconds, then you can remotely access, after a successful connection, you can watch the video during internet.

HDMiniCam

Cam
CMS5CD0-588842FC7894-16F218
Online
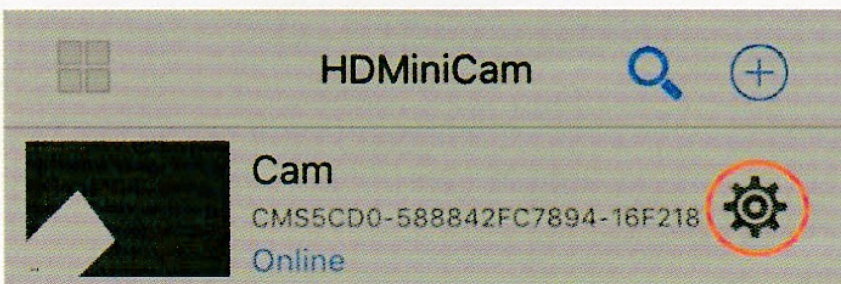
Modify device

Delete device

Reconnect

Device Settings

< HDMiniCam **Device Settings**

Cam

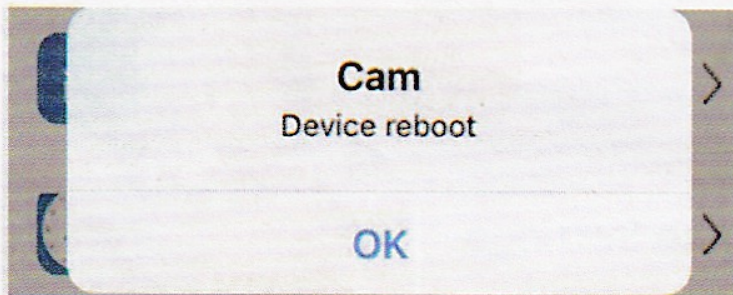⚠️ Alarm Config 〉

📶 WiFi Config 〉

< Device Settings **WiFi Config**

Current WiFi network

Current WiFi network

S   Password

•••••••••••

Cancel   OK

Cam

Are you sure to connect network
████████ (Password:
████████████) ?

Cancel   OK

Cam
Device reboot   >
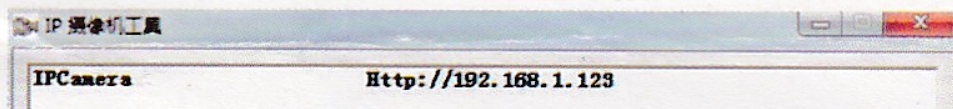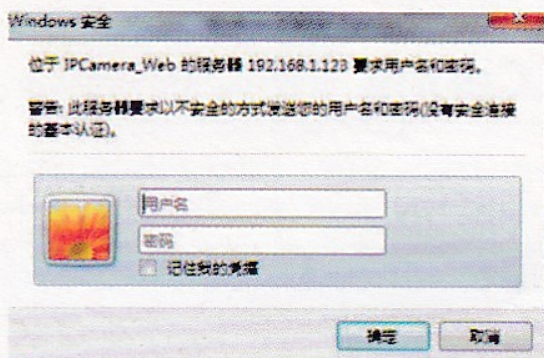
OK   >
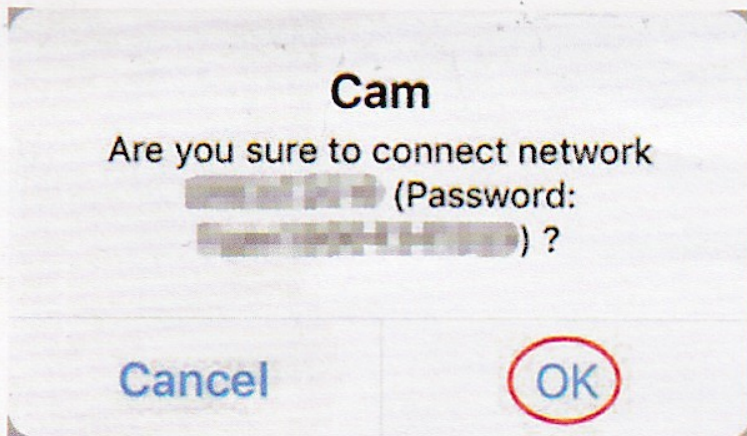
V. LAN review the picture on the page & computer client access setting

IPCFinder_V1.7.

Open   CD,   and   double   click [icon] ,   It   will   appear   a   window   as   below

IP 摄像机工具

IPCamera   Http://192.168.1.123

Double click，you will see below image

Windows 安全

位于 IPCamera_Web 的服务器 192.168.1.123 要求用户名和密码。

警告: 此服务器要求以不安全的方式发送您的用户名和密码(没有安全连接的基本认证)。

用户名
密码
记住我的凭据

确定   取消

Input your user name and password and click [确定] to confirm, finally you can see it directly
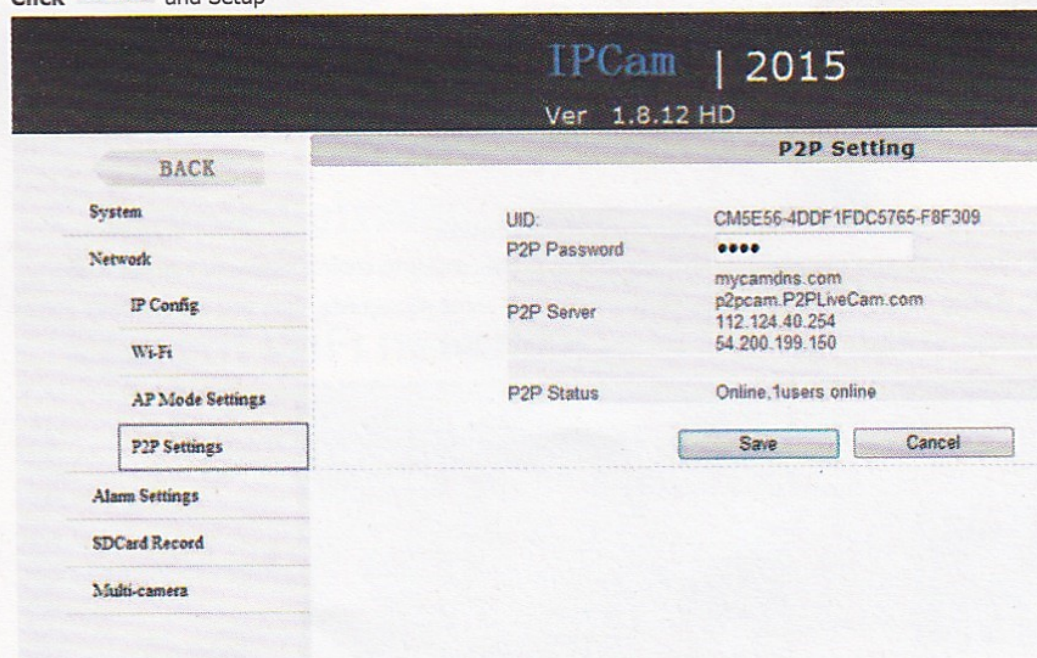
Attention:

You need to download the plugin and choose the language if this is your first time to use.

6
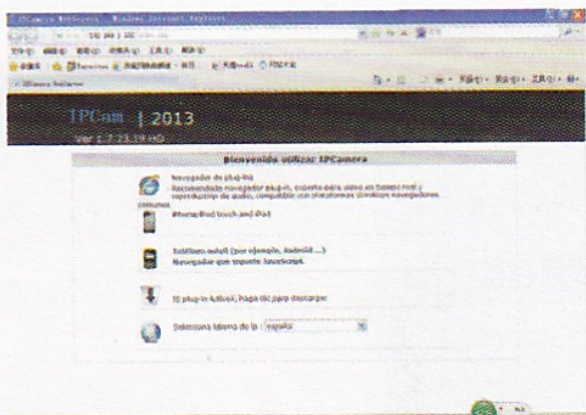
Navegador de plug-ins
Recomendado navegador plug-in, soporte para video en tiempo real y
reproducción de audio, compatible con plataformas Windows navegadores
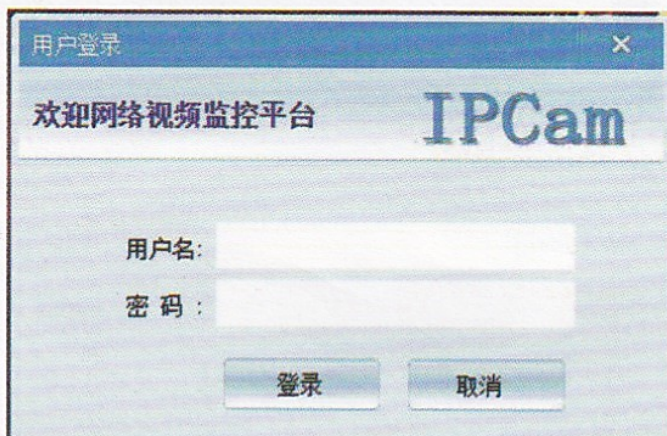
click

Click and Setup

You will see UID and password（Original password: 8888）, you can change password to your own password.

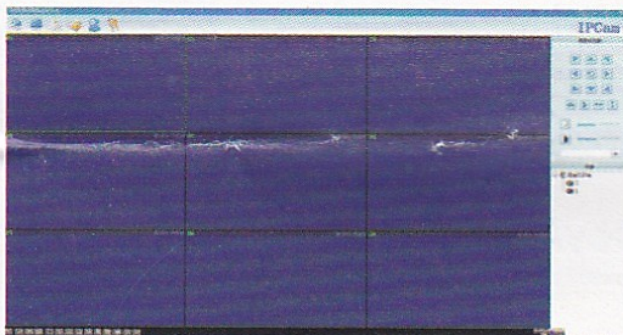## VI. How to watch camera by Computer

1. Use computer CD drive to read CD and install this software on compute

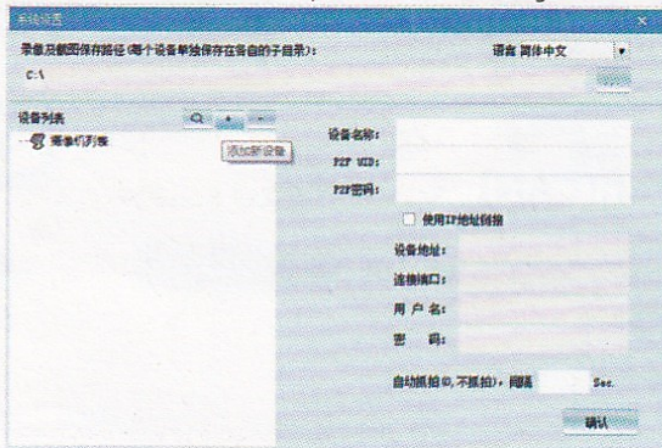2. You will see this icon and then click it, you can see this image

Input your user name and password, click login this key.
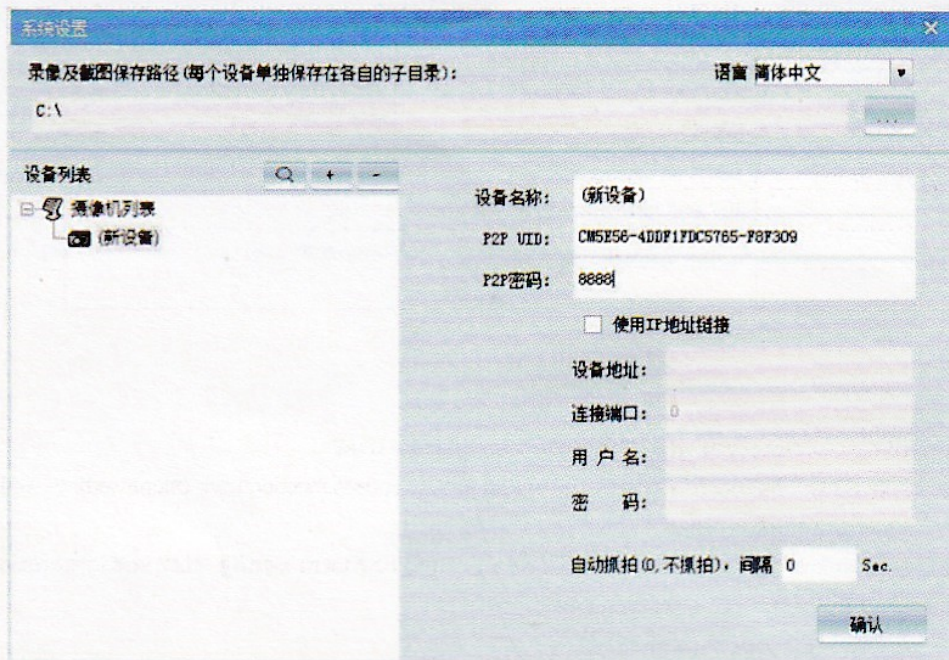
（Remark：Original user name is admin, no password）

Click this icon and you will see below image

click add new requirement ⬚ to add camera

Click "**confirm**" ⬚ key and then click this icon ⬚

Attention:

Equipment: you can set up by yourselft

P2P UID Paster

Original password is 8888

VII. Specifications

Pixel	1200 Mega CMOS
Resolution Ratio	1080P/720P/640P/480P
Video Format	ASF
Frame Number	25
Visual Angle	90 degree
function	Motion detective, email alert
Minimal Illumination	1LUX
Battery Capacity	2500 mAh
Video Duration	Over 4 Hours
Compressed Format	H.264
Recording Range	5 m²
Consumption	240MA/3.7V
Storage Temperature	-20-80 degree centigrade

Operating Temperature	-10-60 degree centigrade
Operation Humidity	15-85%RH
Memory Card Type	TF card
Maximum capacity of memory card	32GB
Player Software	VLC Player/SM Player
Computer Operating System	Windows/Mac OS X
Mobile Phone Operating System	Android/iOS
Web browser	IE7 and above, chrome, Firefox safari. etc
窗体顶端 Largest customer	4

VIII. FAQ

1. Why the camera can't connected with phone on second time use?

You could reset (long press reset button 10 second) the camera and reset reconnection from phone setting—wifi.

2. How to open the motion detect feature.

Enter HDMiniCam App, click the gear icon and select **Device Settings->Alarm Config**, click **setting motion detection sensitivity**, then you could set up related data.

3. Why remote monitoring is not smooth?

You should choose suitable resolution to watch according to your Internet.

4. Why SD card cannot save?

SD card must be formatted if this is your first time to use.

5. Why Connection is not on the network?

Select the correct connection way according to your network

6. Why APP remote viewing SD card video is not smooth?

As a result of the mobile decoding ability are different, and you can adjust video equipment according to your mobile's resolution

7. How to find my password?

To press reset key with 10 seconds and Restore the factory Settings.

Note:

The device name easy to remember just write

Paste on P2P UID

Password had not been changed, then that is 8888 if you have modified, please fill in the date.

Special note:

1. If the camera is not connected to the router, please reset, when camera connect router then set up again.

2. If the camera does not read the memory card, use mobile phone or LAN internet to format the memory card.

3. Shutdown Reset: Please turn off and reset when you see the red light shine.

4. To play a video file on your computer, please use the disc in the player vlc play software.