

CATALOG

Stainless steel solutions

Corrosion-resistant protection
for electrical systems

T&B Fittings | ***T&B Liquidtight Systems*** | ***Kindorf*** | ***Superstrut*** | ***T&B Cable Tray*** | ***Ty-Met***



04

Kindorf® modular framing system



Kindorf® modular framing system

Stainless steel modular framing system

Overview	46
Channels, straps and clamps	47
Trapnut® strut fastener	48
Channel fittings and hardware	49

Kindorf® modular framing system

Saving you time and money.

—
01 1½" wide x 1½" deep
⅞" continuous open slot
10 ft. and 20 ft. lengths

Kindorf channels

The Kindorf channel system is designed so that the maximum number of support and framing applications can be constructed with a minimum amount of labor and pieces.

Uniqueness in design

The 1½" dimension in the channel, hole spacing and fittings means all parts fit together, no matter where they're used, or at what angle. This modular dimension provides maximum flexibility in field applications, saving inventory and labor dollars.

Strength


Even though the Kindorf channel is slightly smaller in dimensions, it supports the same weight as 1½" channel.

Compatibility with 1½" strut

The Kindorf system is designed so that most accessories are compatible with 1½" strut. Conduit and pipe straps will work equally well with 1½" and 1½" strut. In addition, 98% of 1½" accessories are interchangeable with Kindorf channel. Angle fittings can adapt easily to the open side of any 1½" strut and the unique parallelogram nuts provide secure attachment to both types of strut.

Full line of support products

The Kindorf channel system's many advantages are extended into a broad product offering, including beam clamps, concrete inserts, lighting supports, cable cleats and a variety of threaded components. This, combined with a nationwide network of distributors and service centers, makes the Kindorf system a single source for your supported metal-framing needs.

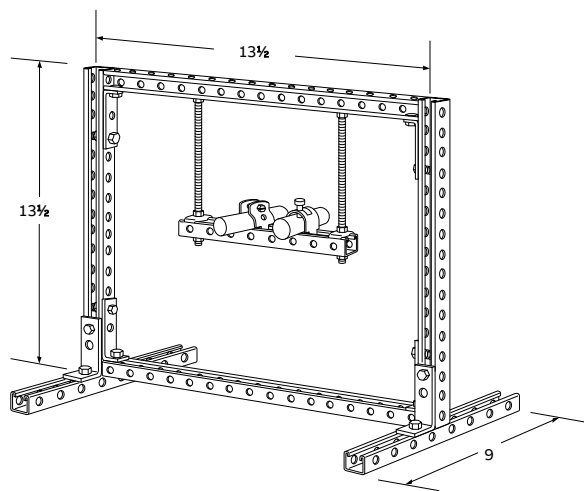

—
01

Kindorf® channels, straps and clamps


Type 304 and Type 316 stainless steel




B-900 Channel — 1½" x 1½"

Cat. no.	Description	Length (ft.)
B-900-10SS	Type 304	10
B-900-10316-SS	Type 316	10

Diagrams




Use H-113-B bolts and B-910-1/2 or B-911-1/2 stainless steel nuts for mounting fittings.
Available 20 ft. lengths.



B-907 Channel — 1½" x ¾"

Cat. no.	Description	Length (ft.)
B-907-10SS	Type 304	10
B-907-10316SS	Type 316	10

Diagrams



- Connection by means of continuous slot or ⅜" holes on 1½" centers


Available 20 ft. lengths.



B-905 Channel — 1½" x 1½"

Cat. no.	Description	Length (ft.)
B-905-10SS	Type 304	10
B-905-10-316SS	Type 316	10

Diagrams



- ⅜" holes on 1½" centers punched in channel base. Connection also by means of continuous slot.

Use H-113-B bolts and B-910-1/2 or B-911-1/2 stainless steel nuts for mounting fittings.
Scribe marks designate mid-point between holes for accurate field cutting.
Available 20 ft. lengths.



C-105

Straps for rigid conduit and pipe — Type 304 stainless steel

Cat. no.	Rigid conduit or pipe size (in.)
C-105-1/2SS	½
C-105-3/4SS	¾
C-105-1SS	1
C-105-1-1/4SS	1¼
C-105-1-1/2SS	1½
C-105-2SS	2
C-105-2-1/2SS	2½
C-105-3SS	3
C-105-3-1/2SS	3½
C-105-4SS	4

For Type 316 stainless steel, add 316 suffix.

Kindorf® Trapnut® strut fastener

Type 316 stainless steel





- 01 Hold in the open position
- No need to thread the Trapnut fastener from either end of the rod – saves valuable time
 - Perfect for retrofit applications where rod ends are not accessible

- 02 Insert the bottom plate on the rod and close the top plate
- Precision threads trap the threaded rod for a sturdy hold that can be adjusted up or down for fine-tune positioning
 - Functions as a hex nut, square washer and flat washer combined

- 03 Press the pin with pliers
- Locking pin holds Trapnut fastener in the desired position
 - Can be removed and reused

- 04 Tighten to the desired position with pliers
- Can be adjusted up or down for fine-tune positioning
 - Sturdy, load-bearing stainless steel construction
 - Sized to provide custom fit for either 1 5/8" or 1 1/2" strut systems

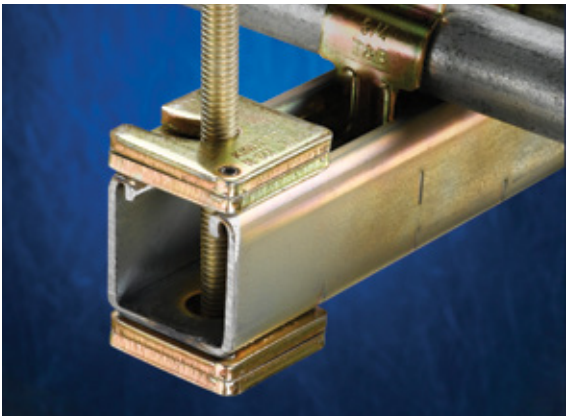

Fewer parts, less installation time and huge labor savings. The unique scissor action of the Trapnut strut fastener closes at any desired position on the threaded rod. Once closed, precision threads trap the rod for a sturdy hold that can be adjusted up or down for fine-tune positioning. While the versatile Trapnut strut fastener has a locking pin that holds it in the desired position, it can also be removed and reused.

Unlike a hex nut, there's no need to thread the Trapnut fastener from either end of the rod, saving valuable time on the job. While the Trapnut fastener is a time-saver for new work, it's also invaluable for retrofit applications. Rather than disassembling an existing trapeze to run additional conduit above it, simply clamp the Trapnut fastener between the trapeze and beam clamp for a speedy retrofit solution. Ideal for applications where the rod ends aren't accessible.


The Trapnut fastener offers sturdy, load-bearing stainless steel construction for a solid installation. In addition, the Trapnut fastener functions as a hex nut, square washer and flat washer all in one, so there are fewer parts to keep track of on the job.

- Takes 30% less time than the traditional method on new work*
- Takes 43% less time than the traditional method on retrofit applications*


* Based on time study conducted by ABB comparing the time to install 15 feet of 2" conduit with typical trapeze assemblies using washers and nuts versus Trapnut fasteners.

Trapnut fastener — Type 316 stainless steel


Product code	Material	Size		Design load	
		(in.)	(mm)	(lb)	(kg)
H122-1/4-SS6	Type 316 stainless steel	1/4	6.35	150	68.04
H122-3/8-SS6	Type 316 stainless steel	3/8	9.53	590	267.62
H122-1/2-SS6	Type 316 stainless steel	1/2	12.70	1080	489.88




01



02



03



04

Kindorf® channel fittings and hardware
Type 304 and Type 316 stainless steel

Self-holding clamping nut with spring attached.
For use with 1½" deep channels.



B-911 series spring channel nuts


Cat. no.	Size (in.)	Thickness (in.)	lbs./C
B-911-3/8-SS	¾-16	⅜	12.5
B-911-1/2-SS	½-13	⅝	16.0

Square nuts for use with channel and spot-type concrete inserts.


B-914 series

Cat. no.	Size (in.)	Thickness (in.)	Wt. lbs./C
B 914 1/4SS	¼-20	⅜	10.50
B-914-3/8SS	¾-16	⅝	13.25
B-914-1/2SS	½-13	¾	14.00

Diagrams

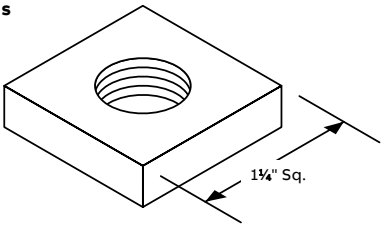

* Standard pipe threads.



AB-241 series square washers

Cat. no.	Bolt size (in.)	Std. ctn.
AB-241-1/4SS	¼	100
AB-241-5/16SS	⅝	100
AB-241-3/8SS	¾	100
AB-241-1/2SS	½	100

Note: All hardware shown here is made of Type 304 stainless steel. For Type 316 stainless steel, substitute SS6 suffix for SS suffix at the end of catalog number.


Kindorf® channel fittings and hardware

Type 304 stainless steel

B-915 two-hole angle connector

Cat. no.	Description
B 915SS	Type 304

Diagrams

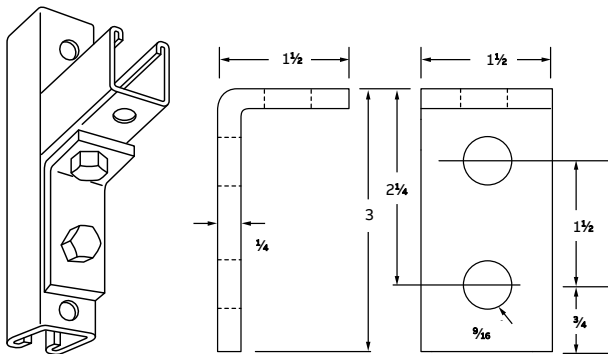


Can also be used as side-beam connector to suspend 1/2" hanger rod.



B-917 five-hole angle connector

Cat. no.	Description
B 917SS	Type 304


Diagrams

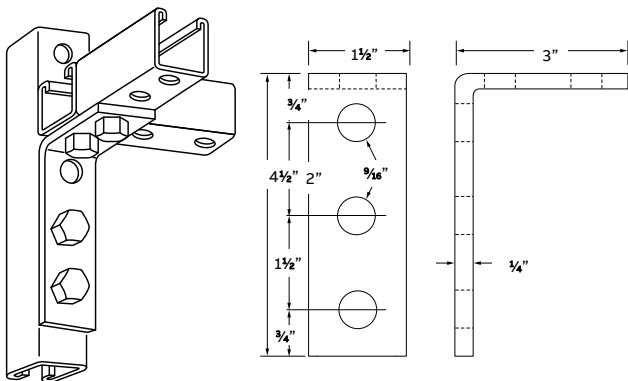

B-924 post base connector

Cat. no.	Description
B 924SS	Type 304

Diagram

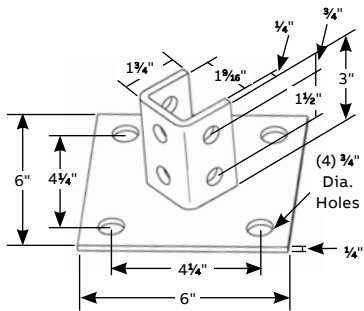


For use with 1 1/2" x 1 1/2" channels.

B-937 T-plate connector

Cat. no.	Description
B 937SS	Type 304

Diagrams

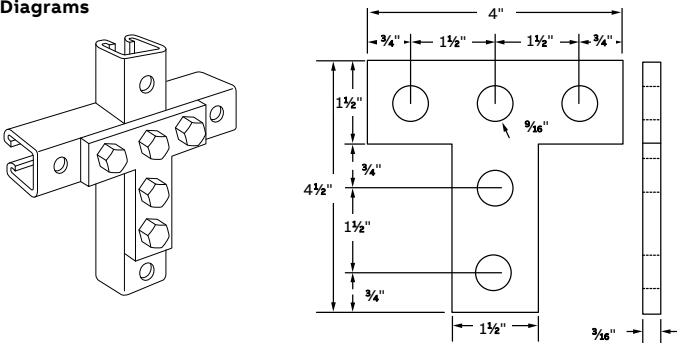

Stainless steel helps protect
electrical systems exposed
to water, salt and humidity.



05

Superstrut® channels and accessories



Superstrut® channels and accessories

Stainless steel channels and accessories

Channels	54
Hardware	55
Fittings	57
Threaded rod	58
Beam clamps and pipe straps	59

Superstrut® channels

Type 304 and Type 316 stainless steel





- 12- or 14-gauge Type 304 or Type 316 stainless steel
- Available in 10-ft. and 20-ft. lengths with standard length tolerance of $\pm \frac{1}{8}$ "
- Choose standard or shallow and solid or half-slot style



— 01 A1200HS
— 02 B1400
— 03 Half-slot
— 04 A1202




01



02

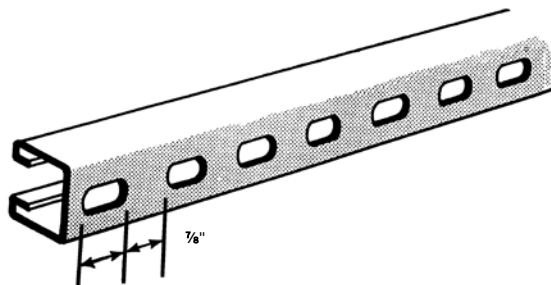

03



04



Type 304 cat. no.	Type 316 cat. no.	Style	Steel gauge	Length (ft.)	Width	In Height
A1200-10-SS	A1200-10-T316SS	Standard	12	10	1.63	1.63
A1200-20-SS	A1200-20-T316SS	Standard	12	20	1.63	1.63
A1200HS-10-SS	A1200HS-10-T316SS	Standard half-slot	12	10	1.63	1.63
A1200HS-20-SS	A1200HS-20-T316SS	Standard half-slot	12	20	1.63	1.63
B1400-10-SS	B1400-10-T316SS	Shallow	14	10	1.63	.81
B1400-20-SS	B1400-20-T316SS	Shallow	14	20	1.63	.81
B1400HS-10-SS	B1400HS-10-T316SS	Shallow half-slot	14	10	1.63	.81
B1400HS-20-SS	B1400HS-20-T316SS	Shallow half-slot	14	20	1.63	.81
A1202-10-SS	A1202-10-T316SS	Back-to-back	12	10	1.63	3.25
A1202-20-SS	A1202-20-T316SS	Back-to-back	12	20	1.63	3.25
A1202HS-10-SS	A1202HS-10-T316SS	Back-to-back half-slot	12	10	1.63	3.25
A1202HS-20-SS	A1202HS-20-T316SS	Back-to-back half-slot	12	20	1.63	3.25

Superstrut® hardware

Type 304 stainless steel




E-145 standard hex nut

Cat. no.	Size (in.)
E-145-1/4SS	1/4
E-145-3/8SS	3/8
E-145-1/2SS	1/2



H-119 rod coupling

Cat. no.	Size (in.)
H-119-1/4SS	1/4
H-119-1/2SS	1/2



E-147 flat steel washer

Cat. no.	Size (in.)
E-147-1/4SS	1/4
E-147-3/8SS	3/8
E-147-1/2SS	1/2



EF-147 fender washer

Cat. no.	Size (in.)
EF-147-1/4SS	1/4
EF-147-3/8SS	3/8
EF-147-1/2SS	1/2

Superstrut® hardware

Type 304 stainless steel



E-142 hex head cap screw

Cat. no.	Size (in.)
E-142-3/8x1SS	$\frac{3}{8}$ x 1
E-142-3/8x1-1/2SS	$\frac{3}{8}$ x 1 $\frac{1}{2}$
E-142-1/2x1-1/2SS	$\frac{1}{2}$ x 1 $\frac{1}{2}$

Consult your ABB representative for additional sizes.



B-100 short spring nut

Cat. no.	Size (in.)
B-100-1/4SS	$\frac{1}{4}$
B-100-3/8SS	$\frac{3}{8}$
B-100-1/2SS	$\frac{1}{2}$

- Nut is square over $\frac{1}{2}$ " size
- For all "B" series channel and inserts



A-100 regular spring nut

Cat. no.	Size (in.)
A-100-1/4SS	$\frac{1}{4}$
A-100-5/16SS	$\frac{5}{16}$
A-100-3/8SS	$\frac{3}{8}$
A-100-1/2SS	$\frac{1}{2}$
A-100-5/8SS	$\frac{5}{8}$

- Nut is square over $\frac{1}{2}$ " size
- For all "A" and "C" series channel and inserts



AB-100 springless nut


Cat. no.	Size (in.)
AB-100-1/4SS	$\frac{1}{4}$
AB-100-3/8SS	$\frac{3}{8}$
AB-100-1/2SS	$\frac{1}{2}$

- Nut is square over $\frac{1}{2}$ " size
- For use with all channels


Superstrut® fittings

Type 304 stainless steel


Flat plate fittings




AB220SS



AB207SS




AB206SS




X207SS


90° corner fittings or brackets




AB201SS




AB202SS




AB203SS




AB204SS




AB213SS



AB214SS




AB219SS




AW219SS

45° fittings



AB225SS




SPAB-227SS


Superstrut® fittings and threaded rod

Type 304 and Type 316 stainless steel


Type 304 fittings
Pedestal base




AP-232SS



AP-232SQSS




AP-235SS




AP-235SQSS

Type 316 fittings
Flat plate fitting




AB220T316SS


90° corner fittings or brackets



AB201T316SS




AB203T316SS



AB205T316SS

45° fitting



AB225T316SS

All-thread rod



Continuously threaded rod for use with conduit hangers and strut to suspend overhead conduit runs.

- Available in Type 304 or Type 316 stainless steel
- Comes in standard 6- or 12-ft. lengths

All-thread rod

Type 304 cat. no.	Type 316 cat. no.	Size (in.)	Length (ft.)	Threads per inch
H104-1/4X6SS	H104-1/4X6SS316	1/4	6	20
H104-1/4X12SS	H104-1/4X12SS6	1/4	12	20
H104-3/8X6SS	H104-3/8X6SS316	3/8	6	16
H104-3/8X12SS	H104-3/8X12SS6	3/8	12	16
H104-1/2X12SS	H104-1/2X12SS316	1/2	12	13
H104-5/8X12SS	H104-5/8X12SS316	5/8	12	11

Superstrut® beam clamps and pipe straps


Type 304 and Type 316 stainless steel



Type 316 stainless steel beam clamps

Cat. no.	Base size (in.)		Jaw opening (in.)	Tapping of base and back holes	Set screw load rating†	Torque in inch-lbs.	Std. ctn.
	A	B					
500SS316	1	1¼	1⅝	¼-20	250	60	50
502SS316	2	2	1	⅜-16	750	120	50
503SS316	2⅝	2½	1	½-13	1,250	250	20

Diagrams

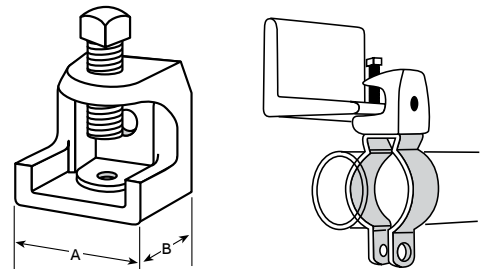

†Safety factor of 3.

Load ratings based on bottom hole of beam clamp.
CSA File No. LR-52208.



Just twist-insert these pipe straps anywhere you need them along the slot side of a channel. For additional flexibility, you can position the straps as closely as your pipe couplings permit.

- Combination slot and hex head bolt for flexibility of attachment
- Captivated square nut on shoulder enables easy one-handed tightening

Type 304 and Type 316 pipe straps

Type 304 cat. no.	Type 316 cat. no.	Conduit size (in.)	O.D. size (in.)
702-3/8SS	702-3/8T316SS	⅜	0.675
702-1/2SS	702-1/2T316SS	½	0.840
702-3/4SS	702-3/4T316SS	¾	1.050
702-1SS	702-1T316SS	1	1.315
702-1-1/4SS	702-1-1/4T316SS	1¼	1.660
702-1-1/2SS	702-1-1/2T316SS	1½	1.900
702-2-1/2SS	702-2-1/2T316SS	2½	2.875
702-3SS	702-3T316SS	3	3.500
702-3-1/2SS	702-3-1/2T316SS	3½	4.000
702-4SS	702-4T316SS	4	4.500
702-5SS	702-5T316SS	5	5.563
702-6SS	702-6T316SS	6	6.625

**06**

T&B® Cable Tray cable support systems






T&B® Cable Tray cable support systems

Stainless steel cable tray and accessories	
Overview	62
Straight and cover sections	64
Fittings	65
Combo hold-down/guide clamp	67

T&B® Cable Tray

Overview

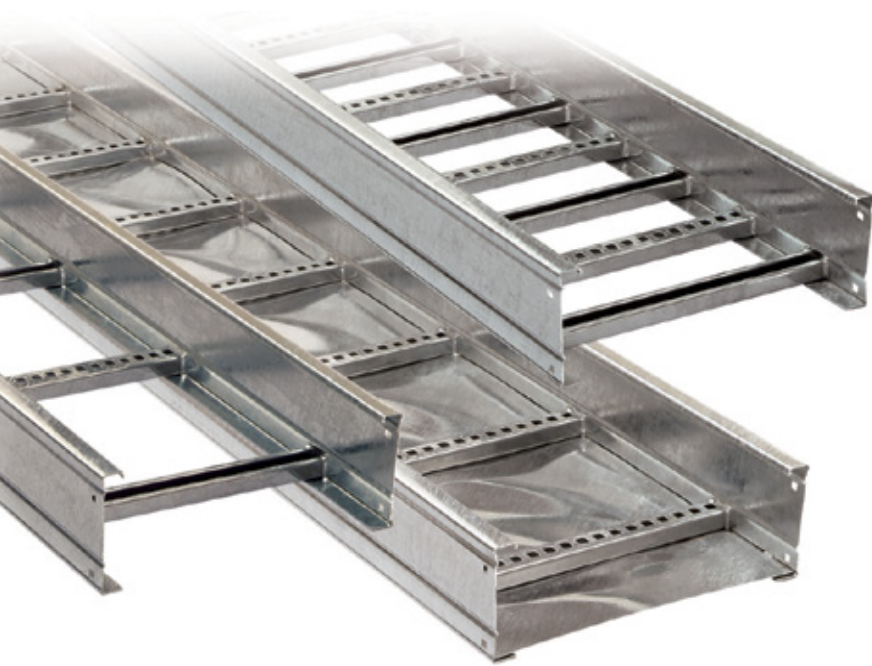

Benefits of cable tray

Cable tray wiring systems offer significant advantages over conduit pipe and other wiring systems. Cable tray is less expensive, more reliable, more adaptable to changing needs and easier to maintain. In addition, it is safer than conventional wiring systems.

An evaluation of the costs and benefits of various wiring systems should be done in the design phase. Unfortunately, many engineers who are unfamiliar with wiring systems avoid the system selection process or defer it until construction — often resulting in higher costs, scheduling delays and a system that will not meet future needs.

Selection of a wiring system that is not the most suitable for a particular application in terms of cost, potential corrosion and electrical considerations can lead to numerous problems, including excessive initial cost, poor design, faulty installation, extra maintenance, future power outages and unnecessary safety concerns.

Costs

Extensive experience has shown that the initial cost of a cable tray installation (including conductor, material and installation labor costs) may be as much as 60% less than a comparable conduit wiring system.

Cable tray systems — including trays, supports, fittings and other materials — are generally much less expensive than conduit wiring systems. In addition, major cost savings are generated by the relative ease of installation. Labor costs of installing a cable tray system can run up to 50% less. Total cost savings will vary with the complexity and size of the installation.

Direct cost savings are easy to calculate during the design phase of an installation, but the enormous advantages of cable tray systems may accrue only over time. A system's reliability, adaptability, ease of maintenance and inherent safety features result in many other types of cost savings, including:

- Lower engineering and maintenance costs
- Less need to reconfigure system as needs change
- Less down time for electrical and data handling systems
- Fewer environmental problems resulting from loss of power to essential equipment

Stainless steel


Stainless steel offers high yield strength and high creep strength at high ambient temperatures.

T&B stainless steel cable tray systems are roll-formed from AISI Type 316 stainless steel.

Stainless steel is resistant to dyestuffs, organic chemicals and inorganic chemicals at elevated temperatures. Higher levels of chromium and nickel and a reduced level of carbon serve to increase corrosion resistance and facilitate welding. Type 316 includes molybdenum to increase high-temperature strength and improve corrosion resistance, especially to chloride and sulfuric acid. Carbon content is reduced to facilitate welding.

T&B® Cable Tray

Sample plant layout

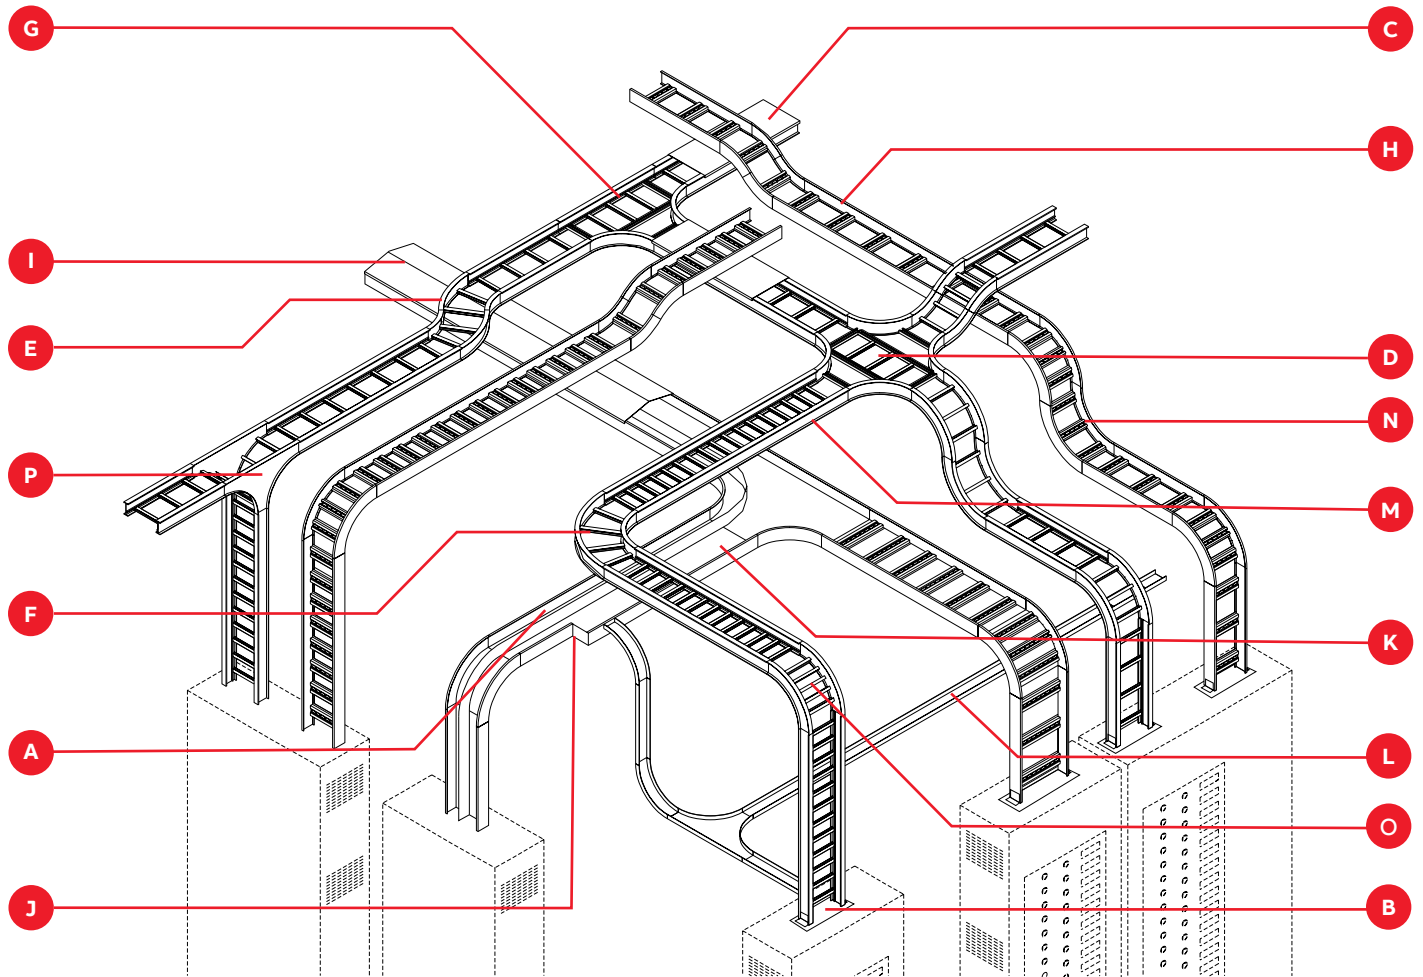

Application

- Commercial
- Schools
- Hospitals
- Office buildings
- Airports
- Casinos
- Stadiums
- Industrial
- Petrochemical plants
- Automotive plants
- Paper plants
- Food processing
- Power plants
- Refineries
- Manufacturing
- Mining

Legend

- A - Barrier strip
- B - Box connector
- C - Flat cover
- D - Horizontal cross
- E - Horizontal 45°
- F - Horizontal 90°
- G - Horizontal tee
- H - Ladder tray
- I - Peaked cover
- J - Right reducer
- K - Solid tray
- L - Solid channel tray
- M - Ventilated tray
- N - Vertical 90° inside
- O - Vertical 90° outside
- P - Vertical tee

T&B® Cable Tray straight and cover sections

Type 316 stainless steel



Straight section catalog number system

S

S

1

3

2

4

L

0

9

1

4

4

Material

Description	Code
Type 316 stainless steel	SS

Series

Description	Code
Series 1	1**
Series 2	2**
Series 3	3**
Series 4	4
Series 5	5

** Series 1–3 are not available in 6-meter and 24-foot lengths.

Side rail height

Code
3 7/8"
4"
5"
6"
7"

Width

Description	Code
6"	06
9"	09
12"	12
18"	18
24"	24
30"	30
36"	36

Bottom type

Description	Code
6" Rung spacing	L06
9" Rung spacing	L09
12" Rung spacing	L12
6" Rung spacing	L18*
Ventilated	V
Solid trough	S

* Only upon request (consult your ABB representative for loading lengths).

Length

Description	Code
3 Meters	3
6 Meters	6
12 Feet	144
24 Feet	288

Straight cover catalog number system

S

S

W

2

4

S

N

C

1

4

4

Material prefix

Description	Code
Type 316 stainless steel	SSW

Width

Description	Code
6"	06
9"	09
12"	12
18"	18
24"	24
30"	30
36"	36

Type

Description	Code
Solid non-flanged cover	SNC
Solid flanged cover	SFC
Ventilated flanged cover	VFC
Peaked flanged cover	PFC

Length

Description	Code
6 Feet	72
12 Feet	144
3 Meters	3

T&B® Cable Tray fittings

Type 316 stainless steel



S S F 3 2 4 L V 0 9 0 2 4

Material prefix

Description	Code
Type 316 stainless steel	SSF

Side rail depth

Description	Code
3 1/4"	3
4"	4
5"	5
6"	6
7"	7

Width

Description	Code
6"	06
9"	09
12"	12
18"	18
24"	24
30"	30
36"	36

Bottom type

Description	Code
Ladder	L*
Ventilated	V***
Solid through	S****

Fitting type

Description	Code
Horizontal bend	HB
Horizontal tee	HT
Horizontal cross	HX
Vertical inside bend	VI
Vertical outside bend	VO
Vertical tee down	VTD
Vertical tee up	VTU
Horizontal wye right	HYR
Horizontal wye left	HYL
Horizontal reducing tee	RT
Horizontal expanding tee	ET
Horizontal expand cross	EX
Horizontal left reducer	HLR
Horizontal straight reducer	HSR
Horizontal right reducer	HRR
Cable support fitting	CS

Angle*

Description	Code
30°	30
45°	45
60°	60
90°	90

* Angle is required for HB, VI, VO only.

Nominal radius†

Description	Code
12"	12
24"	24
36"	36
48"	48

* Manufactured with 9" rung spacing measured at the center line of fitting.

*** Manufactured with 4" edge-to-edge rung spacing measured at the center line of fitting.

**** Manufactured with flat sheet inserted under rungs with 9" rung spacing measured at the center line of fitting.

† Radius is not required for fitting types HYR, HYL, HLR, HRR, HSR.

T&B® Cable Tray fittings

Type 316 stainless steel

Material		Width		Cover type		Fitting type		Degree*		Radius	
Description	Code	Description	Code	Description	Code	Description	Code	Description	Code	Description	Code
Type 316 stainless steel	SSW	6"	06	Solid non-flanged cover	SNC	Horizontal bend	HB	30°	30	12"	12
		9"	09	Solid flanged cover	SFC	Horizontal tee	HT	45°	45	24"	24
		12"	12	Ventilated flanged cover	VFC	Horizontal cross	HX	60°	60	36"	36
		18"	18			Vertical inside bend	VI	90°	90	48"	48
		24"	24			Vertical tee up	VTU				
		30"	30			Horizontal wye right	HYR				
		36"	36			Horizontal wye left	HYL				

* Required for HB and VI only.

Material		Width 1		Width 2		Cover type		Fitting type		Radius*	
Description	Code	Description	Code	Description	Code	Description	Code	Description	Code	Description	Code
Type 316 stainless steel	SSW	6"	06	6"	06	Solid non-flanged cover	SNC	Horizontal reduce tee	RT	12"	12
		9"	09	9"	09	Solid flanged cover	SFC	Horizontal expand tee	ET	24"	24
		12"	12	12"	12	Ventilated flanged cover	VFC	Horizontal expand tee and reduce cross	EX	36"	36
		18"	18	18"	18			Horizontal straight reducer	HSR	48"	48
		24"	24	24"	24			Horizontal left reducer	HLR		
		30"	30	30"	30			Horizontal right reducer	HRR		
		36"	36	36"	36						

* Radius not required for HSR, HLR, HRR.

Material		Side rail depth		Width		Cover type		Fitting type		Degree*		Radius	
Description	Code	Description	Code	Description	Code	Description	Code	Description	Code	Description	Code	Description	Code
Type 316 stainless steel	SSW	3 3/8"	3	6"	06	Solid non-flanged cover	SNC	Vertical outside bend	VO	30°	30	12"	12
		4"	4	9"	09	Solid flanged cover	SFC	Vertical tee down	VTD	45°	45	24"	24
		5"	5	12"	12	Ventilated flanged cover	VFC	Cable support fitting	CS	60°	60	36"	36
		6"	6	18"	18					90°	90	48"	48
		7"	7	24"	24								
				30"	30								
				36"	36								

* Required for VO only.

T&B® Cable Tray combo hold-down/guide clamp

Type 316 stainless steel



- Easy-to-install design
- Compatible with all series of T&B Cable Tray
- Versatile use for strut and beam installations
- Functional in all cable tray positions, including vertical installations

Cable tray combo clamp

Cat. no.	Description
SSWCHGC	Combo clamp, 316 stainless steel
SSWCHGC-HDW	3/8" hardware, 316 stainless steel







07

Ty-Met™ cable ties



Ty-Met™ cable ties

Stainless steel cable ties	
Overview	72
Ball-lock type cable ties	74
Multi-Lok type cable ties	77

Ty-Met™ stainless steel cable ties

Features and benefits

Ball-lock type

Easy application and strong self-locking mechanism (steel ball), with low insertion force



Angled/rounded tail, for safer handling and easier insertion

Rounded edges and smooth surfaces, for fast and safe hand installation
Uncoated or fully coated with non-toxic, halogen-free polyester

Ball-lock retained tension type

Wave-form spring crimp eliminates movement – even in high-vibration applications



Convenience of a ball-lock fastening mechanism with a spring crimp that maintains tension after installation

Multi-Lok

Self-locking mechanism (pawl and ratchet)



Larger slot at the end, allows the use of a hook-type tool

Low profile, flat head (no sharp edges), for easy and safe installation
Uncoated or fully coated with non-toxic, halogen free polyester

Bands on reel with separate heads

Bands and separate heads are made of corrosion-resistant 316 grade stainless steel, for high mechanical and chemical durability



Available in 5 widths up to 19.1 mm (0.75"), to suit a wide range of applications
25 m (82.02 ft) reels for a cost-saving and customized installation, around all sizes and shapes of objects

Bands are fully covered with non-toxic, halogen-free polypropylene


Dedicated heads are easy to install




UV-resistant



Flame retardant



Heat resistant



Low temperature flexibility



Weather-proof



Chemical resistant



Radiation resistant



Low smoke



Detectable

Ty-Met™ ball-lock type cable ties

Type 316 stainless steel — Fully coated



Characteristics

The ball-lock type stainless steel ties from ABB are self-locking and require no time-consuming crimping or folding operations.

- Strong self-locking mechanism (stainless steel ball) with low insertion force
- Fast, easy and reliable installation
- Standard widths (4.6 mm and 7.9 mm/0.18" and 0.31"), suitable for most applications, indoor and outdoor
- Corrosion-resistant 316 grade stainless steel (marine grade) for high mechanical and chemical durability
- Fully coated version with non-toxic, halogen-free polyester coating for superior protection of cables and installer's hands and for improved insulation between dissimilar materials

- Applications: installation of cables and pipes in extreme conditions and hazardous areas, such as: petrochemical and food processing industries, power stations, mining, shipbuilding, offshore and other aggressive environments

Technical information

- Material: 316 grade non-magnetic stainless steel
- UV-resistant coating
- Temperature range: -60 °C to +165 °C (-76 °F to 329 °F)
- Color: Black
- Extremely high flame and UV resistance

Ball-lock type — Fully coated, standard widths



Product code	GID No.	Max. bundle diameter		Length L		Width W		Min. tensile strength [lb/N]	Quantity [pieces]
		[mm]	[in]	[mm]	[in]	[mm]	[in]		
LS-4.6-200-C	77TAG009420R0001	50	2	200	7.8	4.6	0.18	175 (778)	100
LS-4.6-260-C	7TAG009410R0001	70	2.8	260	10.2	4.6	0.18	175 (778)	1000
LS-4.6-360-C	7TAG009420R0004	100	3.9	360	14.1	4.6	0.18	175 (778)	100
LS-4.6-520-C	7TAG009420R0007	150	5.9	520	20.4	4.6	0.18	175 (778)	1000
LS-4.6-680-C	7TAG009420R0010	200	7.9	680	26.8	4.6	0.18	175 (778)	100
LS-7.9-200-C	7TAG009420R0017	50	2	200	7.9	7.9	0.31	250 (1112)	50
LS-7.9-360-C	7TAG009410R0005	100	3.9	360	14.2	7.9	0.31	250 (1112)	50
LS-7.9-520-C	7TAG009420R0020	150	5.9	520	20.5	7.9	0.31	250 (1112)	50
LS-7.9-680-C	7TAG009420R0022	200	7.9	680	26.8	7.9	0.31	250 (1112)	500


Some approvals may not be applicable to all product codes.
Contact your Sales Office for approval limitations.

Tooling



DAS250
For use with 175 to 250 lb cable ties.

Dimensions



Ty-Met™ ball-lock type cable ties

Type 304 and Type 316 stainless steel — Uncoated



Characteristics

The ball-lock type stainless steel ties from ABB are self-locking and require no time-consuming crimping or folding operations.

- Strong self-locking mechanism (stainless steel ball) with low insertion force
- Fast, easy and reliable installation
- Standard widths (4.6 mm and 7.9 mm/0.18" and 0.31"), suitable for most applications, indoor and outdoor
- Uncoated version, suitable for high temperature environments
- Two grades of non-magnetic stainless steel: 304 grade for standard applications and 316 grade (marine grade) for extra corrosion resistance

- Applications: installation of cables and pipes in extreme conditions and hazardous areas, such as: petrochemical and food processing industries, power stations, mining, shipbuilding, offshore and other aggressive environments

Technical information

- Material: A. 304 grade non-magnetic stainless steel; B. 316 grade non-magnetic stainless steel
- Temperature range: -60 °C to +300 °C (-76 °F to 572 °F)
- Color: Metallic
- Extremely high flame and UV resistance

Ball-lock type — Uncoated 316 stainless steel, 0.187" width



Product code	GID No.	Bundle ø from ... to		Length L		Width W		Min. tensile strength [lb/N]	Quantity [pieces]
		[mm]	[in]	[mm]	[in]	[mm]	[in]		
LS-4.6-200B	7TAG009420R0003	50	2	200	7.9	4.75	0.187	200 (890)	50
LS-4.6-260B	7TAG009410R0003	70	2.7	260	10.2	4.75	0.187	200 (890)	1000
LS-4.6-360B	7TAG009420R0006	102	4	360	14.2	4.75	0.187	200 (890)	50
LS-4.6-520B	7TAG009420R0009	152	6	520	20.5	4.75	0.187	200 (890)	50
LS-4.6-680B	7TAG009420R0012	203	8	680	26.8	4.75	0.187	200 (890)	1000
LS-4.6-840B	7TAG009420R0014	254	10	840	33.1	4.75	0.187	200 (890)	1000

Some approvals may not be applicable to all product codes.
Contact your Sales Office for approval limitations.

Ball-lock type — Uncoated 304 stainless steel, 0.187" width


Product code	GID No.	Bundle ø from ... to		Length L		Width W		Min. tensile strength [lb/N]	Quantity [pieces]
		[mm]	[in]	[mm]	[in]	[mm]	[in]		
LS-4.6-200A	7TAG009410R0000	50	2	200	7.9	4.75	0.187	200 (890)	50
LS-4.6-260A	7TAG009410R0002	70	2.7	260	10.2	4.75	0.187	200 (890)	1000
LS-4.6-360A	7TAG009410R0004	102	4	360	14.2	4.75	0.187	200 (890)	50
LS-4.6-520A	7TAG009420R0008	152	6	520	20.5	4.75	0.187	200 (890)	1000
LS-4.6-680A	7TAG009420R0011	203	8	680	26.8	4.75	0.187	200 (890)	1000
LS-4.6-840A	7TAG009420R0013	254	10	840	33.1	4.75	0.187	200 (890)	1000

Tooling



DAS250
For use with 175 to 250 lb cable ties.

Dimensions



Ty-Met™ ball-lock type cable ties

Type 304 and 316 stainless steel — Uncoated



Characteristics

The ball-lock type stainless steel ties from ABB are self-locking and require no time-consuming crimping or folding operations.

- Strong self-locking mechanism (stainless steel ball) with low insertion force
- Fast, easy and reliable installation
- Standard widths (4.6 mm and 7.9 mm/0.18" and 0.31"), suitable for most applications, indoor and outdoor
- Uncoated version suitable for high temperature environments
- Two grades of non-magnetic stainless steel: 304 grade for standard applications and 316 grade (marine grade) for extra corrosion resistance

- Applications: installation of cables and pipes in extreme conditions and hazardous areas, such as: petrochemical and food processing industries, power stations, mining, shipbuilding, offshore and other aggressive environments

Technical information

- Material: A. 304 grade non-magnetic stainless steel; B. 316 grade non-magnetic stainless steel
- Temperature range: -60 °C to +300 °C (-76 °F to 572 °F)
- Color: Metallic
- Extremely high flame and UV resistance

Ball-lock type — Uncoated 316 stainless steel, 0.305" width



Product code	GID No.	Bundle ø from ... to		Length L		Width W		Min. tensile strength [lb/N]	Quantity [pieces]
		[mm]	[in]	[mm]	[in]	[mm]	[in]		
LS-7.9-200B	7TAG009420R0019	50	2	200	7.9	7.75	0.305	450 (2002)	50
LS-7.9-360B	7TAG009410R0007	102	4	360	14.2	7.75	0.305	450 (2002)	50
LS-7.9-520B	7TAG009420R0021	152	6	520	20.5	7.75	0.305	450 (2002)	50
LS-7.9-680B	7TAG009000R0130	203	8	680	26.8	7.75	0.305	450 (2002)	500
LS-7.9-840B	7TAG009420R0025	254	10	840	33.1	7.75	0.305	450 (2002)	500
LS-7.9-1010B	7TAG009420R0016	304	12	1010	39.8	7.75	0.305	450 (2002)	50

Some approvals may not be applicable to all product codes.
Contact your Sales Office for approval limitations.

Ball-lock type — Uncoated 304 stainless steel, 0.305" width


Product code	GID No.	Bundle ø from ... to		Length L		Width W		Min. tensile strength [lb/N]	Quantity [pieces]
		[mm]	[in]	[mm]	[in]	[mm]	[in]		
LS-7.9-200A	7TAG009420R0018	50	2	200	7.9	7.75	0.305	450 (2002)	50
LS-7.9-360A	7TAG009410R0006	70	2.7	360	14.2	7.75	0.305	450 (2002)	50
LS-7.9-520A	7TAG009410R0008	102	4	520	20.5	7.75	0.305	450 (2002)	50
LS-7.9-680A	7TAG009420R0023	152	6	680	26.8	7.75	0.305	450 (2002)	50
LS-7.9-840A	7TAG009420R0024	203	8	840	33.1	7.75	0.305	450 (2002)	50
LS-7.9-1010A	7TAG009420R0015	254	10	1010	39.8	7.75	0.305	450 (2002)	50

Tooling



DAS250
For use with 175 to
250 lb cable ties.

Dimensions



Ty-Met™ Multi-Lok type cable ties

Type 316 stainless steel — Fully coated and uncoated



Characteristics

The Multi-Lok type stainless steel ties from ABB have a flat, low-profile head for easy application.

- Strong self-locking mechanism (pawl and ratchet) requires no time-consuming crimping or folding operations
- Flat and low-profile head (no sharp edge) for easy installation
- Corrosion-resistant 316 grade stainless steel for high mechanical and chemical durability
- Fully coated version with non-toxic, halogen-free polyester coating for superior protection of cables and installer's hands and for improved insulation between dissimilar materials
- Increased usable length (slots up to the end of the tail) allows larger bundle diameters with the same tie length

- Larger slot at the end, allows the use of a hook-type tool
- Applications: Installation of cables and pipes in extreme conditions and hazardous areas, indoor and outdoor, such as: petrochemical and food processing industries, power stations, mining, shipbuilding, offshore and other aggressive environments

Technical information

- Material: 316 grade stainless steel
- Coating: Polyester
- Temperature range: -60 °C to +165 °C (-75 °F to 329 °F)
- Color: Black
- Extremely high flame and UV resistance


Multi-Lok type — Fully coated and uncoated



Product code	GID No.	Max bundle diameter		Length L		Width W		Min. tensile strength [lb/N]	Quantity [pieces] Standard
		[mm]	[in]	[mm]	[in]	[mm]	[in]		
Multi-Lok, coated 316									
TYS6-280C	7TAG009450R0207	33	1.3	150	5.9	7	0.28	250 (1112)	100
TYS9-280C	7TAG009450R0209	57	2.24	225	8.8	7	0.28	250 (1112)	100
TYS12-280C	7TAG009450R0201	81	3.19	300	11.8	7	0.28	250 (1112)	100
TYS18-280C	7TAG009450R0204	129	5.08	450	17.7	7	0.28	250 (1112)	100
TYS24-280C	7TAG009460R0118	180	7.09	610	24	7	0.28	250 (1112)	100
TYS6-470C	7TAG009460R0123	33	1.3	150	5.9	12	0.47	250 (1112)	100
TYS9-470C	7TAG009000R0329	57	2.24	225	8.8	12	0.47	250 (1112)	100
TYS12-470C	7TAG009450R0202	81	3.19	300	11.8	12	0.47	250 (1112)	100
TYS18-470C	7TAG009450R0205	129	5.08	450	17.7	12	0.47	250 (1112)	100
TYS24-470C	7TAG009460R0120	180	7.09	610	24	12	0.47	250 (1112)	100
Multi-Lok, uncoated 316									
TYS6-280	7TAG009450R0206	33	1.3	150	5.9	7	0.28	250 (1112)	100
TYS9-280	7TAG009450R0208	57	2.24	225	8.8	7	0.28	250 (1112)	100
TYS12-280	7TAG009450R0200	81	3.19	300	11.8	7	0.28	250 (1112)	100
TYS18-280	7TAG009460R0114	129	5.08	450	17.7	7	0.28	250 (1112)	100
TYS24-280	7TAG009460R0117	180	7.09	610	24	7	0.28	250 (1112)	100
TYS6-470	7TAG009460R0122	33	1.3	150	5.9	12	0.47	250 (1112)	100
TYS9-470	7TAG009000R0328	57	2.24	225	8.8	12	0.47	250 (1112)	100
TYS12-470	7TAG009460R0113	81	3.19	300	11.8	12	0.47	250 (1112)	100
TYS18-470	7TAG009460R0115	129	5.08	450	17.7	12	0.47	250 (1112)	100
TYS24-470	7TAG009460R0119	180	7.09	610	24	12	0.47	250 (1112)	100

Some approvals may not be applicable to all product codes.
Contact your Sales Office for approval limitations.

Dimensions

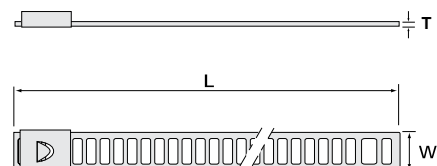





Catalog number index

Part. No.	Page	Part. No.	Page	Part. No.	Page
141SST	42	5332SST6-6	37	5345SST6-FB	36
142SST	42	5332SST6-6HT	38	5345SST6HT	38
143-SST	42	5332SST6-FB	36	5346SST6	37
144-SST	42	5332SST6HT	38	5346SST6-6	37
145-SST	42	5333SST6	37	5346SST6-6HT	38
146-SST	42	5333SST6-6	37	5346SST6-FB	36
2918SST	33	5333SST6-6HT	38	5346SST6HT	38
2919SST	33	5333SST6-FB	36	5347SST6	37
2920SST	33	5333SST6HT	38	5347SST6-6	37
2921SST	33	5334SST6	37	5347SST6-6HT	38
2922SST	33	5334SST6-6	37	5347SST6-FB	36
2930SST	33	5334SST6-6HT	38	5347SST6HT	38
2931SST	33	5334SST6-FB	36	5351SST6	37
2932SST	33	5334SST6HT	38	5351SST6-6	37
2940SST	33	5335SST6	37	5351SST6-6HT	38
2941SST	33	5335SST6-6	37	5351SST6HT	38
2942SST	33	5335SST6-6HT	38	5352SST6	37
500SS316	16, 59	5335SST6-FB	36	5352SST6-6	37
502SS316	16, 59	5335SST6HT	38	5352SST6-6HT	38
503SS316	16, 59	5336SST6	37	5352SST6-FB	36
5261	36, 37, 42	5336SST6-6	37	5352SST6HT	38
5261-HT	38, 42	5336SST6-6HT	38	5353SST6	37
5262	36, 37, 42	5336SST6-FB	36	5353SST6-6	37
5262-FB	42	5336SST6HT	38	5353SST6-6HT	38
5262-HT	38, 42	5337SST6	37	5353SST6-FB	36
5263	36, 37, 42	5337SST6-6	37	5353SST6HT	38
5263-FB	42	5337SST6-6HT	38	5354SST6	37
5263-HT	38, 42	5337SST6-FB	36	5354SST6-6	37
5264	36, 37, 42	5337SST6HT	38	5354SST6-6HT	38
5264-FB	42	5341SST6	37	5354SST6-FB	36
5264-HT	38, 42	5341SST6-6	37	5354SST6HT	38
5265	36, 37, 42	5341SST6-6HT	38	5355SST6	37
5265-FB	42	5341SST6HT	38	5355SST6-6	37
5265-HT	38, 42	5342SST6	37	5355SST6-6HT	38
5266	36, 37, 42	5342SST6-6	37	5355SST6-FB	36
5266-FB	42	5342SST6-6HT	38	5355SST6HT	38
5266-HT	38, 42	5342SST6-FB	36	5356SST6	37
5267	36, 37, 42	5342SST6HT	38	5356SST6-6	37
5267-FB	42	5343SST6	37	5356SST6-6HT	38
5267-HT	38, 42	5343SST6-6	37	5356SST6-FB	36
5268	42	5343SST6-6HT	38	5356SST6HT	38
5268-HT	42	5343SST6-FB	36	5357SST6	37
5269	42	5343SST6HT	38	5357SST6-6	37
5269-HT	42	5344SST6	37	5357SST6-6HT	38
5270	42	5344SST6-6	37	5357SST6-FB	36
5270-HT	42	5344SST6-6HT	38	5357SST6HT	38
5331SST6	37	5344SST6-FB	36	6302SST	41
5331SST6-6	37	5344SST6HT	38	6303SST	41
5331SST6-6HT	38	5345SST6	37	6304SST	41
5331SST6HT	38	5345SST6-6	37	6305SST	41
5332SST6	37	5345SST6-6HT	38	6306SST	41

Catalog number index

Part. No.	Page	Part. No.	Page	Part. No.	Page
6307SST	41	702-5T316SS	59	B-907-10316SS	47
6312SST	41	702-6SS	59	B-907-10SS	47
6313SST	41	702-6T316SS	59	B-911-1/2-SS	49
6314SST	41	A-100-1/2SS	56	B-911-3/8-SS	49
6322SST	41	A-100-1/4SS	56	B-914-1/2SS	49
6323SST	41	A-100-3/8SS	56	B-914-3/8SS	49
6324SST	41	A-100-5/16SS	56	C-105-1/2SS	47
6325SST	41	A-100-5/8SS	56	C-105-1-1/2SS	47
6326SST	41	A1200-10-SS	54	C-105-1-1/4SS	47
6327SST	41	A1200-10-T316SS	54	C-105-1SS	47
675SST	19	A1200-20-SS	54	C-105-2-1/2SS	47
676SST	19	A1200-20-T316SS	54	C-105-2SS	47
677SST	19	A1200HS-10-SS	54	C-105-3/4SS	47
678SST	19	A1200HS-10-T316SS	54	C-105-3-1/2SS	47
679SST	19	A1200HS-20-SS	54	C-105-3SS	47
680SST-TB	19	A1200HS-20-T316SS	54	C-105-4SS	47
6H0 BSS	17	A1202-10-SS	54	C18SST-TB	25
6H0SS	17	A1202-10-T316SS	54	C28SST-TB	25
6H1-BSS	17	A1202-20-SS	54	C38SST-TB	25
6H1SS	17	A1202-20-T316SS	54	CLNPL1/2SS	10
6H2-BSS	17	A1202HS-10-SS	54	CLNPL1/2SST	10
6H2SS	17	A1202HS-10-T316SS	54	CLNPL11/2SS	10
6H3-BSS	17	A1202HS-20-SS	54	CLNPL11/2SST	10
6H4-BSS	17	A1202HS-20-T316SS	54	CLNPL11/4SS	10
6H5-BSS	17	AB-100-1/2SS	56	CLNPL11/4SST	10
6H5SS	17	AB-100-1/4SS	56	CLNPL1SS	10
6H6-BSS	17	AB-100-3/8SS	56	CLNPL1SST	10
6H7-BSS	17	AB-241-1/2SS	49	CLNPL21/2SS	10
6H8-BSS	17	AB-241-1/4SS	49	CLNPL2SS	10
6H9-BSS	17	AB-241-3/8SS	49	CLNPL2SST	10
702-1/2SS	59	AB-241-5/16SS	49	CLNPL3/4SS	10
702-1/2T316S	59	B 914 1/4SS	49	CLNPL3/4SST	10
702-1-1/2SS	59	B 915SS	50	CLNPL3SS	10
702-1-1/2T316SS	59	B 917SS	50	COND1/2SS	8
702-1-1/4SS	59	B 924SS	50	COND1/2SST	8
702-1-1/4T316SS	59	B 937SS	50	COND11/2SS	8
702-1SS	59	B-100-1/2SS	56	COND11/2SST	8
702-1T316SS	59	B-100-1/4SS	56	COND11/4SS	8
702-2-1/2SS	59	B-100-3/8SS	56	COND11/4SST	8
702-2-1/2T316SS	59	B1400-10-SS	54	COND1SS	8
702-3/4SS	59	B1400-10-T316SS	54	COND1SST	8
702-3/4T316SS	59	B1400-20-SS	54	COND21/2SS	8
702-3/8SS	59	B1400-20-T316SS	54	COND21/2SST	8
702-3/8T316SS	59	B1400HS-10-SS	54	COND2SS	8
702-3-1/2SS	59	B1400HS-10-T316SS	54	COND2SST	8
702-3-1/2T316SS	59	B1400HS-20-SS	54	COND3/4SS	8
702-3SS	59	B1400HS-20-T316SS	54	COND3/4SST	8
702-3T316SS	59	B-900-10316-SS	47	COND3SS	8
702-4SS	59	B-900-10SS	47	COND3SST	8
702-4T316SS	59	B-905-10-316SS	47	COND4SS	8
702-5SS	59	B-905-10SS	47	COND4SST	8

Catalog number index

Part. No.	Page	Part. No.	Page	Part. No.	Page
COND5SS	8	ELL145SST	13	H122-1/4-SS6	48
COND5SST	8	ELL1SS	12	H122-3/8-SS6	48
COND6SS	8	ELL1SST	12	H125FGSST	22
COND6SST	8	ELL245SS	13	H125GRSST	20
CPL1/2SS	9	ELL245SST	13	H150FGSST	22
CPL1/2SST	9	ELL2SS	12	H150GRSST	20
CPL11/2SS	9	ELL2SST	12	H200FGSST	22
CPL11/2SST	9	ELL3/445SS	13	H200GRSST	20
CPL11/4SS	9	ELL3/445SST	13	HS 101-SS	39
CPL11/4SST	9	ELL3/4SS	12	HS 102-SS	39
CPL1SS	9	ELL3/4SST	12	HS 103-SS	39
CPL1SST	9	FBCM2SST	26	HS 104-SS	39
CPL21/2SS	9	FBCS2SST	26	HS 105-SS	39
CPL21/2SST	9	FBDR12SST	23	HS 106-SS	39
CPL2SS	9	FBDR12SST-FLTR	23	HS 901-SS	39
CPL2SST	9	FBDR34SST	23	HS 902-SS	39
CPL3/4SS	9	FBDR34SST-FLTR	23	HS 903-SS	39
CPL3/4SST	9	FBDRFLTR	23	HS 904-SS	39
CPL3SS	9	FD2SST	26	HS 905-SS	39
CPL3SST	9	FDA2SST	26	HS 906-SS	39
CPL4SS	9	FDC2SST	26	HS100-SS	14
CPL4SST	9	FDS2SST	26	HS101-SS	14, 41
CPL5SS	9	FDX2SST	26	HS101SST	15
CPL5SST	9	FSCG-0381	32	HS102-SS	14, 41
CPL6SS	9	FSCG-0382	32	HS102SST	15
CPL6SST	9	FSCG-0501	32	HS103-SS	14, 41
E-142-1/2x1-1/2SS	56	FSCG-0751	32	HS103SST	15
E-142-3/8x1-1/2SS	56	FSEM-0381	32	HS104-SS	14, 41
E-142-3/8x1SS	56	FSEM-0502	32	HS104SST	15
E-145-1/2SS	55	FSEM-0751	32	HS105-SS	14, 41
E-145-1/4SS	55	H050FGSST	22	HS105SST	15
E-145-3/8SS	55	H050GRSST	20	HS106-SS	14, 41
E-147-1/2SS	55	H075FGSST	22	HS106SST	15
E-147-1/4SS	55	H075GRSST	20	HS107-SS	14
E-147-3/8SS	55	H100FGSST	22	HS107SST	15
EF-147-1/2SS	55	H100GRSST	20	HS108-SS	14
EF-147-1/4SS	55	H104-1/2X12SS	58	HS108SST	15
EF-147-3/8SS	55	H104-1/2X12SS316	58	HS110-SS	14
ELL1/245SS	13	H104-1/4X12SS	58	HS110SST	15
ELL1/245SST	13	H104-1/4X12SS6	58	HS901-SS	14, 41
ELL1/2SS	12	H104-1/4X6SS	58	HS901SST	15
ELL1/2SST	12	H104-1/4X6SS316	58	HS902-SS	14, 41
ELL11/245SS	13	H104-3/8X12SS	58	HS902SST	15
ELL11/245SST	13	H104-3/8X12SS6	58	HS903-SS	14, 41
ELL11/2SS	12	H104-3/8X6SS	58	HS903SST	15
ELL11/2SST	12	H104-3/8X6SS316	58	HS904-SS	14, 41
ELL11/445SS	13	H104-5/8X12SS	58	HS904SST	15
ELL11/445SST	13	H104-5/8X12SS316	58	HS905-SS	14, 41
ELL11/4SS	12	H-119-1/2SS	55	HS905SST	15
ELL11/4SST	12	H-119-1/4SS	55	HS906-SS	14, 41
ELL145SS	13	H122-1/2-SS6	48	HS906SST	15

Catalog number index

Part. No.	Page	Part. No.	Page	Part. No.	Page
HS907-SS	14	LS-7.9-520-C	74	NPL1/2X6SST	11
HS907SST	15	LS-7.9-680A	76	NPL1/2X8SS	11
HS908-SS	14	LS-7.9-680B	76	NPL1/2X8SST	11
HS908SST	15	LS-7.9-680-C	74	NPL11/2X10SS	11
HS909-SS	14	LS-7.9-840A	76	NPL11/2X10SST	11
HS910-SS	14	LS-7.9-840B	76	NPL11/2X12SS	11
HS910SST	15	LT6FES01W-C	40	NPL11/2X12SST	11
L050GR-SST	21	LT6FES01W-K	40	NPL11/2X21/2SS	10
L075GR-SST	21	LT6FES01W-L	40	NPL11/2X21/2SST	10
L100GR-SST	21	LT6FES02W-C	40	NPL11/2X2SS	10
L125GR-SST	21	LT6FES02W-K	40	NPL11/2X2SST	10
L150GR-SST	21	LT6FES02W-L	40	NPL11/2X31/2SS	10
L200GR-SST	21	LT6FES03W-C	40	NPL11/2X31/2SST	10
LB18SST-TB	24	LT6FES03W-K	40	NPL11/2X3SS	10
LB28SST-TB	24	LT6FES03W-L	40	NPL11/2X3SST	10
LB38SST-TB	24	LT6FES04W-C	40	NPL11/2X4SS	11
LB48SST-TB	24	LT6FES04W-J	40	NPL11/2X4SST	11
LB58SST-TB	24	LT6FES05W-B	40	NPL11/2X5SS	11
LB68SST-TB	24	LT6FES05W-E	40	NPL11/2X5SST	11
LL18SST-TB	25	LT6FES06W-B	40	NPL11/2X6SS	11
LL28SST-TB	25	LT6FES06W-D	40	NPL11/2X6SST	11
LL38SST-TB	25	LT6FES07W-B	40	NPL11/2X8SS	11
LR28SST-TB	25	LT6FES07W-C	40	NPL11/2X8SST	11
LR38SST-TB	25	LT6FES08W-A	40	NPL11/4X10SS	11
LS-4.6-200A	75	LT6FES09W-A	40	NPL11/4X10SST	11
LS-4.6-200B	75	LT6FES11W-A	40	NPL11/4X12SS	11
LS-4.6-200-C	74	LU18SST-TB	24	NPL11/4X12SST	11
LS-4.6-260A	75	LU28SST-TB	24	NPL11/4X21/2SS	10
LS-4.6-260B	75	LU38SST-TB	24	NPL11/4X21/2SST	10
LS-4.6-260-C	74	LU48SST-TB	24	NPL11/4X2SS	10
LS-4.6-360A	75	LU58SST-TB	24	NPL11/4X2SST	10
LS-4.6-360B	75	LU68SST-TB	24	NPL11/4X31/2SS	10
LS-4.6-360-C	74	NPL1/2X10SS	11	NPL11/4X31/2SST	10
LS-4.6-520A	75	NPL1/2X10SST	11	NPL11/4X3SS	10
LS-4.6-520B	75	NPL1/2X11/2SS	10	NPL11/4X3SST	10
LS-4.6-520-C	74	NPL1/2X11/2SST	10	NPL11/4X4SS	11
LS-4.6-680A	75	NPL1/2X12SS	11	NPL11/4X4SST	11
LS-4.6-680B	75	NPL1/2X12SST	11	NPL11/4X5SS	11
LS-4.6-680-C	74	NPL1/2X21/2SS	10	NPL11/4X5SST	11
LS-4.6-840A	75	NPL1/2X21/2SST	10	NPL11/4X6SS	11
LS-4.6-840B	75	NPL1/2X2SS	10	NPL11/4X6SST	11
LS-7.9-1010A	76	NPL1/2X2SST	10	NPL11/4X8SS	11
LS-7.9-1010B	76	NPL1/2X31/2SS	10	NPL11/4X8SST	11
LS-7.9-200A	76	NPL1/2X31/2SST	10	NPL1X10SS	11
LS-7.9-200B	76	NPL1/2X3SS	10	NPL1X10SST	11
LS-7.9-200-C	74	NPL1/2X3SST	10	NPL1X12SS	11
LS-7.9-360A	76	NPL1/2X4SS	11	NPL1X12SST	11
LS-7.9-360B	76	NPL1/2X4SST	11	NPL1X21/2SS	10
LS-7.9-360-C	74	NPL1/2X5SS	11	NPL1X21/2SST	10
LS-7.9-520A	76	NPL1/2X5SST	11	NPL1X2SS	10
LS-7.9-520B	76	NPL1/2X6SS	11	NPL1X2SST	10

Catalog number index

Part. No.	Page	Part. No.	Page	Part. No.	Page
NPL1X31/2SS	10	NPL3/4X8SS	11	TS102-SS	14
NPL1X31/2SST	10	NPL3/4X8SST	11	TS103-SS	14
NPL1X3SS	10	NPL3X12SS	11	TS104-SS	14
NPL1X3SST	10	RB21SST	18	TS105-SS	14
NPL1X4SS	11	RB31SST	18	TS106-SS	14
NPL1X4SST	11	RB32SST	18	TS901-SS	14
NPL1X5SS	11	RB42SST	18	TS902-SS	14
NPL1X5SST	11	RB43SST	18	TS903-SS	14
NPL1X6SS	11	RB65SST	18	TS904-SS	14
NPL1X6SST	11	RB76SST	18	TS905-SS	14
NPL1X8SS	11	RC1/2SST	16	TS906-SS	14
NPL1X8SST	11	RC11/2SST	16	TYS12-280	77
NPL21/2X10SS	11	RC11/4SST	16	TYS12-280C	77
NPL21/2X12SS	11	RC1SST	16	TYS12-470	77
NPL21/2X5SS	11	RC2SST	16	TYS12-470C	77
NPL21/2X6SS	11	RC3/4SST	16	TYS18-280	77
NPL21/2X8SS	11	RCS2SST	26	TYS18-280C	77
NPL2X10SS	11	RLN112SST	18	TYS18-470	77
NPL2X10SST	11	RLN114SST	18	TYS18-470C	77
NPL2X12SS	11	RLN12SST	18	TYS24-280	77
NPL2X12SST	11	RLN1SST	18	TYS24-280C	77
NPL2X31/2SS	10	RLN212SST	18	TYS24-470	77
NPL2X31/2SST	10	RLN2SST	18	TYS24-470C	77
NPL2X4SS	11	RLN312SST	18	TYS6-280	77
NPL2X4SST	11	RLN34SST	18	TYS6-280C	77
NPL2X5SS	11	RLN3SST	18	TYS6-470	77
NPL2X5SST	11	RLN4SST	18	TYS6-470C	77
NPL2X6SS	11	SPL16/038/SAM	39	TYS9-280	77
NPL2X6SST	11	SPL20/050/SAM	39	TYS9-280C	77
NPL2X8SS	11	SPL25/075/SAM	39	TYS9-470	77
NPL2X8SST	11	SPL32/100/SAM	39	TYS9-470C	77
NPL3/4X10SS	11	SPL40/125/SAM	39	WMG-LT1	36-38
NPL3/4X10SST	11	SPL50/150/SAM	39	WMG-LT2	36-38
NPL3/4X11/2SS	10	SPL63/200/SAM	39	WMG-LT3	36-38
NPL3/4X11/2SST	10	SSWCHGC	67	WMG-LT4	36-38
NPL3/4X12SS	11	SSWCHGC-HDW	67	WMG-LT5	36-38
NPL3/4X12SST	11	SWCS2SST	26	WMG-LT6	36-38
NPL3/4X21/2SS	10	T18SST-TB	24	WMG-LT7	36-38
NPL3/4X21/2SST	10	T28SST-TB	24	X28SST-TB	25
NPL3/4X2SS	10	T38SST-TB	24	X38SST-TB	25
NPL3/4X2SST	10	T48SST-TB	24	XPLFL110S	27
NPL3/4X31/2SS	10	T58SST-TB	24	XPLFL112S	27
NPL3/4X31/2SST	10	T68SST-TB	24	XPLFL115S	27
NPL3/4X3SS	10	T78SST-TB	24	XPLFL118S	27
NPL3/4X3SST	10	TB18SST-TB	24	XPLFL121S	27
NPL3/4X4SS	11	TB28SST-TB	24	XPLFL124S	27
NPL3/4X4SST	11	TB38SST-TB	24	XPLFL127S	27
NPL3/4X5SS	11	TB48SST-TB	24	XPLFL130S	27
NPL3/4X5SST	11	TB58SST-TB	24	XPLFL133S	27
NPL3/4X6SS	11	TB68SST-TB	24	XPLFL136S	27
NPL3/4X6SST	11	TS101-SS	14	XPLFL16S	27

Catalog number index

Part. No.	Page	Part. No.	Page
XPLFL18S	27	XPLFL636S	28
XPLFL210S	27		
XPLFL212S	27		
XPLFL215S	27		
XPLFL218S	27		
XPLFL221S	27		
XPLFL224S	27		
XPLFL227S	27		
XPLFL230S	27		
XPLFL233S	27		
XPLFL236S	27		
XPLFL24S	27		
XPLFL26S	27		
XPLFL28S	27		
XPLFL310S	28		
XPLFL312S	28		
XPLFL315S	28		
XPLFL318S	28		
XPLFL321S	28		
XPLFL327S	28		
XPLFL330S	28		
XPLFL333S	28		
XPLFL336S	28		
XPLFL36S	28		
XPLFL38S	28		
XPLFL412S	28		
XPLFL415S	28		
XPLFL418S	28		
XPLFL421S	28		
XPLFL424S	28		
XPLFL427S	28		
XPLFL430S	28		
XPLFL433S	28		
XPLFL436S	28		
XPLFL512S	28		
XPLFL515S	28		
XPLFL518S	28		
XPLFL521S	28		
XPLFL524S	28		
XPLFL527S	28		
XPLFL530S	28		
XPLFL533S	28		
XPLFL536S	28		
XPLFL612S	28		
XPLFL615S	28		
XPLFL618S	28		
XPLFL621S	28		
XPLFL624S	28		
XPLFL627S	28		
XPLFL630S	28		
XPLFL633S	28		

Additional information

ABB has made every attempt to ensure the accuracy and reliability of the contents of this document. However, all content is provided for general informational purposes only, and ABB makes no guaranty or warranty, express or implied, as to the accuracy of any technical content, or that the information contained in this publication will be error free and all such guarantees or warranties are expressly disclaimed. ABB may change or modify the contents at any time, without prior notice. We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction or utilization of its contents — in whole or in parts — is forbidden without prior written consent of ABB.



—
US

ABB Installation Products
Electrification Business
860 Ridge Lake Blvd.
Memphis, TN 38120
+1 901-252-5000

electrification.us.abb.com