



MAX OUTPUT LITHIUM EXPD 18V 8.0Ah LITHIUM-ION BATTERY 2-PACK

▶ *Up to
3X More Power,*

▶ *Runs Cooler &
Lasts Longer*

**Paquet de 2 piles de sortie
maximale au lithium ion
de 8,0 Ah et 18 V**
Jusqu'à 3 fois plus de puissance,
Fonctionne à une température plus
fraîche et dure plus longtemps
„Comparé à la pile au lithium-ion 18 V 1,5 Ah R870015

**Paquete de 2 baterías de
salida máxima de iones de
litio de 8,0 Ah y 18 V**
Hasta 3 veces más potencia,
Funciona más frío y dura más tiempo
„En comparación con una batería
de iones de litio de 18 V y 1,5 Ah R870015



REGISTRATION REQUIRED

„Compared to R870015 18V 1.5Ah Lithium-Ion Battery



**100%
COMPATIBLE**

**ALL RIDGID,
18V TOOLS
WORK WITH
ALL RIDGID,
18V BATTERIES**



register.ridgidpower.com

**FREE
BATTERIES
FOR LIFE**

Piles gratuites à vie
Baterías gratis de por vida

RIDGID is a registered trademark of
RIDGID, Inc., and used under license.
RIDGID est une marque déposée de
RIDGID, Inc., utilisée sous licence.
RIDGID es una marca comercial
registrada de RIDGID, Inc. y
es empleada mediante autorización.

POWERTOOLS.RIDGID.COM

1-866-539-1710

CALIFORNIA PROPOSITION 65
PROPOSITION 65 DE L'ETAT DE CALIFORNIE
CALIFORNIA - PROPUESTA DE LEY NÚM. 65

 **WARNING:** Cancer and Reproductive Harm –
www.P65Warnings.ca.gov

 **AVERTISSEMENT:** Cancer et dommages à la
reproduction – www.P65Warnings.ca.gov

 **ADVERTENCIA:** Cáncer y daño reproductivo –
www.P65Warnings.ca.gov

Includes // (2) 8.0Ah Batteries and Operator's Manual
Inclut // (2) Piles de 8,0 Ah et manuel d'utilisation
Incluye // (2) Baterías de 8,0 Ah y manual del operador



CERTIFIED



NOM



RECYCLE
R.R.C.
1-800-822-8837

6
48846 09239
3



Made in China
Fabriqu  en Chine
Fabricado en China

Distributed by: Distrib   par : Distribuido por:
TTI Consumer Power Tools, Inc.
P.O. Box 1427, Anderson, SC 29622


Imported by: Importe par: Importado por:
Servicios Home Depot, S. de R.L. de C.V.
Ricardo Margain 605,
Santa Engracia, San Pedro Garza Garc a,
Nuevo Leon, Mexico C.P. 66267

RIDGID 18V 8AH MAX OUTPUT BATTERY 2PK
Package: AC840080P

Product Information
Internet # 325654041
Model # AC840080P


Serial1:
Serial2:

DoP: 2025.01.23



RIDGID 18V 8AH MAX OUTPUT BATTERY
Model: R840080

Serial Number* CS24131D420301



RIDGID 18V 8AH MAX OUTPUT BATTERY
Model: R840080

Serial Number* CS24131D420307

RIDGID

MAX OUTPUT EXP
LITHIUM

3X
MORE POWER

LED FUEL GAUGE
Integrated LED fuel gauge monitors runtime

ADVANCED INTELLIGENT ELECTRONICS
Communicates directly with battery cells to optimize performance when paired with brushless tools

SYSTEM COMPATIBILITY
RIDGID's batteries are 100% backwards compatible with all RIDGID 18V tools

THERMAGUARD™ TECHNOLOGY
Runs cooler by utilizing advanced intelligent electronics and oversized heat sinks to protect cell performance

DURABLE PACK DESIGN
Reinforced housing shields battery against impact

PREMIUM 21700 LITHIUM-ION CELLS
Engineered to maximize runtime and delivers up to 3X more power during high demand applications

AC840080 18V 8.0Ah MAX OUTPUT EXP BATTERY

OPERATOR'S MANUAL

MANUEL D'UTILISATION


MANUAL DEL OPERADOR

18V LITHIUM-ION BATTERY PACK

18 V LITHIUM-ION BLOC-PILES

PAQUETE DE BATERÍAS DE 18 V DE IONES DE LITIO

R87002, R87004, R840020, R840040, R840060, R840080, R840120,
R840041

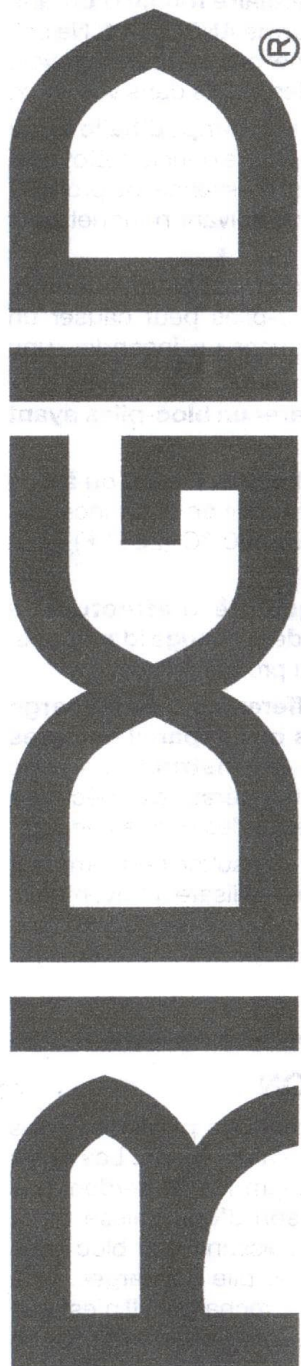

Customer Service Information:

For parts or service, do not return this product to the store. Contact your nearest RIDGID® authorized service center. Be sure to provide all relevant information when you call or visit. For the location of the authorized service center nearest you, please call 1-866-539-1710 or visit us online at powertools.ridgid.com.

MODEL NO.* _____ SERIAL NO. _____

**Model number on product may have additional letters at the end. These letters designate manufacturing information and should be provided when calling for service.*

Service après-vente :

Pour acheter des pièces ou pour un dépannage, ne pas retourner ce produit au magasin. Contacter le centre de réparations RIDGID® agréé le plus proche. Veiller à fournir toutes les informations pertinentes lors de tout appel téléphonique ou visite. Pour obtenir l'adresse du centre de réparations agréé le plus proche, téléphoner au 1-866-539-1710 ou visiter notre site powertools.ridgid.com.

NO. DE MODÈLE* _____ NO. DE SÉRIE _____

**Le numéro de modèle sur le produit peut contenir des lettres supplémentaires à la fin. Ces lettres désignent les informations du fabricant et doivent être fournies lors d'un appel de demande de service.*

Información sobre servicio al consumidor:

Para piezas de repuesto o servicio, no devuelva este producto a la tienda. Comuníquese con el centro de servicio autorizado de productos RIDGID® de su preferencia. Asegúrese de proporcionar todos los datos pertinentes al llamar o al presentarse personalmente. Para obtener información sobre el centro de servicio autorizado más cercano a usted, le suplicamos llamar al 1-866-539-1710 o visitar nuestro sitio en la red mundial, en la dirección powertools.ridgid.com.

NÚM. DE MODELO* _____ NÚM. DE SERIE _____

**El número de modelo que figura en el producto podría tener letras adicionales al final. Estas designan información de fabricación y deben suministrarse cuando llame para obtener asistencia o servicio.*

TTI CONSUMER POWER TOOLS, INC.

P.O. Box 1427
Anderson, SC 29622 USA
1-866-539-1710 ■ powertools.ridgid.com

RIDGID is a registered trademark of RIDGID, Inc., used under license.

999000179
1-19-24 (REV:02)
961153751-02A



WARNING:

NEVER IMMERSE OR EXPOSE YOUR BATTERY PACK, TOOL, OR CHARGER TO CORROSIVE OR CONDUCTIVE FLUIDS OR ALLOW THESE FLUIDS TO FLOW INSIDE THESE ITEMS.

Corrosive or conductive fluids, such as seawater, chlorine, certain industrial chemicals, and bleach or bleach containing products, etc., can cause a short circuit in the battery pack.

If your battery pack is exposed to a corrosive or conductive fluid, do not attempt to use or charge the battery pack and immediately perform the following steps:

- Wear appropriate personal protective equipment, including eye protection and rubber gloves.
- Place your exposed battery pack in a large bucket, such as a 5 gallon or similar bucket, and fill the bucket with regular tap water. Do not place more than two packs in the bucket.
- Locate the bucket outdoors in an area inaccessible to children and pets and away from all buildings, garages/sheds, structures, vehicles, and combustible/flammable materials.
- Leave the battery pack(s) in the bucket filled with tap water and call Customer Service at 1-866-539-1710 for additional instructions on the proper disposal of the exposed battery pack(s).

Battery packs exposed to corrosive or conductive fluids and failure to follow the steps above in the event of exposure to these fluids can result in smoke/fire, serious personal injury, and/or property damage.



AVERTISSEMENT :

NE JAMAIS IMMERGER NI EXPOSER VOTRE BLOC-PILES, OUTIL OU CHARGEUR AUX LIQUIDES CORROSIFS OU CONDUCTEURS OU PERMETTRE À CES LIQUIDES DE S'ÉCOULER À L'INTÉRIEUR DE CES OBJETS.

Les liquides corrosifs ou conducteurs, tels que l'eau de mer, le chlore, certains produits chimiques industriels, et l'eau de Javel ou les produits contenant de l'eau de Javel, etc., peuvent causer un court-circuit du bloc-piles.

Si votre bloc-piles est exposé à un liquide corrosif ou conducteur, ne pas essayer de l'utiliser ou de le charger et effectuer immédiatement les étapes suivantes :

- Porter un équipement de protection personnel approprié, incluant une protection oculaire et des gants de caoutchouc.
- Déposer votre bloc-piles dans un grand seau, tel qu'un seau de 18,9 l (5 gallons) ou un autre seau similaire, et remplir le seau avec de l'eau du robinet. Ne pas déposer plus de deux bloc-piles dans le seau.
- Placer le seau à l'extérieur dans un endroit non accessible aux enfants et aux animaux et loin des bâtisses, garages, remises, structures, véhicules et matières combustibles ou inflammables.
- Laisser le(s) bloc-piles dans le seau rempli avec de l'eau du robinet et appeler le Service à la clientèle au 1-866-539-1710 pour de plus amples instructions sur la bonne façon d'éliminer le(s) bloc-piles exposé(s).

Le défaut de suivre les étapes ci-haut lorsqu'un bloc-piles est exposé aux liquides corrosifs ou conducteurs peut causer de la fumée, un feu, des blessures corporelles graves et/ou des dommages à la propriété.



ADVERTENCIA:

NUNCA SUMERJA NI EXPONGA EL PAQUETE DE BATERÍAS, LA HERRAMIENTA NI EL CARGADOR A FLUIDOS CORROSIVOS O CONDUCTIVOS, NI PERMITA QUE ESTOS FLUIDOS PENETREN EN ESTOS ELEMENTOS.

Los fluidos corrosivos o conductivos, como el agua de mar, el cloro, ciertos químicos industriales y la lavandina o los productos con lavandina, etc., pueden causar un cortocircuito en el paquete de baterías.

Si expone el paquete de baterías a un fluido corrosivo o conductivo, no intente usar ni cambiar el paquete de baterías, y realice los siguientes pasos de inmediato:

- Use elementos de protección personal, incluidos protección ocular y guantes de goma.
- Coloque el paquete de baterías expuesto en un recipiente grande (por ejemplo, de 18,9 l [5 gal]) y llene el recipiente con agua regular del grifo. No coloque más de dos paquetes en el recipiente.
- Coloque el recipiente en el exterior en un área inaccesible para niños y mascotas y lejos de edificios, garajes/casetas, estructuras, vehículos y material combustible/inflamable.
- Deje los paquetes de baterías en el recipiente con agua del grifo y llame al Servicio al cliente al 1-866-539-1710 para obtener instrucciones adicionales sobre el desecho apropiado de los paquetes de baterías.

Los paquetes de baterías expuestos a fluidos corrosivos o conductivos y no seguir los pasos anteriores en caso de exposición a estos fluidos podrían resultar en incendios, lesiones personales graves y daños materiales.

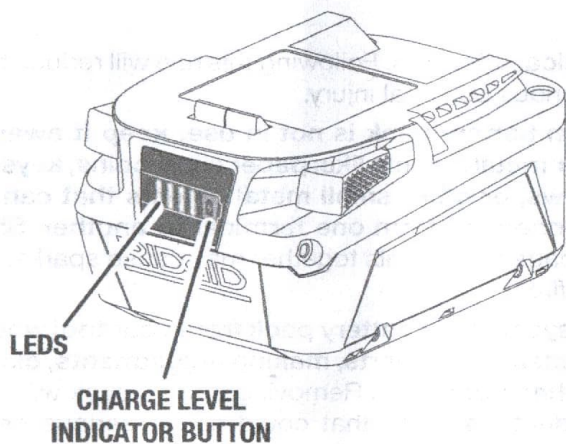


Fig. 1

BATTERY PROTECTION FEATURES

Lithium-ion battery packs are designed with features that protect the lithium-ion cells and maximize battery life.

If the tool stops during use, release the trigger to reset and resume operation. If the tool still does not work, the battery needs to be recharged.

COLD WEATHER OPERATION

The lithium-ion battery pack can be used in temperatures down to 14°F. Put the battery pack on a tool and use the tool in a light duty application. After about a minute, the pack will warm up and begin operating normally.

BATTERY FUEL GAUGE

See Figure 1.

To display the amount of charge left in the battery, press and release the charge level indicator button:

LED FUNCTIONS	CHARGE STATUS
	Need to Charge
	0 - 25%
	25 - 50%
	50 - 75%
	75 - 100%

CHARGING THE BATTERY PACK

Battery packs are shipped in a low charge condition to prevent possible problems. Therefore, you should charge prior to first use. If the charger does not charge the battery pack under normal circumstances, return both the battery pack and charger to your nearest Authorized Service Center for electrical check.

- Charge the battery pack only with the recommended chargers.
- Refer to charger operator's manual for charging instructions.

CHARGING A HOT BATTERY PACK

When using a tool continuously, the battery pack may become hot. A hot battery pack may be placed directly onto the charger port but charging will not begin until the battery temperature cools to within acceptable temperature range. When a hot battery pack is placed on the charger, the charger may indicate the pack is not ready to charge. Please refer to charger operator's manual. When the battery pack cools, the charger will automatically begin charging.

CHARGING A COLD BATTERY PACK

A cold battery pack may be placed directly onto the charger port but charging will not begin until the battery temperature warms to within acceptable temperature range. When a cold battery pack is placed on the charger, the charger may indicate the pack is not ready to charge. Please refer to charger operator's manual. When the battery pack warms, the charger will automatically begin charging.

MAINTENANCE

BATTERIES

These batteries have been designed to provide maximum trouble-free life. However, like all batteries, they will eventually wear out. Do not disassemble battery pack and attempt to replace the batteries. Handling of these batteries, especially when wearing rings and jewelry, could result in a serious burn.

For battery pack storage longer than 30 days:

- Store the battery pack where the temperature is below 80° F and away from moisture.
- Store battery packs in a 30%-50% charged condition.
- Every six months of storage, charge the pack as normal.

BATTERY PACK REMOVAL AND PREPARATION FOR RECYCLING



To preserve natural resources, please recycle or dispose of batteries properly.

This product contains lithium-ion batteries. Local, state or federal laws may prohibit disposal of lithium-ion batteries in ordinary trash.

Consult your local waste authority for information regarding available recycling and/or disposal options.

⚠ WARNING:

Upon removal, cover the battery pack's terminals with heavy-duty adhesive tape. Do not attempt to destroy or disassemble battery pack or remove any of its components. Batteries must be recycled or disposed of properly. Also, never touch both terminals with metal objects and/or body parts as short circuit may result. Keep away from children. Failure to comply with these warnings could result in fire and/or serious injury.

This product has a 90-Day Satisfaction Guarantee Policy, as well as a Three-year Limited Warranty.

For Warranty and Policy details, please go to powertools.ridgid.com or call (toll free) 1-866-539-1710.



OPERATOR'S MANUAL 18V LITHIUM-ION BATTERY PACK

R87002, R87004, R840020,
R840040, R840060, R840080,
R840120, R840041

Use this battery pack for RIDGID® 18V cordless lithium-ion products only. Refer to the Operator's Manual provided with product. Always mention the model number above when communicating with us regarding your battery pack.

SAFETY RULES

▲ WARNING!

READ AND UNDERSTAND ALL INSTRUCTIONS.

Failure to follow all instructions listed below, may result in electric shock, fire and/or serious personal injury.

- **Battery tools do not have to be plugged into an electrical outlet; therefore, they are always in operating condition. Be aware of possible hazards when not using your battery tool or when changing accessories.** Following this rule will reduce the risk of electric shock, fire, or serious personal injury.
- **Do not place battery tools or their batteries near fire or heat.** This will reduce the risk of explosion and possibly injury.
- **Do not crush, drop or damage battery pack. Do not use a battery pack or charger that has been dropped or received a sharp blow.** A damaged battery is subject to explosion. Properly dispose of a dropped or damaged battery immediately.
- **Batteries can explode in the presence of a source of ignition, such as a pilot light.** To reduce the risk of serious personal injury, never use any cordless product in the presence of open flame. An exploded battery can propel debris and chemicals. If exposed, flush with water immediately.
- **Charge only with RIDGID® 18 V battery chargers. Use of other chargers may result in personal injury, fire, or damage.**
- **Do not charge in an area of extreme heat or cold. It will work best at normal room temperature.** To reduce the risk of serious personal injury, do not store outside or in vehicles.
- **Under extreme usage or temperature conditions, battery leakage may occur. If liquid comes in contact with your skin, wash immediately with soap and water. If liquid gets into your eyes, flush them with clean water for at least 10 minutes, then seek immediate**

medical attention. Following this rule will reduce the risk of serious personal injury.

- **When battery pack is not in use, keep it away from other metal objects like: paper clips, coins, keys, nails, screws, or other small metal objects that can make a connection from one terminal to another.** Shorting the battery terminals together may cause sparks, burns, or a fire.
- **Always remove battery pack from your tool when you are assembling parts, making adjustments, cleaning, or when not in use.** Removing battery pack will prevent accidental starting that could cause serious personal injury.
- **Always remove battery pack before storing the device.**
- **When battery becomes fully charged, unplug the charger from the power supply and remove the battery pack from the charger.**
- **Always wear eye protection with side shields marked to comply with ANSI Z87.1.** Failure to do so could result in objects being thrown into your eyes and other possible serious injuries.
- **Keep battery pack dry, clean, and free from oil and grease.** Always use a clean cloth when cleaning. Never use brake fluids, gasoline, petroleum-based products, or any solvents to clean battery pack.
- **Do not use a battery pack that is damaged or modified.** Damaged or modified batteries may exhibit unpredictable behavior resulting in fire, explosion or risk of injury.
- **Do not modify or attempt to repair a battery pack that has been damaged.**
- **Do not expose a battery pack or appliance to fire or excessive temperature.** Exposure to fire or temperature above 265° F (130 °C) may cause explosion.
- **Have servicing performed by a qualified repair person using only identical replacement parts.** This will ensure that the safety of the product is maintained.
- **Follow all charging instructions and do not charge the battery pack or appliance outside of the temperature range specified in the instructions.** Charging improperly or at temperatures outside of the specified range may damage the battery and increase the risk of fire.
- **Save these instructions.** Refer to them frequently and use them to instruct others who may use this tool. If you loan someone this tool, loan them these instructions also.

OPERATION

LITHIUM-ION BATTERY PACKS

Lithium-ion batteries deliver fade free power for their entire run time. Lithium-ion tools will not gradually lose power due to decreasing battery charge. Instead, power from the battery pack will drop from full to zero once the full charge has been drained from the battery. Once this happens, recharging of the battery is required. It is not necessary to drain the battery pack completely before recharging.



College Station **10PM** 77802

Order Number: #WJ75200645

Order Total: \$161.29

Order #WJ75200645

Placed on: Jan 23, 2025

Billing Information

David Malawey
3500 Green Ridge Cir
Bryan TX 77802

Payment Method: VISA ***9091

Item	Price/Item	Qty	Line Total
Scheduled Delivery (1 item) 3500 Greenridge Cir , Bryan, TX 77802			
RIDGID 18V 8.0 Ah Max Output EXP Lithium-Ion Battery (2-Pack)	\$149.00 \$329.00 Saved 55%	1	\$149.00
Expect it on Jan 23, 2025 6am - 8pm			
Subtotal			\$149.00
Delivery			\$0.00
Sales Tax			\$12.29
Total			\$161.29
You Saved			\$180.00

Need help?

Online Customer Support:
1-800-430-3376

Call 7 days a week:
6 a.m. to 2 a.m. EST

Need Help?

Visit ourCustomer Service Center or Text 38698



Technical Data Sheet

RIDGID Lithium-Ion Battery Pack

Battery Voltage: 18V

Battery Capacity: 4Ah / 72Wh

SECTION 1: PRODUCT AND COMPANY IDENTIFICATION

Product Name: Lithium-Ion Battery — Rechargeable

Model Number:

R87004

Issue Date:

March 2022

TTI CONSUMER POWER TOOLS, INC.

P.O. Box 1288

Anderson, SC 29622

Company Phone Number:

1-866-539-1710

Emergency Contact Number:

Chemtrec (United States only): 1-800-424-9300

(International): +1-703-741-5970

SECTION 2: HAZARDS IDENTIFICATION

Refer to battery cell SDS for more information.

No exposure to hazards during routine handling of product.

▲ WARNING:

- To reduce the risk of injury, user must read operator's manual.
- Risk of fire and burns.
- Do not open, crush, heat above 50°C, incinerate, or short terminals.
- Follow manufacturer's instructions.
- Use only with charger listed in operator's manual.
- Remove battery from tool when storing, changing attachments, or making adjustments.
- To reduce the risk of explosion and possible injury, do not place battery near fire or heat.
- Do not crush, drop, or damage battery pack.
- Do not use a battery pack that has been dropped or received a sharp blow. A damaged battery is subject to explosion. Properly dispose of a dropped or damaged battery immediately.
- Under extreme usage or temperature conditions, battery leakage may occur. If fluid comes in contact with your skin, wash immediately with soap and water. If fluid gets into your eyes, flush them with clean water for at least 10 minutes, then seek immediate medical attention. Following this rule will reduce the risk of serious personal injury.
- Battery cells and battery pack assembly will burn if incinerated.

SECTION 3: COMPOSITION/INFORMATION OF INGREDIENTS

Refer to battery cell SDS for more information.

SECTION 4: FIRST AID MEASURES

Refer to battery cell SDS for more information.

No exposure to hazards during routine handling of product.

▲ WARNING:

- To reduce the risk of injury, user must read operator's manual.
- Risk of fire and burns.
- Do not open, crush, heat above 50°C, incinerate, or short terminals.
- Follow manufacturer's instructions.
- Use only with charger listed in operator's manual.
- Remove battery from tool when storing, changing attachments, or making adjustments.
- To reduce the risk of explosion and possible injury, do not place battery near fire or heat.
- Do not crush, drop, or damage battery pack.
- Do not use a battery pack that has been dropped or received a sharp blow. A damaged battery is subject to explosion. Properly dispose of a dropped or damaged battery immediately.
- Under extreme usage or temperature conditions, battery leakage may occur. If fluid comes in contact with your skin, wash immediately with soap and water. If fluid gets into your eyes, flush them with clean water for at least 10 minutes, then seek immediate medical attention. Following this rule will reduce the risk of serious personal injury.
- Battery cells and battery pack assembly will burn if incinerated.
- No exposure during routine handling of product. Risk of exposure occurs only if the battery is mechanically or electrically abused.
- No effect under routine handling and use to eyes, skin, or if inhaled. Ingestion is not likely, given the physical size and state of the cell. If swallowed, seek medical attention immediately.
- If exposure to internal materials within cell due to damaged outer casing, the following actions are recommended:

EYE CONTACT:

Flush with water for 10 minutes without rubbing and immediately seek medical attention.

SKIN CONTACT:

Wash area immediately with soap and water. If irritation continues, seek medical attention.

INHALATION:

Leave area immediately, move to fresh air, and seek medical attention.

INGESTION:

If swallowed, contact POISON CONTROL CENTER immediately.

SECTION 5: FIRE FIGHTING MEASURES

Refer to battery cell SDS for more information.

SECTION 6: ACCIDENTAL RELEASE MEASURES

PERSONAL PRECAUTIONS:

- Use standard industrial clothing in normal use.
- If handling large containers of cells, wear steel-toed footwear.

ENVIRONMENTAL PRECAUTIONS:

No special precautions necessary.

METHODS FOR CONTAINMENT:

- Transport container outdoors.
- Always consult and obey all international, federal, and local environmental laws.

METHODS FOR CLEAN-UP:

No data available

OTHER INFORMATION:

No data available

SECTION 7: HANDLING AND STORAGE

HANDLING:

- Use only approved charging equipment.
- Do not disassemble battery or battery pack.
- Do not puncture, crush, or dispose of in fire.

STORAGE:

To obtain the longest possible battery life, we suggest the following:

- Remove the battery pack from the charger once it is fully charged and ready for use.

For battery pack storage longer than 30 days:

- Store the battery pack where the temperature is below 80°F and away from moisture.
- Store battery packs in a 30%-50% charged condition.
- Every six months of storage, charge the pack as normal.

SECTION 8: EXPOSURE CONTROLS/PERSONAL PROTECTION

Refer to battery cell SDS for more information.

SECTION 9: PHYSICAL AND CHEMICAL PROPERTIES

Battery pack consists of battery cells assembled in resin enclosure and is a solid odorless product that will burn if incinerated.

SECTION 10: STABILITY AND REACTIVITY

Refer to battery cell SDS for more information.

No exposure to hazards during routine handling of product.

▲ WARNING:

- To reduce the risk of injury, user must read operator's manual.
- Risk of fire and burns.
- Do not open, crush, heat above 50°C, incinerate, or short terminals.
- Follow manufacturer's instructions.
- Use only with charger listed in operator's manual.
- Remove battery from tool when storing, changing attachments, or making adjustments.
- To reduce the risk of explosion and possible injury, do not place battery near fire or heat.
- Do not crush, drop, or damage battery pack.
- Do not use a battery pack that has been dropped or received a sharp blow. A damaged battery is subject to explosion. Properly dispose of a dropped or damaged battery immediately.
- Under extreme usage or temperature conditions, battery leakage may occur. If fluid comes in contact with your skin, wash immediately with soap and water. If fluid gets into your eyes, flush them with clean water for at least 10 minutes, then seek immediate medical attention. Following this rule will reduce the risk of serious personal injury.
- Battery cells and battery pack assembly will burn if incinerated.

SECTION 11: TOXICOLOGY INFORMATION

Refer to battery cell SDS for more information.

No exposure to hazards during routine handling of product.

▲ WARNING:

- To reduce the risk of injury, user must read operator's manual.
- Risk of fire and burns.
- Do not open, crush, heat above 50°C, incinerate, or short terminals.
- Follow manufacturer's instructions.
- Use only with charger listed in operator's manual.
- Remove battery from tool when storing, changing attachments, or making adjustments.
- To reduce the risk of explosion and possible injury, do not place battery near fire or heat.
- Do not crush, drop, or damage battery pack.
- Do not use a battery pack that has been dropped or received a sharp blow. A damaged battery is subject to explosion. Properly dispose of a dropped or damaged battery immediately.
- Under extreme usage or temperature conditions, battery leakage may occur. If fluid comes in contact with your skin, wash immediately with soap and water. If fluid gets into your eyes, flush them with clean water for at least 10 minutes, then seek immediate medical attention. Following this rule will reduce the risk of serious personal injury.
- Battery cells and battery pack assembly will burn if incinerated.

SECTION 12: ECOLOGICAL INFORMATION

ECOTOXICOLOGICAL INFORMATION:

None in routine handling of product.

TOXICITY:

No data available

PERSISTENCE AND DEGRADABILITY (BIOPERSISTENCY & BIODEGRADABILITY):

None in routine handling of product.

POTENTIAL OF BIOACCUMULATION:

None in routine handling of product.

MOBILITY IN SOIL:

None in routine handling of product.

OTHER ADVERSE EFFECTS:

No data available

DISPOSAL:

Follow guidelines in Section 13.

SECTION 13: DISPOSAL CONSIDERATIONS

This product contains Lithium-ion batteries. Local, state or federal laws may prohibit disposal of batteries in ordinary trash. Consult your local waste authority for information regarding available recycling and/or disposal options.

DISPOSAL:

- Dispose in accordance with appropriate regulations.
- Always consult and obey all international, federal, provincial/state, and local hazardous waste disposal laws. Some jurisdictions require recycling of this spent product. Battery recycling is encouraged.
- Lithium-ion batteries are safe for disposal in the normal municipal waste stream since they are not defined by the federal government as hazardous waste. However, Lithium-ion batteries are recyclable.
- To preserve natural resources, please recycle or dispose of batteries properly.

▲ WARNING:

- Upon removal, cover the battery pack's terminals with heavy-duty adhesive tape.
- Do not attempt to destroy or disassemble battery pack or remove any of its components.
- Batteries must be recycled or disposed of properly.
- Also, never touch both terminals with metal objects and/or body parts as short circuit may result.
- Keep away from children. Failure to comply with these warnings could result in fire and/or serious injury.
- This product does not contain mercury, cadmium or Lithium (metal).
- DO NOT INCINERATE battery cells.

SECTION 14: TRANSPORTATION INFORMATION

U.S. DOT Hazardous Material Regulations (Re: Ground Transport)

Lithium-ion batteries under 101 watt hours or Lithium-ion batteries packed with equipment under 101 watt hours when packaged correctly are not subject to any regulations when traveling by ground in the continental U.S.

Canada Transport Dangerous Goods (Re: Ground Transport)

Lithium-ion batteries under 101 watt hours or Lithium-ion batteries packed with equipment under 101 watt hours when packaged correctly are not subject to any regulation when traveling by ground in Canada.

International Dangerous Goods Regulations (Re: Air, Sea, Ground Transport)

Lithium-ion batteries under 101 watt hours or Lithium-ion batteries under 101 watt hours packed with equipment are not subject to any regulation when packaged correctly when shipped by sea.

No more than (16) Lithium-ion batteries under 101 watt hours can be shipped in a box by air, and no more than 2 shipments can be sent to a consignee in a day. The package must contain a Red Bordered Lithium-ion label (ICAO) containing an emergency contact telephone number and a Cargo Air Craft only label.

For accessory batteries under 101 watt hours when shipped by air, Dangerous Goods declaration must be presented to the air forwarder and the shipment identified as 1B on the declaration. The following labels must be attached: DG9 diamond label, Cargo Aircraft Only label, UN3480 Lithium-ion batteries label (all 3 of those labels must be on the same side of the carton), and the Red Bordered Lithium-ion label (ICAO), and UN3480 / 3481 label with the kg of lithium label . (all 4 of those labels must be on the same side of the carton).

SECTION 15: REGULATORY INFORMATION

Compliant with, relevant transportation test requirements as described in the UN Manual of Tests & Criteria, Part III, Sub-section 38.3.

CALIFORNIA PROPOSITION 65

 **WARNING: Cancer and Reproductive Harm – www.P65Warnings.ca.gov**

SECTION 16: OTHER INFORMATION

The information contained within this document is provided for your information only. In case of any discrepancy, the information provided in the battery cell Safety Data Sheet takes precedence over the information provided in the battery pack Technical Data Sheet.

Prepared by: TTI Consumer Power Tools, Inc.

The batteries referenced herein are considered exempt articles and are not subject to the OSHA Hazard Communication Standard; therefore an SDS is not required. This sheet is being provided as a service to our customers.

The information and recommendations set forth are made in good faith and believed to be accurate as of the date of preparation. TTI CONSUMER POWER TOOLS, INC. makes no warranty, expressed or implied, regarding the accuracy of this data or the results to be obtained from the use thereto.

MSDS Report

Sample	
Description	Lithium-ion Cell
& Model	

Material Safety Data Sheet

Reference to ST/SG/AC.10/30/Rev.6 (GHS)

Section 1 - Chemical Product and Company Identification

Chemical product identification

Sample Description: Lithium-ion Cell

Recommended Uses: N/A

Restrictions on use: N/A

Section 2 - Hazards Identification

Emergency overview: This product is an article which contains a chemical substance. Safety information is given for exposure to the article as sold. Intended use of the product should not result in exposure to the chemical substance. This is a battery. In case of rupture: the below hazards exist.

CAS# 1333-86-4

Classification according to GHS

Carcinogenicity (2)

Specific target organ toxicity, repeated exposure (1) (lung)

Label elements

Hazard pictogram(s):



Signal word: Danger

Hazard statement(s):

H351 Suspected of causing cancer

H372 Causes damage to organs through prolonged or repeated exposure (lung)

Precautionary statement(s):

Prevention:

P201 Obtain special instructions before use.

P202 Do not handle until all safety precautions have been read and understood.

P280 Wear protective gloves, protective clothing, eye protection and face protection.

P260 Do not breathe dust.

P264 Wash skin and clothing thoroughly after handling.

P270 Do not eat, drink or smoke when using this product.

Response:

P308 + P313 IF exposed or concerned: Get medical advice.

P314 Get medical advice if you feel unwell.

Storage

P405 Store locked up.

Disposal:

P501 Contents handling to approved waste treatment plants.

CAS# 616-38-6

Classification according to GHS

Flammable liquids (2)

Specific target organ toxicity, single exposure; Narcotic effects (3)

Reproductive toxicity (2)

Label elements

Hazard pictogram(s):



Signal word: Danger

Hazard statement(s):

H225 Highly flammable liquid and vapour

H336 May cause drowsiness or dizziness

H361 Suspected of damaging fertility or the unborn child

Precautionary statement(s):

Prevention:

P210 Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.

P233 Keep container tightly closed.

P240 Ground and bond container and receiving equipment.

P241 Use explosion-proof equipment.

P242 Use non-sparking tools.

P243 Take action to prevent static discharges.

P280 Wear protective gloves, protective clothing, eye protection and face protection.

P261 Avoid breathing gas, mist, vapours and spray.

P271 Use only outdoors or in a well-ventilated area.

P201 Obtain special instructions before use.

P202 Do not handle until all safety precautions have been read and understood.

Response:

P303 + P361 + P353 IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water.

P370 + P378 In case of fire: Use the appropriate media put out the fire.

P304 + P340 IF INHALED: Remove person to fresh air and keep comfortable for breathing.

P312 Call a POISON CENTER or doctor, if you feel unwell.

P308 + P313 IF exposed or concerned: Get medical advice.

Storage

P403 + P235 Store in a well-ventilated place. Keep cool.

P403 + P233 Store in a well-ventilated place. Keep container tightly closed.

P405 Store locked up.

Disposal:

P501 Contents handling to approved waste treatment plants.

CAS# 7440-50-8

Classification according to GHS

Specific target organ toxicity, single exposure; Respiratory tract irritation (3)

Specific target organ toxicity, repeated exposure (1) (liver)

Hazardous to the aquatic environment, long-term hazard (3)

Label elements

Hazard pictogram(s):



Signal word:

Danger

Hazard statement(s):

H335 May cause respiratory irritation

H372 Causes damage to organs through prolonged or repeated exposure (liver)

H412 Harmful to aquatic life with long lasting effects

Precautionary statement(s):

Prevention:

P271 Use only outdoors or in a well-ventilated area.

P260 Do not breathe dust.

P264 Wash skin and clothing thoroughly after handling.

P270 Do not eat, drink or smoke when using this product.

P273 Avoid release to the environment.

Response:

P304 + P340 IF INHALED: Remove person to fresh air and keep comfortable for breathing.

P312 Call a POISON CENTER or doctor, if you feel unwell.

Storage

P403 + P233 Store in a well-ventilated place. Keep container tightly closed.

Disposal:

P501 Contents or container handling to approved waste treatment plants.

CAS# 7429-90-5

Classification according to GHS

Specific target organ toxicity, repeated exposure (1) (Lung)

Hazardous to the aquatic environment, long-term hazard (4)

Label elements

Hazard pictogram(s):



Signal word: Danger

Hazard statement(s):

H372 Causes damage to organs through prolonged or repeated exposure (Lung)

H413 May cause long lasting harmful effects to aquatic life

Precautionary statement(s):**Prevention:**

P260 Do not breathe dust.

P264 Wash skin and clothing thoroughly after handling.

P270 Do not eat, drink or smoke when using this product.

P273 Avoid release to the environment.

Response:

P314 Get medical advice if you feel unwell.

Storage

None.

Disposal:

P501 Contents handling to approved waste treatment plants.

Other hazards

Physical and chemical hazards: See Section 10

Human health hazards: See Section 11

Environmental hazards: See Section 12

Section 3 – Composition/Information on Ingredients

Chemical characterization: Mixture

Chemical Composition	CAS No.	EC#	Weight (%)
Lithium Manganese Nickel And Cobalt	---	---	<35
Carbon black	1333-86-4	215-609-9	<5
Sodium carboxy methyl cellulose	9004-32-4	618-378-6	<2
Polyvinylidene fluoride resin	24937-79-9	607-458-6	<2
Graphite	7782-42-5	231-955-3	<20
Phosphate(1-), hexafluoro-, lithium	21324-40-3	244-334-7	<5
1,3-Dioxolan-2-one	96-49-1	202-510-0	<5
Carbonic acid, dimethyl ester	616-38-6	210-478-4	<5
Copper	7440-50-8	231-159-6	<15
Aluminium	7429-90-5	231-072-3	<10

Section 4 - First Aid Measures

Description of first aid measures

General information No special measures required.

After eye contact

Flush eyes with plenty of water for several minutes while holding eyelids open. Get medical attention if irritation persists.

After skin contact

Remove contaminated clothing and shoes. Immediately wash with water and soap and rinse thoroughly. Wash clothing and shoes before reuse. If irritation occurs, get medical attention.

After inhalation

Remove victim to fresh area. Administer artificial respiration if breathing is difficult. Seek medical attention.

After swallowing

Do not induce vomiting. Get medical attention.

Personal protective equipment for first-aid responders: No data available.

Most important symptoms/effects, acute and delayed: No data available.

Indication of immediate medical attention and special treatment needed: No data available.

Section 5 - Fire Fighting Measures

Suitable extinguishing media:

Use extinguishing agent suitable for local conditions and the surrounding environment .
Such as dry powder , CO₂.

Unsuitable extinguishing media:

No data available.

Specific Hazards arising from the chemical:

Special hazards arising from the substance or mixture

Battery may burst and release hazardous decomposition products when exposed to a fire situation. Lithium ion batteries contain flammable electrolyte that may vent, ignite and produce sparks when subjected to high temperature(>150°C(302°F)), when damaged or abused (e.g. mechanical damage or electrical overcharging); may burn rapidly with flare-burning effect; may ignite other batteries in clothes proximity.

Specific protective actions for fire-fighters:

Protective equipment: Wear self-contained respirator. Wear fully protective impervious suit.

Section 6 - Accidental Release Measures

Personal precautions:

Wear protective equipment. Keep unprotected persons away. Ensure adequate ventilation

Protective equipment:

No data available.

Emergency procedures:

Remove ignition sources, evacuate area. Sweep up using a method that does not generate dust. Collect as much of the spilled material as possible, placed the spilled material into a suitable disposal container. Keep spilled material out of sewers, ditches and bodies of water.

Environmental precautions:

Do not allow material to be released to the environment without proper governmental permits.

Methods and materials for containment and cleaning up:

All waste must refer to the United Nations, the national and local regulations for disposal.

See Section 7 for information on safe handling.

See Section 8 for information on personal protection equipment.

See Section 13 for disposal information.

Section 7 - Handling and Storage

Precautions for safe handling:

Consumption of food and beverage should be avoided in work areas.

Wash hands with soap and water before eating, drinking.

Ground containers when transferring liquid to prevent static accumulation and discharge.

Information about fire and explosion protection

Batteries may explode or cause burns, if disassembled, crushed or exposed to fire or high temperatures. Do not short or install with incorrect polarity.

Conditions for safe storage, including any incompatibilities:**Requirements to be met by storerooms and receptacles**

Store in a cool, dry, well-ventilated place.

Information about storage in one common storage facility

Keep away from heat, avoiding the long time of sunlight.

Further information about storage conditions

Keep container tightly sealed.

Specific and use

No data available.

Section 8 - Exposure Controls/Personal Protection

Control parameters

CAS No.	ACGIH	NIOSH	OSHA
1333-86-4	TLV-TWA 3.5mg/m ³	REL-TWA 3.5mg/m ³	PEL-TWA 3.5mg/m ³
9004-32-4	N/A	N/A	N/A
24937-79-9	N/A	N/A	N/A

7782-42-5	TLV-TWA 2mg/m3	REL-TWA 2.5mg/m3	PEL-TWA 15mppcf PEL-TWA 20mppcf
21324-40-3	N/A	N/A	N/A
96-49-1	N/A	N/A	N/A
616-38-6	N/A	N/A	N/A
7440-50-8	TLV-TWA 0.2mg/m3 TLV-TWA 1mg/m3	REL-TWA 1mg/m3 REL-TWA 0.1mg/m3	PEL-TWA 0.1mg/m3 PEL-TWA 1mg/m3
7429-90-5	TLV-TWA 10mg/m3 TLV-TWA 5mg/m3	REL-TWA 2mg/m3 REL-TWA 5mg/m3 REL-TWA 10mg/m3	PEL-TWA 5mg/m3 PEL-TWA 15mg/m3

Appropriate engineering controls:

The usual precautionary measures for handling chemicals should be followed.

Keep away from foodstuffs, beverages and feed.

Remove all soiled and contaminated clothing immediately.

Wash hands before breaks and at the end of work.

Personal Protective Equipment

Respiratory protection: Wear suitable protective mask in order to reduce the respiratory system. A large number of leakage, wear chemical protective clothing, including self-contained breathing apparatus.

Hand Protection: Wear appropriate protective gloves to reduce skin contact.

Eyes Protection: Wear safety goggles or eye protection combined with respiratory protection.

Skin and Body Protection: Working environment required, wear suitable protective clothing to minimize contact with skin. The type of protective equipment must be according to the concentration and the content of certain hazardous substances in the workplace.

Section 9 - Physical and Chemical Properties

Information on basic physical and chemical properties

Colour: Green.

Physical State: Cylindrical.

Odour: Not available.

Odour threshold: Not available.

pH: Not available.

Melting point/freezing point:	Not available.
Initial boiling point and boiling range:	Not available.
Flash Point:	Not available.
Evaporation rate:	Not available.
Flammability (solid, gas):	Not available.
Explosion Limits (vol% in air):	Not available.
Vapour pressure, kPa at 20°C:	Not available.
Vapor density:	Not available.
Density/Relative density (water = 1):	Not available.
Solubility(ies):	Not available.
Partition coefficient: n-octanol/water:	Not available.
Auto-ignition temperature:	Not available.
Decomposition temperature:	Not available.
Viscosity:	Not available.
Other information:	
Voltage	3.6V
Electric capacity	2000mAh
Electric Energy	7.2Wh

Section 10 - Stability and Reactivity

Reactivity: No data available.

Chemical stability: Stable.

Possibility of hazardous reactions: No data available.

Conditions to Avoid: Flames, sparks, and other sources of ignition, incompatible materials.

Incompatibilities materials: Oxidizing agents, acid, base.

Hazardous decomposition products: Carbon monoxide, carbon dioxide, lithium oxide fumes.

Section 11 - Toxicological Information

Acute Toxicity:

CAS No.	LC50/LD50
1333-86-4	LD50 Rat (oral): 15400mg/kg
9004-32-4	No data available.
24937-79-9	No data available.

7782-42-5	No data available.
21324-40-3	No data available.
96-49-1	LD50 Rat (oral): 10g/kg
616-38-6	LD50 Rat (oral): 6400-12800mg/kg; LC50 Rat (Inhalation: Vapours) ≥ 140 mg/L
7440-50-8	No data available.
7429-90-5	No data available.

Skin corrosion/irritation: No data available.

Serious eye damage/irritation: No data available.

Respiratory or Skin sensitization: No data available.

Germ Cell mutagenicity: No data available.

Carcinogenicity: No data available.

Reproductive toxicity: No data available.

Specific target organ toxicity-Single exposure: No data available.

Specific target organ toxicity-Repeated exposure: No data available.

Aspiration hazard: No data available.

Information on the likely routes of exposure: No data available.

Eye: No data available.

Skin: No data available.

Ingestion: No data available.

Inhalation: No data available.

Section 12 - Ecological Information

Ecological Toxicity: No data available.

Persistence and degradability: No data available.

Bioaccumulative Potential: No data available.

Mobility in Soil: No data available.

Other adverse effects: No data available.

Section 13 - Disposal Considerations

Disposal methods:

Recommendation:

Consult state, local or national regulations to ensure proper disposal.

Uncleaned packaging

Recommendation: Disposal must be made according to official regulations.

Section 14 - Transport Information

UN Number	
IATA	UN3480
IMDG	UN3480
UN Proper shipping name	
IAT	Lithium ion batteries
IMDG	LITHIUM ION BATTERIES
Transport hazard class(es)	
IATA	9
IMDG	9
Packing group	
IATA	N/A
IMDG	N/A
Packaging Sign	
IATA	
IMDG	N/A
Environmental hazards	
Marine pollutant:	No
Special precautions for user	Not applicable.

Transport information: The Lithium-ion Cell has passed the test UN38.3, according to the report ID: MDIKXCJN51537721.

Exceeds the standard of Table 965- II , so it belongs to dangerous goods. Cargo aircraft only. According to the Packing Instruction 965 section I B of IATA DGR 57th Edition for transportation.

According to the special provision 188 of IMDG (37-14). The products are not subject to dangerous goods.

Separate batteries to prevent short-circuiting. and they should be packed in strong package during transport. Lithium cell or battery should incorporate a safety venting device or be designed to prevent a violent rupture under normal transport conditions. Keep away from

high temperature and open flames. Lithium ion cells and batteries must be offered for transport at a state of charge (SoC) not exceeding 30% of their rated design capacity from 1 April 2016.

Transport Fashion: By air, by sea.

Section 15 - Regulatory Information

Safety, health and environmental regulations/legislation specific for the substance or mixture

CAS No.	TSCA	IECSC	DSL/NDSL	EINECS/ ELINCS/ NLP
1333-86-4	Listed	Listed	Listed DSL	Listed
9004-32-4	Listed	Listed	Listed DSL	Listed
24937-79-9	Listed	Listed	Listed DSL	Listed
7782-42-5	Listed	Listed	Listed DSL	Listed
21324-40-3	Listed	Listed	Listed DSL	Listed
96-49-1	Listed	Listed	Listed DSL	Listed
616-38-6	Listed	Listed	Listed DSL	Listed
7440-50-8	Listed	Listed	Listed DSL	Listed
7429-90-5	Listed	Listed	Listed DSL	Listed

Section 16 - Other Information

Issue Time: 2016-03-28

Issue Department: Technical department

Modification record:

Notice to reader

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein.

Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

Other Information:

CAS: (Chemical Abstracts Service);

EC: (European Commission);

ACGIH: (American Conference of Governmental Industrial Hygienists);

NIOSH: (US National Institute for Occupational Safety and Health);
OSHA: (US Occupational Safety and Health);
TLV: (Threshold Limit Value)
TWA: (Time Weighted Average);
STEL: (Short Term Exposure Limit);
PEL: (Permissible Exposure Level);
REL: (Recommended Exposure Limit);
PC-STEL: (Permissible concentration-time weighted average);
PC-TWA: (Permissible concentration-short time exposure limit);
LC50: (Lethal concentration, 50 percent kill);
LD50: (Lethal dose, 50 percent kill);
IARC: (International Agency for Research on Cancer);
EC50: (Median effective concentration);
BCF: (Bioconcentration Factor);
BOD: (Biochemical oxygen demand);
NOEC: (No observed effect concentration);
NTP: (US National Toxicology Program);
RTECS: (Registry of Toxic Effects of Chemical Substances);
IATA: (International Air Transport Association);
IMDG: (International Maritime Dangerous Goods);
TDG: (Recommendations on the TRANSPORT OF DANGEROUS GOODS Model Regulations);
TOC: (Total Organic Carbon);
TSCA: (Toxic Substances Control Act of USA);
DSL: (the Domestic Substances List of Canada);
NDSL: (the Non-domestic Substances List of Canada)

End of report



Technical Data Sheet

RIDGID Lithium-Ion Battery Pack

Battery Voltage: 18V

Battery Capacity: 2Ah / 36Wh

SECTION 1: PRODUCT AND COMPANY IDENTIFICATION

Product Name: Lithium-Ion Battery — Rechargeable

Model Number:

R87002

Issue Date:

October 2020

Techtronic Industries Power Equipment

P.O. Box 1288

Anderson, SC 29622

Company Phone Number:

1-866-539-1710

Emergency Contact Number:

Chemtrec (United States only): 1-800-424-9300

(International): +1-703-741-5970

SECTION 2: HAZARDS IDENTIFICATION

Refer to battery cell SDS for more information.

No exposure to hazards during routine handling of product.

▲ WARNING:

- To reduce the risk of injury, user must read operator's manual.
- Risk of fire and burns.
- Do not open, crush, heat above 50°C, incinerate, or short terminals.
- Follow manufacturer's instructions.
- Use only with charger listed in operator's manual.
- Remove battery from tool when storing, changing attachments, or making adjustments.
- To reduce the risk of explosion and possible injury, do not place battery near fire or heat.
- Do not crush, drop, or damage battery pack.
- Do not use a battery pack that has been dropped or received a sharp blow. A damaged battery is subject to explosion. Properly dispose of a dropped or damaged battery immediately.
- Under extreme usage or temperature conditions, battery leakage may occur. If fluid comes in contact with your skin, wash immediately with soap and water. If fluid gets into your eyes, flush them with clean water for at least 10 minutes, then seek immediate medical attention. Following this rule will reduce the risk of serious personal injury.
- Battery cells and battery pack assembly will burn if incinerated.

SECTION 3: COMPOSITION/INFORMATION OF INGREDIENTS

Refer to battery cell SDS for more information.

SECTION 4: FIRST AID MEASURES

Refer to battery cell SDS for more information.

No exposure to hazards during routine handling of product.

▲ WARNING:

- To reduce the risk of injury, user must read operator's manual.
- Risk of fire and burns.
- Do not open, crush, heat above 50°C, incinerate, or short terminals.
- Follow manufacturer's instructions.
- Use only with charger listed in operator's manual.
- Remove battery from tool when storing, changing attachments, or making adjustments.
- To reduce the risk of explosion and possible injury, do not place battery near fire or heat.
- Do not crush, drop, or damage battery pack.
- Do not use a battery pack that has been dropped or received a sharp blow. A damaged battery is subject to explosion. Properly dispose of a dropped or damaged battery immediately.
- Under extreme usage or temperature conditions, battery leakage may occur. If fluid comes in contact with your skin, wash immediately with soap and water. If fluid gets into your eyes, flush them with clean water for at least 10 minutes, then seek immediate medical attention. Following this rule will reduce the risk of serious personal injury.
- Battery cells and battery pack assembly will burn if incinerated.
- No exposure during routine handling of product. Risk of exposure occurs only if the battery is mechanically or electrically abused.
- No effect under routine handling and use to eyes, skin, or if inhaled. Ingestion is not likely, given the physical size and state of the cell. If swallowed, seek medical attention immediately.
- If exposure to internal materials within cell due to damaged outer casing, the following actions are recommended:

EYE CONTACT:

Flush with water for 10 minutes without rubbing and immediately seek medical attention.

SKIN CONTACT:

Wash area immediately with soap and water. If irritation continues, seek medical attention.

INHALATION:

Leave area immediately, move to fresh air, and seek medical attention.

INGESTION:

If swallowed, contact POISON CONTROL CENTER immediately.

SECTION 5: FIRE FIGHTING MEASURES

Refer to battery cell SDS for more information.

SECTION 6: ACCIDENTAL RELEASE MEASURES

PERSONAL PRECAUTIONS:

- Use standard industrial clothing in normal use.
- If handling large containers of cells, wear steel-toed footwear.

ENVIRONMENTAL PRECAUTIONS:

No special precautions necessary.

METHODS FOR CONTAINMENT:

- Transport container outdoors.
- Always consult and obey all international, federal, and local environmental laws.

METHODS FOR CLEANUP:

No data available

OTHER INFORMATION:

No data available

SECTION 7: HANDLING AND STORAGE

HANDLING:

- Use only approved charging equipment.
- Do not disassemble battery or battery pack.
- Do not puncture, crush, or dispose of in fire.

STORAGE:

To obtain the longest possible battery life, we suggest the following:

- Remove the battery pack from the charger once it is fully charged and ready for use.

For battery pack storage longer than 30 days:

- Store the battery pack where the temperature is below 80°F and away from moisture.
- Store battery packs in a 30%-50% charged condition.
- Every six months of storage, charge the pack as normal.

SECTION 8: EXPOSURE CONTROLS/PERSONAL PROTECTION

Refer to battery cell SDS for more information.

SECTION 9: PHYSICAL AND CHEMICAL PROPERTIES

Battery pack consists of battery cells assembled in resin enclosure and is a solid odorless product that will burn if incinerated.

SECTION 10: STABILITY AND REACTIVITY

Refer to battery cell SDS for more information.

No exposure to hazards during routine handling of product.

▲ WARNING:

- To reduce the risk of injury, user must read operator's manual.
- Risk of fire and burns.
- Do not open, crush, heat above 50°C, incinerate, or short terminals.
- Follow manufacturer's instructions.
- Use only with charger listed in operator's manual.
- Remove battery from tool when storing, changing attachments, or making adjustments.
- To reduce the risk of explosion and possible injury, do not place battery near fire or heat.
- Do not crush, drop, or damage battery pack.
- Do not use a battery pack that has been dropped or received a sharp blow. A damaged battery is subject to explosion. Properly dispose of a dropped or damaged battery immediately.
- Under extreme usage or temperature conditions, battery leakage may occur. If fluid comes in contact with your skin, wash immediately with soap and water. If fluid gets into your eyes, flush them with clean water for at least 10 minutes, then seek immediate medical attention. Following this rule will reduce the risk of serious personal injury.
- Battery cells and battery pack assembly will burn if incinerated.

SECTION 11: TOXICOLOGY INFORMATION

Refer to battery cell SDS for more information.

No exposure to hazards during routine handling of product.

▲ WARNING:

- To reduce the risk of injury, user must read operator's manual.
- Risk of fire and burns.
- Do not open, crush, heat above 50°C, incinerate, or short terminals.
- Follow manufacturer's instructions.
- Use only with charger listed in operator's manual.
- Remove battery from tool when storing, changing attachments, or making adjustments.
- To reduce the risk of explosion and possible injury, do not place battery near fire or heat.
- Do not crush, drop, or damage battery pack.
- Do not use a battery pack that has been dropped or received a sharp blow. A damaged battery is subject to explosion. Properly dispose of a dropped or damaged battery immediately.
- Under extreme usage or temperature conditions, battery leakage may occur. If fluid comes in contact with your skin, wash immediately with soap and water. If fluid gets into your eyes, flush them with clean water for at least 10 minutes, then seek immediate medical attention. Following this rule will reduce the risk of serious personal injury.
- Battery cells and battery pack assembly will burn if incinerated.

SECTION 12: ECOLOGICAL INFORMATION

ECOTOXICOLOGICAL INFORMATION:

None in routine handling of product.

TOXICITY:

No data available

PERSISTENCE AND DEGRADABILITY (BIOPERSISTENCY & BIODEGRADABILITY):

None in routine handling of product.

POTENTIAL OF BIOACCUMULATION:

None in routine handling of product.

MOBILITY IN SOIL:

None in routine handling of product.

OTHER ADVERSE EFFECTS:

No data available

DISPOSAL:

Follow guidelines in Section 13.

SECTION 13: DISPOSAL CONSIDERATIONS

This product contains Lithium-ion batteries. Local, state or federal laws may prohibit disposal of batteries in ordinary trash. Consult your local waste authority for information regarding available recycling and/or disposal options.

DISPOSAL:

- Dispose in accordance with appropriate regulations.
- Always consult and obey all international, federal, provincial/state, and local hazardous waste disposal laws. Some jurisdictions require recycling of this spent product. Battery recycling is encouraged.
- Lithium-ion batteries are safe for disposal in the normal municipal waste stream since they are not defined by the federal government as hazardous waste. However, Lithium-ion batteries are recyclable.
- To preserve natural resources, please recycle or dispose of batteries properly.

▲ WARNING:

- Upon removal, cover the battery pack's terminals with heavy-duty adhesive tape.
- Do not attempt to destroy or disassemble battery pack or remove any of its components.
- Batteries must be recycled or disposed of properly.
- Also, never touch both terminals with metal objects and/or body parts as short circuit may result.
- Keep away from children. Failure to comply with these warnings could result in fire and/or serious injury.
- This product does not contain mercury, cadmium or Lithium (metal).
- DO NOT INCINERATE battery cells.

SECTION 14: TRANSPORTATION INFORMATION

U.S. DOT Hazardous Material Regulations (Re: Ground Transport)

Lithium-ion batteries under 101 watt hours or Lithium-ion batteries packed with equipment under 101 watt hours when packaged correctly are not subject to any regulations when traveling by ground in the continental U.S.

Canada Transport Dangerous Goods (Re: Ground Transport)

Lithium-ion batteries under 101 watt hours or Lithium-ion batteries packed with equipment under 101 watt hours when packaged correctly are not subject to any regulation when traveling by ground in Canada.

International Dangerous Goods Regulations (Re: Air, Sea, Ground Transport)

Lithium-ion batteries under 101 watt hours or Lithium-ion batteries under 101 watt hours packed with equipment are not subject to any regulation when packaged correctly when shipped by sea.

No more than (16) Lithium-ion batteries under 101 watt hours can be shipped in a box by air, and no more than 2 shipments can be sent to a consignee in a day. The package must contain a Red Bordered Lithium-ion label (ICAO) containing an emergency contact telephone number and a Cargo Air Craft only label.

For accessory batteries under 101 watt hours when shipped by air, Dangerous Goods declaration must be presented to the air forwarder and the shipment identified as 1B on the declaration. The following labels must be attached: DG9 diamond label, Cargo Aircraft Only label, UN3480 Lithium-ion batteries label (all 3 of those labels must be on the same side of the carton), and the Red Bordered Lithium-ion label (ICAO), and UN3480 / 3481 label with the kg of lithium label . (all 4 of those labels must be on the same side of the carton).

SECTION 15: REGULATORY INFORMATION

Compliant with, relevant transportation test requirements as described in the UN Manual of Tests & Criteria, Part III, Sub section 38.3.

CALIFORNIA PROPOSITION 65

 **WARNING: Cancer and Reproductive Harm – www.P65Warnings.ca.gov**

SECTION 16: OTHER INFORMATION

The information contained within this document is provided for your information only. In case of any discrepancy, the information provided in the battery cell Safety Data Sheet takes precedence over the information provided in the battery pack Technical Data Sheet.

Prepared by: Techtronic Industries Power Equipment

The batteries referenced herein are considered exempt articles and are not subject to the OSHA Hazard Communication Standard; therefore an SDS is not required. This sheet is being provided as a service to our customers.

The information and recommendations set forth are made in good faith and believed to be accurate as of the date of preparation. TECHTRONIC INDUSTRIES POWER EQUIPMENT makes no warranty, expressed or implied, regarding the accuracy of this data or the results to be obtained from the use thereto.

Safety Data Sheet

1. Product and Company Identification

Important Note: As a solid, manufactured article, exposure to hazardous ingredients is not expected with normal use. This battery is an article pursuant to 29 CFR 1910.1200 and, as such, is not subject to the OSHA Hazard Communication Standard requirement. The information contained in this Safety Data Sheet contains valuable information critical to the safe handling and proper use of the product. This SDS should be retained and available for employees and other users of this product.

Use of the substance/preparation

Lithium-ion batteries

Synonyms

Lithium-ion Cell, Lithium-ion Battery, Li-Ion Cell, Li-Ion Battery

Further Information

Battery-System: Lithium-ion (Li-ion)

Nominal Voltage: 3.6 V

Rated Capacity: 2.000 Ah

Wh rating: 7.20 Wh

Anode (negative electrode): based on intercalation graphite

Cathode (positive electrode): based on lithiated metal oxide (Cobalt, Nickel, Manganese)

Remark:

The information and recommendations set forth are made in good faith and believed to be accurate as of the date of preparation. The manufacturer makes no warranty, expressed or implied, with respect to this information and disclaims all liabilities from reliance on it.

2. Hazards Identification

Classification of the substance or mixture.

Preparation Hazards and Classification: The product is a Lithium ion cell or battery and is therefore classified as an article and is not hazardous when used according to the recommendations of the manufacturer. The hazard is associated with the contents of the cell or battery. Under recommended use conditions, the electrode materials and liquid electrolyte are non-reactive provided that the cell or battery integrity remains and the seals remain intact. The potential for exposure should not exist unless the cell or battery leaks, is exposed to high temperatures or is mechanically, electrically or physically abused/damaged. If the cell or battery is compromised and starts to leak, based upon the battery ingredients, the contents are classified as Hazardous.

Hazard Summary

Physical hazards: Not classified for physical hazards.

Health hazards: Not classified for health hazards.

Environmental hazards: Not classified for hazards to the environment.

Specific hazards: Exposure to contents of an open or damaged cell or battery: contact with this material will cause burns to the skin, eyes and mucous membranes. May cause sensitization by skin contact.

Main Symptoms: Symptoms include itching, burning, redness and tearing.

Hazardous Materials Information Label (HMIS)

Health: 0

Flammability: 1

Physical Hazard: 0

NFPA Hazard Ratings

Health: 0

Flammability: 1

Reactivity: 0

Unique Hazard:

Labelling

If the cell or battery is compromised and starts to leak, based upon the battery ingredients, the contents are classified as Hazardous

Symbol:



Signal word: Danger

GHS precautionary statements

Precautionary Statement(s) Prevention	P102: Keep out of reach of children. P103: Read label prior to use. P202: Do not handle until all safety precautions have been read and understood. P210: Keep away from heat/sparks/open flames/hot surfaces – No smoking. P234: Keep only in original container. P254: Wash hands thoroughly after handling.
Response (If cell/battery leaks)	P260: Do not breathe vapor or spray. P280: Wear protective gloves/protective clothing/eye protection/face protection. P301/330/331: IF SWALLOWED: Rinse mouth. DO NOT induce vomiting. P303/361/353: IF ON SKIN (or hair): Remove/Take off immediately all contaminated clothing. Rinse skin with water/shower. P304/340: If INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. P305/351/338: IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. P310: Immediately call a POISON CENTER or doctor/physician. P363: Wash contaminated clothing before reuse. P370: In case of fire: Use carbon dioxide, dry chemical or water extinguisher.
Storage (Store as indicated in Section 7)	P402: Store in a dry place. P405: Store locked up. P410: Protect from sunlight.
Disposal	P406: Store any spilled/leaking electrolyte material in a corrosive resistant container with a resistant inner liner. P501: Dispose of batteries in accordance with applicable hazardous waste regulations.

Other Hazards.

Appearance, Color and Odor: Solid object with no odor.

Primary Routes(s) of Exposure: These chemicals are contained in a sealed enclosure. Risk of exposure occurs only if the cell or pack is mechanically, thermally, electrically or physically abused to the point of compromising the enclosure.

If this occurs, exposure to the electrolyte solution contained within can occur by inhalation, ingestion, eye contact and skin contact.

Potential Health Effect(s):

Acute (short term): see Section 8 for exposure controls.

In the event that this cell or pack has been ruptured, the electrolyte solution contained within the cell would be corrosive and can cause burns to skin and eyes.

Inhalation: Inhalation of materials from a sealed cell is not an expected route of exposure. Vapors or mists from a ruptured cell may cause respiratory irritation.

Ingestion: Swallowing of materials from a sealed cell is not an expected route of exposure. Swallowing the contents of an open cell can cause serious chemical burns to mouth, esophagus, and gastrointestinal tract.

Skin: Contact between the cell and skin will not cause any harm. Skin contact with the contents of an open cell can cause severe irritation or burns to the skin.

Eye: Contact between the cell and the eye will not cause any harm. Eye contact with the contents of an open cell can cause severe irritation or burns to the eye.

CHRONIC (long term): see Section 11 for additional toxicological data.

Interactions with other chemicals: Immersion in high conductivity liquids may cause corrosion and breaching of the cell or battery enclosure. The electrolyte solution inside of the cells may react with alkaline (basic) materials and present a flammability hazard.

Potential Environmental Effects: Not Available.

3. Composition/information on ingredients

Hazardous components

	Chemical Name	CAS No.	*Mass range in cell (g/g %)
Electrolyte	Contains Electrolyte salt and solvents.		5-20
Electrolyte salt	Lithium hexafluorophosphate	21324-40-3	0.05-5
Electrolyte solvent	Includes one or more of the following; Ethylene Carbonate Propylene Carbonate Diethyl Carbonate Ethyl propionate	96-49-1 108-32-7 105-58-8 105-37-3	5-20
PVDF	Polyvinylidenefluoride	24937-79-9	<1
Copper	Cu	7440-50-8	3-15
Aluminium	Al	7429-90-5	2-10
Cathode	Lithium cobalt oxide	12190-79-3	20-50
Anode	Graphite	7782-42-5	10-30
Steel, Nickel, and inert components		Various	Balance

Because of the cell structure the dangerous ingredients will not be available if used properly.
During charge process a lithium graphite intercalation phase is formed.

4. First Aid Measures

Description of first aid measures

The hazardous components of this cell or battery are contained within a sealed unit. The following measures are only applicable if exposure has occurred to components when a cell or battery leaks, is exposed to high temperatures or is

mechanically, electrically or physically abused/damaged. The hazardous contents are caustic alkaline electrolytes contained in cells with lithium metal oxide cathodes, graphite and carbon anodes and Polyvinylidenefluoride binders.

Ingestion: Have victim rinse mouth thoroughly with water. DO NOT INDUCE VOMITING. Quickly transport victim to an emergency care facility.

EYE: If eye contact with contents of an open cell occurs, immediately flush the contaminated eye(s) with water. Quickly transport victim to an emergency care facility.

Skin Contact: Immediately flush with water. If irritation or pain persists, seek medical attention.

Inhalation: Remove the patient from exposure into fresh air, seek medical attention.

PROTECTION FOR FIRST

AIDERS: Do not enter corrosive vapor contaminated areas without a respirator or Self Contained Breathing Apparatus. Wear adequate personal protective equipment as indicated in Section 8.

FIRST AID FACILITIES: Eye wash bottle, fountain, safety showers or at least a source of running water are required in the area where the product is used.

Most important symptoms & effects, acute & delayed, caused by exposure:

ACUTE: The contents of the battery are rated as corrosive. Ingestion of the electrolyte could lead to severe gastrointestinal tract irritation with nausea, vomiting and potentially burns. Inhalation of vapors may lead to severe irritation of the mouth and upper respiratory tract with a burning sensation, pain, burns and inflammation in the nose and throat; there may also be coughing or difficulty breathing. Eye contact may lead to severe eye irritation or in worst case scenario irreversible damage and possible eye burns. Skin contact may lead to irritation and possible skin burns.

CHRONIC: Skin contact may aggravate/exacerbate existing skin conditions, such as dermatitis. Chronic inhalation may lead to the same symptoms as listed for acute inhalation above.

Indication of any immediate medical attention and special treatment needed

ADVICE TO DOCTOR: Treat symptomatically if the person comes into contact with the corrosive electrolyte liquid contents of a damaged battery.

5. Fire Fighting Measures

Suitable extinguishing media

Cold water and dry powder in large amount are applicable.

Use metal fire extinction powder or dry sand if only few cells are involved.

Special hazards arising from the chemical

May form hydrofluoric acid if electrolyte comes into contact with water.

In case of fire, the formation of the following flue gases cannot be excluded:

Hydrogen fluoride (HF), Carbon monoxide and carbon dioxide.

Protective equipment and precautions for firefighters

Wear self-contained breathing apparatus and protective suit.

Additional information

If possible, remove cell(s) from fire fighting area. If heated above 125°C, cell(s) can explode/vent. Cell is not flammable but internal organic material will burn if the cell is incinerated.

6. Accidental Release Measures

Personal precautions, protective equipment and emergency procedures:

As an immediate precautionary measure, isolate spill or leak area for at least 25 meters (75 feet) in all directions.

Keep unauthorized personnel away. Stay upwind. Keep out of low areas. Ventilate closed areas before entering.

Wear adequate personal protective equipment as indicated in Section 8.

Environmental precautions

Absorb spilled material with non-reactive absorbent such as vermiculite, clay or earth. Prevent from migration into soil, sewers and natural waterways – inform local authorities if this occurs.

Methods and material for containment and cleaning up

Evacuate spill area immediately and remove sources of ignition. Do NOT touch spilled material. Cleanup personnel must be trained in the safe handling of this product. Spills may be absorbed on non-reactive absorbents such as vermiculite. Place cells or batteries into individual plastic bags and then place into appropriate containers and close tightly for disposal. Ensure that cleanup procedures do not expose spilled material to any moisture. Immediately transport closed containers outside. Lined steel drums are suitable for storage of damaged cells or batteries until proper disposal can be arranged.

7. Handling and Storage

Precaution for Handling

Avoid short circuiting the cell. Avoid mechanical damage of the cell. Do not open or disassemble.
Advice on protection against fire and explosion
Keep away from open flames, hot surfaces and sources of ignition.

Condition for storage

Storage at room temperature (approx. 20°C) at approx. 20~60% of the nominal capacity (OCV approx. 3.6 - 3.9 V/cell).
Keep in closed original container.

8. Exposure controls/personal protection Exposure limit values Exposure limits

Exposure Control Measures

Exposure Limit Values: Airborne exposures to hazardous substances are not expected when the cells or batteries are used for their intended purposes. Exposure standards are not applicable to the sealed articles.

Biological Monitoring: Not applicable.

Control Banding: Not applicable.

Recommended monitoring procedures: Follow standard monitoring procedures.

Derived no-effect level (DNEL): Not applicable.

Derived minimal effect level (DMEL): Not applicable.

Predicted no-effect concentrations (PNECs): Not applicable.

Engineering Controls

Engineering Controls: Special ventilation is not required when using these products in normal use scenarios. Ventilation is required if there is leakage from the cell or battery.

Individual Protection Measures

Eye and Face protection: Eye protection is not required when handling cells or batteries during normal use. Wear safety glasses/goggles if handling a leaking or ruptured cell or battery.

Skin (Hand) protection: Hand protection is not required when handling the cell or battery during normal use. PVC gloves are recommended when dealing with a leaking or ruptured cell or battery.

Skin (clothing) protection: Skin protection is not required when handling the cell or battery during normal use. Wear long sleeved clothing to avoid skin contact if handling a leaking or ruptured cell or battery. Soiled clothing should be washed with detergent prior to re-use.

Respiratory protection: During routine operation, a respirator is not required. However, if dealing with an electrolyte leakage and irritating vapors are generated, an approved half face inorganic vapor and gas/acid/particulate respirator is required.

Thermal Protection: Not applicable.

Other Protective Equipment: Have a safety shower or eye wash station readily available

Hygiene Measures: Do not eat, drink or smoke in work areas. Avoid storing food, drink or tobacco near the product. Practice and maintain good housekeeping.

Environmental exposure controls: Avoid release to the environment.

9. Physical and Chemical Properties

Appearance

physical state,: Solid
Color: Various
Odor: Odorless

Important health, safety and environmental information

Test method

pHValue:	n.a.
Flash point:	n.a.
Lower explosion limits:	n.a.
Vapour pressure:	n.a.
Density:	n.a.
Water solubility:	Insoluble
Ignition temperature:	n.a.

10. Stability and Reactivity

Stability

Stable

Conditions to avoid

Keep away from open flames, hot surfaces and sources of ignition. Do not puncture, crush or incinerate.

Materials to avoid

No materials to be especially mentioned.

Hazardous decomposition products

In case of open cells, there is the possibility of hydrofluoric acid and carbon monoxide release.

Possibility of Hazardous Reactions

Will not occur

Additional information

No decomposition if stored and applied as directed.

11. Toxicological Information

Information on toxicological effects:

The hazardous components of the cell or battery are contained within a sealed unit. Under recommended use conditions, the electrode materials and liquid electrolyte are non-reactive provided that the cell or battery integrity remains and the seals remain intact. The potential for exposure should not exist unless the battery leaks, is exposed

to high temperature or is mechanically, electrically or physically abused/damaged. **The following toxicology data is in respect to if a person comes into contact with the electrolyte.**

Acute Toxicity:

Swallowed: The electrolyte contained within the cell or battery is a corrosive liquid. Ingestion of this electrolyte would be harmful. Swallowing may result in nausea, vomiting, diarrhea, abdominal pain and chemical burns to the gastrointestinal tract. During normal usage ingestion should not be a means of exposure.

Eye: The electrolyte contained within the cell or battery is a corrosive liquid and it is expected that it would cause irreversible damage to the eyes. Contact may cause corneal burns. Effects may be slow to heal after eye contact. Correct handling procedures incorporating appropriate eye protection should minimize the risk of eye irritation.

Skin: The electrolyte contained within the cell or battery is a corrosive liquid and it is expected that it would cause skin burns or severe irritation to the skin if not washed off immediately. Correct handling procedures should minimize the risk of skin irritation. People with pre-existing skin conditions, such as dermatitis, should take extreme care so as not to exacerbate the condition.

Inhaled: Inhalation of vapors from a leaking cell or battery is expected to cause severe irritation of the mouth and upper respiratory tract with a burning sensation, pain, burns and inflammation in the nose and throat; there may also be coughing or difficulty breathing.

Skin Corrosion/Irritation: The electrolyte contained within the cell or battery is classified as a corrosive liquid and is expected to exhibit Dermal Corrosivity/Irritation.

Serious Eye Damage/Irritation: The electrolyte contained within the cell or battery is classified as a corrosive liquid and is expected to exhibit serious Damage/Corrosivity.

Respiratory or Skin Sensitization: The electrolyte contained within the cell or battery is not expected to be a skin sensitizer according to OECD test 406, based on the available data and the known hazards of the components. The electrolyte contained within the battery is not expected to be a respiratory tract sensitizer, based on the available data and the known hazards of the components.

Germ Cell Mutagenicity: The electrolyte contained within the cell or battery is not expected to be mutagenic according to test such as OECD tests 471, 475, 476, 478 and 479, based on the available data and the known hazards of the components.

Carcinogenicity: The electrolyte contained within the cell or battery is not expected to be a carcinogen. The cathode contains Cobalt and Nickel components. These components are classified as IARC 2B – possibly carcinogenic to humans, however they do not pose a threat when contained in the cell or battery sealed unit.

Reproductive Toxicity: The electrolyte contained within the cell or battery is not expected to be a reproductive hazard according to test such as OECD tests 414 and 421, based on the available data and the known hazards of the components.

Specific Target Organ Toxicity (STOT) – Single Exposure: The electrolyte contained within the cell or battery is corrosive and is expected to cause respiratory irritation by inhalation. Inhalation of vapors may lead to severe irritation of the mouth and upper respiratory tract with a burning sensation, pain, burns and inflammation in the nose and throat; there may also be coughing or difficulty breathing.

Specific Target Organ Toxicity (STOT) – Repeated Exposure: The cells or batteries are not expected to cause organ damage from prolonged or repeated exposure according to tests such as OECD tests 410 and 412, based on the available data and the known hazards of the components.

Aspiration Hazard: The cells or batteries are not classified as an aspiration hazard, based on the available data and the known hazards of the components. However, due to the corrosive nature of the product if swallowed, do NOT induce vomiting. If vomiting has occurred after ingestion the person should be observed to ensure that aspiration into the lungs has not occurred and assessed for chemical burns to the gastrointestinal and respiratory tracts.

12. Ecological Information

Further information

Ecological injuries are not known or expected under normal use. Do not flush into surface water or sanitary sewer system.

13. Disposal Considerations**Advice on disposal**

For recycling consult manufacturer.

Contaminated packaging

Disposal in accordance with local regulations.

14. Transport Information

With regard to transport, the following regulations are cited and considered:

- UN No. 3480
- UN proper shipping name: Lithium Ion Batteries.
- Transportation hazard class 9
- Air PI 965 Section I B: Dangerous Goods
- Sea, Land, Air PI965 Section II : Non dangerous Goods
- The International Civil Aviation Organization (ICAO) Technical Instructions, Packing Instruction 965, Section I B or II (2018-2019 Edition),
- The International Air Transport Association (IATA) Dangerous Goods Regulations, Packing Instruction 965, Section I B or II (59th Edition, 2018)
- The International Maritime Dangerous Goods (IMDG) Code [Special provision 188, 230, 384] (38-2016 Edition),
- US Hazardous Materials Regulations 49 CFR(Code of Federal Regulations) Sections 173.185 Lithium batteries and cells,
- The UN Recommendations on the Transport of Dangerous Goods, Manual of Tests and Criteria 38.3 Lithium batteries, Revision 3, Amendment 1 or any subsequent revision and amendment applicable at the date of the type (latest version is Revision 6)

If those lithium-ion batteries are packed with or contained in an equipment, then it is the responsibility of the shipper to ensure that the consignment are packed in compliance to the latest edition of the IATA Dangerous Goods Regulations section II of either Packing Instruction 966 or 967 in order for that consignment to be declared as NOT RESTRICTED (non-hazardous/non-Dangerous). If those lithium-ion batteries are packed with or contained in an equipment, UN No. is UN3481

Our products are properly classified, described, packaged, marked, and labeled, and are in proper condition for transportation according to all the applicable international and national governmental regulations, not limited to the above mentioned. We further certify that the enclosed products have been tested and fulfilled the requirements and conditions in accordance with UN Recommendations (T1 – T8) on the Transport of Dangerous Goods Model Regulations and the Manual of Testes and Criteria.

Test results of the UN Recommendation on the Transport of Dangerous Goods

Manual of Test and Criteria (38.3 Lithium batteries)		Test Results	Remark
No	Test item		
T1	Altitude Simulation	Pass	
T2	Thermal Test	Pass	
T3	Vibration	Pass	
T4	Shock	Pass	
T5	External Short Circuit	Pass	
T6	Impact/Crush	Pass	
T7	Overcharge	Pass	For pack and single cell

			battery only
T8	Forced Discharge	Pass	

15. Regulatory Information

Canadian Federal Regulations:

These products have been classified in accordance with the hazard criteria of the Controlled Products Regulations and the SDS contains all the information required by the Controlled Products Regulations.

WHMIS Classification: Not Controlled, manufactured article.

New Substance Notification Regulations: Lithium hexafluorophosphate is listed on the Non-Domestic Substance List (NDSL). All other ingredients in the product are listed, as required, on Canada's Domestic Substances List (DSL).

National Pollutant Release Inventory (NPRI) Substances: These products do not contain any NPRI chemicals.

United States Federal and State Regulations:

TSCA Status: All ingredients in these products are listed on the TSCA inventory.

OSHA: These products do not meet criteria as per Part 1910.1200, manufactured article.

SARA EPA Title III: None.

Sec. 302/304: None.

Sec. 311/312: None.

Sec. 313: None.

CERCLA RQ: None.

Australia and New Zealand

SUSMP: Not applicable

AICS: All ingredients are on the AICS list.

HSNO Approval number: Not applicable

HSNO Group Title: Not applicable

NOHSC:10008 Risk Phrases: R34 - Causes Burns.

NOHSC:1008 Safety Phrases:

S1 – Keep locked up.

S2 – Keep out of reach of children.

S23 – Do not breathe vapor.

S24/25 – Avoid contact with skin and eyes.

S26 – In case of contact with eyes, rinse immediately with plenty of water and seek medical advice.

S27/28 – After contact with skin, take off immediately all contaminated clothing and wash immediately with plenty of water.

S36/37/39 – Wear suitable protective clothing, gloves and eye/face protection.

S56 – Dispose of this material and its container at hazardous waste or special waste collection point.

S62 – If swallowed, DO NOT induce vomiting: seek medical advice immediately and show this container or label.

S64 – If swallowed, rinse mouth with water (Only if the person is conscious).

EC Classification for the Substance/Preparation:

These products are not classified as hazardous according to Regulation (EC) No. 1272/2008.

Keep out of the reach of children.

EU Restrictions on use:

Regulation (EC) No. 1907/2006, REACH Annex XVII Substances subject to restriction on marketing and use as amended: Aluminium (CAS 7429-90-5)

Other EU Regulations

This Safety Data Sheet complies with the requirements of Regulation (EC) No. 1907/2006.

Japanese Regulations

Japanese Industrial Standards (JIS) JIS Z 7253:2012

Waste disposal and public cleaning law

Law for Promotion of Effective Utilization of Resources

LIMITED WARRANTY

RIDGID® HAND HELD AND STATIONARY POWER TOOL 3 YEAR LIMITED SERVICE WARRANTY

RECON LIMITED WARRANTY

Reconditioned tools automatically receive a 1 year limited warranty from the date of purchase. Valid receipt from an authorized retailer is required. Warranty is not transferable. Reconditioned tools will have the word 'RECON' or some variation stamped into the tools housing. Reconditioned tools are not eligible for the Lifetime Service Agreement.

3-YEAR LIMITED WARRANTY

RIDGID® Brand Hand Held Power Tools, Stationary Power Tools, and Pneumatic Tools are automatically covered under a 3-year Limited Warranty. This 3-Year Limited Warranty begins from the date of purchase shown by a valid receipt. If a valid receipt is not available, the 3 year limited warranty period begins from the date of manufacture shown by the serial code.

LIFETIME SERVICE AGREEMENT

The original purchaser of an eligible product may apply for a free Lifetime Service Agreement. To apply for this Lifetime Service Agreement, you must register your product and submit proof of purchase for processing and approval as described below. The Lifetime Service Agreement provides the original owner of qualifying RIDGID® Brand tools a lifetime of free replacement batteries, free service and free replacement parts subject to the limitations set forth below.

The Lifetime Service Agreement is available free of charge, on all eligible RIDGID® Brand hand held power tools, stationary power tools and pneumatic tools, subject to the terms and conditions stated below. Customers have 90 days from date of purchase to register tools for the Lifetime Service Agreement. Once all conditions of the registration process are fulfilled, and the Lifetime Service Agreement is accepted by the manufacturer, the tool's service coverage lasts the lifetime of the original purchaser. The Lifetime Service Agreement status on a tool is not transferable.

NOTE: The RIDGID® Lifetime Service Agreement is only available for eligible RIDGID tools purchased at THE HOME DEPOT.

CONDITIONS OF THE RIDGID® BRAND LIFETIME SERVICE AGREEMENT

To apply for the RIDGID® Brand Lifetime Service Agreement, you must register your qualifying RIDGID® Brand Hand Held Power Tool, Stationary Power Tool or Pneumatic Tool within 90 days after purchase. Register by logging on to powertools.ridgid.com, click on "Product Registration," and choose the appropriate product category. Log into your personal account, if you do not have one, create an account. Then click 'Register New Product' and agree to the terms and conditions of the Lifetime Service Agreement. Include all qualifying RIDGID® brand product information:

complete model and serial numbers for each serialized piece of equipment, including batteries and chargers. If you don't have access to the internet, enclose a letter with the following information: First name, last name, e-mail, date of birth, phone number, address, city, state, zip code, model number from package, and the model/serial number of all qualifying serialized tool(s), battery(s), and charger(s) if applicable. Then mail the online confirmation print out or the hand written letter with your original receipt (making a photo-copy of your receipt to keep for your records is recommended) and the original UPC from the qualifying products package to: RIDGID® Hand Held and Stationary Power Tool Technical Service, PO Box 1427, Anderson, SC 29622 for processing and approval. All registrations must be made under the name of an individual person. Within approximately 6-8 weeks after completion of the registration process and approval, you will receive confirmation via email or US mail that will include your Customer ID number and verification that the tool has been upgraded to Lifetime Service Agreement status. Keep track of this number as you will need it in order to obtain service for your product under the Lifetime Service Agreement.

NOTE: Handwritten registrations may take longer.

WHAT IS COVERED

(applies to the 3-Year Limited Warranty, the Lifetime Service Agreement, and the Recon Limited Warranty)

The 3 Year Limited Warranty, The Recon Limited Warranty and the Lifetime Service Agreement covers all worn parts in properly maintained tools. This includes normal wear items such as brushes, chucks, motors, switches, gears and even cordless batteries in your qualifying RIDGID® Brand hand held and stationary power tools. These programs also cover replacement rings, driver blades and bumpers on RIDGID® Brand pneumatic tools. This service coverage does not apply to other ineligible RIDGID® Brand products.

WHAT IS NOT COVERED

(applies to the 3-Year Limited Warranty, the Lifetime Service Agreement, and the Recon Limited Warranty)

The 3 Year Limited Warranty, The Recon Limited Warranty and the Lifetime Service Agreement are only applicable to the original purchaser and may not be transferred. These programs only cover wear and tear or failure of the tool arising under normal usage and proper maintenance. They do not cover any malfunction, failure or defect resulting from misuse, abuse, neglect, alteration, modification or repair by anyone other than an authorized service center for RIDGID® brand hand held, pneumatic and stationary power tools. Any damage or malfunction inflicted upon the tool by the user or other external sources, or any failure to comply with the warnings and instructions in the operator's manual is not covered. Consumable accessories provided with the tool

such as, but not limited to, saw blades, planer blades and knives, insert bits, drill bits, grinding wheels and discs, cut off wheels, sand paper, safety glasses and fasteners are not covered.

HOW TO OBTAIN SERVICE

The Lifetime Service Agreement (if accepted), commences after the expiration of the standard RIDGID® 3 year Limited Warranty. To obtain service for this RIDGID® tool on either the 3-year limited warranty, the Lifetime Service Agreement, or the recon limited warranty, you must bring the equipment, to an authorized RIDGID® service center.

You may obtain the location of the authorized service center nearest you by logging on to the RIDGID website at powertools.ridgid.com. When requesting service under the Lifetime Service Agreement, you must present your Lifetime Service Agreement Identification Number and proper personal identification (a valid driver's license, passport, or military I.D. or a valid Social Security card with photo ID).

REPLACEMENT

If a serialized piece of equipment with Lifetime Service Agreement status is ever replaced, the customer has 90 days to call 1-866-539-1710 and re-register that piece of equipment. Proof of replacement required. If a serialized piece of equipment without Lifetime Service Agreement status is ever replaced, the 3-year limited warranty period on the replacement piece of equipment starts from the original date of purchase, not the date of replacement.

If a serialized piece of equipment is ever replaced under the Recon Limited Warranty, the 1-year limited warranty period on the replacement piece of equipment starts from the original date of purchase, not the date of replacement.

SERVICE COMMUNICATIONS

All Lifetime Service Agreement communications should be directed to TTI Consumer Power Tools, Inc., attn.: RIDGID® Hand Held and Stationary Power Tool Technical Service or call (toll-free) 1-866-539-1710.

ADDITIONAL LIMITATIONS

This Lifetime Service Agreement is not a warranty; it does not alter or limit the 3-Year Limited Service Warranty provided with your product, and it is not intended to create any implied warranties or rights of any kind including any warranties of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. Any such implied warranties are expressly disclaimed. To the extent they cannot be disclaimed they are hereby limited to three years from the date of purchase. TTI Consumer Power Tools, Inc. and RIDGID®, Inc. are not responsible for direct, indirect, incidental or consequential damages. Some states restrict limitations on how long an implied warranty lasts and/or do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations may not apply to you. This Agreement gives you specific legal rights, and you may also have other rights which vary from state to state.

PRIVACY POLICY

A detailed statement regarding measures to preserve the privacy of information submitted in connection with communications regarding your RIDGID® Brand tool is available at powertools.ridgid.com.

This product is manufactured by TTI Consumer Power Tools, Inc. The trademark is used pursuant to a license granted by RIDGID, Inc.

TTI Consumer Power Tools, Inc.

P.O. Box 1427, Anderson, SC 29622

1-866-539-1710 • powertools.ridgid.com

GARANTIE LIMITÉE

OUTIL ÉLECTRIQUE PORTATIF ET FIXES DE RIDGID® GARANTIE DE SERVICE LIMITÉE DE 3 ANS

GARANTIE LIMITÉE POUR OUTILS RECONDITIONNÉS

Les outils réusinés sont automatiquement couverts par une garantie limitée d'un (1) an à compter de la date d'achat. Un reçu valide d'un détaillant autorisé est requis. La garantie n'est pas transférable. Les outils réusinés seront étampés du mot « RECON » ou d'une autre étampe sur le boîtier de l'outil. Les outils réusinés ne sont pas admissibles au contrat d'entretien à vie.

GARANTIE LIMITÉE DE TROIS (3) ANS

Les outils électriques, à main, fixes et pneumatiques de marque RIDGID® sont automatiquement couverts par une garantie limitée de trois (3) ans. Cette garantie limitée de trois (3) ans commence à la date d'achat indiquée sur le reçu valide. En l'absence d'un reçu valide, la période de garantie limitée de 3 ans commence à la date de fabrication indiquée par le code de série.

CONTRAT D'ENTRETIEN À VIE

L'acheteur d'origine d'un produit éligible peut demander un accord de service à vie gratuit. Pour demander ce contrat d'entretien à vie, vous devez enregistrer votre produit et soumettre une preuve d'achat pour que nous puissions traiter et l'approuver, comme décrit ci-dessous. Le contrat d'entretien à vie offre au propriétaire initial des outils de marque RIDGID® une durée de vie de piles de remplacement gratuites, un service gratuit et des pièces de rechange gratuites, sous réserve des limitations indiquées ci-dessous.

Le contrat d'entretien à vie est disponible gratuitement sur tous les outils électriques portatifs, outils électriques fixes et outils pneumatiques de la marque RIDGID® éligibles, sous réserve des conditions énoncées ci-dessous. Les clients ont quatre-vingt-dix (90) jours suivant la date d'achat pour enregistrer les outils au contrat d'entretien à vie. Une fois que toutes les conditions du processus d'enregistrement sont remplies, et que le contrat de service à vie est accepté par le fabricant, la couverture de service de l'outil dure toute la vie de l'acheteur d'origine. Le contrat de service à vie d'un outil n'est pas transférable.

NOTE : Le contrat d'entretien à vie de RIDGID® n'est offert que pour les outils RIDGID admissibles achetés chez HOME DEPOT.

CLAUSES DU CONTRAT D'ENTRETIEN À VIE DE MARQUE RIDGID®

Pour demander le contrat d'entretien à vie de marque RIDGID®, vous devez enregistrer votre outil électrique, à main, fixe ou pneumatique de marque RIDGID® dans les 90 jours suivant l'achat. Enregistrez-vous en vous connectant à powertools.ridgid.com, cliquez sur « Enregistrement de produit » et choisissez la catégorie de produit appropriée.

Ouvrez une session de compte personnel sinon créez-vous un compte. Cliquez ensuite sur « Enregistrer un nouveau produit » et acceptez les termes et conditions de l'accord de service à vie. Vous devez fournir tous les renseignements du produit RIDGID® admissible, soit : le numéro de modèle ainsi que le numéro de série complet pour chacune des pièces d'équipement portant un numéro de série, y compris les piles et les chargeurs. Si vous n'avez pas accès à Internet, rédigez une lettre comprenant les renseignements suivants : Vos prénom et nom, adresse courriel, date de naissance, numéro de téléphone, adresse, ville, province et code postal, de même que le numéro de modèle apparaissant sur l'emballage du produit ainsi que les numéros de modèle et de série de tous les outils, toutes les piles et tous les chargeurs admissibles portant un numéro de série, s'il y a lieu. Postez la confirmation imprimée en ligne ou la lettre manuscrite avec le reçu d'origine (nous vous recommandons de faire une copie de votre reçu afin de le conserver) et le code à barres d'origine de l'emballage des produits à : RIDGID® Hand Held and Stationary Power Tool Technical Service, PO Box 1427, Anderson, SC 29622 pour traitement et approbation. Toutes les inscriptions doivent être faites au nom d'une personne physique. De 6 à 8 semaines après avoir complété la procédure d'enregistrement et l'approbation, vous recevrez une confirmation par courriel ou par la porte indiquant votre numéro d'identification de client et que votre outil a été inclus dans l'état du contrat d'entretien à vie. Prenez ce numéro en note puisque vous en aurez besoin pour faire faire l'entretien de votre produit au titre du contrat d'entretien à vie.

NOTE : Il peut falloir plus de temps pour les enregistrements faits à la main.

CE QUI EST COUVERT :

(s'applique à la garantie limitée de trois (3) ans, au contrat d'entretien à vie et à la garantie limitée des outils réusinés)

La garantie limitée de trois (3) ans, la garantie limitée des outils réusinés et le contrat d'entretien à vie couvrent l'usure des pièces des outils entretenus correctement. Ceci comprend l'usure des pièces comme les brosses, mandrins, moteurs, interrupteurs, engrenages et même les piles des outils sans fil des outils à main et fixes de marque RIDGID®. Ces programmes couvrent également les rondelles, lames d'entraînement et pare-chocs des outils pneumatiques de marque RIDGID®. La couverture d'entretien ne couvre pas les produits de marque RIDGID® inadmissibles.

CE QUI N'EST PAS COUVERT

(s'applique à la garantie limitée de trois (3) ans, au contrat d'entretien à vie et à la garantie limitée des outils réusinés)

La garantie limitée de trois (3) ans, la garantie des outils réusinés et le contrat d'entretien à vie ne couvrent que le

premier acheteur et n'est pas transférable. Ces programmes ne couvrent que l'usure ou la défectuosité d'un outil lors de conditions normales d'utilisation et d'un entretien adéquat. Ces programmes ne couvrent aucune défectuosité, aucun bris ou défaut provoqué par la mauvaise utilisation, l'abus, la négligence, l'altération, la modification ou la réparation effectuée par toute personne n'étant pas autorisée par un Centre de service pour outils à main, pneumatiques, fixes et électriques de marque RIDGID®. Tout dommage ou dysfonctionnement infligé à l'outil par l'utilisateur ou d'autres sources externes, ou tout manquement aux avertissements et instructions du manuel d'utilisation n'est pas couvert. Les accessoires consommables fournis avec l'outil, tels que, mais sans s'y limiter, les lames de scie, les lames et couteaux de raboteuse, les mèches, les forets, les meules et disques, les disques à tronçonner, le papier de verre, les lunettes de sécurité et les fixations ne sont pas couverts.

COMMENT OBTENIR UN SERVICE

Le contrat d'entretien à vie (si accepté) commence après la date d'expiration de la garantie limitée classique de trois (3) ans de RIDGID®. Afin d'obtenir le service pour cet outil RIDGID® pendant la garantie limitée de trois (3) ans, le contrat d'entretien à vie ou la garantie limitée des outils réusinés, apportez votre équipement à un Centre de service RIDGID® autorisé.

Vous pouvez obtenir l'adresse du centre de service agréé le plus proche de chez vous en vous connectant au site Web de RIDGID à l'adresse powertools.ridgid.com. Lorsque vous demandez un service dans le cadre de l'accord de service à vie, vous devez présenter votre numéro d'identification de l'accord de service à vie et une pièce d'identité appropriée (permis de conduire valide, passeport, carte d'identité militaire ou carte de sécurité sociale valide avec photo d'identité).

REEMPLACEMENT

Si une pièce d'équipement portant un numéro de série selon l'état du Contrat de service à vie est remplacée, le client a quatre-vingt-dix (90) jours pour appeler au numéro 1-866-539-1710 afin d'enregistrer à nouveau la pièce d'équipement. Preuve de remplacement requise. En cas de remplacement d'un équipement portant un numéro de série selon l'état du Contrat de service à vie, la période de garantie limitée de 3 ans sur l'équipement de remplacement commence à la date d'achat d'origine et non à la date de remplacement.

Si une pièce d'équipement portant un numéro de série est remplacée dans le cadre de la garantie limitée Recon, la période de garantie limitée d'un an sur la pièce d'équipement de remplacement commence à la date d'achat d'origine, et non à la date de remplacement.

COMMUNICATIONS POUR ENTRETIEN

Toutes les communications relatives à l'accord de service à vie doivent être adressées à TTI Consumer Power Tools, Inc. à l'attention de : Service technique des outils à main et fixes RIDGID® ou au numéro sans frais 1-866-539-1710.

LIMITATIONS ADDITIONNELLES

Le contrat d'entretien à vie n'est pas une garantie; il ne modifie pas ou ne limite pas la garantie limitée de réparation de trois (3) ans de votre produit et n'a pas été élaboré afin de créer des garanties implicites ou des droits de toute nature incluant toutes garanties de QUALITÉ MARCHANDE ou D'ADAPTATION À UN USAGE PARTICULIER. De telles garanties implicites sont expressément déclinées. Dans le mesure où elles ne peuvent être déclinées, elles sont par la présente limitées à trois (3) ans à compter de la date d'achat. TTI Consumer Power Tools, Inc. et RIDGID®, Inc. ne sont pas responsables des dommages directs, indirects, accessoires ou consécutifs. Certaines provinces ne permettant pas de limitation sur la durée des garanties implicites, et/ou l'exclusion ou la limitation des dommages directs ou indirects, les restrictions ci-dessus peuvent ne pas être applicables. Cette garantie donne des droits spécifiques au consommateur, et celui-ci peut bénéficier d'autres droits, qui varient d'une province à l'autre.

POLITIQUE DE CONFIDENTIALITÉ

Une déclaration détaillée concernant les mesures visant à préserver la confidentialité des informations soumises dans le cadre des communications relatives à votre outil de marque RIDGID® est disponible sur le site powertools.ridgid.com.

Ce produit est fabriqué par TTI Consumer Power Tools, Inc. La marque est utilisée en vertu d'une licence accordée par RIDGID, Inc.

TTI Consumer Power Tools, Inc.

P.O. Box 1427, Anderson, SC 29622

1-866-539-1710 • powertools.ridgid.com

GARANTÍA LIMITADA

HERRAMIENTA ELÉCTRICA ESTACIONARIA Y DE MANO RIDGID® GARANTÍA DE SERVICIO LIMITADA DE 3 AÑOS

GARANTÍA LIMITADA DE HERRAMIENTA REACONDICIONADA

Las herramientas reacondicionadas gozan automáticamente de una garantía de 1 año a partir de la fecha de compra. Se requiere un recibo válido de un distribuidor autorizado. No se puede transferir la garantía. En las herramientas reacondicionadas se estampará la palabra 'RECON' o alguna variación en la carcasa de la herramienta. Las herramientas reacondicionadas no califican para el Acuerdo de servicio vitalicio.

GARANTÍA LIMITADA DE 3 AÑOS

Las herramientas eléctricas de mano, las herramientas eléctricas estacionarias y las herramientas neumáticas marca RIDGID® están cubiertas automáticamente por una Garantía limitada de 3 años. Esta Garantía limitada de 3 años comienza a partir de la fecha de compra que figure en un recibo válido. Si no se dispone de ningún recibo válido, el período de la garantía de 3 años comienza a partir de la fecha de fabricación que aparece en el código de serie.

ACUERDO DE SERVICIO VITALICIO

El comprador original de un producto elegible puede optar por un Acuerdo de servicio vitalicio. Para solicitar o disponer de este Acuerdo de servicio vitalicio, deberá registrar su producto y presentar un comprobante de compra para su procesamiento y aprobación según se describe a continuación. El Acuerdo de servicio vitalicio proporciona al propietario original de herramientas calificadas de la marca RIDGID® baterías de reemplazo gratuitas, servicio gratuito y piezas de repuesto gratuitas de por vida sujetos a las limitaciones establecidas a continuación.

El Acuerdo de servicio vitalicio está disponible de forma gratuita en todas las herramientas eléctricas de mano, herramientas eléctricas estacionarias y herramientas neumáticas de la marca RIDGID® elegibles, sujeto a los términos y condiciones que se establecen a continuación. Los clientes tienen 90 días a partir de la fecha de compra para registrar las herramientas para el Acuerdo de servicio vitalicio. Una vez que se cumplen todas las condiciones del proceso de registro y el fabricante acepta el Acuerdo de servicio vitalicio, la cobertura de servicio de la herramienta dura toda la vida del comprador original. El estado del Acuerdo de servicio vitalicio de una herramienta no es transferible.

NOTA: El Acuerdo de servicio vitalicio RIDGID® solo se encuentra disponible para herramientas RIDGID elegibles adquiridas en THE HOME DEPOT.

CONDICIONES DEL ACUERDO DE SERVICIO VITALICIO PARA PRODUCTOS MARCA RIDGID®

Para disponer del Acuerdo de servicio vitalicio de la marca RIDGID®, debe registrar su herramienta eléctrica de mano, estacionaria o neumática marca RIDGID® calificada en un plazo de 90 días a partir de la fecha de compra. Para registrar la herramienta, inicie sesión en powertools.ridgid.com, haga clic en "Product Registration" ("Registro de productos") y elija la categoría de producto apropiada. Inicie sesión en su cuenta personal; si no tiene una, créela. Luego haga clic en "Register New Product" (Registrar nuevo producto) y acepte los términos y condiciones del Acuerdo de servicio vitalicio. Incluya toda la información sobre el producto marca RIDGID® calificado: complete los números de modelo y de serie de cada equipo que tenga un número de serie, incluyendo baterías y cargadores. Si no tiene acceso a Internet, envíe una carta con la siguiente información: nombre y apellido, dirección de correo electrónico, fecha de nacimiento, número de teléfono, dirección, ciudad, estado, código postal, número de modelo que aparece en el paquete y, si corresponde, número de modelo/serie de todas las herramientas, baterías y cargadores con servicio vitalicio que tengan número de serie. Luego envíe la impresión de confirmación en línea o la carta manuscrita por correo junto con su recibo original (se recomienda sacar una fotocopia del recibo para conservarlo para sus registros) y el UPC original del paquete de productos con servicio vitalicio a: RIDGID® Hand Held and Stationary Power Tool Technical Service, PO Box 1427, Anderson, SC 29622 para su procesamiento y aprobación. Todos los registros deben realizarse a nombre de una persona individual. En aproximadamente 6 a 8 semanas de haber completado el proceso de registro y la aprobación, recibirá una confirmación por correo electrónico o por servicio postal de EE.UU. en la que se incluirá su Número de identificación como cliente y la verificación de que se ha modificado el estado de la herramienta al de "cubierta por el Acuerdo de servicio vitalicio". Guarde este número, lo necesitará para recibir servicio técnico para su producto bajo los términos el Acuerdo de servicio vitalicio.

NOTA: Los registros escritos a mano pueden tomar más tiempo.

QUÉ CUBRIMOS

(Se aplica a la Garantía limitada de 3 años, al Acuerdo de servicio vitalicio y a la Garantía limitada de productos reacondicionados)

La Garantía limitada de 3 años, la Garantía limitada de productos reacondicionados y el Acuerdo de servicio vitalicio cubren todas las piezas desgastadas en herramientas mantenidas de forma apropiada. Esto incluye piezas de desgaste normal como cepillos, portabrocas, motores,

interruptores, engranajes e incluso baterías sin cable en las herramientas eléctricas de mano y fijas marca RIDGID® con servicio vitalicio. Estos programas también pueden cubrir juntas, hojas de empuje y topes de repuesto en herramientas neumáticas marca RIDGID®. La cobertura de este servicio no se aplica a otros productos marca RIDGID® sin servicio vitalicio.

QUÉ COSAS NO CUBRE LA GARANTÍA

(Se aplica a la Garantía limitada de 3 años, al Acuerdo de servicio vitalicio y a la Garantía limitada de productos reacondicionados)

La Garantía limitada de 3 años, la Garantía limitada de productos reacondicionados y el Acuerdo de servicio vitalicio aplican solo al comprador original y no se pueden transferir. Estos programas solo cubren el desgaste y roturas o fallas de las herramientas en condiciones de uso normal y mantenimiento correcto. No cubren averías, fallas o defectos causados por uso indebido, abuso, negligencia, alteración, modificación o reparaciones efectuadas por personas ajenas a un centro de servicio autorizado para herramientas eléctricas de mano, neumáticas y estacionarias marca RIDGID®. No se cubre ningún daño o mal funcionamiento infligido a la herramienta por el usuario u otras fuentes externas, o por cualquier incumplimiento de las advertencias e instrucciones del manual del operador. Los accesorios consumibles proporcionados con la herramienta, como, entre otros, hojas de sierra, hojas de cepilladora y cuchillas, brocas, muelas y discos abrasivos, discos de corte, papel de lija, gafas de seguridad y sujetadores, no están cubiertos.

FORMA DE OBTENER EL SERVICIO

El Acuerdo de servicio vitalicio (de aceptarse) comienza luego del vencimiento de la Garantía limitada estándar RIDGID® de 3 años. Si desea obtener servicio técnico para esta herramienta RIDGID® bajo la Garantía limitada de 3 años, el Acuerdo de servicio vitalicio o la Garantía limitada de herramientas reacondicionadas, deberá llevar el equipo a un centro de servicio RIDGID® autorizado.

Puede obtener la ubicación del centro de servicio autorizado más cercano a usted iniciando sesión en el sitio web de RIDGID en powertools.ridgid.com. Al solicitar servicio conforme al Acuerdo de servicio vitalicio, debe presentar su Número de identificación del Acuerdo de servicio vitalicio y un documento de identificación personal adecuado (una licencia de conducir válida, pasaporte o identificación militar o una tarjeta de Seguro Social válida con identificación con fotografía).

RECAMBIO

Si alguna vez se reemplaza una pieza con número de serie y estado de Acuerdo de servicio vitalicio, el cliente tiene 90 días para llamar al 1-866-539-1710 y volver a registrar la pieza en cuestión. Se requiere un comprobante del recambio.

Si alguna vez se reemplaza una pieza con número de serie sin estado de Acuerdo de servicio vitalicio, el período de garantía limitada de 3 años de la pieza de reemplazo comienza a partir de la fecha de compra original, no de la fecha de reemplazo.

Si alguna vez se reemplaza una pieza en virtud de la Garantía limitada de equipos reacondicionados, el período de garantía limitada de 1 año de la pieza o equipo de reemplazo comienza a partir de la fecha de compra original, no de la fecha de reemplazo.

COMUNICACIONES RELACIONADAS CON EL SERVICIO

Todas las comunicaciones relacionadas con el Acuerdo de servicio vitalicio se deben dirigir a TTI Consumer Power Tools, Inc., attn.: RIDGID® Hand Held and Stationary Power Tool Technical Service; o bien, deberá llamar al 1-866-539-1710 (línea gratuita).

LIMITACIONES ADICIONALES

Este Acuerdo de servicio vitalicio no es una garantía; no altera ni limita la Garantía de servicio limitada de 3 años que acompaña a su producto ni tiene como objetivo crear ninguna garantía o derecho implícitos de ningún tipo, incluida cualquier garantía de COMERCIABILIDAD o APTITUD PARA UN PROPÓSITO EN PARTICULAR. Se niegan explícitamente todas y cada una de esas garantías implícitas. Cuando no puedan negarse, por medio del presente documento se las limita a tres años a partir de la fecha de compra. TTI Consumer Power Tools, Inc. y RIDGID®, Inc. no son responsables de daños directos, indirectos, incidentales o consecuentes. Algunos estados restringen las limitaciones en cuanto al período de vigencia de una garantía implícita y/o no permiten exclusiones o limitaciones de daños incidentales o consecuentes; por lo tanto, es posible que las limitaciones anteriores no se apliquen a su caso. Este Acuerdo le confiere derechos legales específicos, y es posible que usted goce de otros derechos, los cuales pueden variar según el estado.

POLÍTICA DE PRIVACIDAD

Consulte en powertools.ridgid.com una declaración detallada de las medidas para preservar la privacidad de la información enviada en relación con las comunicaciones relacionadas con su herramienta marca RIDGID®.

Este producto es fabricado por TTI Consumer Power Tools, Inc. La marca comercial se utiliza de conformidad con una licencia otorgada por RIDGID, Inc.

TTI Consumer Power Tools, Inc.

P.O. Box 1427, Anderson, SC 29622

1-866-539-1710 • powertools.ridgid.com
