

DEMOLITION PART PLAN
Scale 1/8"=1'-0"

GENERAL NOTES:

1. REFER TO DRAWING E0.01 FOR ELECTRICAL SYMBOLS, NOTES AND SCHEDULES.
2. REFER TO ARCHITECTURE PLANS FOR EXACT LIMIT AND PHASING OF WORK UNDER THIS RENOVATION.
3. REFER TO ARCHITECTURAL DRAWINGS FOR MOUNTING HEIGHTS AND DEVICE LOCATIONS.

KEY NOTES:

- ① UTILIZE EXISTING LIGHTING CIRCUIT SERVING THIS ROOM AND CONNECT TO NEW FIXTURES INDICATED ON LIGHTING PLAN E1.04.

GENERAL DEMOLITION NOTES: (UNLESS OTHERWISE NOTED)

1. REFER TO ARCHITECTURAL DRAWINGS FOR EXACT EXTENT OF DEMOLITION WORK.
2. DISCONNECT AND REMOVE ALL EXISTING LIGHTING FIXTURES, SWITCHES AND BACKBOXES. PULLBACK AND REMOVE CONDUIT AND WIRING BACK TO PANEL OR LAST ACTIVE FIXTURE IN AREA OF RENOVATION. (TYPICAL FOR ALL FIXTURES ON WALLS OR CEILINGS SLATED FOR REMOVAL).
3. DISCONNECT AND REMOVE ALL EXISTING, RECEPTACLES AND BACKBOXES. PULLBACK AND COIL EXISTING TELECOMMUNICATIONS CABLING TO ABOVE ACCESSIBLE CEILING FOR FUTURE USE. THESE DROPS SHALL BE UTILIZED FOR NEW DEVICES AS INDICATED ON NEW PLAN. (TYPICAL FOR ALL DEVICES IN AREA OF RENOVATION)
4. DISCONNECT AND REMOVE ALL EXISTING TELEPHONE/DATA OUTLETS AND BACKBOXES. PULLBACK AND COIL EXISTING TELECOMMUNICATIONS CABLING TO ABOVE ACCESSIBLE CEILING FOR FUTURE USE. THESE DROPS SHALL BE UTILIZED FOR NEW DEVICES AS INDICATED ON NEW PLAN. (TYPICAL FOR ALL DEVICES IN AREA OF RENOVATION)
5. WITHIN OUTLINED AREAS, ELECTRICAL CONTRACTOR SHALL MAINTAIN/RECONNECT ALL EXISTING BRANCH CIRCUIT WIRING DISTURBED DURING CONSTRUCTION BUT OUTSIDE OF NEW CONSTRUCTION AREA.
6. DISCONNECT AND REMOVE ALL EXISTING CEILING AND WALL MOUNTED FIRE ALARM DEVICES, BACKBOXES, CONDUIT AND WIRING BACK TO RESPECTIVE FIRE ALARM TERMINAL CABINET (TYPICAL FOR ALL AREAS IN AREA OF RENOVATION) UNLESS OTHERWISE INDICATED.
7. DISCONNECT AND REMOVE ALL EXISTING MISCELLANEOUS ELECTRICAL EQUIPMENT, JUNCTION BOXES, CONDUIT AND WIRING IN AREA OF RENOVATION. (TYPICAL FOR ALL EQUIPMENT IN AREA OF RENOVATION)

8. EXISTING PANEL SHALL BE RELOCATED. REFER TO DRAWING E2.04 FOR NEW PANEL LOCATION. MODIFY AND EXTEND PANEL FEEDER AND BRANCH CIRCUITS AS REQUIRED TO NEW PANEL LOCATION.
9. DISCONNECT AND REMOVE ALL EXISTING LIGHTING FIXTURES IN CORRIDORS 402 AND 403. UTILIZE EXISTING BRANCH CIRCUITS AND SWITCH CONTROL AND CONNECT TO NEW LIGHTING FIXTURES AS INDICATED ON DRAWING E1.04. MODIFY AND EXTEND CONDUIT AND WIRING AS REQUIRED.

INTERIM FIRE ALARM COVERAGE: THE ELECTRICAL CONTRACTOR SHALL PROVIDE INTERIM HEAT DETECTOR COVERAGE WITHIN OUTLINED AREAS UNDER CONSTRUCTION. THE HEAT DETECTORS SHALL BE SUPPLIED TO THE CONTRACTOR BY FIRE ALARM VENDOR FCI AND COMPATIBLE WITH THE FIRE ALARM SYSTEM PRESENTLY SERVING THE AREA. THE HEAT DETECTORS SHALL BE LOCATED ON A DRAWING AND WIRED TO THE EXISTING FIRE ALARM ZONE. THIS DRAWING SHALL BE SUBMITTED TO MEEI ENGINEERING FOR APPROVAL. THE CONTRACTOR SHALL SUBMIT IN WRITING TO MEEI THAT THE INTERIM HEAT DETECTORS HAVE BEEN SYSTEM TESTED AND ARE CERTIFIED OPERATIONAL BY FCI. THE DETECTORS SHALL BE REMOVED AND TURNED OVER TO MEEI WHEN THE PERMANENT SYSTEM IS IN PLACE AND CERTIFIED OPERATIONAL BY FCI. THE ELECTRICAL CONTRACTOR SHALL CARRY THE COST FOR INTERIM HEAT DETECTOR COVERAGE IN THE BASE BID.

PROGRESS SET ONLY

NO DATE DESCRIPTION

REVISIONS

DRAWN : LMD

DATE : September 26, 2012

JOB NO :

SCALE : 1/8"=1'-0"

ED1.04

DRAWING NO.
SHEET ___ OF TOTAL ___ SHEETS

PROJECT NO:

ig Associates

ARCHITECTS PLANNERS INTERIOR DESIGN


8 SUMMIT ROAD, LEXINGTON MA 02421
TEL: 781-861-7812 FAX: 781-353-6006

CONSULTANTS

PROJECT:

OTOLARYNGOLOGY LAB
FOURTH FLOOR-MEEI
243 CHARLES ST, BOSTON-MA

OWNER:

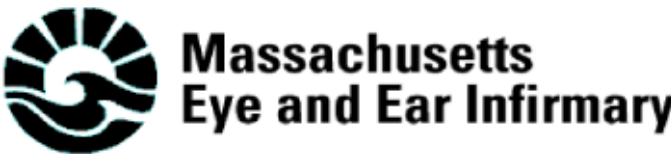

DRAWING TITLE

ELECTRICAL PARTIAL
FOURTH FLOOR
DEMOLITION PLAN