

Preparation for Debug Kit Setup

- For different marketing, we prepared relevant application software for professional use.
- Main Version : 1、 Four Wheel EV ; 2、 for two or three wheel scooter ; 3、 Electric Bicycle use
- This document guide you build the environment, in order to insure the DriveManager software can be well operated on your PC.
- How to setup and use the DriveManager, please check the document "APT1001.A2.02E.V1.0 - User's Manual for DriveManager.pdf"

1、 COMPUTER REQUIREMENT

- Personal Computer , 512M memory at least, runs Windows XP , Windows 7 better , 32bit or 64bit.
- Also can be tablet with USB-OTG in Window8

2、 COMMUNICATION PORT CHECK

If the PC did not have the RS232C port, you need prepare a cable named "USB to RS232C" , you can get it from C2C website, such as EBAY or ALIBABA, cost from \$1 to \$10, better price for better stability, especially for real-time debug.



Plug in the cable, and install the firmware, go back to the Device Manager → , **remember the ID** , such as"COM4"
Once you changed the USB position, port id will change.

Tips - DriveManager will use the port ID From1 to9, if the port ID you get is beyond 9, how to continue? Take easy, click PORT, find the COM id, change it as you want.

3、 HOW TO CONNECT TO CONTROLLER

The controller use GX16-10 socket to exchange the signal, Followed with controller, there have a cable "RS232 to GX16-10"


PORT DEFINITION

5-GND / 9-TX / 10-RX




HOW TO EXAM THE RS232C PORT

一、 CHECK THE COMPUTER

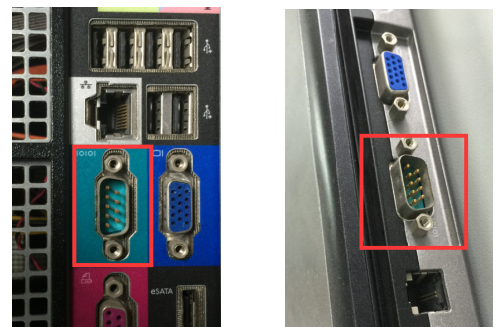

二、 CHECK IN THE WINDOWS

Control Panel\All Control Panel Items\System

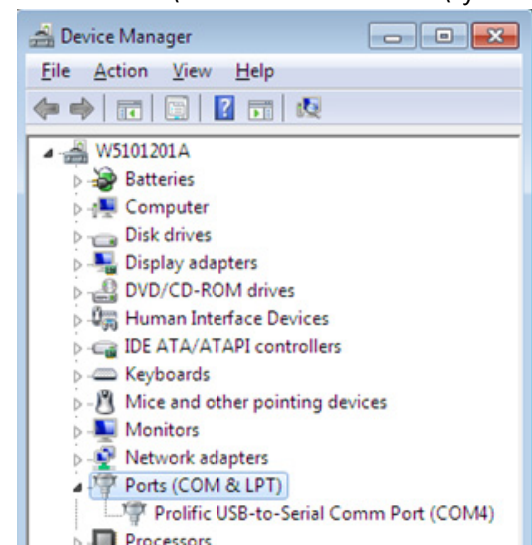


NOTE: For AE1107 series , controller use GX12-6 socket to exchange, as shown below.




4. "OCX ActiveX" NEED ADD TO SYSTEM MANUAL


STEP1. Check the operate system. 32bit or 64bit

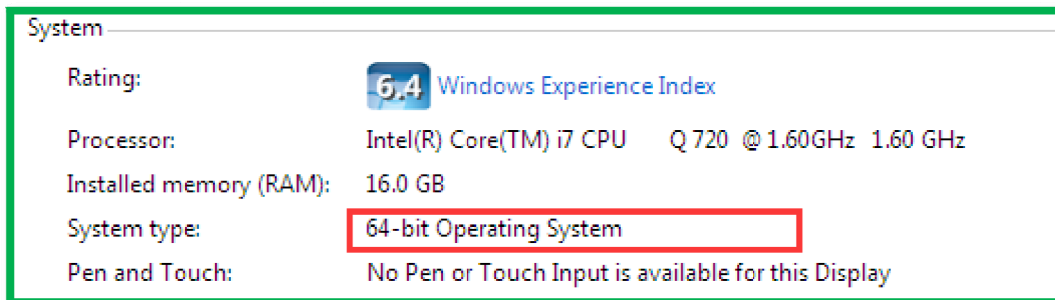


STEP2. Unzip the file, get the OCX file and its excutive file

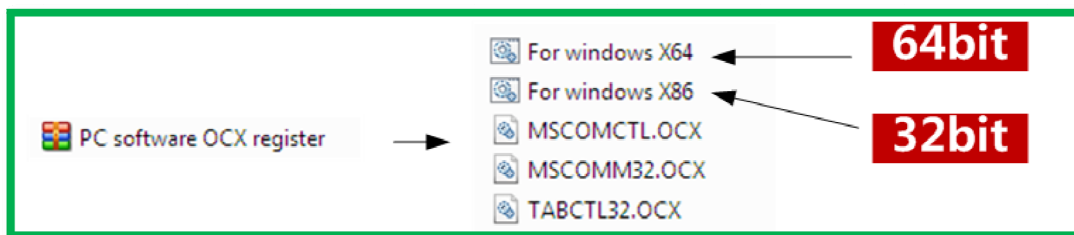

STEP3. According to your PC windows version, right click ,select "run as administrator"

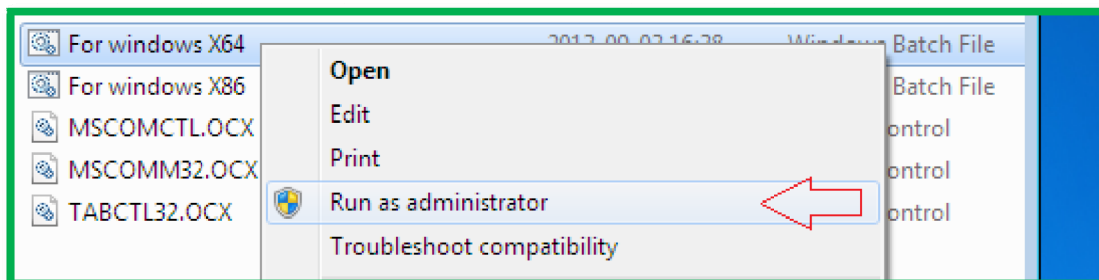

STEP4. Success info

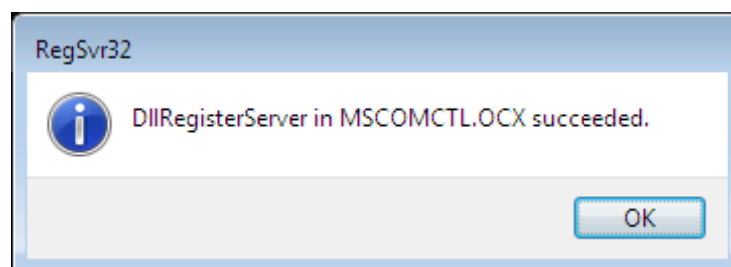

Congratulations

We have finish the preparation, and we can install the software next.