
ETC Installation Guide

Source Four Insulated Handle

Remove the lamp housing before you install the insulated handle. This prevents metal shavings (from drilling) from falling into the lamp reflector.

Remove the Lamp Housing




1: Disconnect the fixture from its power source.
2: Loosen the knurled knob on the back of the lamp housing.
3: Carefully pull out the lamp housing. (If an HPL lamp is installed, remove it.)

Drill the Screw Holes

The lamp housing has four existing holes that you will deepen slightly to accommodate the mounting screws for the insulated handle.


Using an 1/8-inch bit, drill through the holes on the lamp housing to a depth of 1/2 inch (see image at right).



WARNING: Drilling to a depth of more than 1/2 inch may damage the wiring in the lamp housing.

Mount the Handle

1: Insert the screws and secure the handle to the lamp housing as shown below.
2: Replace the lamp housing and tighten the knurled bolt to secure it.

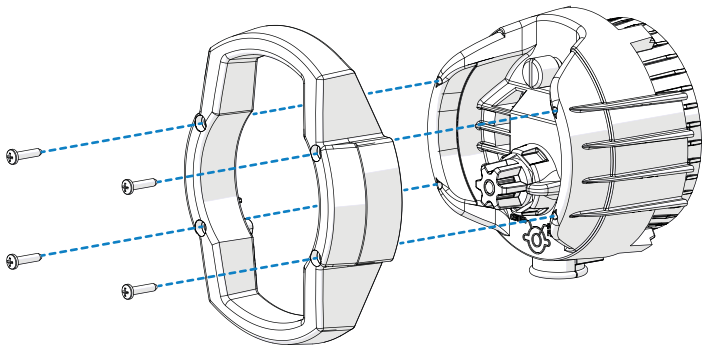

Corporate Headquarters Middleton, WI, USA +1 608 831 4116 **London, UK** +44 (0)20 8896 1000
Holzkirchen, DE +49 (80 24) 47 00-0 **Rome, IT** +39 (06) 32 111 683 **Hong Kong** +852 2799 1220 **Paris, FR** +33 1 4243 3535
Web etcconnect.com **Support** support.etcconnect.com **Contact** etcconnect.com/contactETC
© 2019 Electronic Theatre Controls, Inc. Trademark and patent info: etcconnect.com/ip
Product information and specifications subject to change. ETC intends this document to be provided in its entirety.
7060M1013 Rev B Released 2019-06