




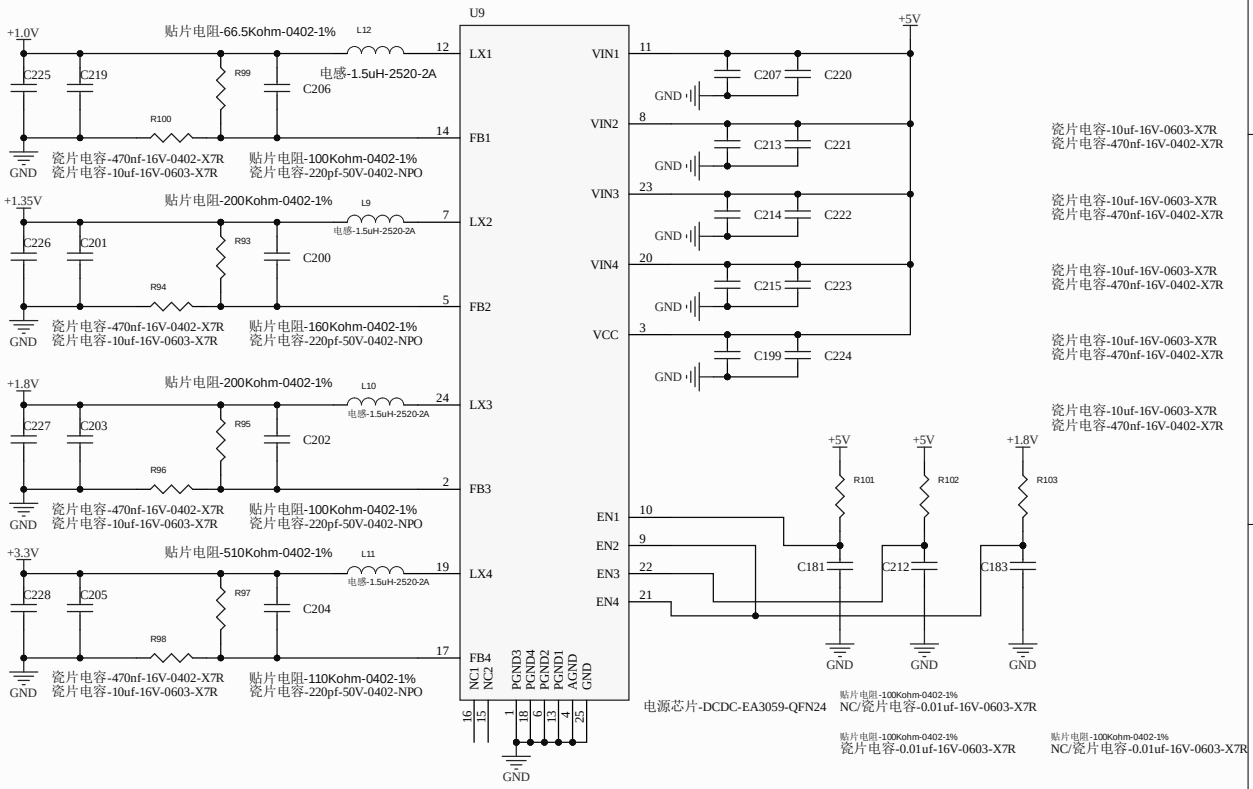

Title		
Size A3	Number	Revision
Date: 6/21/2024		Sheet of
File: E:\正点原子\STUDYBOARD.08 A\01_PCB\Power.SchDoc		Drawn By:

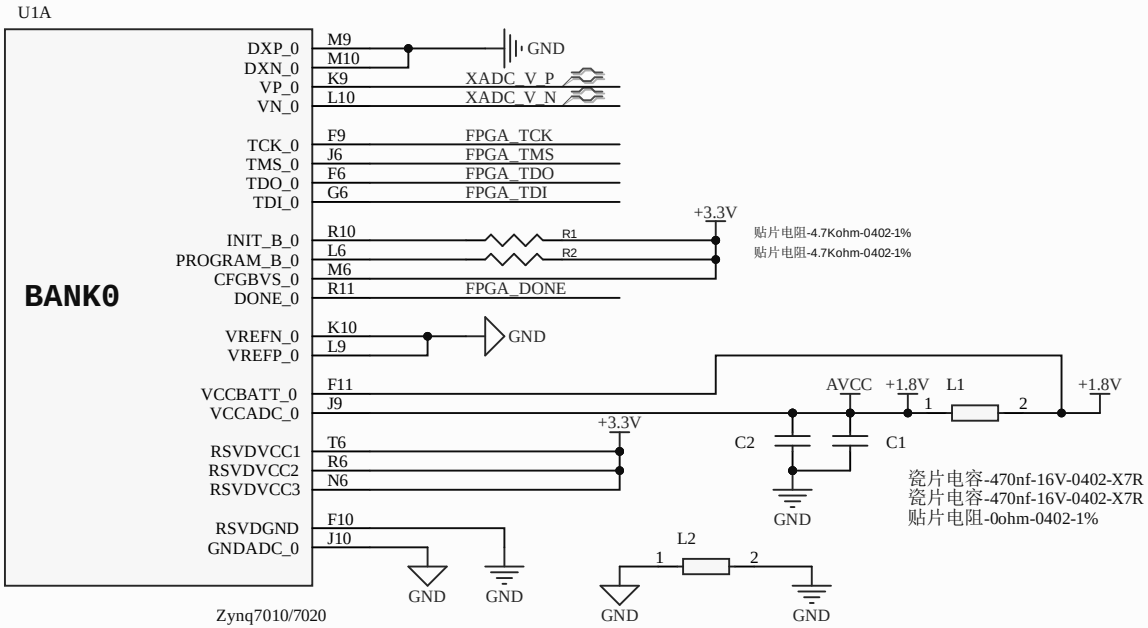

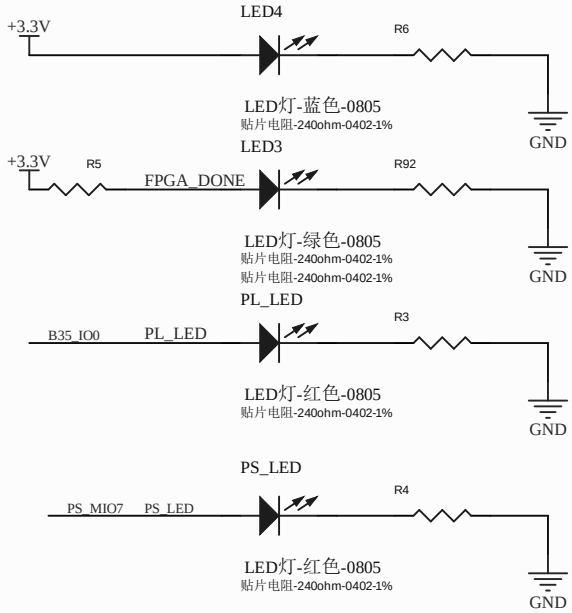

Title		
Size A4	Number	Revision
Date: 6/21/2024		Sheet of
File: E:\正点原子\STUDYBOARD.08 A\02_HDL\SBD.Doc		Drawn By:

U1F

BANK34

B34_IO0	R19	IO_0_34	IO_L11P_T1_SRCC_34
B34_IO25	T19	IO_25_34	IO_L11N_T1_SRCC_34
B34_L1_P	T11	IO_L1P_T0_34	IO_L12P_T1_MRCC_34
B34_L1_N	T10	IO_L1N_T0_34	IO_L12N_T1_MRCC_34
B34_L2_P	T12	IO_L2P_T0_34	IO_L13P_T2_MRCC_34
B34_L2_N	U12	IO_L2N_T0_34	IO_L13N_T2_MRCC_34
B34_L3_P	U13	IO_L3P_T0_DQS_PUDC_B_34	IO_L14P_T2_SRCC_34
B34_L3_N	V13	IO_L3N_T0_DQS_34	IO_L14N_T2_SRCC_34
B34_L4_P	V12	IO_L4P_T0_34	IO_L15P_T2_DQS_34
B34_L4_N	W13	IO_L4N_T0_34	IO_L15N_T2_DQS_34
B34_L5_P	T14	IO_L5P_T0_34	IO_L16P_T2_34
B34_L5_N	T15	IO_L5N_T0_34	IO_L16N_T2_34
B34_L6_P	P14	IO_L6P_T0_34	IO_L17P_T2_34
B34_L6_N	R14	IO_L6N_T0_VREF_34	IO_L17N_T2_34
B34_L7_P	Y16	IO_L7P_T1_34	IO_L18P_T2_34
B34_L7_N	Y17	IO_L7N_T1_34	IO_L18N_T2_34
B34_L8_P	W14	IO_L8P_T1_34	IO_L19P_T2_34
B34_L8_N	Y14	IO_L8N_T1_34	IO_L19N_T3_VREF_34
B34_L9_P	T16	IO_L9P_T1_DQS_34	IO_L20P_T3_34
B34_L9_N	U17	IO_L9N_T1_DQS_34	IO_L20N_T3_34
B34_L10_P	V15	IO_L10P_T1_34	IO_L21P_T3_DQS_34
B34_L10_N	W15	IO_L10N_T1_34	IO_L21N_T3_DQS_34
			IO_L22P_T3_34
			IO_L22N_T3_34
			IO_L23P_T3_34
			IO_L23N_T3_34
			IO_L24P_T3_34
			IO_L24N_T3_34

U14	B34_L11_P
U15	B34_L11_N
U18	PL_GCLK
U19	B34_L12_N
N18	B34_L13_P
P19	B34_L13_N
N20	B34_L14_P
P20	B34_L14_N
T20	B34_L15_P
U20	B34_L15_N
V20	B34_L16_P
W20	B34_L16_N
Y18	B34_L17_P
Y19	B34_L17_N
V16	B34_L18_P
W16	B34_L18_N
R16	B34_L19_P
R17	B34_L19_N
T17	B34_L20_P
R18	B34_L20_N
V17	B34_L21_P
V18	B34_L21_N
W18	B34_L22_P
W19	B34_L22_N
N17	B34_L23_P
P18	B34_L23_N
P15	B34_L24_P
P16	B34_L24_N

Zynq7010/7020

B34_L3_P

R8
贴片电阻-1Kohm-0402-1%

GND

U1G

BANK35

B35_IO0	G14	IO_0_35	IO_L11P_T1_SRCC_35
B35_IO25	J15	IO_25_35	IO_L11N_T1_SRCC_35
B35_L1_P	C20	IO_L1P_T0_AD0P_35	IO_L12P_T1_MRCC_35
B35_L1_N	B20	IO_L1N_T0_AD0N_35	IO_L12N_T1_MRCC_35
B35_L2_P	B19	IO_L2P_T0_AD8P_35	IO_L13P_T2_MRCC_35
B35_L2_N	A20	IO_L2N_T0_AD8N_35	IO_L13N_T2_MRCC_35
B35_L3_P	E17	IO_L3P_T0_DQS_AD1P_35	IO_L14P_T2_AD4P_SRCC_35
B35_L3_N	D18	IO_L3N_T0_DQS_AD1N_35	IO_L14N_T2_AD4N_SRCC_35
B35_L4_P	D19	IO_L4P_T0_35	IO_L15P_T2_DQS_AD12P_35
B35_L4_N	D20	IO_L4N_T0_35	IO_L15N_T2_DQS_AD12N_35
B35_L5_P	E18	IO_L5P_T0_AD9P_35	IO_L16P_T2_35
B35_L5_N	E19	IO_L5N_T0_AD9N_35	IO_L16N_T2_35
B35_L6_P	F16	IO_L6P_T0_35	IO_L17P_T2_AD5P_35
B35_L6_N	F17	IO_L6N_T0_VREF_35	IO_L17N_T2_AD5N_35
B35_L7_P	M19	IO_L7P_T1_AD2P_35	IO_L18P_T2_AD13P_35
B35_L7_N	M20	IO_L7N_T1_AD2N_35	IO_L18N_T2_AD13N_35
B35_L8_P	M17	IO_L8P_T1_AD10P_35	IO_L19P_T3_35
B35_L8_N	M18	IO_L8N_T1_AD10N_35	IO_L19N_T3_VREF_35
B35_L9_P	L19	IO_L9P_T1_DQS_AD3P_35	IO_L20P_T3_AD6P_35
B35_L9_N	L20	IO_L9N_T1_DQS_AD3N_35	IO_L20N_T3_AD6N_35
B35_L10_P	K19	IO_L10P_T1_AD11P_35	IO_L21P_T3_DQS_AD14P_35
B35_L10_N	J19	IO_L10N_T1_AD11N_35	IO_L21N_T3_DQS_AD14N_35
			IO_L22P_T3_AD7P_35
			IO_L22N_T3_AD7N_35
			IO_L23P_T3_35
			IO_L23N_T3_35
			IO_L24P_T3_AD15P_35
			IO_L24N_T3_AD15N_35

L16	B35_L11_P
L17	B35_L11_N
K17	B35_L12_P
K18	B35_L12_N
H16	B35_L13_P
H17	B35_L13_N
J18	B35_L14_P
H18	B35_L14_N
F19	B35_L15_P
F20	B35_L15_N
G17	B35_L16_P
G18	B35_L16_N
J20	B35_L17_P
H20	B35_L17_N
G19	B35_L18_P
G20	B35_L18_N
H15	B35_L19_P
G15	B35_L19_N
K14	B35_L20_P
J14	B35_L20_N
N15	B35_L21_P
N16	B35_L21_N
L14	B35_L22_P
L15	B35_L22_N
M14	B35_L23_P
M15	B35_L23_N
K16	B35_L24_P
J16	B35_L24_N

Zynq7010/7020

+3.3V

C3

GND

X1

VDD OUT

OE GND

4 3 2 1

R7

PL_GCLK

GND

有源晶振-50MHZ-3225

瓷片电容-470nf-16V-0402-X7R

贴片电阻-40.2ohm-0402-1%

Title		
Size A4	Number	Revision
Date: 6/21/2024	Sheet of	
File: E:\正点原子\STUDYBOARD.08 A\03_HDL\SBD.Doc	Drawn By:	

U1B

BANK500

PS_MIO0_500	E6	PS_MIO0
PS_MIO1_500	A7	QSPI_CS
PS_MIO2_500	B8	QSPI_D0
PS_MIO3_500	D6	QSPI_D1
PS_MIO4_500	B7	QSPI_D2
PS_MIO5_500	A6	QSPI_D3
PS_MIO6_500	A5	QSPI_SCK
PS_MIO7_500	D8	PS_MIO7
PS_MIO8_500	D5	PS_MIO8
PS_MIO9_500	B5	PS_MIO9
PS_MIO10_500	E9	PS_MIO10
PS_MIO11_500	C6	PS_MIO11
PS_MIO12_500	D9	PS_MIO12
PS_MIO13_500	E8	PS_MIO13
PS_MIO14_500	C5	UART_RXD
PS_MIO15_500	C8	UART_TXD
PS_POR_B_500	C7	PS_POR_B
PS_CLK_500	E7	

R13 贴片电阻-40.2ohm-0402-1%

R17 贴片电阻-40.2ohm-0402-1%

X2 有源晶振-33.333333MHZ-3225

OUT VDD GND OE

+3.3V C4 瓷片电容-470nf-16V-0402-X7R GND

Zynq7010/7020

U1C

BANK501

PS_MIO_VREF_501	E11	
PS_MIO16_501	A19	ETH_TXCK
PS_MIO17_501	E14	ETH_TXD0
PS_MIO18_501	B18	ETH_TXD1
PS_MIO19_501	D10	ETH_TXD2
PS_MIO20_501	A17	ETH_TXD3
PS_MIO21_501	F14	ETH_TXCTL
PS_MIO22_501	B17	ETH_RXCK
PS_MIO23_501	D11	ETH_RXD0
PS_MIO24_501	A16	ETH_RXD1
PS_MIO25_501	F15	ETH_RXD2
PS_MIO26_501	A15	ETH_RXD3
PS_MIO27_501	D13	ETH_RXCTL
PS_MIO28_501	C16	OTG_DATA4
PS_MIO29_501	C13	OTG_DIR
PS_MIO30_501	C15	OTG_STP
PS_MIO31_501	E16	OTG_NXT
PS_MIO32_501	A14	OTG_DATA0
PS_MIO33_501	D15	OTG_DATA1
PS_MIO34_501	A12	OTG_DATA2
PS_MIO35_501	F12	OTG_DATA3
PS_MIO36_501	A11	OTG_CLK
PS_MIO37_501	A10	OTG_DATA5
PS_MIO38_501	E13	OTG_DATA6
PS_MIO39_501	C18	OTG_DATA7
PS_MIO40_501	D14	SD_CLK
PS_MIO41_501	C17	SD_CMD
PS_MIO42_501	E12	SD_D0
PS_MIO43_501	A9	SD_D1
PS_MIO44_501	F13	SD_D2
PS_MIO45_501	B15	SD_D3
PS_MIO46_501	D16	MMC_DATA0
PS_MIO47_501	B14	MMC_CMD
PS_MIO48_501	B12	MMC_CCLK
PS_MIO49_501	C12	MMC_DATA1
PS_MIO50_501	B13	MMC_DATA2
PS_MIO51_501	B9	MMC_DATA3
PS_MIO52_501	C10	ETH_MDC
PS_MIO53_501	C11	ETH_MDIO
PS_SRST_B_501	B10	PS_SRST_B

R23 贴片电阻-40.2ohm-0402-1%

R25 +1.8V 贴片电阻-4.7Kohm-0402-1%

+1.8V R20 贴片电阻-1Kohm-0402-1%

R21 C5 贴片电阻-1Kohm-0402-1% 瓷片电容-470nf-16V-0402-X7R GND

Zynq7010/7020

+3.3V

R9 PS_MIO8
R10 QSPI_D0
R11 QSPI_D1
R12 QSPI_SCK
R14 PS_MIO7

GND

贴片电阻-4.7Kohm-0402-1%
贴片电阻-4.7Kohm-0402-1%
贴片电阻-4.7Kohm-0402-1%
贴片电阻-4.7Kohm-0402-1%
贴片电阻-4.7Kohm-0402-1%

```
MIO[8] = 1 ---- MIO bank1 voltage = 1.8V
MIO[2] = 0 ---- cascaded JTAG
MIO[3] = 0 ---- JTAG/NAND/Quad-SPI/SD
MIO[6] = 0 ---- PLL used
MIO[7] = 0 ---- MIO bank0  voltage = 3.3V
```


KEY1 贴片按键4.4*3mm GND


U2 #MR VDD GND #RESET 复位芯片-HX811T

+3.3V C6 GND


+3.3V R22 贴片电阻-4.7Kohm-0402-1% 瓷片电容-470nf-16V-0402-X7R PS_POR_B


Title			
Size A3	Number		Revision
Date: 6/21/2024		Sheet of	
File: E:\正点原子\STUDYBOARD.08 A\04_PCB\ZYNQ_BD.PrjPcb		Drawn By:	

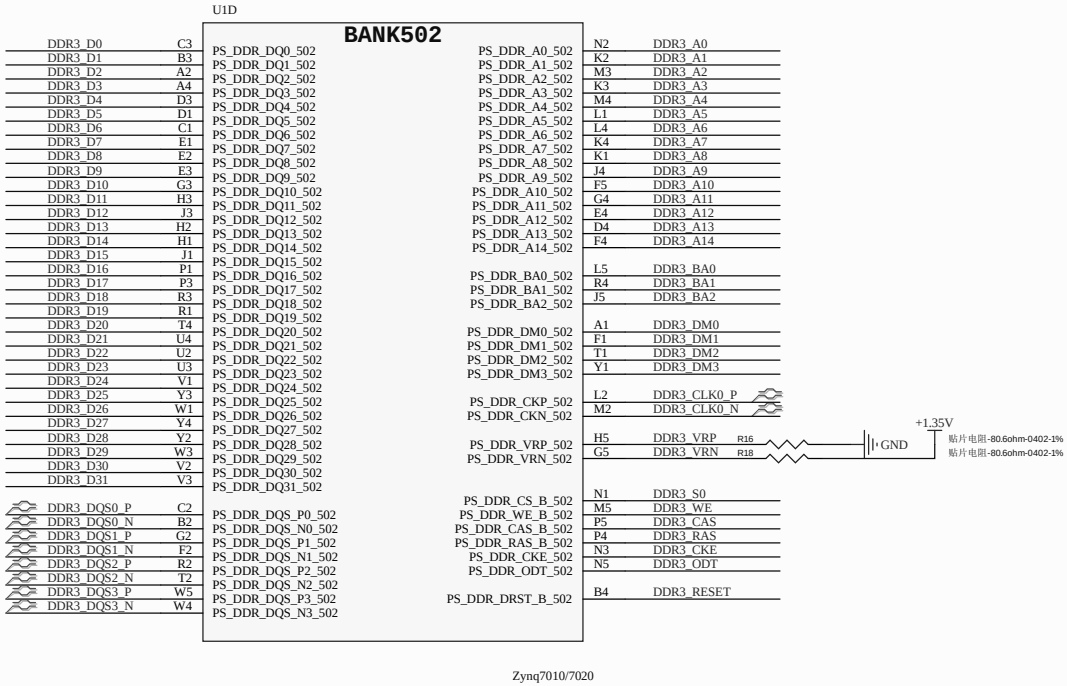

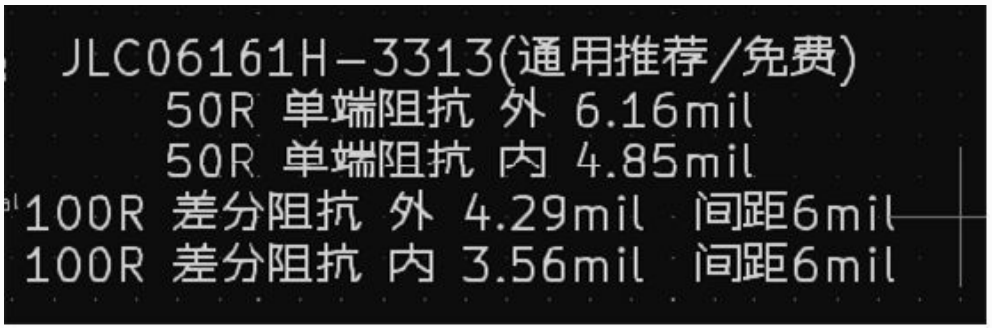



Title		
Size A3	Number	Revision
Date: 6/21/2024	Sheet of	
File: E:\正点原子\STUDYBOARD.08 A\05_PL\ALX.SchDoc	Drawn By:	

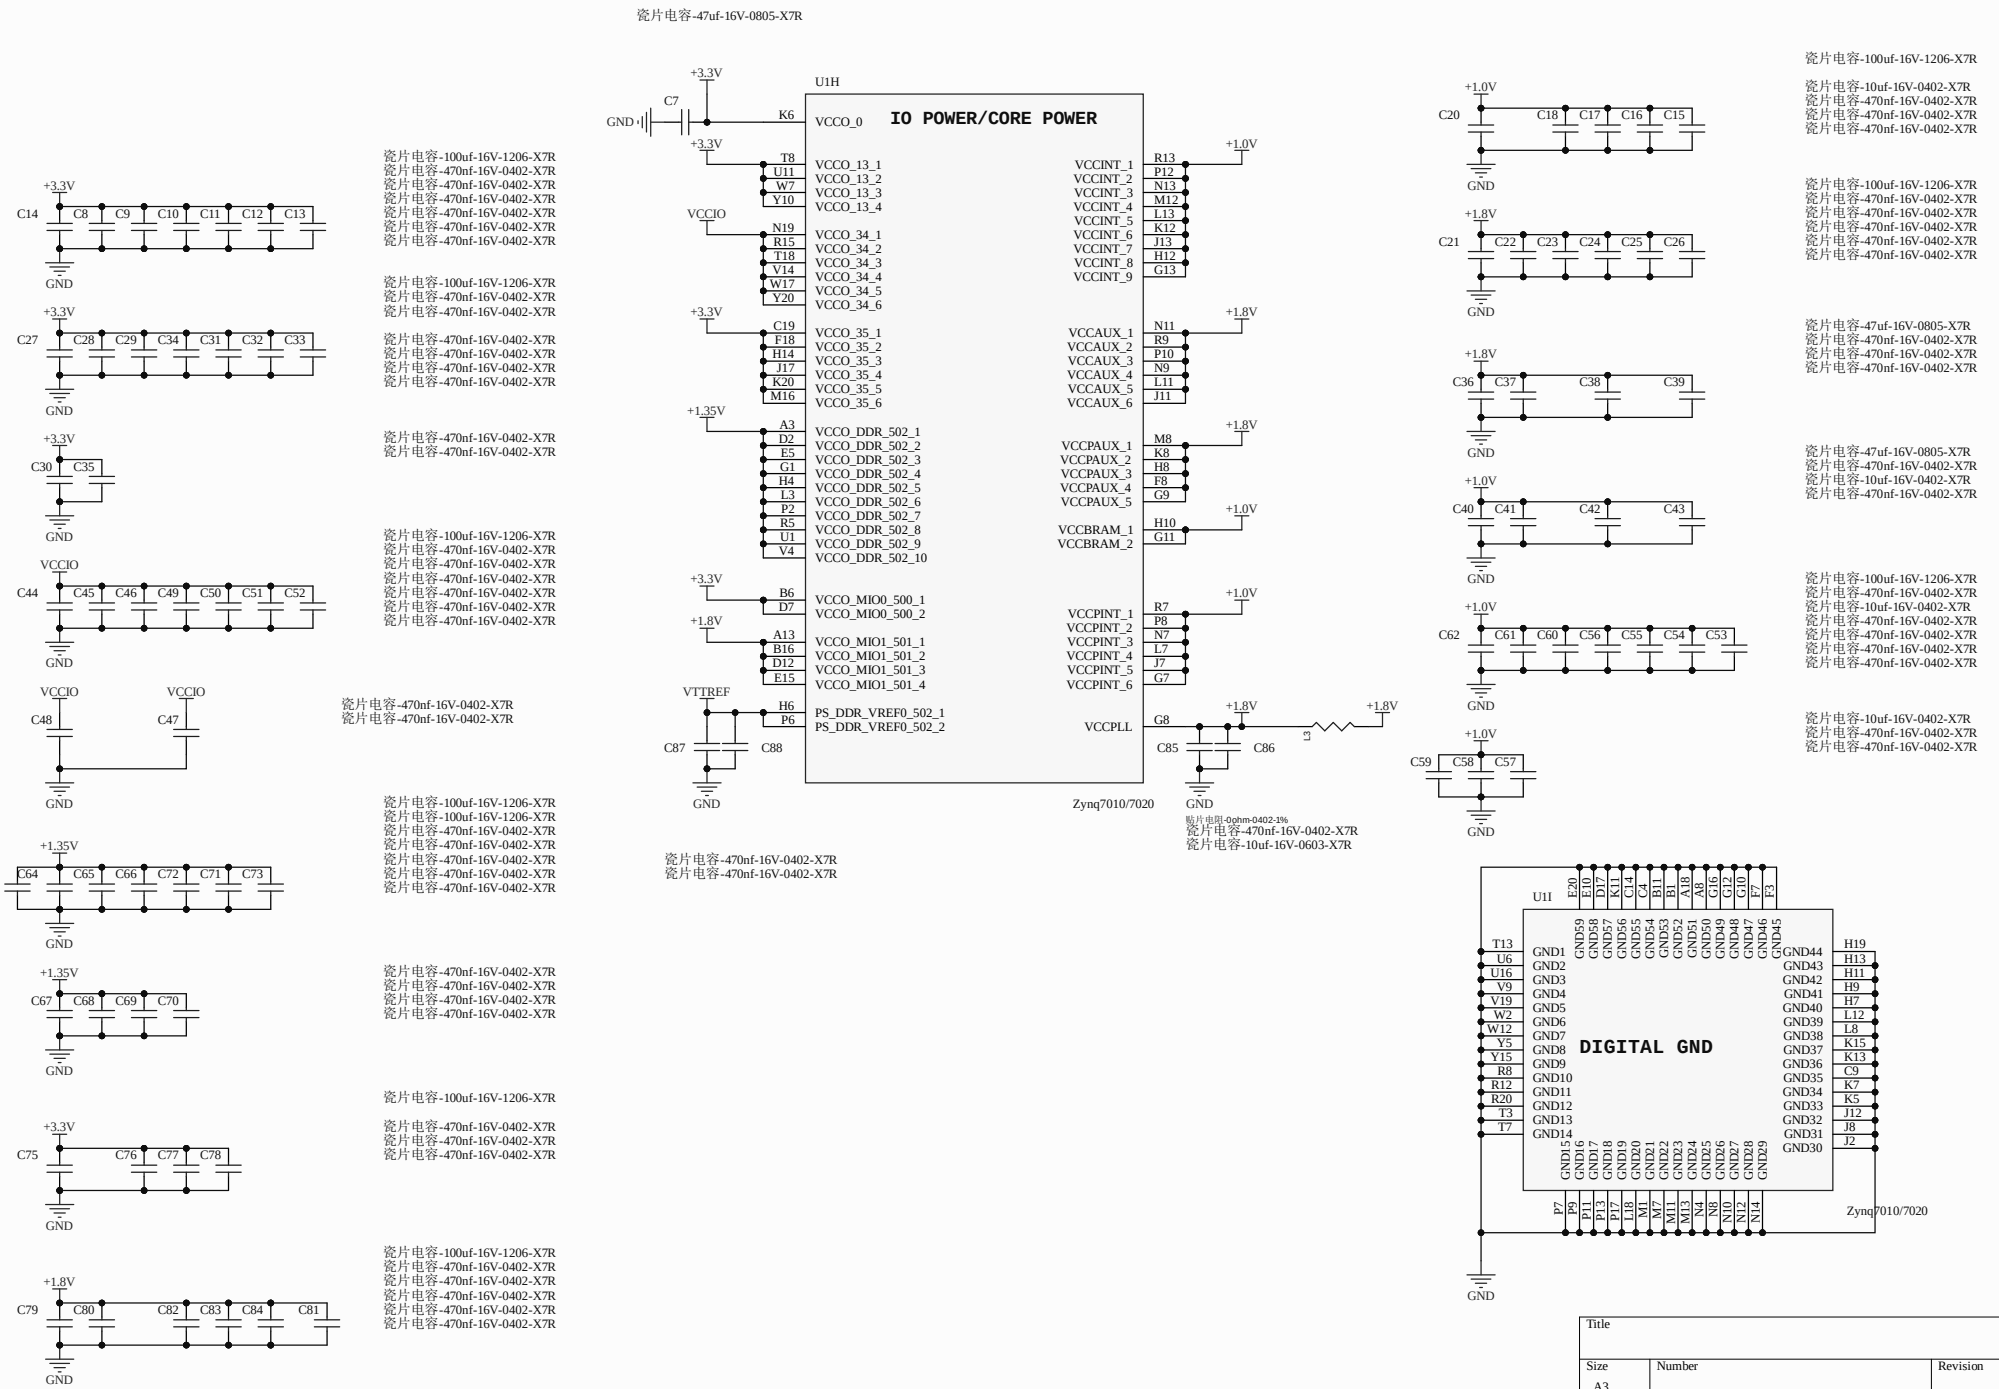
瓷片电容-47uf-16V-0805-X7R
U1H
IO POWER/CORE POWER
VCCO_0
VCCO_13_1
VCCO_13_2
VCCO_13_3
VCCO_13_4
VCCO_34_1
VCCO_34_2
VCCO_34_3
VCCO_34_4
VCCO_34_5
VCCO_34_6
VCCO_35_1
VCCO_35_2
VCCO_35_3
VCCO_35_4
VCCO_35_5
VCCO_35_6
VCCO_DDR_502_1
VCCO_DDR_502_2
VCCO_DDR_502_3
VCCO_DDR_502_4
VCCO_DDR_502_5
VCCO_DDR_502_6
VCCO_DDR_502_7
VCCO_DDR_502_8
VCCO_DDR_502_9
VCCO_DDR_502_10
VCCO_MIO0_500_1
VCCO_MIO0_500_2
VCCO_MIO1_501_1
VCCO_MIO1_501_2
VCCO_MIO1_501_3
VCCO_MIO1_501_4
PS_DDR_VREF0_502_1
PS_DDR_VREF0_502_2
VCCINT_1
VCCINT_2
VCCINT_3
VCCINT_4
VCCINT_5
VCCINT_6
VCCINT_7
VCCINT_8
VCCINT_9
VCCAUX_1
VCCAUX_2
VCCAUX_3
VCCAUX_4
VCCAUX_5
VCCAUX_6
VCCPAUX_1
VCCPAUX_2
VCCPAUX_3
VCCPAUX_4
VCCPAUX_5
VCCBRAM_1
VCCBRAM_2
VCCPINT_1
VCCPINT_2
VCCPINT_3
VCCPINT_4
VCCPINT_5
VCCPINT_6
VCCPLL
Zynq7010/7020
贴片电阻-0ohm-0402-1%
瓷片电容-470nf-16V-0402-X7R
瓷片电容-10uf-16V-0603-X7R
瓷片电容-100uf-16V-1206-X7R
瓷片电容-10uf-16V-0402-X7R
瓷片电容-470nf-16V-0402-X7R
瓷片电容-47uf-16V-0805-X7R
瓷片电容-10uf-16V-0402-X7R
U1I
DIGITAL GND
Zynq7010/7020
Title
Size
A3
Number
Revision
Date:
6/21/2024
Sheet of
File:
E:\正点原子\STUDYBOARD.08 A\06_PCB\Sch.SchDoc
Drawn By:

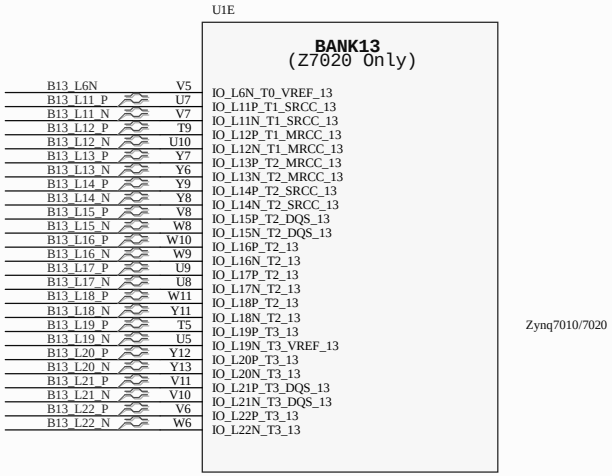


Title		
Size A3	Number	Revision
Date: 6/21/2024	Sheet of	
File: E:\让点原子\STUDYBOARD.08 A\07_FPGA\5_BD.SchDoc	Drawn By:	

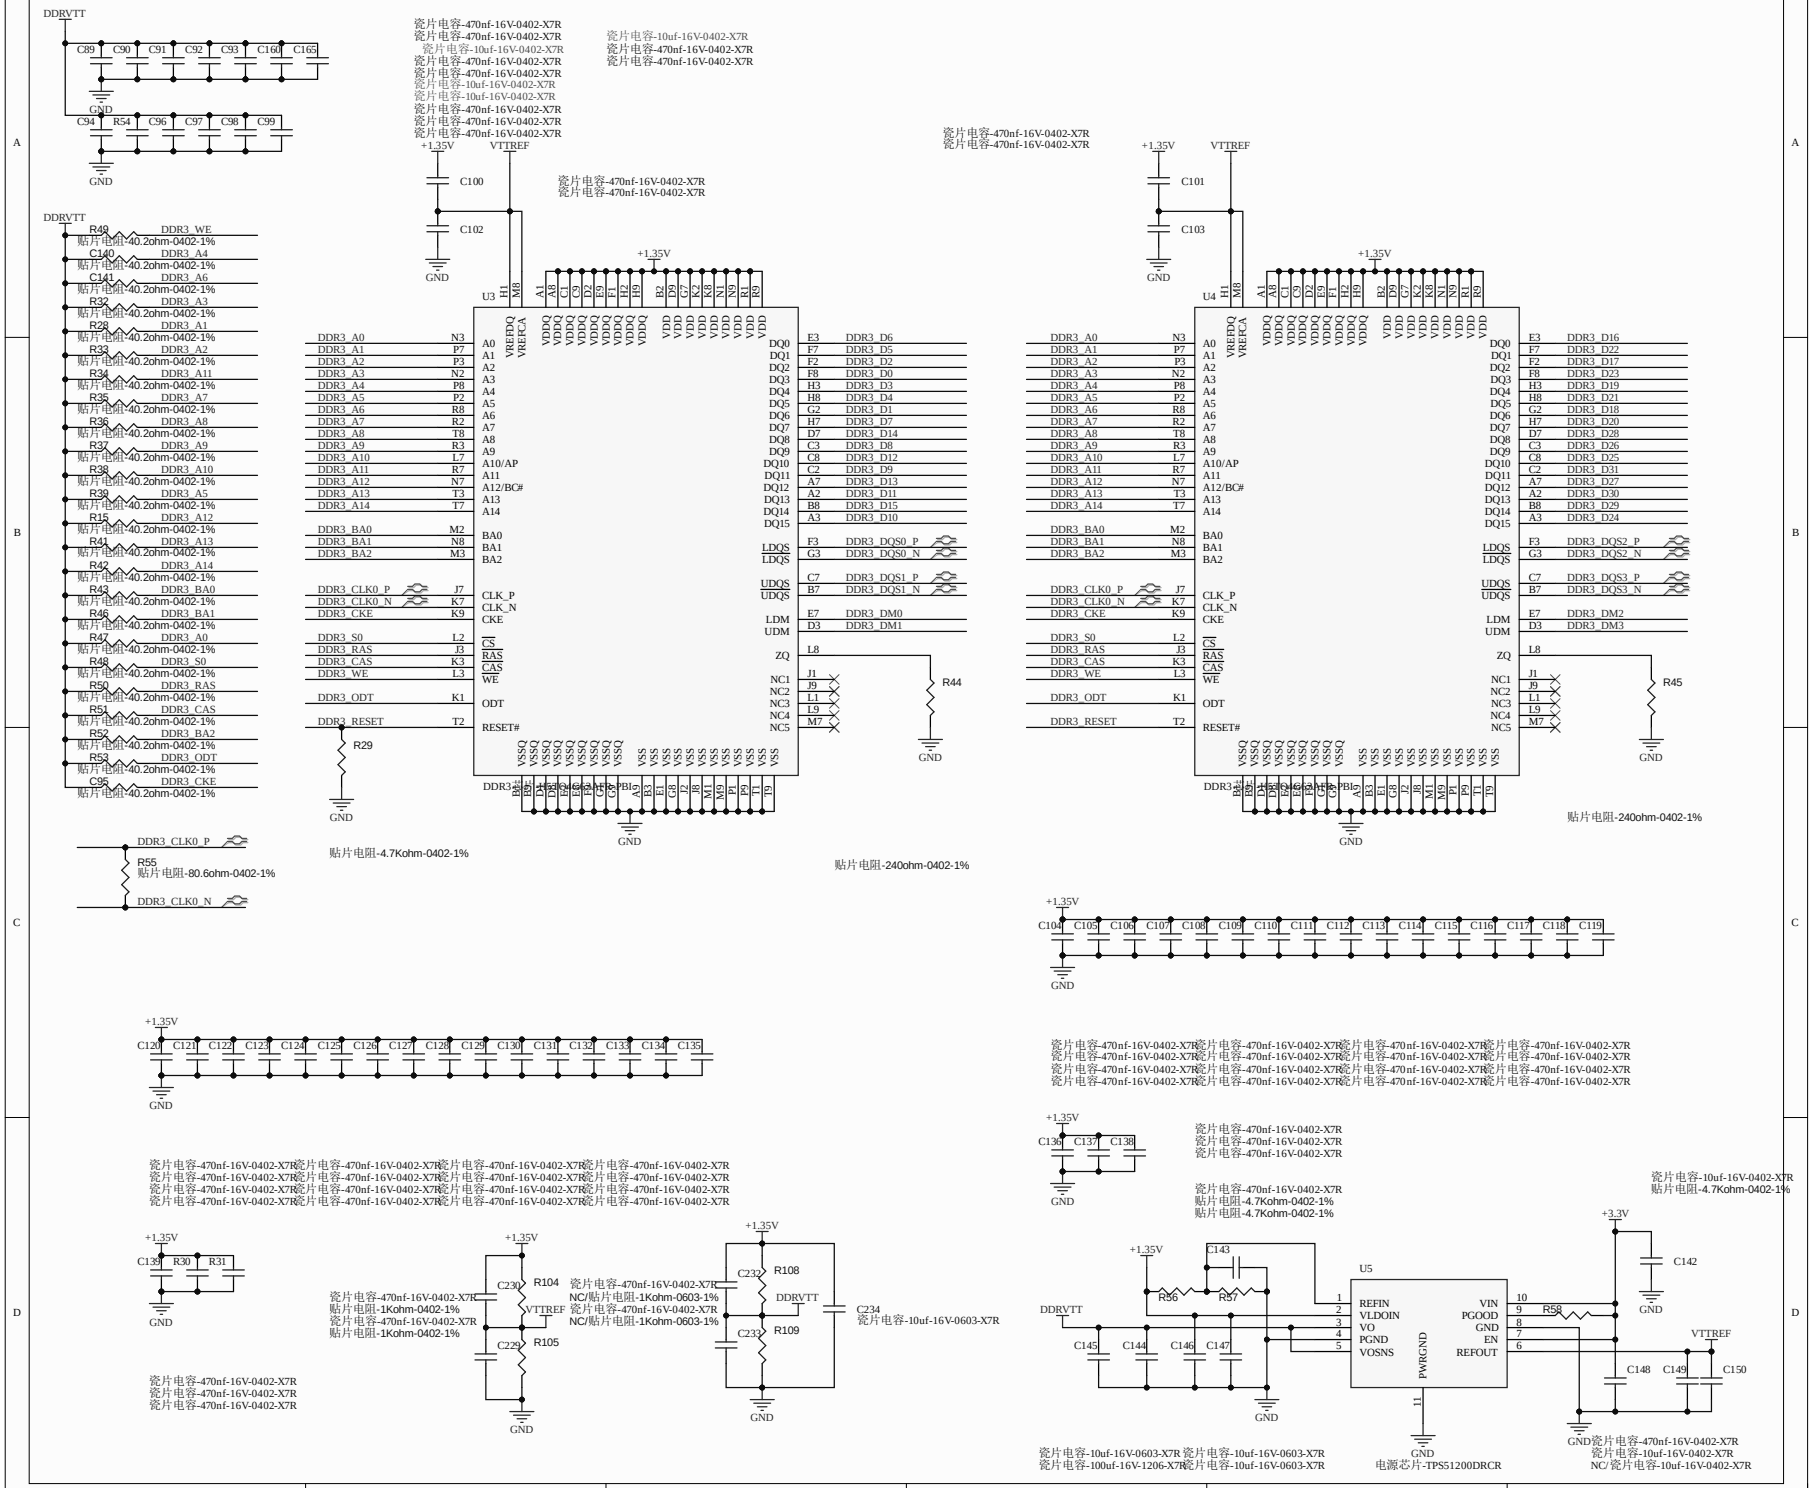

DDRVTT
C89 C90 C91 C92 C93 C160 C165
GND
C94 R54 C96 C97 C98 C99
GND
瓷片电容-470nf-16V-0402-X7R
瓷片电容-470nf-16V-0402-X7R
瓷片电容-10uf-16V-0402-X7R
瓷片电容-470nf-16V-0402-X7R
瓷片电容-470nf-16V-0402-X7R
瓷片电容-10uf-16V-0402-X7R
瓷片电容-10uf-16V-0402-X7R
瓷片电容-470nf-16V-0402-X7R
瓷片电容-470nf-16V-0402-X7R
瓷片电容-470nf-16V-0402-X7R
瓷片电容-470nf-16V-0402-X7R
瓷片电容-10uf-16V-0402-X7R
瓷片电容-470nf-16V-0402-X7R
瓷片电容-470nf-16V-0402-X7R
+1.35V
VTTREF
C100
C102
GND
瓷片电容-470nf-16V-0402-X7R
瓷片电容-470nf-16V-0402-X7R
U3
DDR3_A0 DDR3_A1 DDR3_A2 DDR3_A3 DDR3_A4 DDR3_A5 DDR3_A6 DDR3_A7 DDR3_A8 DDR3_A9 DDR3_A10 DDR3_A11 DDR3_A12 DDR3_A13 DDR3_A14
DDR3_BA0 DDR3_BA1 DDR3_BA2
DDR3_CLK0_P DDR3_CLK0_N DDR3_CKE
DDR3_S0 DDR3_RAS DDR3_CAS DDR3_WE
DDR3_ODT
DDR3_RESET
DDR3_DQS0_P DDR3_DQS0_N DDR3_DQS1_P DDR3_DQS1_N
DDR3_DM0 DDR3_DM1
DDR3_D0 DDR3_D1 DDR3_D2 DDR3_D3 DDR3_D4 DDR3_D5 DDR3_D6 DDR3_D7 DDR3_D8 DDR3_D9 DDR3_D10 DDR3_D11 DDR3_D12 DDR3_D13 DDR3_D14 DDR3_D15
R29
R44
GND
DDR3_CLK0_P
R55
贴片电阻-80.6ohm-0402-1%
DDR3_CLK0_N
贴片电阻-4.7Kohm-0402-1%
贴片电阻-240ohm-0402-1%
DDRVTT
R49 DDR3_WE
C140 DDR3_A4
C141 DDR3_A6
R32 DDR3_A3
R28 DDR3_A1
R33 DDR3_A2
R34 DDR3_A11
R35 DDR3_A7
R36 DDR3_A8
R37 DDR3_A9
R38 DDR3_A10
R39 DDR3_A5
R15 DDR3_A12
R41 DDR3_A13
R42 DDR3_A14
R43 DDR3_BA0
R46 DDR3_BA1
R47 DDR3_A0
R48 DDR3_S0
R50 DDR3_RAS
R51 DDR3_CAS
R52 DDR3_BA2
R53 DDR3_ODT
C95 DDR3_CKE
贴片电阻-40.2ohm-0402-1%
瓷片电容-470nf-16V-0402-X7R
瓷片电容-470nf-16V-0402-X7R
+1.35V
VTTREF
C101
C103
GND
瓷片电容-470nf-16V-0402-X7R
瓷片电容-470nf-16V-0402-X7R
U4
DDR3_A0 DDR3_A1 DDR3_A2 DDR3_A3 DDR3_A4 DDR3_A5 DDR3_A6 DDR3_A7 DDR3_A8 DDR3_A9 DDR3_A10 DDR3_A11 DDR3_A12 DDR3_A13 DDR3_A14
DDR3_BA0 DDR3_BA1 DDR3_BA2
DDR3_CLK0_P DDR3_CLK0_N DDR3_CKE
DDR3_S0 DDR3_RAS DDR3_CAS DDR3_WE
DDR3_ODT
DDR3_RESET
DDR3_DQS2_P DDR3_DQS2_N DDR3_DQS3_P DDR3_DQS3_N
DDR3_DM2 DDR3_DM3
DDR3_D16 DDR3_D17 DDR3_D18 DDR3_D19 DDR3_D20 DDR3_D21 DDR3_D22 DDR3_D23 DDR3_D24 DDR3_D25 DDR3_D26 DDR3_D27 DDR3_D28 DDR3_D29 DDR3_D30 DDR3_D31
R45
GND
贴片电阻-240ohm-0402-1%
+1.35V
C104 C105 C106 C107 C108 C109 C110 C111 C112 C113 C114 C115 C116 C117 C118 C119
GND
瓷片电容-470nf-16V-0402-X7R
+1.35V
C120 C121 C122 C123 C124 C125 C126 C127 C128 C129 C130 C131 C132 C133 C134 C135
GND
瓷片电容-470nf-16V-0402-X7R
+1.35V
C136 C137 C138
GND
瓷片电容-470nf-16V-0402-X7R
贴片电阻-4.7Kohm-0402-1%
瓷片电容-10uf-16V-0402-X7R
贴片电阻-4.7Kohm-0402-1%
+1.35V
C139 R30 R31
GND
瓷片电容-470nf-16V-0402-X7R
+1.35V
C230 R104
瓷片电容-470nf-16V-0402-X7R
贴片电阻-1Kohm-0402-1%
VTTREF
C229 R105
GND
+1.35V
C232 R108
NC/贴片电阻-1Kohm-0603-1%
DDRVTT
C233 R109
C234
瓷片电容-10uf-16V-0603-X7R
GND
+1.35V
C143
R56 R57
DDRVTT
U5
REFIN VLDOIN VO PGND VOSNS
VIN PGOOD GND EN REFOUT
PWRGND
C145 C144 C146 C147
GND
+3.3V
C142
GND
R58
VTTREF
C148 C149 C150
GND
瓷片电容-10uf-16V-0603-X7R
瓷片电容-100uf-16V-1206-X7R
瓷片电容-10uf-16V-0603-X7R
瓷片电容-10uf-16V-0603-X7R
电源芯片-TPS51200DRCR
瓷片电容-470nf-16V-0402-X7R
瓷片电容-10uf-16V-0603-X7R
NC/瓷片电容-10uf-16V-0402-X7R

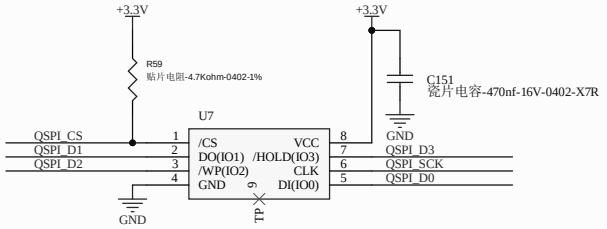


FLASH芯片-W25Q256FV-MLP8


Title		
Size A3	Number	Revision
Date: 6/21/2024	Sheet of	
File: E:\正点原子\STUDYBOARD.08 A\09_硬件设计\...	Drawn By:	

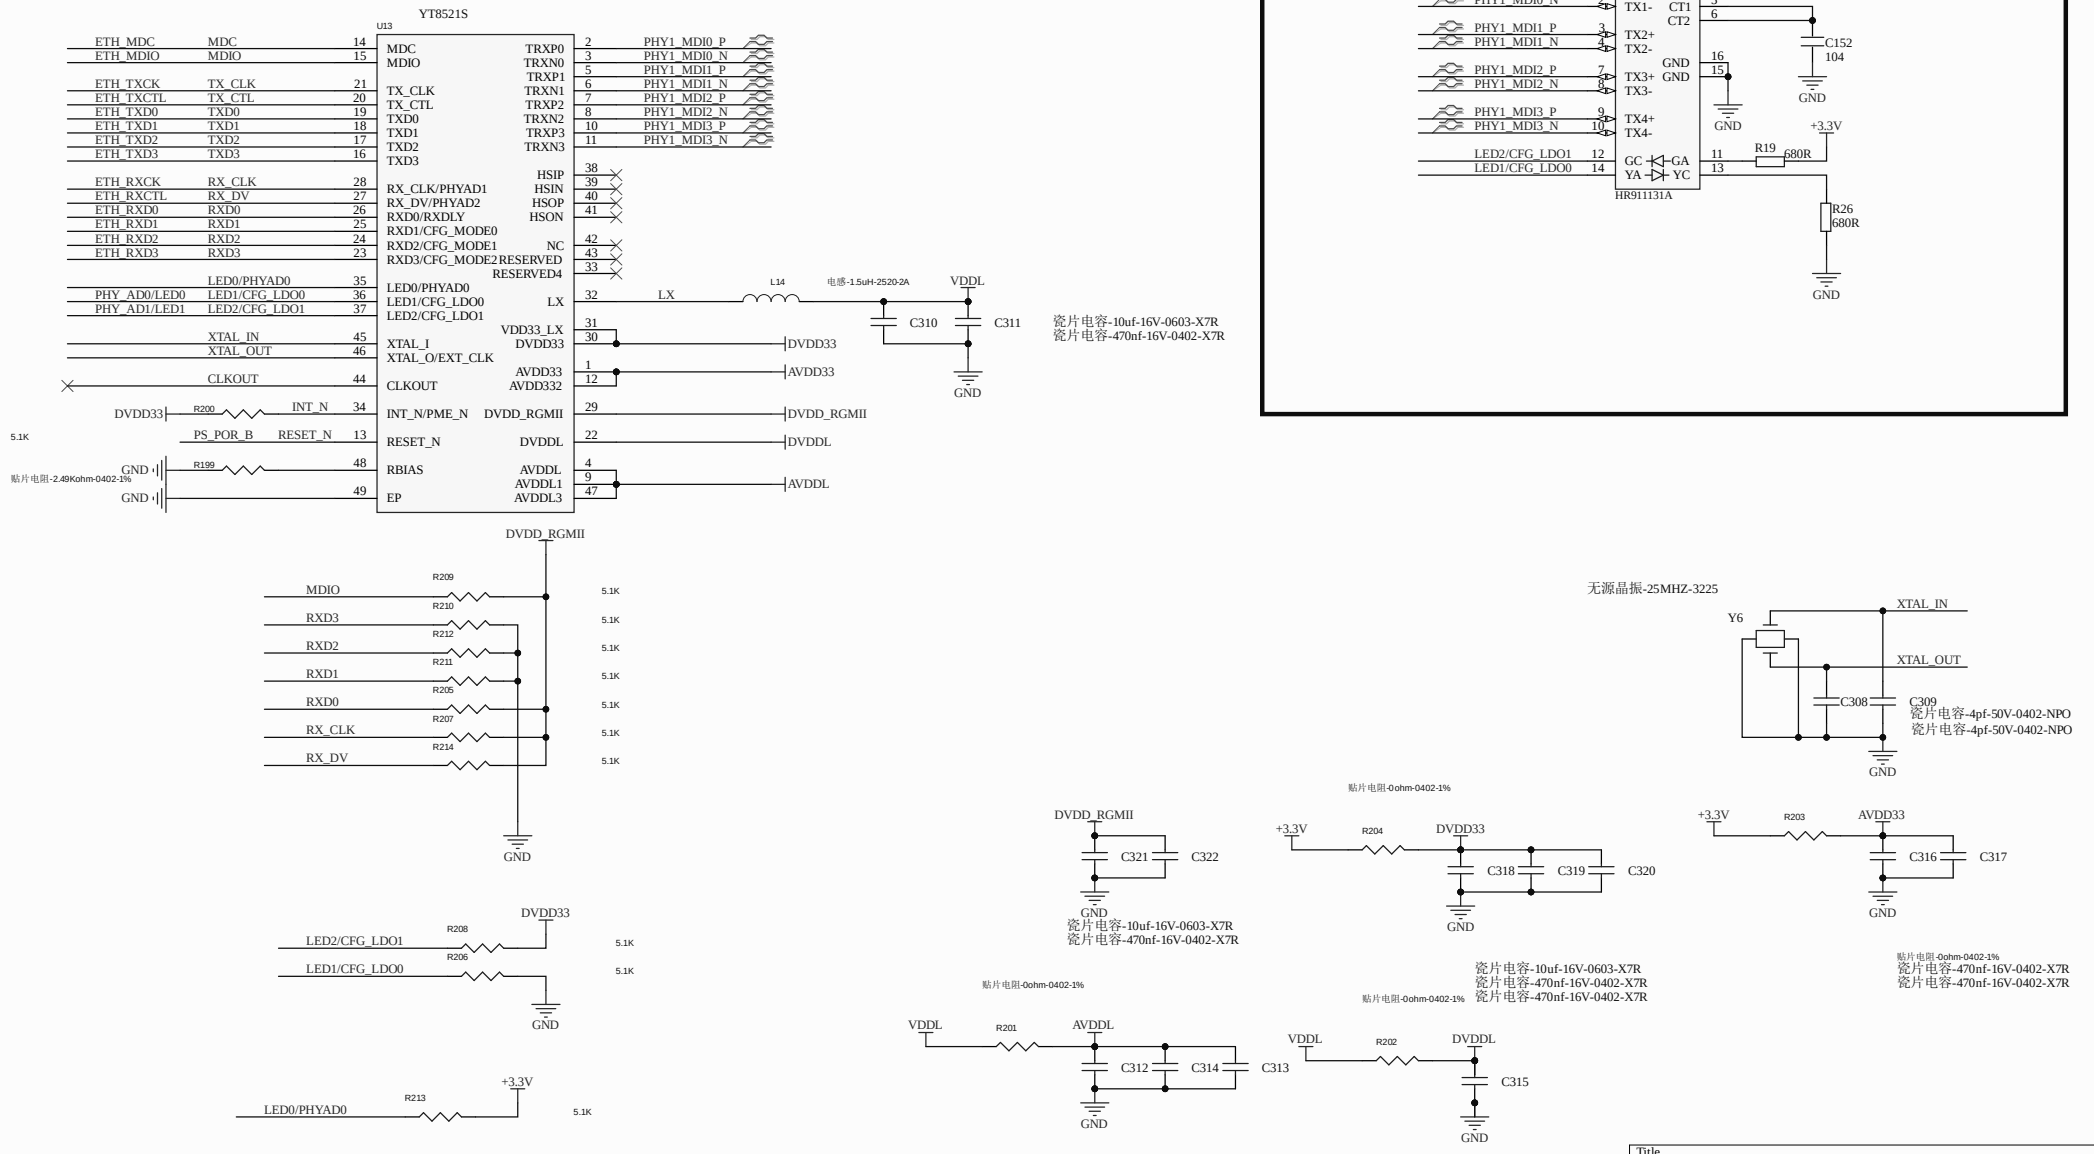

YT8521S
U13
ETH_MDC
ETH_MDIO
ETH_TXCK
ETH_TXCTL
ETH_TXD0
ETH_TXD1
ETH_TXD2
ETH_TXD3
ETH_RXCK
ETH_RXCTL
ETH_RXD0
ETH_RXD1
ETH_RXD2
ETH_RXD3
PHY_AD0/LED0
PHY_AD1/LED1
XTAL_IN
XTAL_OUT
CLKOUT
INT_N
PS_POR_B
RESET_N
MDC
MDIO
TX_CLK
TX_CTL
TXD0
TXD1
TXD2
TXD3
RX_CLK/PHYAD1
RX_DV/PHYAD2
RXD0/RXDLY
RXD1/CFG_MODE0
RXD2/CFG_MODE1
RXD3/CFG_MODE2
LED0/PHYAD0
LED1/CFG_LDO0
LED2/CFG_LDO1
XTAL_I
XTAL_O/EXT_CLK
CLKOUT
INT_N/PME_N
RESET_N
RBIAS
EP
TRXP0
TRXN0
TRXP1
TRXN1
TRXP2
TRXN2
TRXP3
TRXN3
HSIP
HSIN
HSOP
HSON
NC
RESERVED
RESERVED4
LX
VDD33_LX
DVDD33
AVDD33
AVDD332
DVDD_RGMII
DVDDL
AVDDL
AVDDL1
AVDDL3
PHY1_MDI0_P
PHY1_MDI0_N
PHY1_MDI1_P
PHY1_MDI1_N
PHY1_MDI2_P
PHY1_MDI2_N
PHY1_MDI3_P
PHY1_MDI3_N
R200
R199
贴片电阻-2.49Kohm-0402-1%
5.1K
GND
L14
电感-1.5uH-2520-2A
VDDL
C310
C311
瓷片电容-10uf-16V-0603-X7R
瓷片电容-470nf-16V-0402-X7R
DVDD33
AVDD33
DVDD_RGMII
DVDDL
AVDDL
ETH
J2
HR911131A
TX1+
TX1-
TX2+
TX2-
TX3+
TX3-
TX4+
TX4-
CT1
CT2
GC
GA
YA
YC
C152
104
R19
680R
R26
680R
+3.3V
MDIO
RXD3
RXD2
RXD1
RXD0
RX_CLK
RX_DV
R209
R210
R212
R211
R205
R207
R214
LED2/CFG_LDO1
LED1/CFG_LDO0
R208
R206
LED0/PHYAD0
R213
无源晶振-25MHZ-3225
Y6
XTAL_IN
XTAL_OUT
C308
C309
瓷片电容-4pf-50V-0402-NPO
C321
C322
贴片电阻-0ohm-0402-1%
R204
C318
C319
C320
R203
C316
C317
R201
C312
C314
C313
R202
C315
瓷片电容-10uf-16V-0603-X7R
瓷片电容-470nf-16V-0402-X7R
Title
Size
A3
Number
Revision
Date:
6/21/2024
Sheet of
File:
E:\正点原子\..\10_ETHERNET_PHY.SchDoc
Drawn By:

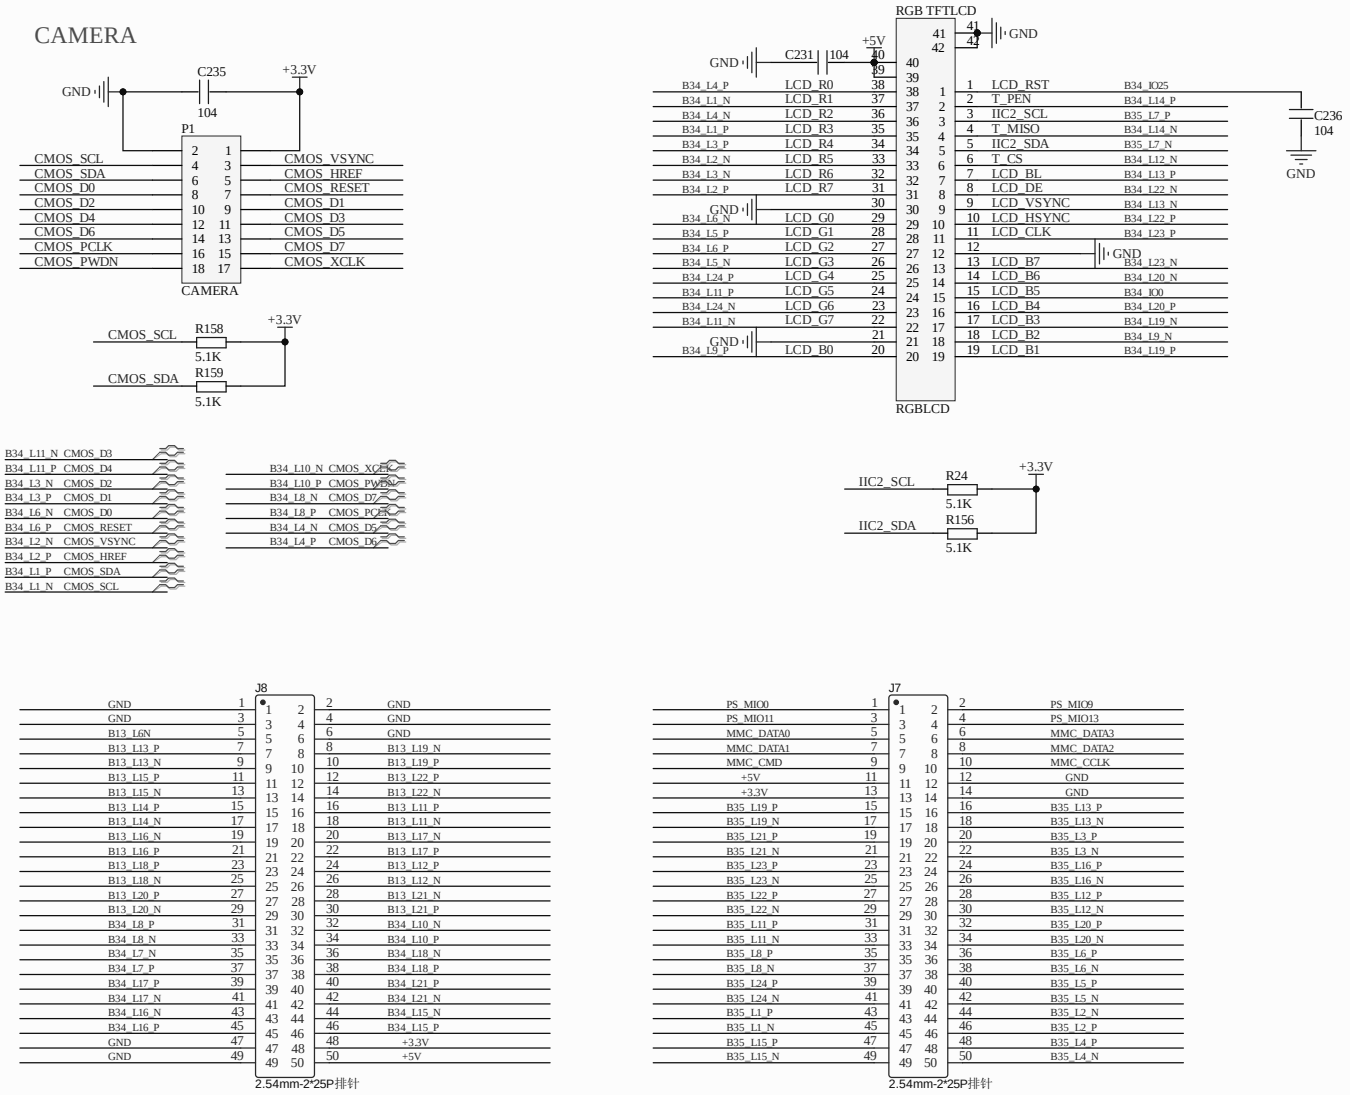

CAMERA
C235
104
GND
+3.3V
P1
CMOS_SCL
CMOS_SDA
CMOS_D0
CMOS_D2
CMOS_D4
CMOS_D6
CMOS_PCLK
CMOS_PWDN
CMOS_VSYNC
CMOS_HREF
CMOS_RESET
CMOS_D1
CMOS_D3
CMOS_D5
CMOS_D7
CMOS_XCLK
CAMERA
R158
5.1K
R159
5.1K
RGB TFTLCD
C231
104
+5V
LCD_R0
LCD_R1
LCD_R2
LCD_R3
LCD_R4
LCD_R5
LCD_R6
LCD_R7
LCD_G0
LCD_G1
LCD_G2
LCD_G3
LCD_G4
LCD_G5
LCD_G6
LCD_G7
LCD_B0
LCD_RST
T_PEN
IIC2_SCL
T_MISO
IIC2_SDA
T_CS
LCD_BL
LCD_DE
LCD_VSYNC
LCD_HSYNC
LCD_CLK
LCD_B7
LCD_B6
LCD_B5
LCD_B4
LCD_B3
LCD_B2
LCD_B1
C236
104
RGBLCD
B34_L11_N CMOS_D3
B34_L11_P CMOS_D4
B34_L3_N CMOS_D2
B34_L3_P CMOS_D1
B34_L6_N CMOS_D0
B34_L6_P CMOS_RESET
B34_L2_N CMOS_VSYNC
B34_L2_P CMOS_HREF
B34_L1_P CMOS_SDA
B34_L1_N CMOS_SCL
B34_L10_N CMOS_XCLK
B34_L10_P CMOS_PWDN
B34_L8_N CMOS_D7
B34_L8_P CMOS_PCLK
B34_L4_N CMOS_D5
B34_L4_P CMOS_D6
IIC2_SCL
IIC2_SDA
R24
5.1K
R156
5.1K
J8
2.54mm-2*25P排针
J7
2.54mm-2*25P排针
Title
Size
A3
Number
Revision
Date: 6/21/2024
File: E:\正点原子\STUDYBOARD.08 A\11_IO_Test\D
Sheet of
Drawn By:

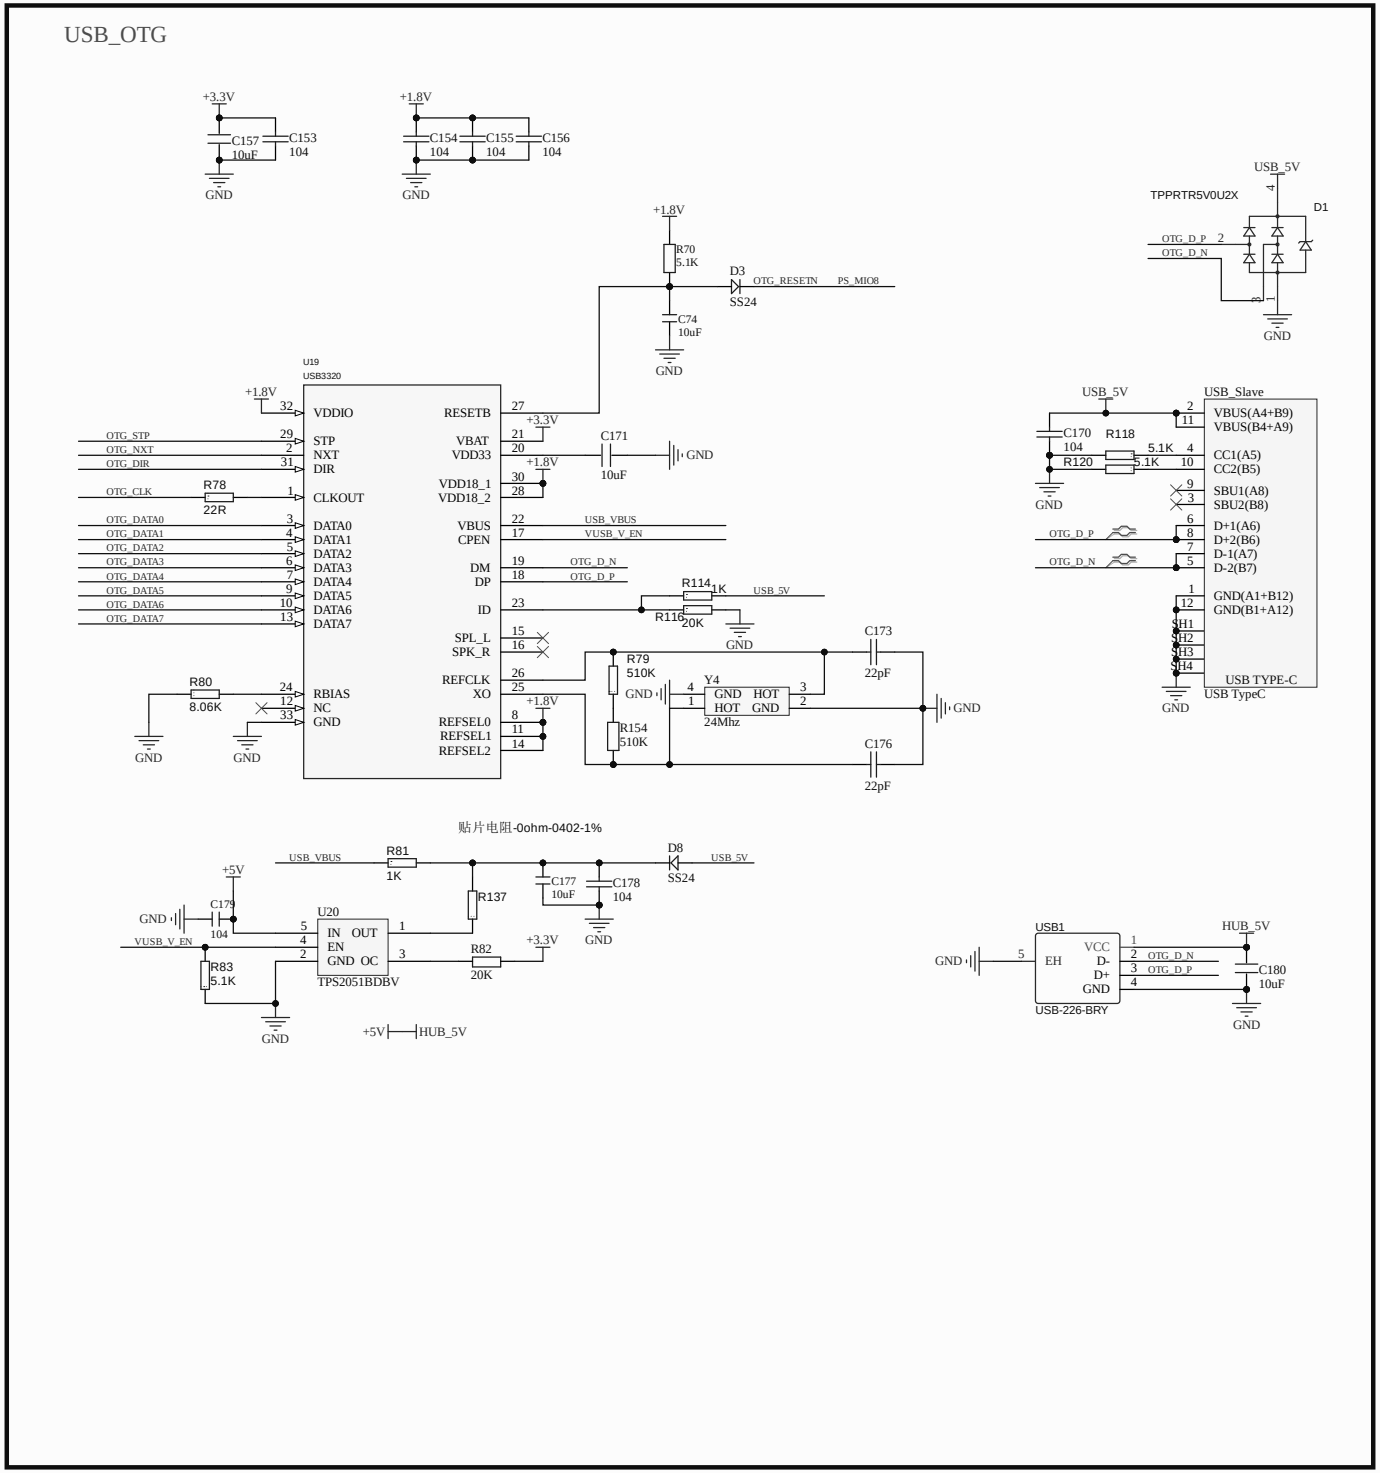

USB_OTG
U19
USB3320
VDDIO
STP
NXT
DIR
CLKOUT
DATA0
DATA1
DATA2
DATA3
DATA4
DATA5
DATA6
DATA7
RBIAS
NC
GND
RESETB
VBAT
VDD33
VDD18_1
VDD18_2
VBUS
CPEN
DM
DP
ID
SPL_L
SPK_R
REFCLK
XO
REFSEL0
REFSEL1
REFSEL2
OTG_STP
OTG_NXT
OTG_DIR
OTG_CLK
OTG_DATA0
OTG_DATA1
OTG_DATA2
OTG_DATA3
OTG_DATA4
OTG_DATA5
OTG_DATA6
OTG_DATA7
USB_VBUS
VUSB_V_EN
OTG_D_N
OTG_D_P
USB_5V
+1.8V
+3.3V
R78 22R
R80 8.06K
R70 5.1K
R79 510K
R154 510K
R114 1K
R116 20K
C74 10uF
C171 10uF
C173 22pF
C176 22pF
Y4 24Mhz
D3 SS24
OTG_RESETN
PS_MIO8
贴片电阻-0ohm-0402-1%
R81 1K
R137
R82 20K
R83 5.1K
C177 10uF
C178 104
C179 104
U20 TPS2051BDBV
IN OUT
EN
GND OC
D8 SS24
+5V
HUB_5V
USB_Slave
VBUS(A4+B9)
VBUS(B4+A9)
CC1(A5)
CC2(B5)
SBU1(A8)
SBU2(B8)
D+1(A6)
D+2(B6)
D-1(A7)
D-2(B7)
GND(A1+B12)
GND(B1+A12)
USB TYPE-C
USB TypeC
C170 104
R118 5.1K
R120 5.1K
TPPRTR5V0U2X
D1
USB1
USB-226-BRY
VCC
D-
D+
EH
C180 10uF
USB_HUB
U18
GL850G
DP0
DM0
DP1
DM1
DP2
DM2
DP3
DM3
DP4
DM4
AVDD
DVDD
RREF
5V
PSELF
OVCUR1
OVCUR2
PWREN2
PWREN1
TEST/SCL
X1
X2
RESET
V33
PGANG
TYPEC_P
TYPEC_N
HUB_3V3
R69 680R
R71 510K
R72 20K
R73 20K
R74
R75 5.1K
R77 20K
R150 5.1K
C166 10uF
C167 22pF
C168 22pF
C172 104
Y3 12Mhz
R76 510K
贴片电阻-0ohm-0402-1%
SW_5V
UART_JTAG
VUSB
R27 5.1K
R40
C174 104
C175 10uF
U6 CH340C
VCC
R232
RTS#
DTR#
DCD#
RI#
DSR#
CTS#
TXD
RXD
V3
D+
D-
XI
XO
GND
UART_RXD
UART_TXD
CH340_P
CH340_N
C182 104
C184 10uF
K1 BUTTON
I/O1
I/O2
TAP1
TAP2

JTAG

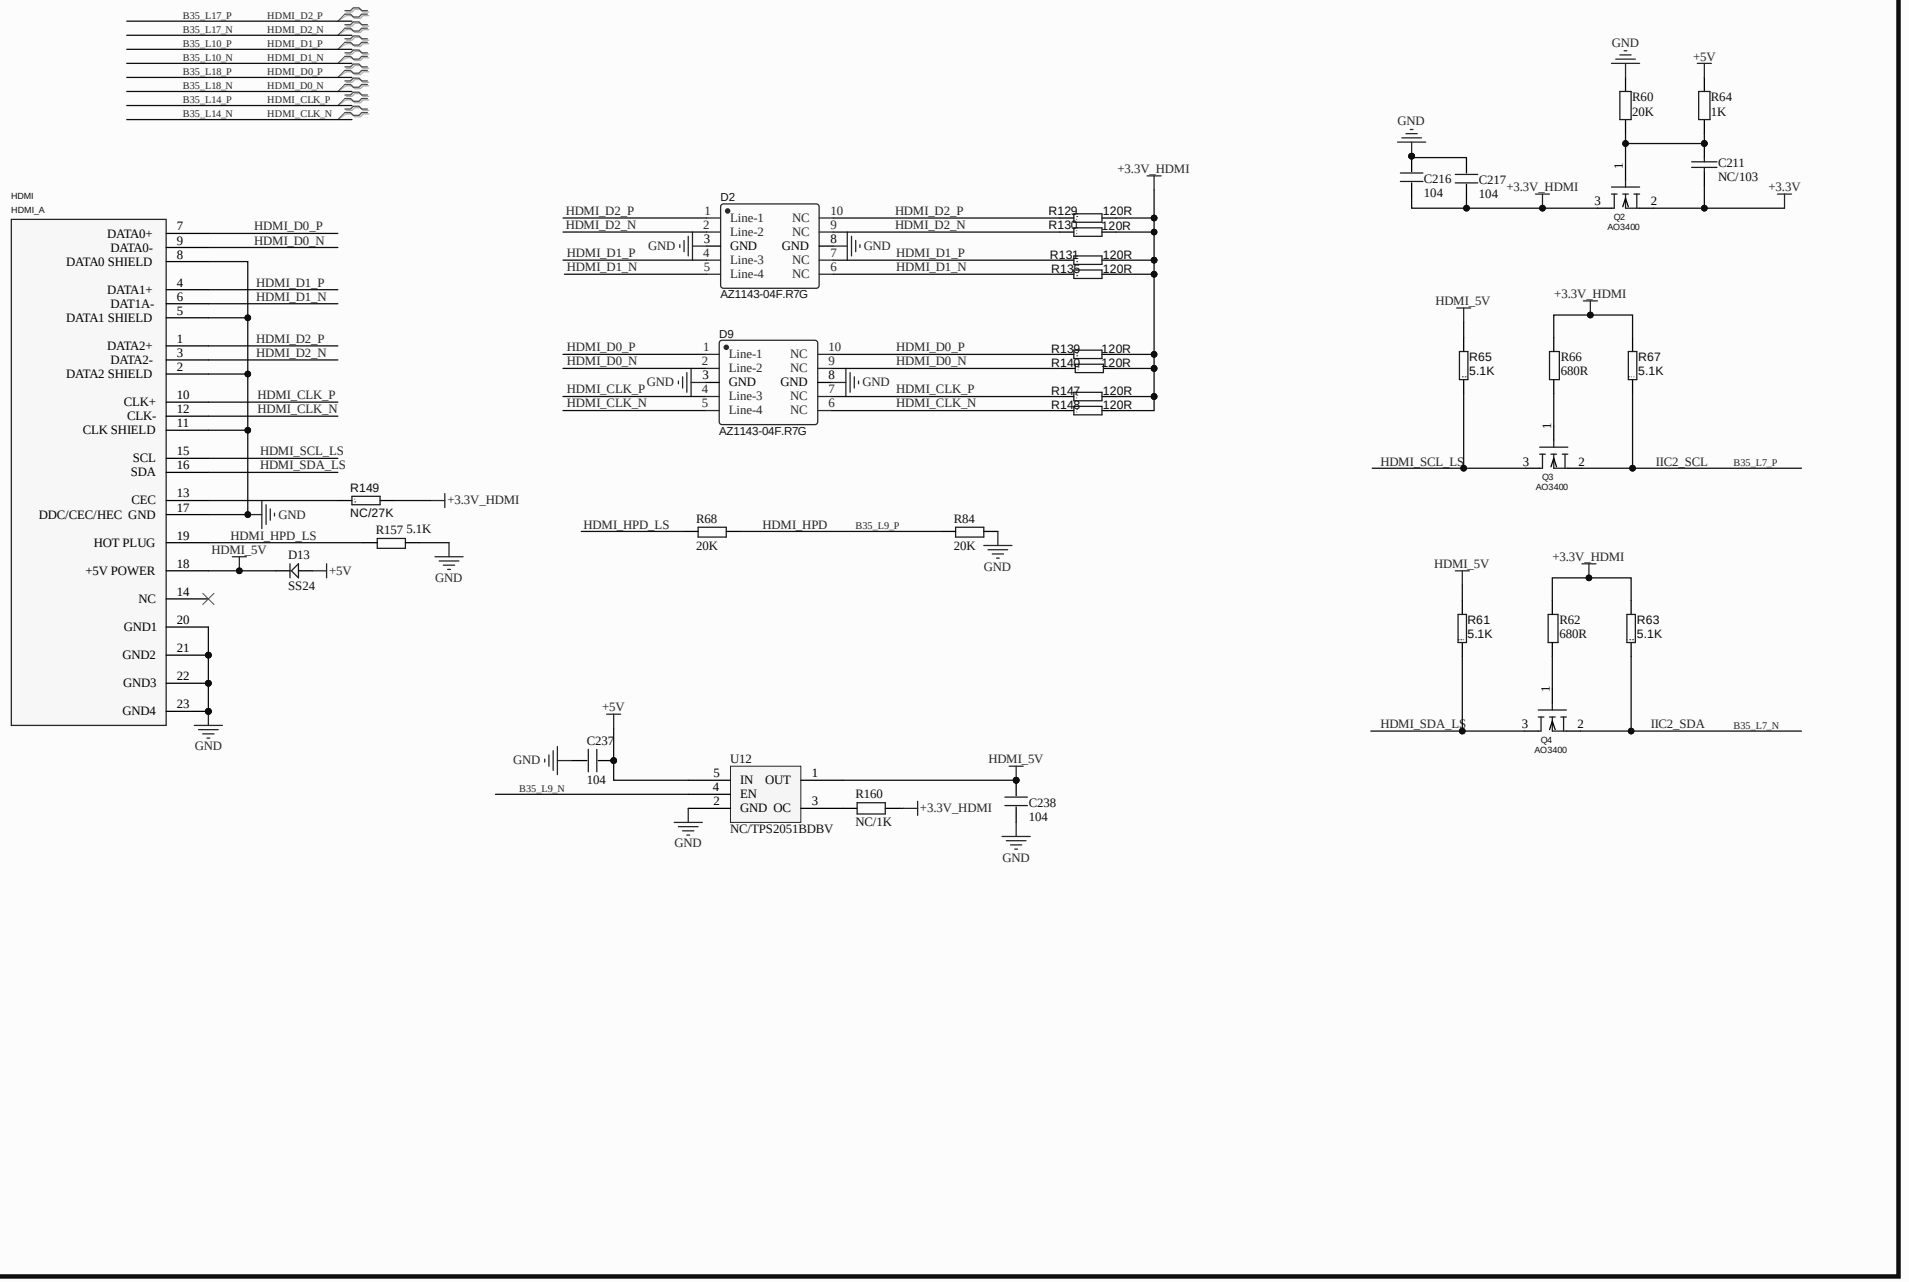
B35_L17_P HDMI_D2_P
B35_L17_N HDMI_D2_N
B35_L10_P HDMI_D1_P
B35_L10_N HDMI_D1_N
B35_L18_P HDMI_D0_P
B35_L18_N HDMI_D0_N
B35_L14_P HDMI_CLK_P
B35_L14_N HDMI_CLK_N
HDMI
HDMI_A
DATA0+ 7 HDMI_D0_P
DATA0- 9 HDMI_D0_N
DATA0 SHIELD 8
DATA1+ 4 HDMI_D1_P
DAT1A- 6 HDMI_D1_N
DATA1 SHIELD 5
DATA2+ 1 HDMI_D2_P
DATA2- 3 HDMI_D2_N
DATA2 SHIELD 2
CLK+ 10 HDMI_CLK_P
CLK- 12 HDMI_CLK_N
CLK SHIELD 11
SCL 15 HDMI_SCL_LS
SDA 16 HDMI_SDA_LS
CEC 13 R149 NC/27K +3.3V_HDMI
DDC/CEC/HEC GND 17 GND
HOT PLUG 19 HDMI_HPD_LS R157 5.1K
+5V POWER 18 HDMI_5V D13 SS24 +5V
NC 14
GND1 20
GND2 21
GND3 22
GND4 23
GND
D2
HDMI_D2_P 1 Line-1 NC 10 HDMI_D2_P R129 120R
HDMI_D2_N 2 Line-2 NC 9 HDMI_D2_N R130 120R
GND 3 GND GND 8 GND
HDMI_D1_P 4 Line-3 NC 7 HDMI_D1_P R131 120R
HDMI_D1_N 5 Line-4 NC 6 HDMI_D1_N R132 120R
AZ1143-04F.R7G
+3.3V_HDMI
D9
HDMI_D0_P 1 Line-1 NC 10 HDMI_D0_P R139 120R
HDMI_D0_N 2 Line-2 NC 9 HDMI_D0_N R140 120R
GND 3 GND GND 8 GND
HDMI_CLK_P 4 Line-3 NC 7 HDMI_CLK_P R147 120R
HDMI_CLK_N 5 Line-4 NC 6 HDMI_CLK_N R148 120R
AZ1143-04F.R7G
HDMI_HPD_LS R68 20K HDMI_HPD B35_L9_P R84 20K GND
+5V
GND C237 104
B35_L9_N
U12
5 IN OUT 1
4 EN
2 GND OC 3
NC/TPS2051BDBV
R160 NC/1K +3.3V_HDMI
HDMI_5V
C238 104
GND
GND
+5V
R60 20K
R64 1K
GND
C216 104
C217 104
+3.3V_HDMI
C211 NC/103
+3.3V
Q2 AO3400
HDMI_5V
+3.3V_HDMI
R65 5.1K
R66 680R
R67 5.1K
HDMI_SCL_LS
Q3 AO3400
IIC2_SCL B35_L7_P
HDMI_5V
+3.3V_HDMI
R61 5.1K
R62 680R
R63 5.1K
HDMI_SDA_LS
Q4 AO3400
IIC2_SDA B35_L7_N

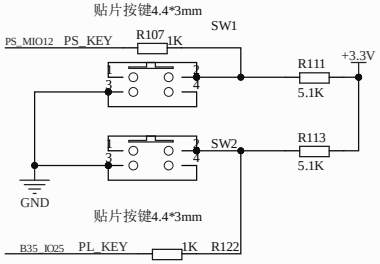

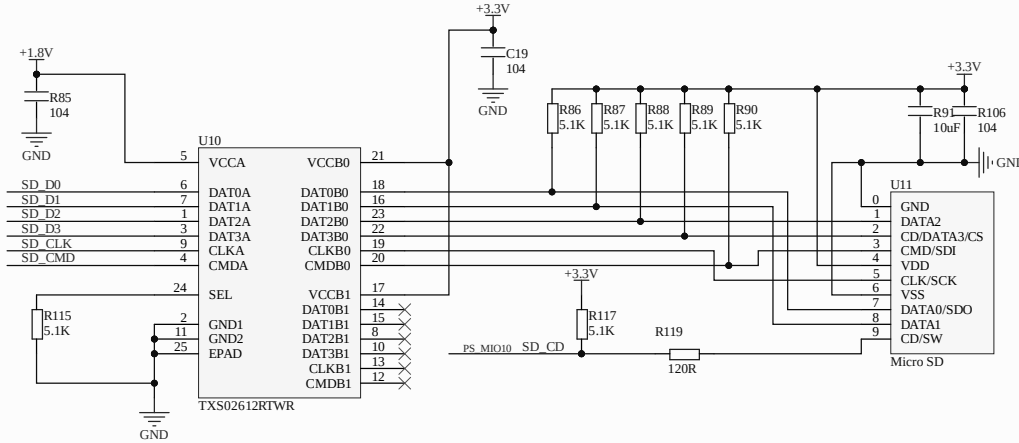



BOOT OPTION

MIO 4 MIO 5

BOOT_CFG	1	2
JTAG	ON	ON
NAND	OFF	ON
QSPI	ON	OFF
SD Card	OFF	OFF

