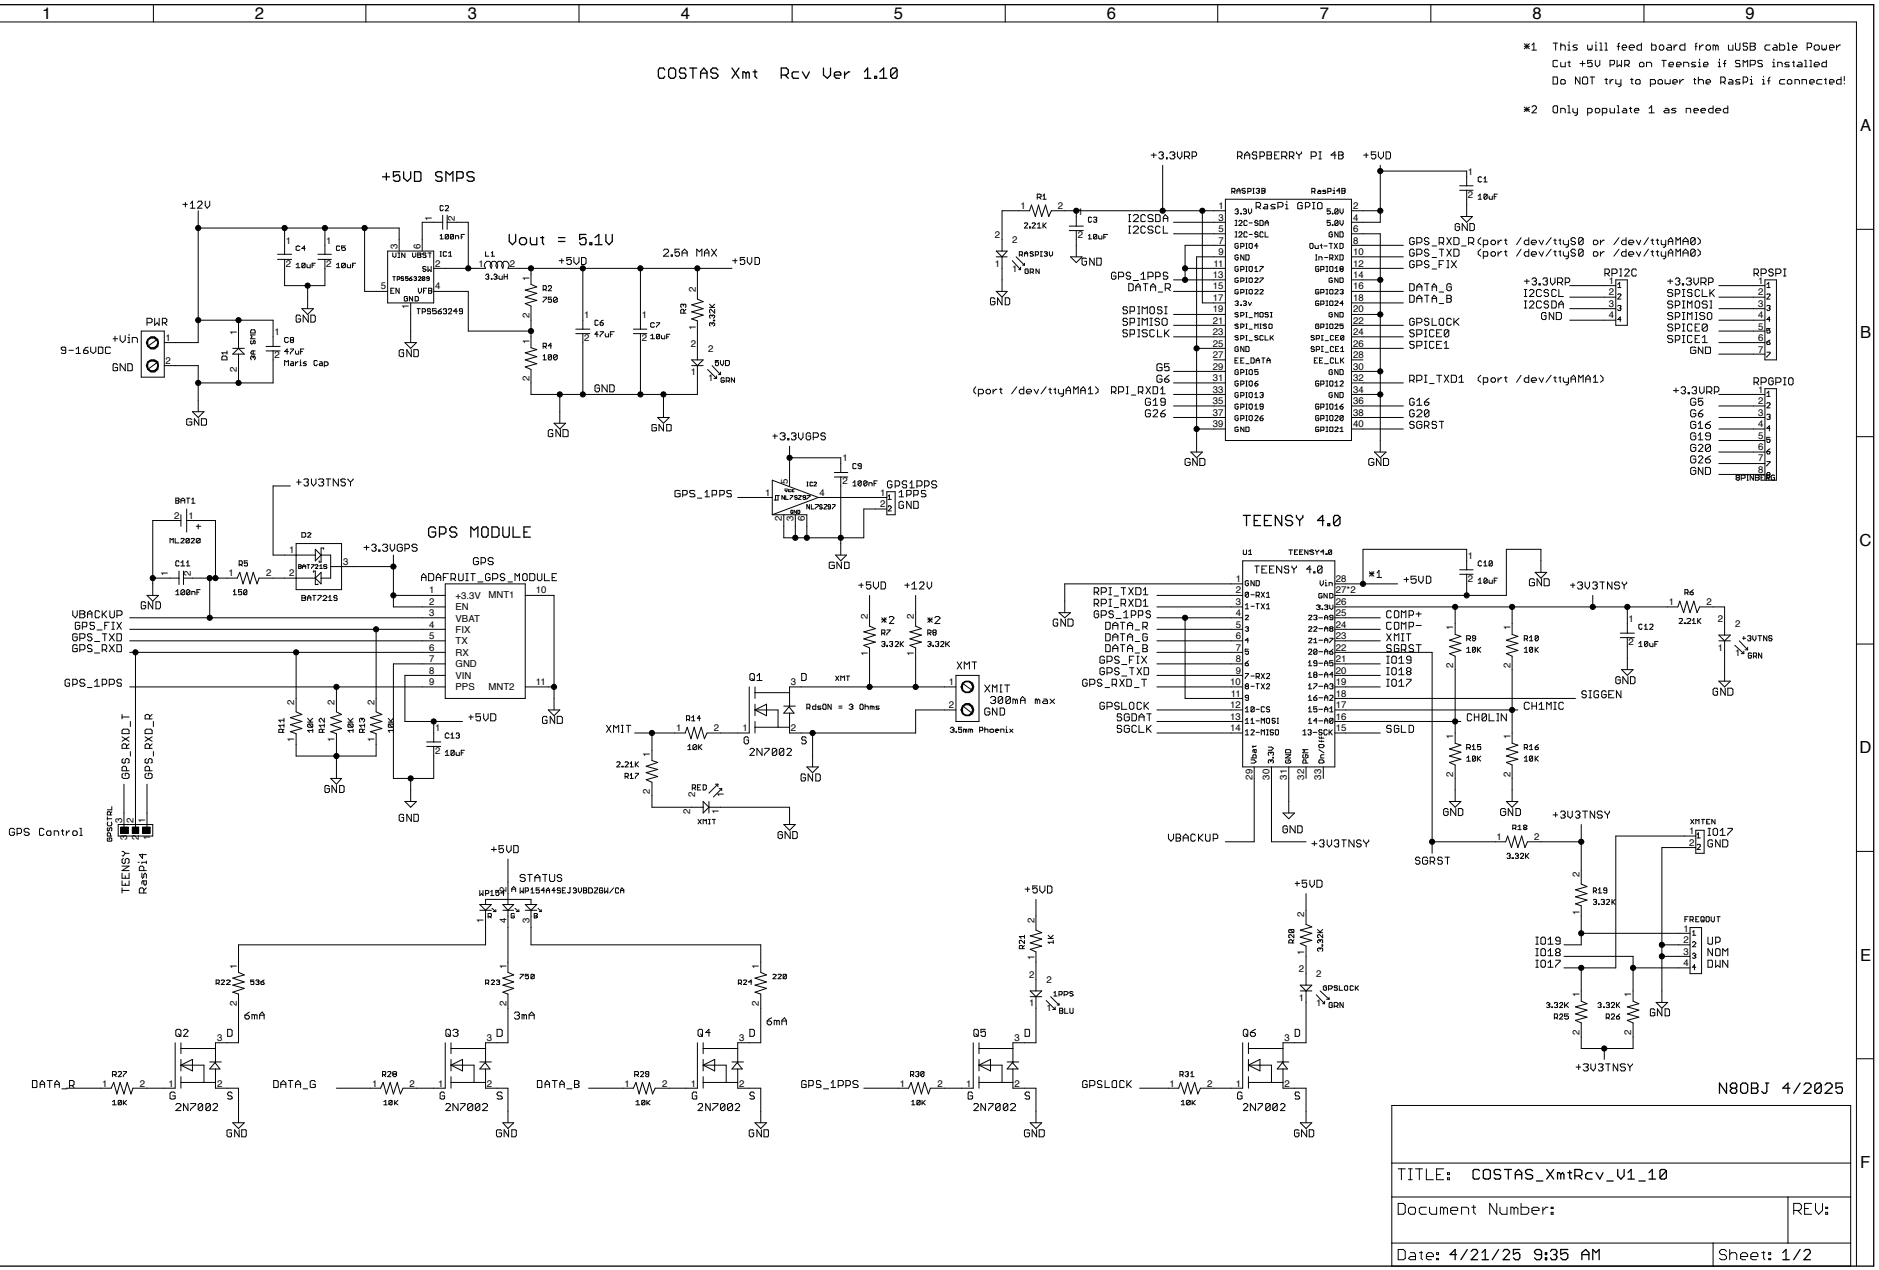
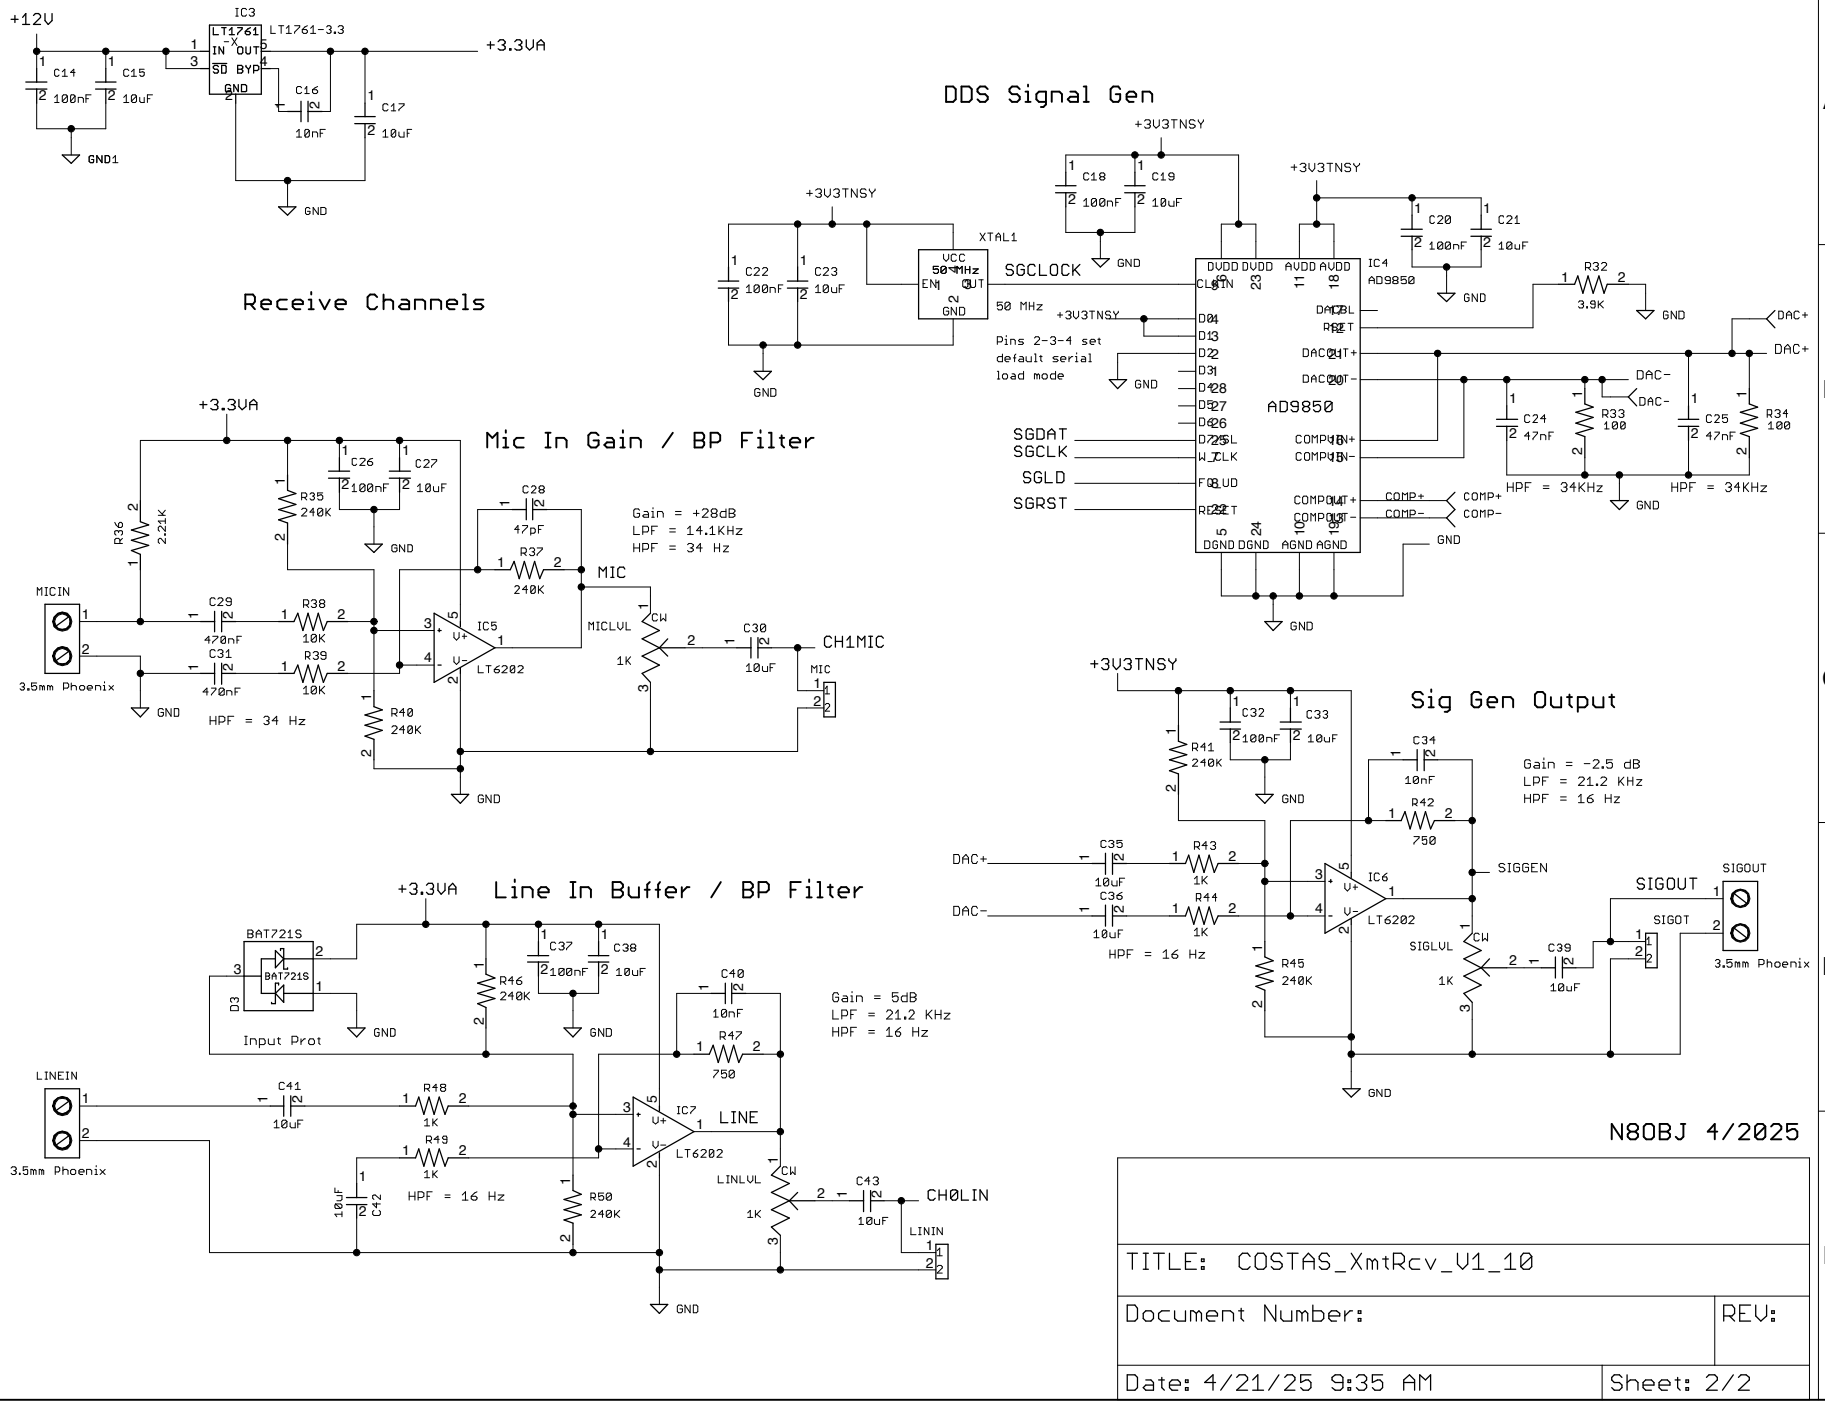

COSTAS Xmt Rcv Ver 1.10
*1 This will feed board from uUSB cable Power
Cut +5V PWR on Teensie if SMPS installed
Do NOT try to power the RasPi if connected!
*2 Only populate 1 as needed
+5VD SMPS
Vout = 5.1V
2.5A MAX
RASPBERRY PI 4B
TEENSY 4.0
GPS MODULE
GPS Control
STATUS
N8OBJ 4/2025
TITLE: COSTAS_XmtRcv_V1_10
Document Number:
REV:
Date: 4/21/25 9:35 AM
Sheet: 1/2


+12V
IC3
LT1761-3.3
+3.3VA
C14 100nF
C15 10uF
C16 10nF
C17 10uF
GND1
GND
DDS Signal Gen
+3V3TNSY
C18 100nF
C19 10uF
C20 100nF
C21 10uF
C22 100nF
C23 10uF
XTAL1
50 MHz
SGCLOCK
Pins 2-3-4 set
default serial
load mode
IC4
AD9850
R32 3.9K
DAC+
DAC-
C24 47nF
C25 47nF
R33 100
R34 100
HPF = 34KHz
SGDAT
SGCLK
SGLD
SGRST
COMP+
COMP-
Receive Channels
Mic In Gain / BP Filter
+3.3VA
MICIN
3.5mm Phoenix
C26 100nF
C27 10uF
C28 47pF
R35 240K
R36 2.21K
R37 240K
R38 10K
R39 10K
R40 240K
C29 470nF
C31 470nF
C30 10uF
IC5
LT6202
MIC
MICLVL
CW
1K
CH1MIC
Gain = +28dB
LPF = 14.1KHz
HPF = 34 Hz
HPF = 34 Hz
Line In Buffer / BP Filter
BAT721S
Input Prot
C37 100nF
C38 10uF
C40 10nF
R46 240K
R47 750
LINEIN
C41 10uF
R48 1K
R49 1K
C42 10uF
R50 240K
IC7
LINE
LINLVL
C43 10uF
CH0LIN
LININ
Gain = 5dB
LPF = 21.2 KHz
HPF = 16 Hz
HPF = 16 Hz
Sig Gen Output
C32 100nF
C33 10uF
C34 10nF
R41 240K
R42 750
R43 1K
R44 1K
R45 240K
C35 10uF
C36 10uF
IC6
LT6202
SIGGEN
SIGLVL
C39 10uF
SIGOUT
Gain = -2.5 dB
LPF = 21.2 KHz
HPF = 16 Hz
N8OBJ 4/2025
TITLE: COSTAS_XmtRcv_V1_10
Document Number:
REV:
Date: 4/21/25 9:35 AM
Sheet: 2/2