


	BS1/BS0	CS	D/C	DIN	CLK
3-Wire SPI	0/1	CS	0	MOSI	CLK
4-Wire SPI	0/0	CS	D/C	MOSI	CLK
I2C(Addr:0x7A)	1/0	0	1	SDA	SCL
I2C(Addr:0x78)	1/0	0	0	SDA	SCL

History

Rev.A1
First Release;

Wikiot

Title		Checked By	
OLED_0.96		Jacob	
Size	Number	Revision	
A4	SP-Wikiot-OLED	A1	
Date:	2017/4/8	Sheet of	1/1
File:	C:\Users\...\OLED_0.96.SchDoc	Drawn By:	Jacob

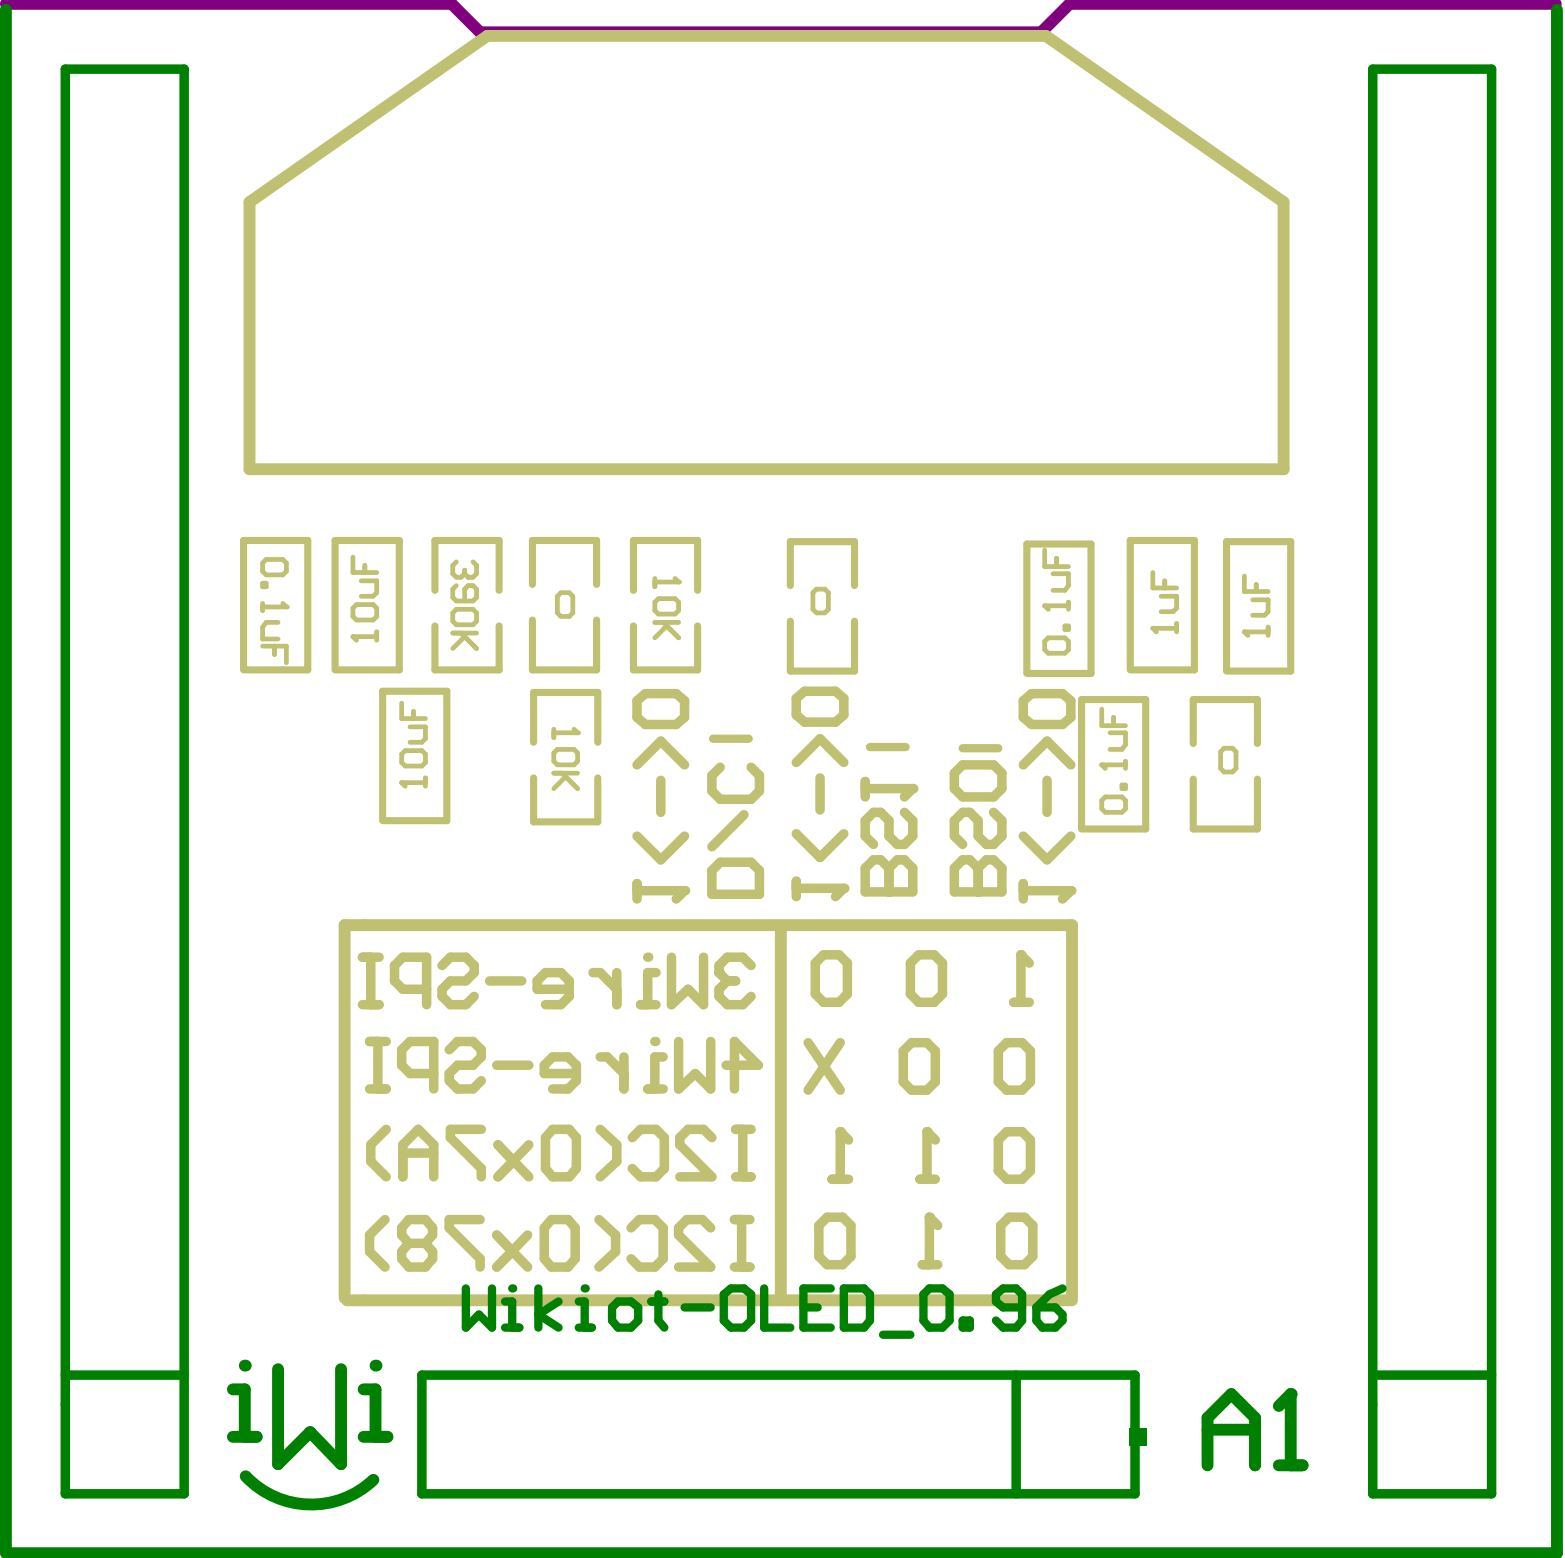

Comment	Description	Designator	Footprint	LibRef	Quantity
LOGO			Logo	LOGO	1
1uF	Capacitor	C1, C2	0603C	Cap	2
0.1uF	Capacitor	C3, C4, C7	0603C	Cap	3
10uF	Capacitor	C5, C6	0603C	Cap	2
JP3		JP1, JP2, JP3	JUMPER3_SMD	JP3	3
Synio Header-L 12-Pin	Synio Header-L, 12-Pin	P1	HDR1X12/2.54MM	Synio Header-L 12-Pin	1
OLED_0.96_SSD1306	OLED_0.96_SSD1306	P2	OLED_0.96_SSD1306	OLED_0.96_SSD1306	1
Synio Header-R 12-Pin	Synio Header-R, 12-Pin	P3	HDR1X12/2.54MM	Synio Header-R 12-Pin	1
Synio Power Header 6 Pin	Synio Power Header 6 Pin	P4	HDR1X6/2.54MM	Synio Power Header 6 Pin	1
0	Resistor	R1, R2, R3	0603R	Res	3
10K	Resistor	R4, R5	0603R	Res	2
390K	Resistor	R6	0603R	Res	1
Circuit Breaker	Circuit Breaker	SB1, SB2, SB3, SB4, SB5,	JP2_SMD	Circuit Breaker	7