SURGICAL FIELD CAMERA

Designed for surgery, clinical photography

Features

- 1080P60 uncompressed HD video
- High quality lens 10x optical zoom
- High quality images ND filter, strong light suppression, no flicker
- Rich interfaces SDI, UART/RS485
- Remote access VISCA, Pelco P/D
- Mini size Φ60mm front face

Application scenarios

Meet the high-definition, high-reduction shooting needs in clinical skills training, standardized training, surgical video, surgical teaching, academic conferences, live surgery, remote guidance, digital operating rooms, and school medical skills teaching. It can be used in different environments such as light and daily indoor light.



Surgical teaching



Academic interactive live broadcast



Medical School/Vocational School Clinical Skills Training



Surgical Remote Teaching Room



Surgery Video



Digital Operating

Technical Parameter:

Model / Parameter	10x Up To 4.35 Million 1/2.8" Cmos High-definition Surgery Movement
Camera	
Sensor Type	/2.8" Progressive Scan CMOS
Scan System	line-by-line scan
Signal System	PAL/NSTC
Video Output	SDI output Network output
Resolution	50HZ:50fps(1920X1080) 60HZ:60fps(1920X1080) 50HZ:25fps(1920X1080) 60HZ:30fps(1920X1080)
Minimum Illumination	Color: 0.05Lux @ (F1.6, AGC ON)
Signal To Noise Ratio	> 52dB
Camera Lens	
Focal Length	4.7-47mm, 10x optical zoom
Aperture Value	F1.6-F3.0
Horizontal Field Of View	58.6-6.4 degrees (Wide-Telephoto)
Close-up	120mm-800mm (wide-angle-telephoto)
Parameter Settings	
Focus Mode	Semi-automatic/automatic/manual/
Exposure Mode	Auto Exposure/aperture Priority/shutter Priority/manual Exposure
Electronic Shutter	1/1 Second ~ 1/30,000 Second
White Balance	Auto1/auto2/indoor/outdoor/manual/sodium Lamp/fluorescent Lamp
Gain	16 Levels Adjustable
Wide Dynamic	Off/on, 15 Levels Adjustable
Digital Noise Reduction	3D
Lens Initialization	Built-in
Image Quality Adjustment	Brightness, Contrast, Sharpness, Saturation Can Be Adjusted
Digital Zoom	10
Interface Function	
External Interface	SDI, RS485, Power, UART
External Communication	Pelco P, Pelco D, VISCA
General Specifications	

Power Supply	DC12V±25%
Operating Temperature And Humidity	-10℃ ~60℃, less than 90%RH
Power Consumption	5W
Size	43.5*45.4*68.8mm
Weight	190g

Application scenarios:



Image Ready For Real

The Image Processing System Independently Developed By Hikvision Is Suitable For Various Lighting Environments. With Functions Such As Fast Focusing, Strong Light Suppression, And Anti-flickering, It Can Provide Clear Images, True Colors, And Rich Details In An Environment Of Up To 18,000 Lux High-intensity Shadowless Lamps. High-quality Images; Built-in Nd Filter, With A Variety Of Scene Modes, More Suitable For Shooting Under Shadowless Lights.



Stable And Reliable, Excellent Performance

Designed With Medical Electrical Standards, The Electrical And Material Properties Are Stable And Reliable.Support Fast Start And Low Delay Function, Start Time Is Less Than 10s, Video Output Delay Is Less Than 100ms.



Rich Interfaces And Flexible Access

Provide Sma Small Sdi Interface, Flexible Choice Of Uart Or Rs485 Communication Interface, Support Visca, Pelco P/d And Other Communication Protocols.



Small And Lightweight, Flexible Installation


Ultra-small Size, The Outer Diameter Of The Movement Is 60mm, And The Weight Is 190g, Which Is Suitable For The Internal Installation Of Various Shadowless Lamps.



Remote Control

Rich Interface, Flexible Access, Flexible Choice Of Uart Or Rs485 Communication Interface, Support Visca, Pelco P/d And Other Communication Protocols, Control Via Computer Or Professional Operating Room Controller.

Dimensions

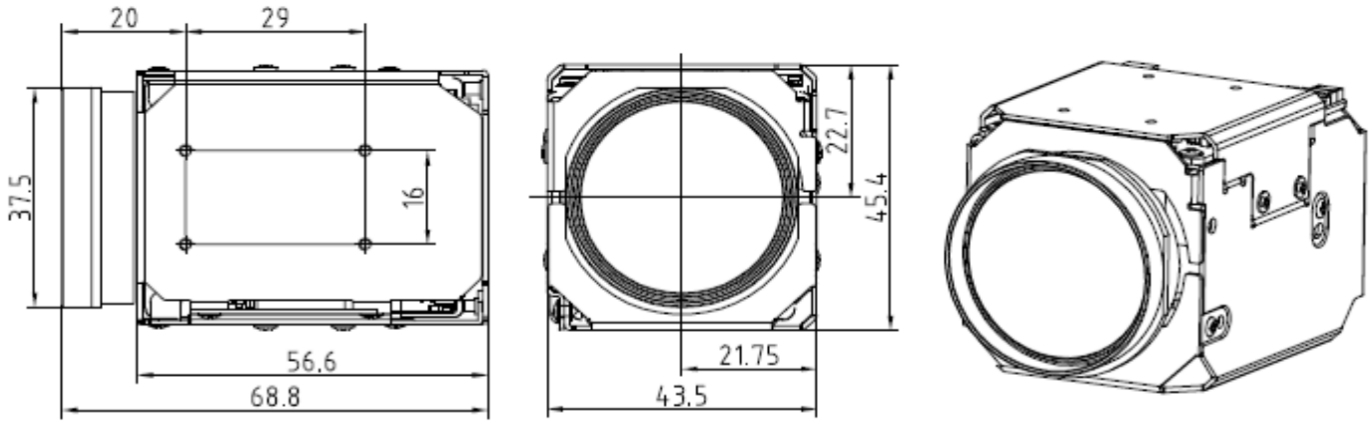

MEDIGE INTERNATIONAL INDUSTRIES CO., LTD.
No. 300, Lianhui Street, Binjiang District, Hangzhou, Zhejiang, China
Telefon + 1 (252) 564 9428
Telefon + 86 180 7271 8706
E-Mail: info@medicalmge.com
Internet: www.medicalmge.com